


Manual Switches

Electronic Control Pushbutton

MML21 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY

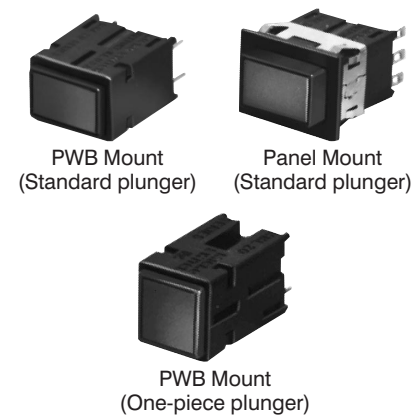

- FEATURES**
- Silver or gold contacts
 - Choice of rectangular or square housings
 - Accepts one LED or incandescent lamp
 - Printed wiring board or snap-in panel mounting
 - Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately
 - UL recognized, CSA certified

Example: MML21KK3AAK
Electronic control pushbutton switch with standard plunger; rectangular housing (black); bezel (black); mounting clips on long sides, PWB terminals; 1-pole, momentary action, silver contacts, black plunger.

Example: MML21KK3AAKRSDR
As above, except furnished with red LED and red lens installed.

MML21KK3AAHRSXX20 as above, legended.

Catalog listing codes for switch, less assembled display options

MML21 STANDARD PLUNGER SWITCHES ORDER GUIDE

MML21K		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action Gold contacts BA 1-pole, mom. action BB 1-pole, alt. action

MML21 ONE PIECE LENS/PLUNGER SWITCHES ORDER GUIDE

Catalog listing codes for switch, less assembled display options

MML21H		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB Mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action Gold contacts BA 1-pole, mom. action BB 1-pole, alt. action

Electrical Data	page 69
Bezels	page 84
Strip and matrix mounting	page 83
PWB pin locations	page 91

Order display options assembled to switch by adding codes below³

K

Plunger Type	
K	Black
W	White

RS

LED*	
XX	No Led ⁴
RS	Red ⁵
YS	Yellow ⁵
GS	Green ⁵

DR

Lens	
XX	No Lens
For LED Display	
DR	Red
DY	Yellow
DG	Green
For Incandescent or Unlighted Display	
LR	Red
LY	Yellow
LG	Green
LW	White
LK	Black

Legend

20
With Legend (Leave Blank if no legend needed)

Use Legend Order Sheet FO-74024 to cover each catalog listing. (See page 80.)

CUSTOMER INSTALLATION:

LED

1. Order LED and receptacle, page 84.

2. Installation instructions, page 85/87.

Incandescent Lamp

1. Order lamp/PWB receptacle or lamp/solder receptacle, page 86.

2. Installation instructions, page 87.

Manuals

Order display options assembled to switch by adding codes below

H

Button Color (One Piece Plunger)	
For LED Display	
H	Red
L	Yellow
N	Green
For Incandescent or non-light display	
R	Red
Y	Yellow
G	Green
Z	Black

RS

LED*	
XX	No LED ⁴
RS	Red ⁵
YS	Yellow ⁵
GS	Green ⁵

Legend

XX20
With Legend (Leave Blank if no legend needed)

Use Legend Order Sheet FO-74024 to cover each catalog listing. (See page 81.)

- *Notes:**
- 1. When an LED is specified in a **rectangular** MML21 listing, MICRO SWITCH will permanently install it in the housing.
 - 2. MICRO SWITCH does **not** permanently install an LED in a **square** MML21 listing. To install an LED in a square housing, order a MML93L or MML93G receptacle and a MML92 LED (see pages 86 and 88).
 - 3. Include four digits (XXXX or XX DR) when a legend is required.
 - 4. For square or rectangular only.
 - 5. For rectangular only.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru