

Confocal Fiber Displacement Sensor

ZW-8000/7000/5000 Series

Light weight 27 g*1 × Outer diameter 12 mm

Transparent object thickness 15 μm*2

- White light confocal principle
Ultra-high-speed, ultra-high-precision measurements
- Ultra-compact, ultra-lightweight, flexible
Easy integration into machines
- 3 controllers and 22 sensor heads
For various applications

NEW
ZW-5000 ZW-7000 ZW-8000

Square-shaped straight type **NEW** Pen-shaped straight type **NEW** Pen-shaped right angle type

Easy-to-integrate sensor measures any material

Reliable and accurate in-line measurements

Transparent object thickness : 15 μm


Ultra-high-precision thickness measurements of transparent sheets

| | |
|----------------------|-----------------------|
| Linearity | $\pm 0.3 \mu\text{m}$ |
| Measurement period | 60 μs |
| Angle characteristic | $\pm 25^\circ$ |
| Measuring range | $\pm 2 \text{ mm}$ |

ZW-8000
Controller



ZW-S8010
Square-shaped Sensor Head

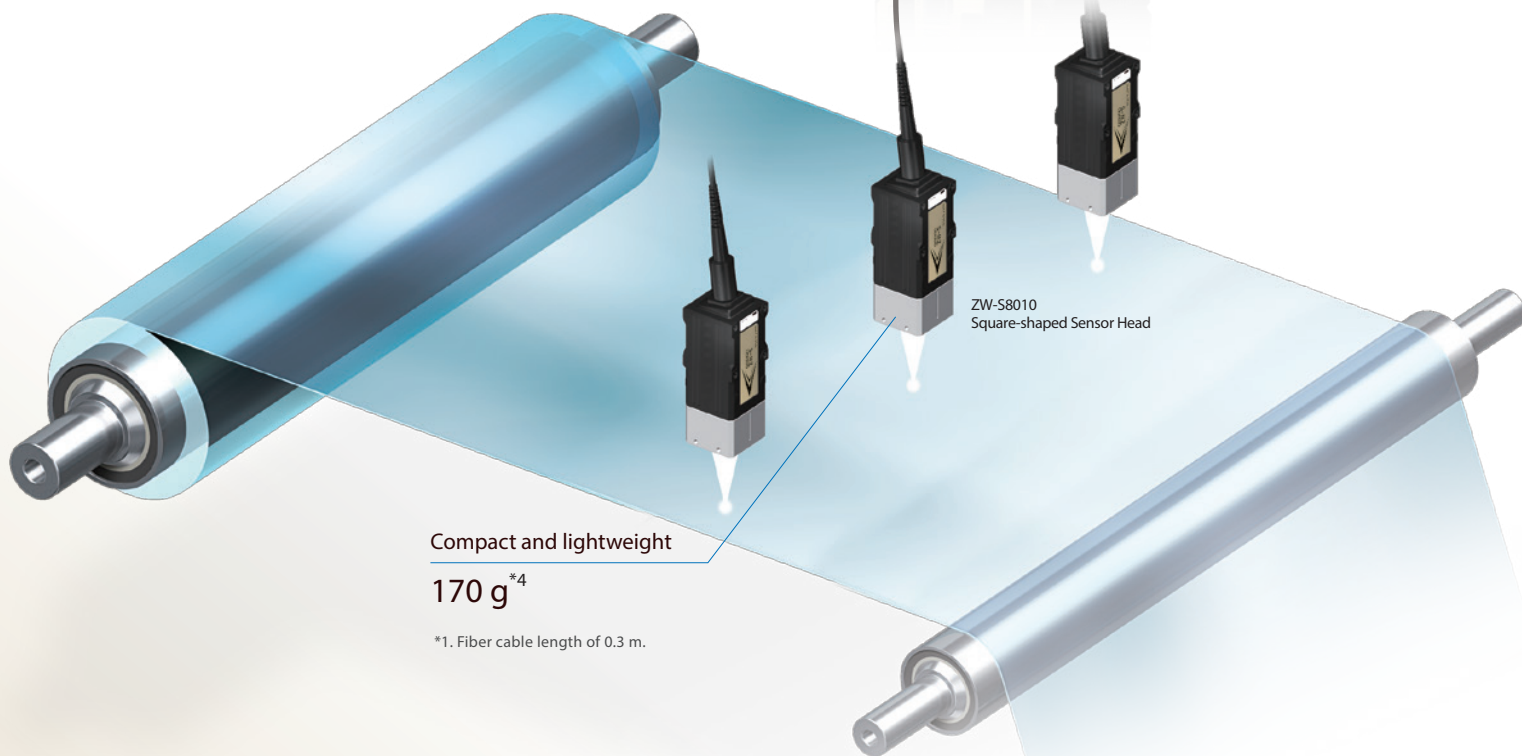

Compact and lightweight

170 g^{*4}

^{*1}. Fiber cable length of 0.3 m.

Measurement period : 20 μs



Ultra-high-speed assembly inspection of ECU boards

Preamplifierless
& flexible fiber cable

Bending radius: 20 mm

| | |
|-----------------|----------|
| Linearity | ±0.45 μm |
| Spot diameter | 130 μm |
| Measuring range | ±0.7 mm |

High-precision synchronization
between devices with 1 μs jitter

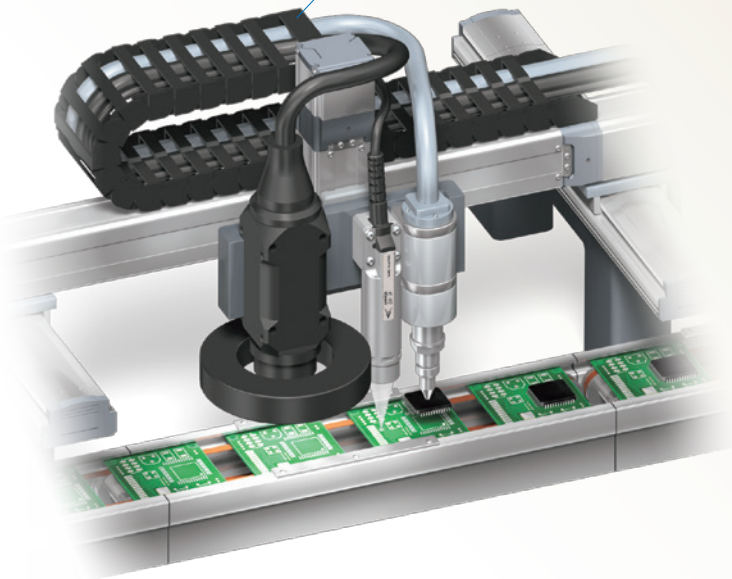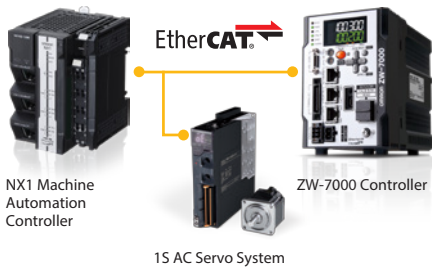


Saving space

Bonding machines

ZW-SPR5007 Pen-shaped
Right Angle Sensor Head

Low installation
height

27.5 mm

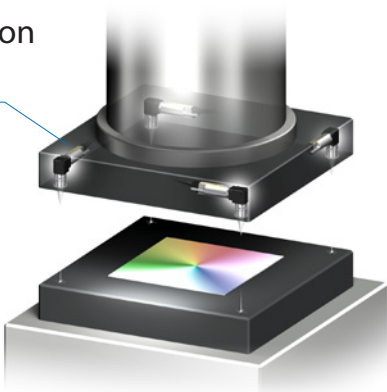

Inclination measurement
for automotive camera
module assembly

ZW-SP7007 Pen-shaped
Straight Sensor Head

Ultra-compact,
ultra-lightweight

12-mm dia./27 g*2


*2. Fiber cable length of 0.3 m.



Note: The resolution, measurement period, angle characteristic, measuring range, linearity, spot diameter, and other specifications differ among models. Refer to the datasheet for details.

Unsurpassed stable in-line measurement

The ZW Series has continued to evolve, meeting the customer's measurement demands and creating a reliable solution for in-line measurements.

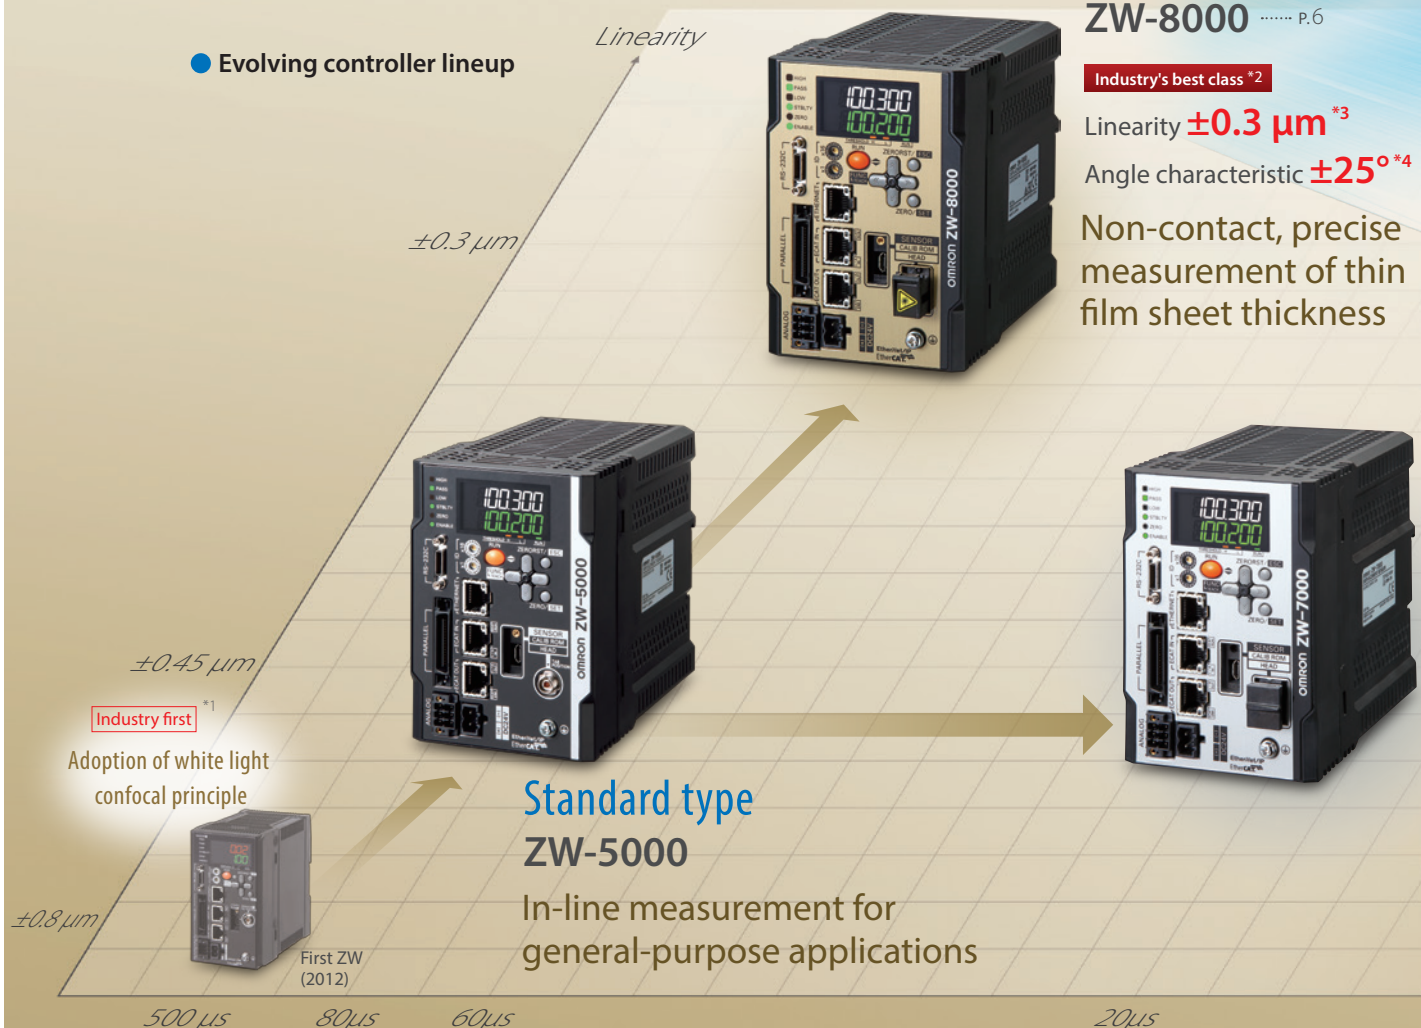

Coaxial measurement based on color


White light confocal principle

Omron is among the first in the industry to adopt the white light confocal principle when it introduced the ZW Series. This principle allows a stable moving measurement of objects in any mixed conditions such as coarse, curved, inclined or narrow areas.

^{*7}. OCFL: Omron Chromatic Focus Lens. Refer to page 17 for details.

Principle

White light produced by the light source ((1)) is focused at different points for each color (wavelength) ((2)) using an OCFL^{*7} created using Omron's unique compact optical design technology. Only the light that is focused on the object is received as reflected light ((3)), and this wavelength information is converted to distance with a spectrometer ((4)), and the height is then measured. Unlike triangulation systems, as the emitted light and received light are positioned along the same axis, the measurement point remains the same at any position in the measuring range so that precise measurements can always be achieved.

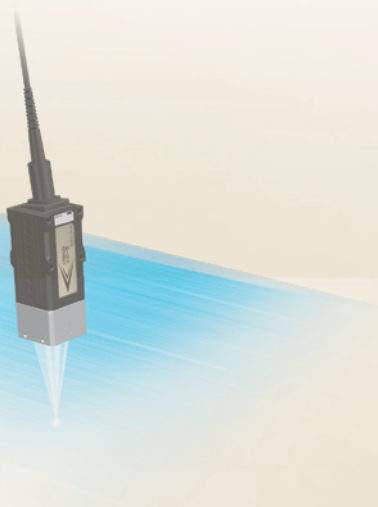

Ultra high-speed type


ZW-7000

..... P.7

Industry's best class*5

Measurement period **20 μs**
(stable even without averaging)

Accurate shape measurement
even of moving objects




→ *Measurement cycle*

Smallest in class*6


Ultra-small head

Compact and easy to use for measuring any shape
..... P.8

One-shot synchronous
measurement of multiple
points on small parts
through close installation



● **Evolving head lineup**

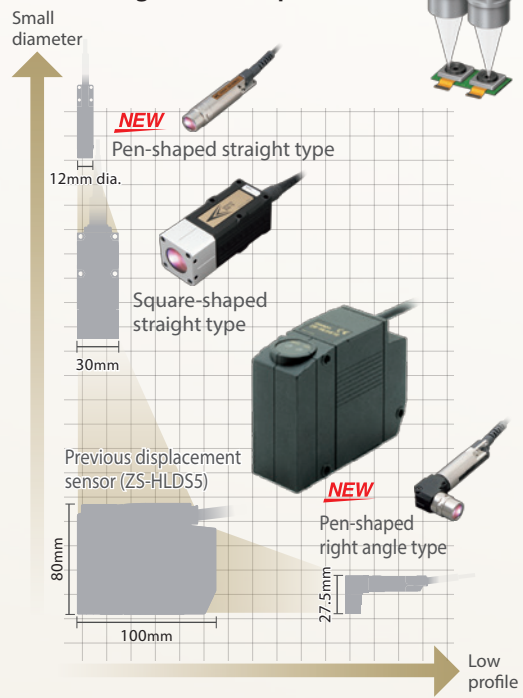

Small diameter

12mm dia.

NEW Pen-shaped straight type

30mm

Square-shaped straight type

80mm

Previous displacement sensor (ZS-HLDS5)


NEW Pen-shaped right angle type

27.5mm

100mm

Low profile


*1/*2/*5/*6. Based on Omron investigation in July 2018.
*3. Material setting for the Omron standard mirror surface target:
Error from an ideal straight line when measuring on mirror surface.
*4. Typical value of the ZW-S8010/ZW-S7010/ZW-S5010 Sensor Heads.



(1) White light

(3) Receiver

(4) Spectrometer

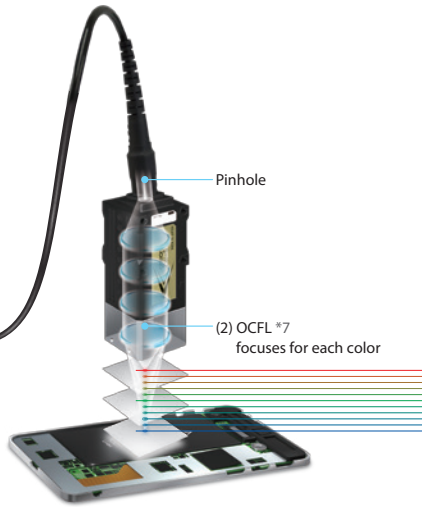

Pinhole

(2) OCFL*7 focuses for each color

Received reflected light

| Pinhole | Received light waveform |
|---------|-------------------------|
| | *8 |
| | |
| *8 | |

(3) Only light focused on the object is received as reflected light

*8. Automatic sensitivity adjustment enables sufficient light to be received even at the range edge where less light is received.



Controller


Solutions for any in-line measu

For measurement of rattling or inclined "transparent objects or mirror surfaces"

NEW

Ultra-high-precision, high-speed type **ZW-8000**

High-precision in-line measurement of rattling or inclined shiny, thin, or minute parts




Curved surfaces



Transparent objects



Minute objects

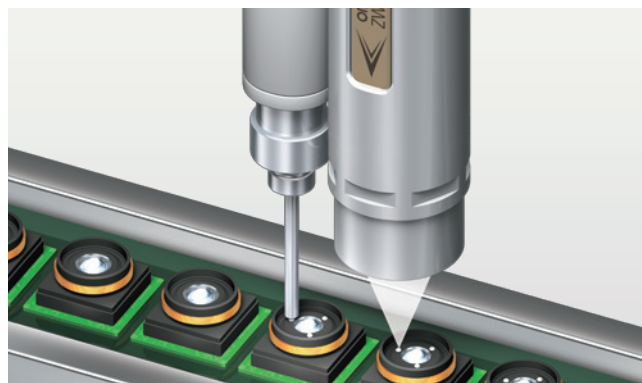



Measurement of coated plastic height

Mirror surfaces (inclined or curved surfaces)

Omron's, unique, white light confocal displacement sensor provides higher resolution measurements of angled or curved and shiny surfaces than traditional laser displacement sensors.

>> Mechanism




p.19 High angle characteristic



Angle characteristic
 $\pm 25^\circ$
for shiny surfaces
*1

Transparent objects



The ZW-8000 Series can measure the top and bottom surfaces of a thin transparent sheet or film by separating the light reflected from both surfaces, which is difficult with conventional laser displacement sensors.



Transparent object thickness from
 $15 \mu\text{m}$
*2

Minute objects

Thanks to its very small spot diameter, the ZW-8000 Series can measure targets on minute objects extremely precisely, which is impossible with a conventional laser displacement sensor with a large spot diameter.



Min. spot diameter
 $4 \mu\text{m}$
*3

● A variety of sensor heads with a small spot diameter to suit your measurement conditions

| Sensor head type | Square-shaped straight | | | Pen-shaped straight | | Pen-shaped right angle | |
|------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|------------------------|------------------------|
| Model | ZW-S8010 | ZW-S8020 | ZW-S8030 | ZW-SP8007 | ZW-SP8010 | ZW-SPR8007 | ZW-SPR8010 |
| Spot diameter | 4- μm dia. | 7- μm dia. | 10- μm dia. | 7- μm dia. | 10- μm dia. | 8- μm dia. | 11- μm dia. |

*1. Typical value of the ZW-S8010/ZW-S7010/ZW-S5010 Sensor Heads.

*2. Typical value of the ZW-S8010 Sensor Heads when transparent objects with refractive index of 1.5 are measured.


*3. Typical value of the ZW-S8010 Sensor Heads

Note: The ZW-5000 standard type is available for measurements with standard precision and speed.

Measurement application


Measurement of “Coarse surfaces” moving at high speed

Ultra-high-speed, high-precision type ZW-7000

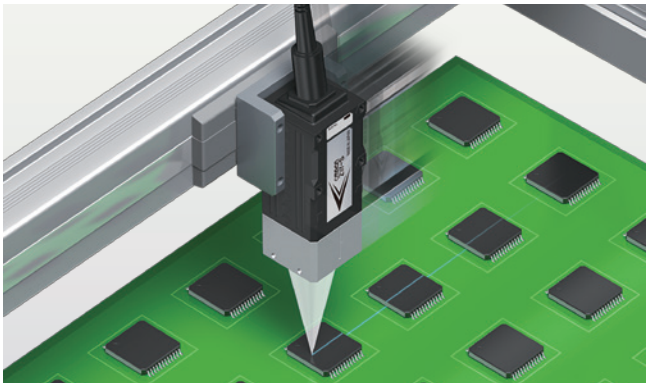

Measurement of height of chips on substrate during movement

Ultra high-speed, stable measurement of diffuse reflective objects during movement




Coarse surfaces

Shape

Shape


Using conventional sensors, the measurement accuracy can be achieved by increasing the averaging times, but downside is that this lowers the profile reproduction accuracy. The ZW-7000 acquires a sharp profile by sampling as fast as 20 μ s without averaging, solving this issue.

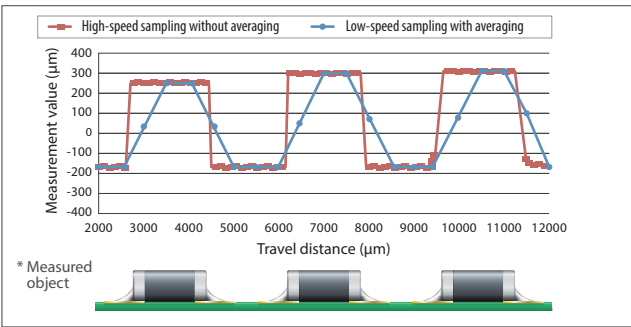

Minimum sampling period
20 μ s

Flatness of coarse surfaces *5


Our white light confocal displacement sensors can provide accurate flatness measurement by tracing an object once without being affected by its excessive reflection, the sensor head direction, nor the material hairline direction, which are difficult to track with a conventional laser displacement sensor.

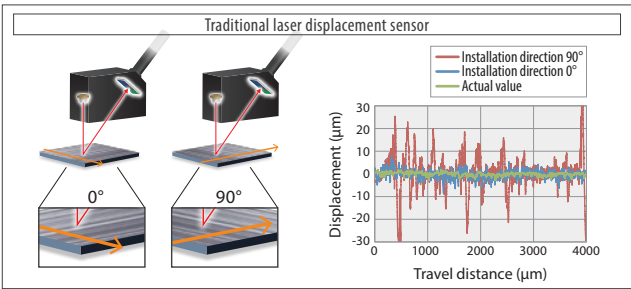

Moving resolution
1/5
(compared to previous principle)
*6

>> Mechanism

p.18 Stable measurements of coarse surfaces

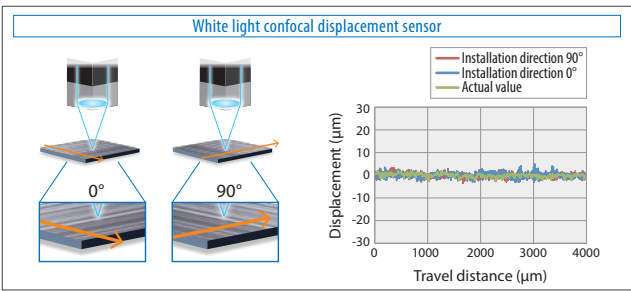

(ZW-S7020) *7

*4. Please ask Omron sales representative for product data for other than the ZW-S7030. *5. Objects with machining marks or hairline pattern *6. ZW-S7020.

*7. Please ask Omron sales representative for product data for other than the ZW-S7020.

Note: All measurement graphs represent typical examples. Measurement may be affected by the shape or material of the object being measured.

Before final installation, test the sensor required for the application to validate that the desired measurements have been obtained.


Sensor head

A wide sensor head offering for diverse integr

New ultra-small sensor heads make integration more flexible

The continued evolution of products as they have become thinner, more curved, and more compact has meant that the inspection process has also become more difficult, and this has necessitated visualization and assembly control in the upstream assembly process.

In response to this, Omron has developed a lineup including both square-shaped type sensor heads with long measurement distance, and ultra-small pen-shaped type (straight or right angle) sensor heads that can be installed in narrow spaces.

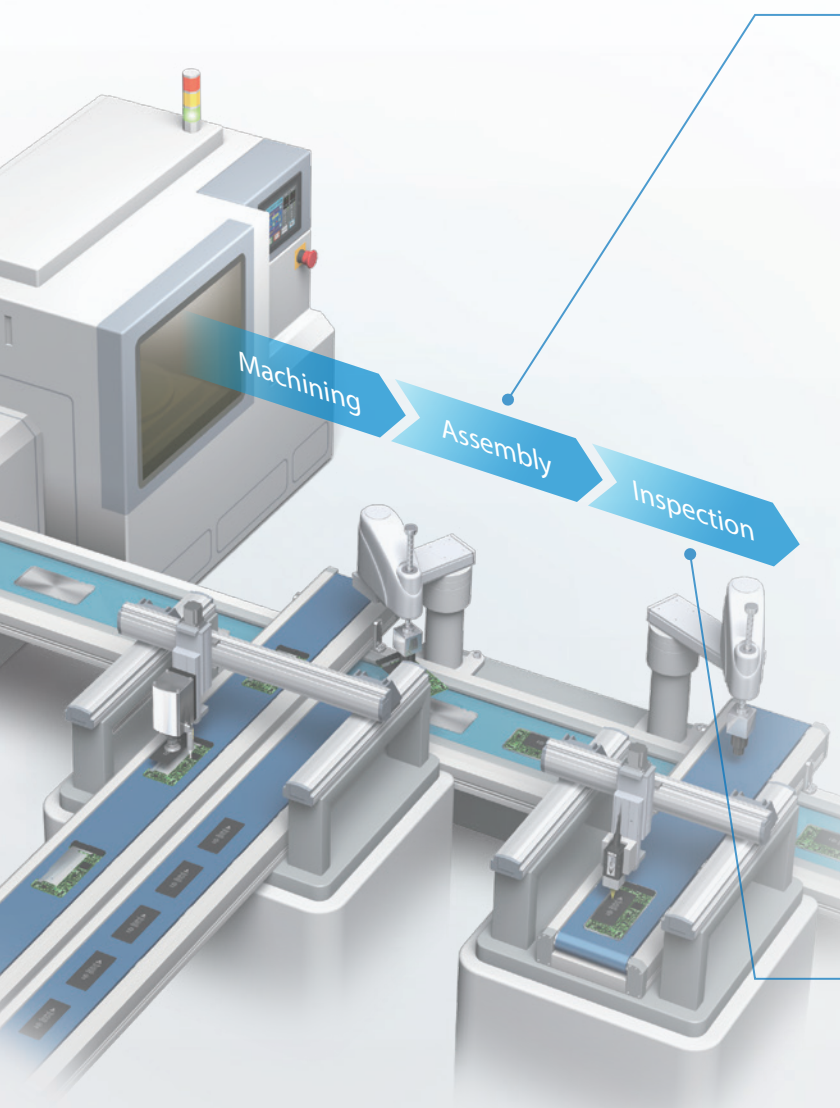

Ideal for assembly process

Reduce interference with stages, robots, or structures

NEW

Pen-shaped straight type

Measuring range
7±0.3 mm/10±0.7 mm

| | |
|-----------|--------------|
| Linearity | ±0.3 μm |
| Weight*1 | approx. 27 g |

Note: Typical values



NEW

Pen-shaped right angle type

Measuring range
7±0.3 mm/10±0.7 mm

| | |
|-----------|--------------|
| Linearity | ±0.45 μm |
| Weight*1 | approx. 31 g |

Note: Typical values



Ideal for inspection process

Perfect solution for strict inspection accuracy

Square-shaped straight type

Measuring range
10±0.5 mm/20±1 mm/
30±2 mm/
40±3 mm *2

| | |
|-----------|---------------|
| Linearity | ±0.3 μm |
| Weight*1 | approx. 170 g |

Note: Typical values




*1. ZW-8000/ZW-7000 Series with 0.3 m fiber cable.

*2. The 40 mm type is only available for the ZW-7000 Series.


* The photo shows the ZW-8000 Series. This size is the same for the ZW-7000/5000 Series.

ation requirements

Installation in narrow spaces

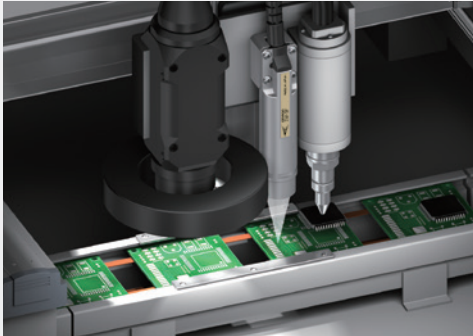


Installation is also possible in places with limited space with pick-up nozzles, positioning cameras, or jigs.

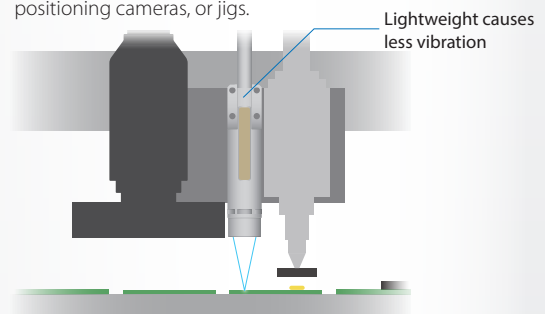


Low-profile, space-saving installation




High-precision control is possible by installing a low-profile head, even in places with strict height restrictions.

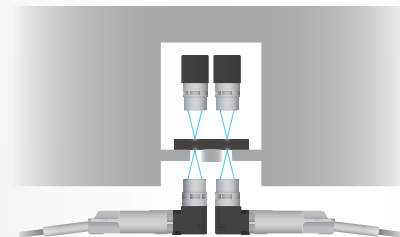

Chip die count

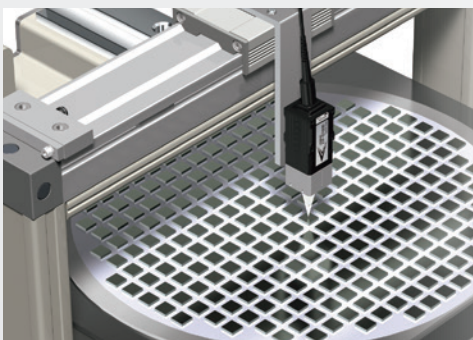

As the heads have no orientation, there is no need to change the angle.




Usability

Reduce production cycle times through

Save Time and Money: No need to rotate the sensor

A conventional laser displacement sensor measures the height of an object based on the position of the spot on the receiver. The machine requires an extra step to rotate the sensor according to the object shape or moving direction. Our white light confocal displacement sensor can measure from the same installation position while moving in any direction, with no restriction on installation direction.

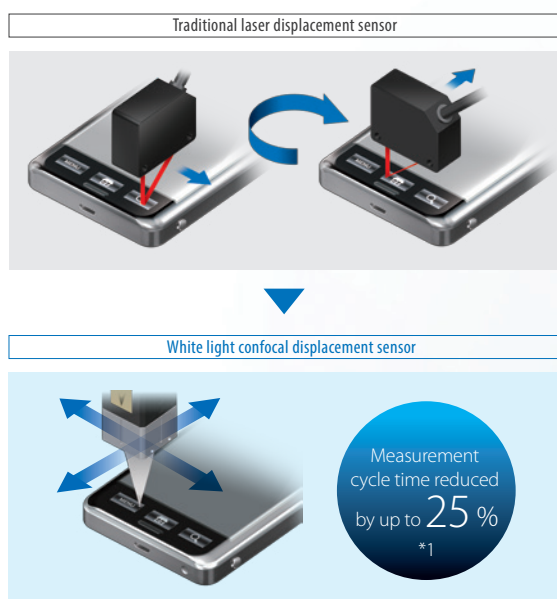

*1. Calculated when an object with irregular surface was measured in both the vertical and horizontal directions.

>> Mechanism


p.19 Direction free

Flexible fiber cable for easy installation

The controller connects to the sensor head through a 3 mm diameter flexible fiber cable.


The cable has cleared a bending test consisting of 3,000,000 repetitions*2 for reliable application on moving parts.

*2. Omron's bending test condition: 3,000,000 bends to a 20 mm bending radius

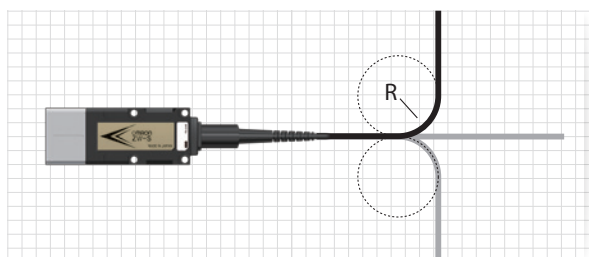

Extension cables for large machines

A 30-m extension fiber cable can be used to extend the distance to up to 32 m, supporting a flexible wiring in a large machine.

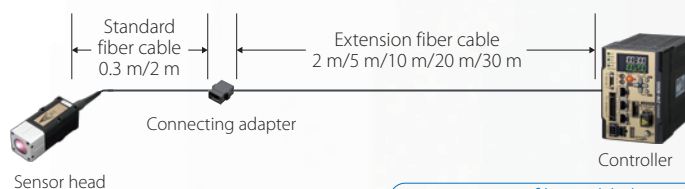


>> Extension fiber cable lineup

p.28 "Order Information Cable"

Easy wiring for moving measurements

No preamplifiers or optical parts are used in the fiber cable, which makes it easy to route the cable through a cable carrier or protective conduit for moving measurements.

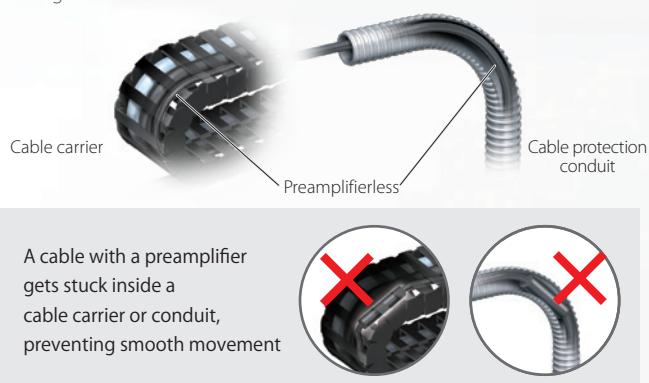


efficient arrangement and movements

Compact fanless controller


The compact sensor controller, which integrates the optical unit including the light source and spectroscopy, can be mounted on a DIN track, saving space in a control panel.

The fanless structure can be used in cleanrooms for manufacturing semiconductors and electronic components.

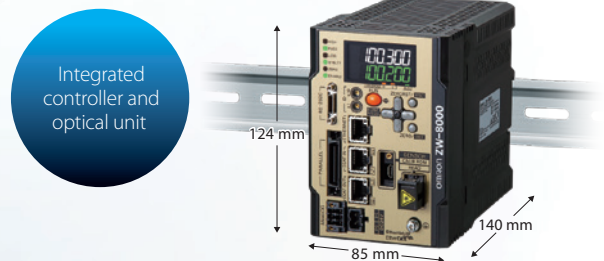

Increase throughput: Simultaneous measurements can be achieved using multiple sensor heads

Space restrictions prevent side-by-side installation of many traditional laser displacement sensors. The pen-shaped straight sensor heads can be installed close together to obtain multiple measurements at once, instead of measuring one at a time, thus reducing measurement time.

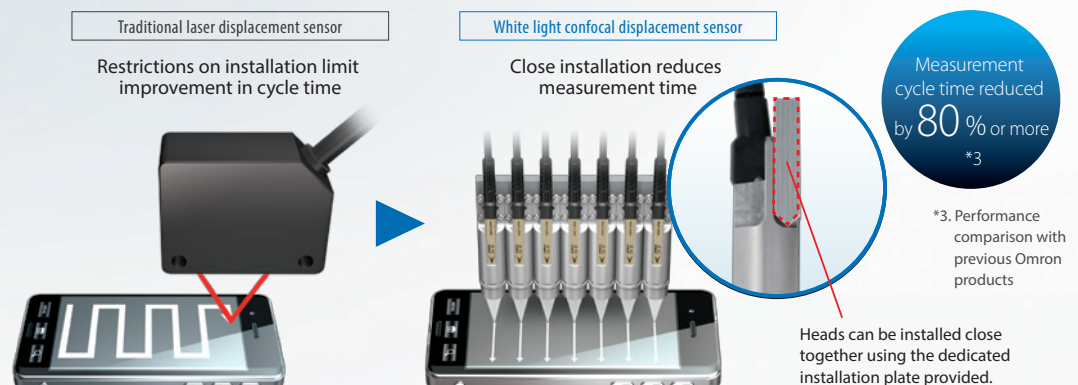


Further Benefits of White Light Confocal

● No discrepancy in the measurement point

With a traditional laser displacement sensor, the measurement position and spot size vary with the height. This means there are times when the position cannot be measured with high resolution due to warping and inclination. With a white light confocal displacement sensor, the measurement point remains the same at any position in the measuring range so that precise measurements can always be made.

● Measurement in narrow area and by the wall

When a traditional laser displacement sensor measures the inside of a narrow tube or the height of a small depression, the wall often obstructs the reflected light, and the orientation of the sensor and object must be adjusted many times. A white light confocal displacement sensor can measure the points in narrow spaces or small objects, without changing its installation orientation, because the emitted light and reflected light are positioned along the same axis.

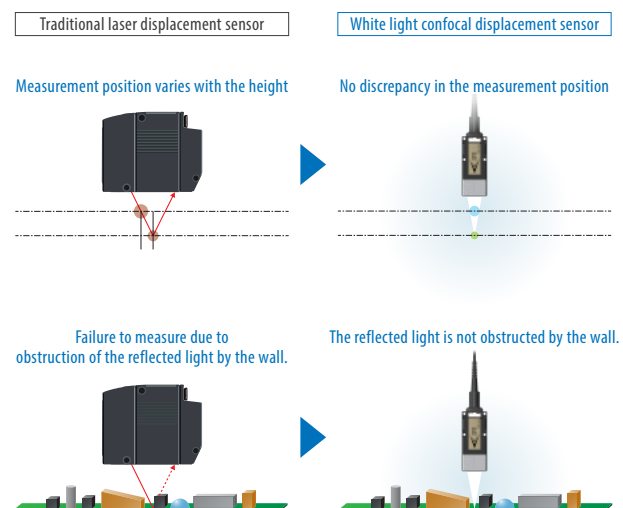



Usability

Reduce setup and tuning time



Reduced work - EMC measures and thermal design are not required

The sensor head contains no electronic parts and indicators that generate noise and heat. The sensor head design maintains stable operation in installations with electronic or magnetic noise. Devices in close proximity and measurement values are not affected by noise or heat from the sensor head.

EMC measures

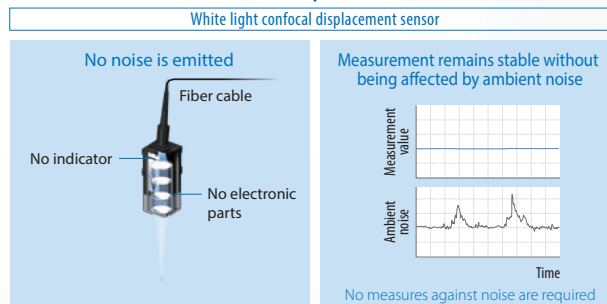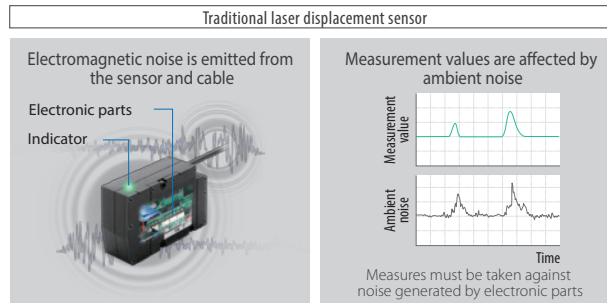


Thermal design

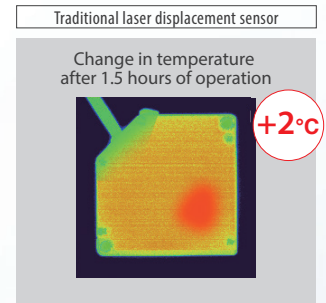

Patent pending

Multi-point scaling for stable measurements

The ZW Series measures up to 10 points to minimize measurement errors. *1 Even when the sensor head is installed at an angle or measures objects through glass, stable measurements can still be achieved, which is difficult with conventional 2-point scaling.

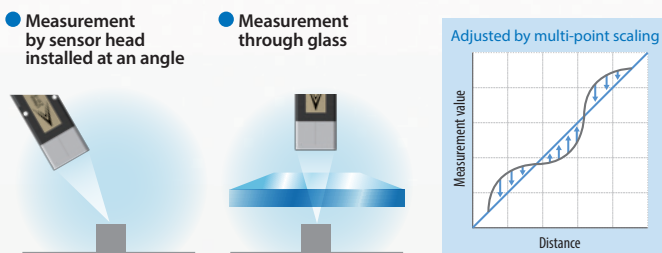

*1. Supported on ZW-8000 Series

No laser safety measures required

A white light source *2 eliminates the need for safety measures around the machine and safe use training for workers that are required for a laser light source.

Previously safety measures or laser were required

When a laser displacement sensor was used, a shield around the machine for safety was required and workers had to be trained for safe use.




*2. The ZW-8000 Series is categorized as Class 1


Patented

Calibration ROM ensures compatibility and precision

The sensor controller is compatible with sensor heads, which enables quick replacement and saves costs. Each sensor head has its own calibration ROM that is used to load calibration values into the sensor controller, providing compatibility and high-precision measurements.

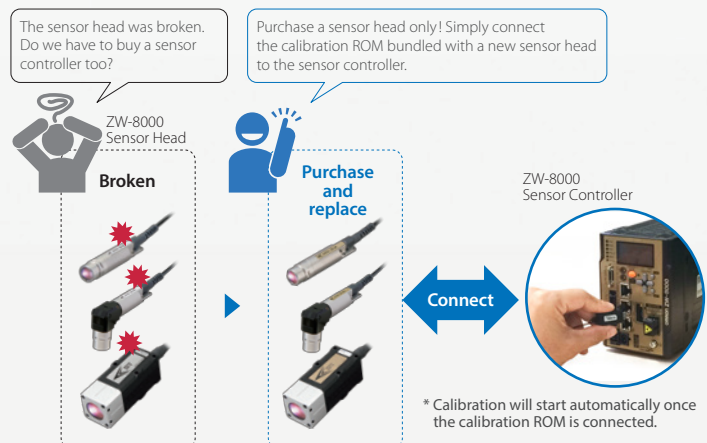

* Any of three ZW-8000 Sensor Head types can be connected to the ZW-8000 Sensor Controller.

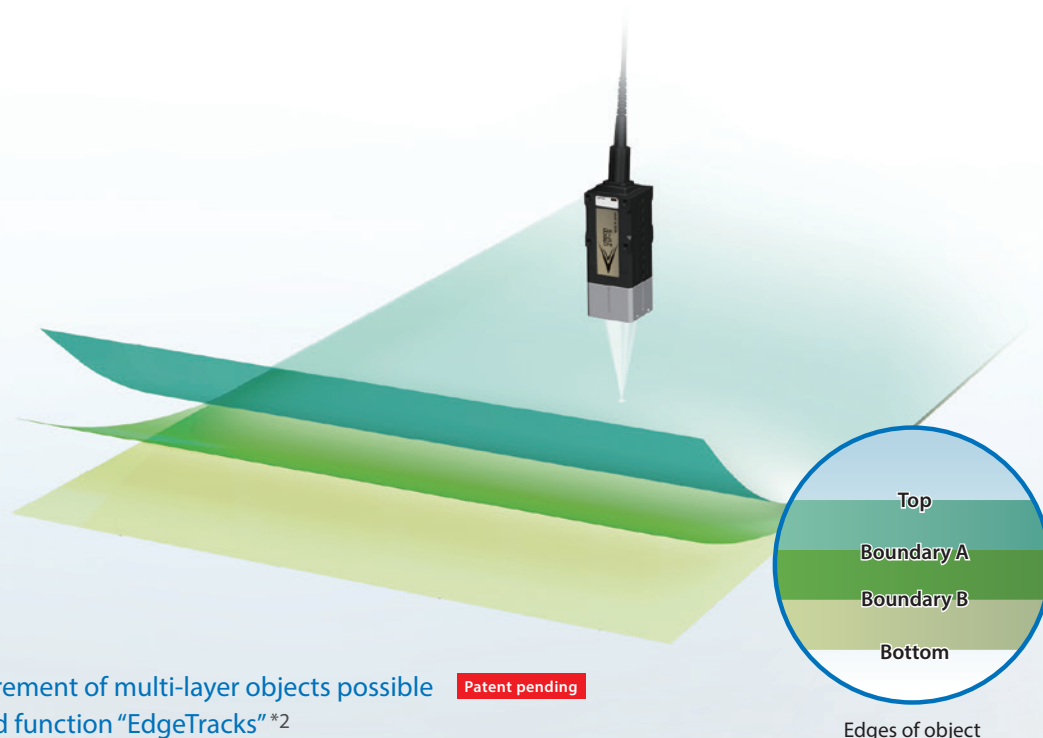

Edges of object


Stable measurement of multi-layer objects possible with advanced function "EdgeTracks" *2

Patent pending

When measuring objects with multiple layers, the white light confocal displacement sensor can stably measure target edges even if the object rattles and certain of the edges cannot be measured.


Traditional laser displacement sensor

If certain of the edges are outside the measuring range (cannot be measured) due to vibrations of the object, the other edges are numbered incorrectly.

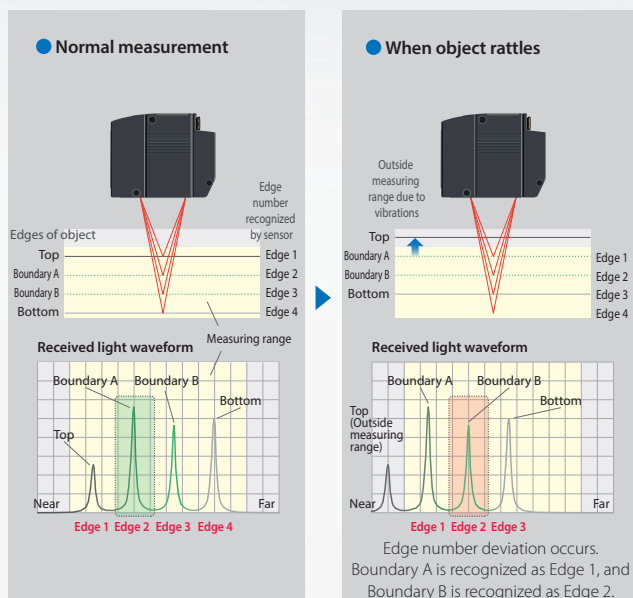


White light confocal displacement sensor


The EdgeTracks function can take stable measurements with no edge number deviation, even if certain of the edges cannot be measured.

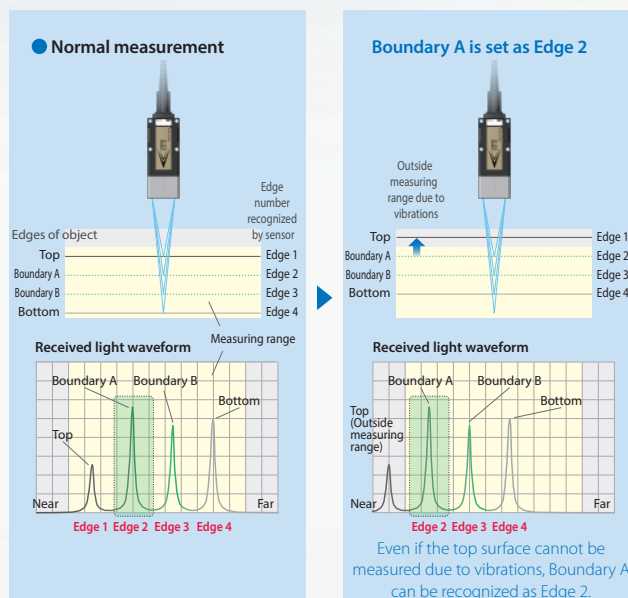

Object displacement

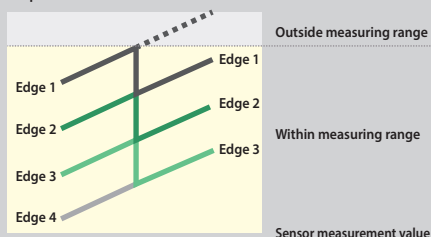

Object displacement

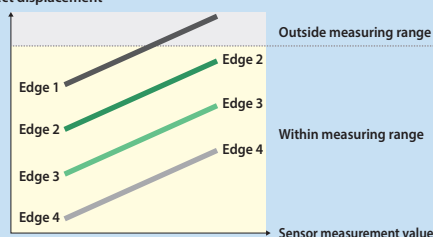

*2. Supported only on ZW-8000 Series

System


Precise measurement of “target positions” through synchronous measurement with

To eliminate measurement errors due to a position offset during moving measurement, the ZW Series provides the functionality to link moving parts with measurement timing (external synchronous measurement mode).

Movement measurement linked to stage position information ^{*1}



In addition to excellent angle characteristics, synchronization with object movement is required to measure the shapes of objects with sharply curved edges (e.g., cover glass of smartphone). Moreover, the system to control vertical movement of the sensor head is required to track shapes outside the measurement range.

^{*1} This functionality is available on the firmware version 2.10 or later.
If you register as a member after purchasing the product, the latest firmware for the controller is available for free.
Refer to the member registration sheet that is enclosed with the product for details.

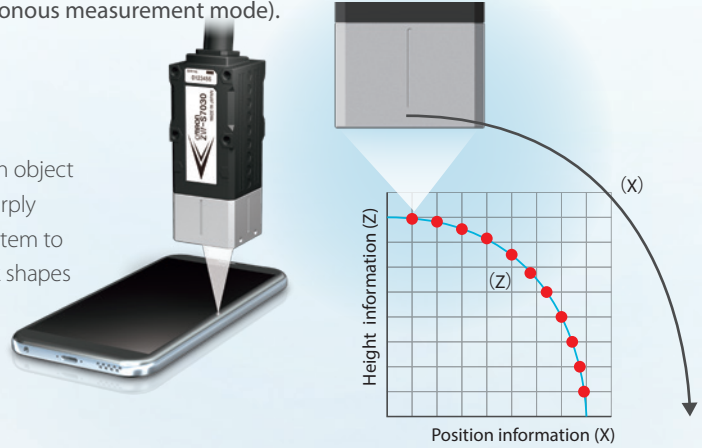

Previous system



Sensors perform measurement within the same cycle, regardless of stage acceleration and deceleration.

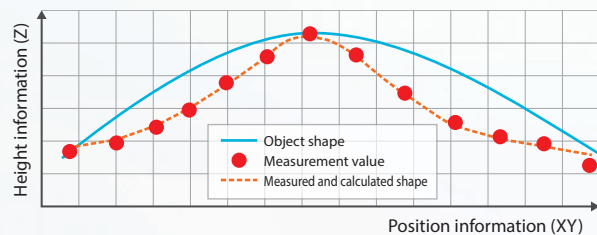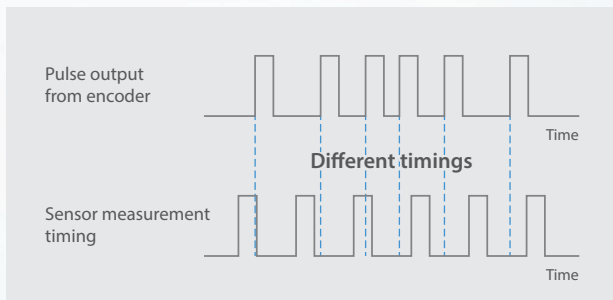

As the measurement position (XY) is not synchronized with the measurement value (Z), an accurate object shape cannot be obtained if the stage accelerates or decelerates.

ZW Series

Sensors perform measurement based on encoder timing (External synchronous measurement mode)

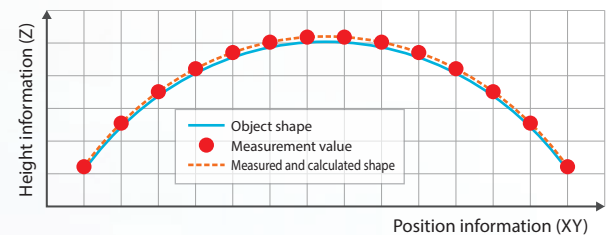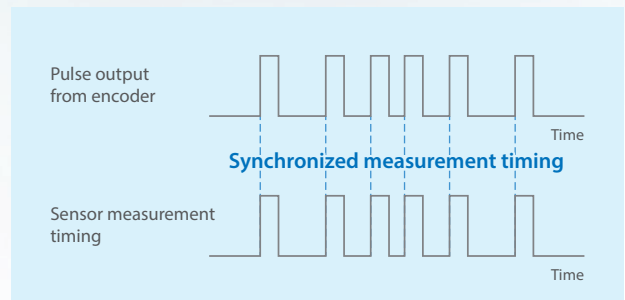

Each sensor synchronizes with pulse output from the encoder, enabling high-precision measurement linked to the XY position, regardless of stage acceleration and deceleration.

DLL Quick integration into machine HMI

DLL ^{*2} files are provided to easily display ZW Series setting screens and measurement results on a Windows/Mac OS PC used as a machine HMI.

| | | |
|--------------|---|---|
| Provided DLL | <ul style="list-style-type: none"> Settings and measurement conditions reference Acquiring measurement values | <ul style="list-style-type: none"> Acquiring light received waveforms Logging control |
|--------------|---|---|


^{*2} If you register as a member after purchasing the product, you can download DLL for free.
Refer to the member registration sheet that is enclosed with the product for details.



on moving objects external devices

More features Sysmac makes moving measurement easy

Easy setting and measurement through synchronization with EtherCAT

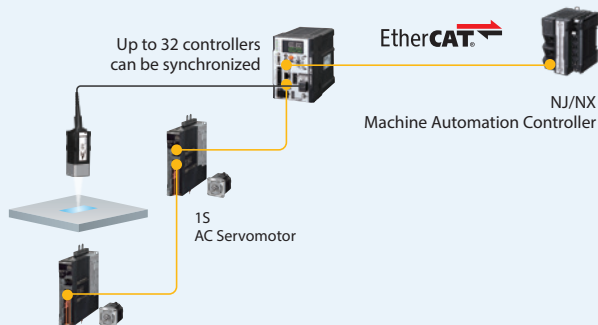

The sensors begin measurement automatically by synchronizing with periodic EtherCAT communication. This system ensures accurate synchronisation between devices with 1 μ s jitter. The sensor controller also supports **EtherNet/IP™**, **analog output**, and **RS-232C**, fitting into a wide range of machines.

Operations integrated within Sysmac Studio



Efficient setting of multiple ZW Sensors

You can make settings for all of devices that are connected via EtherCAT with the Automation Software Sysmac Studio. Even when using many sensors, you can copy the setting data to effectively integrate several sensors and easily program the processing between the sensors.

Easy set-up with Function Blocks




Omron offers Function Blocks (FBs) to make programming for system link applications easier.

Rapid set-up without any programming know-how is possible with an FB which tracks object shapes, FBs used to generate 2D shape data and calculate characteristic point dimensions, and HMI screens used to specify settings and perform measurement.

For details, refer to the SYSMAC-XR014 Dimension Measurement Library on the following URL: www.ia.omron.com/sysmac_xr014


Tracer Control

This method is suitable for measuring shapes whose height varies gradually.




Surface Search


This method is suitable for measuring shapes whose height varies greatly and sharply. When the height of the measurement surface changes and it goes outside the measurement range of the displacement sensor, the height of the displacement sensor is readjusted and the measurement is continued.




Height




Edge position




Inflection point




Angle



Sectional area



Shape comparison



Technical explanation

New technologies for in-line measurements with

● New technology in ZW Series offering unsurpassed precision and speed



Ultra-high precision

Ultra High Power White Light

The long-term stable, high power white light source was adopted for the ZW-7000 Series to provide fast responses and stable measurements of low-reflective objects.

The ZW-8000 Series incorporates a newly-designed white laser for stable measurement of thin transparent sheets and minute shapes.



* Conceptual illustration

NEW



Ultra-high photoconductivity

Precise Core Fiber

The fibers specially designed separately for the ZW-7000 and ZW-8000 Series transmit white light to the sensor head even more efficiently and deliver the lights reflected from other layers to the controller ultra-sensitively, enabling more precise measurement.

NEW



High resolution

Advanced Spectrograph I/II

The spectroscope Advanced Spectrograph, which converts the color wavelength into the distance, offers increased waveform resolution. The ZW-8000 Series with the new Advanced Spectrograph II enables ultra-high-precision measurements.

NEW



● Common technology throughout the entire series offering unsurpassed usability




25 times faster data processing speed*1

High Speed Processor

The new processor was designed to increase processing speed for high precision measurements, from white light emission through sensing and processing to data logging.

*1. Compared to the ZW-CE Series.



* Conceptual illustration



Large logging capacity (up to 2 million values)

Mega Logging Memory

The memory capacity was greatly increased to log, process and store up to 2,000,000 values*2 obtained by high-speed sampling.

*2. Measurement values, emitted light amounts, or received light amounts can be logged.


unmatched precision and speed




High sensitivity

High Sensitivity High Speed CMOS

The CMOS for the ZW-8000/7000 Series were optimized to measure any object more precisely, sensitively, and stably.



* Conceptual illustration



Low aberration


Advanced OCFL Module

The OCFL*3 module that controls the focal point for each wavelength of white light was further developed. Its multi-lens structure reduces aberration to 1/4*4 to provide stable, high-resolution measurements, without compromising its compact design.

*3. OCFL: Omron Chromatic Focus Lens

*4. Compared to the ZW-S07/-S20/-S30/-S40.

* Advanced OCFL Module is also used for the ZW-5000 Series.



* Conceptual illustration

● Common technology throughout the entire series offering unsurpassed ease of integration



Ultra-precision

NEW

Ultra-precision machining and mechanical design

The ultra-precision machining technology and ultra-precision mechanical design minimize the housing while giving a lens diameter sufficient for high-precision measurements.


* The ultra-precision machining technology and ultra-precision mechanical design are also used for the ZW-5000 Sensor Heads.



* Conceptual illustration


Technical explanation

White light confocal principle to achieve stable

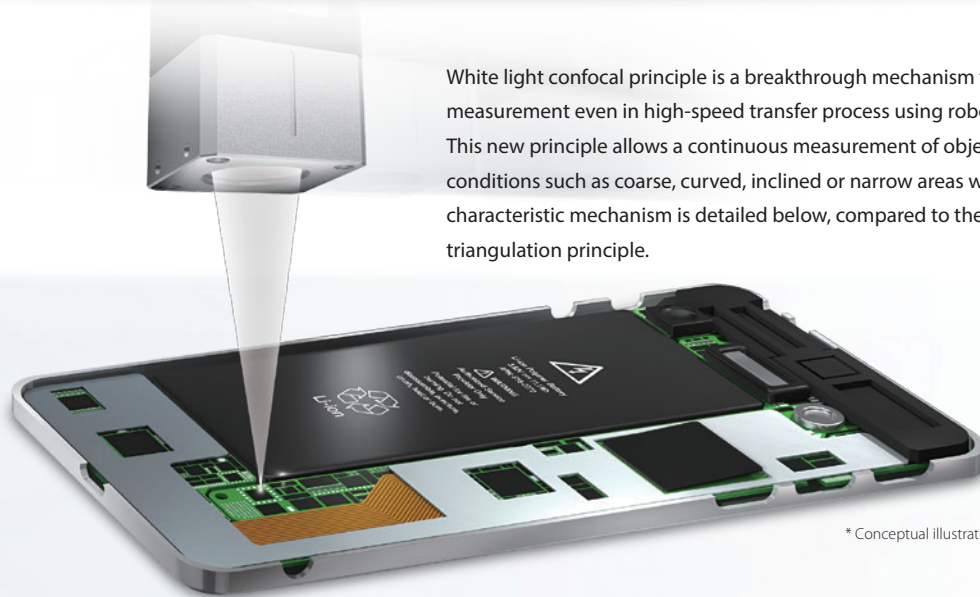


* Conceptual illustration

White light confocal principle is a breakthrough mechanism to enable a stable measurement even in high-speed transfer process using robots and stages. This new principle allows a continuous measurement of object in any mixed conditions such as coarse, curved, inclined or narrow areas while moving. Its characteristic mechanism is detailed below, compared to the traditional triangulation principle.

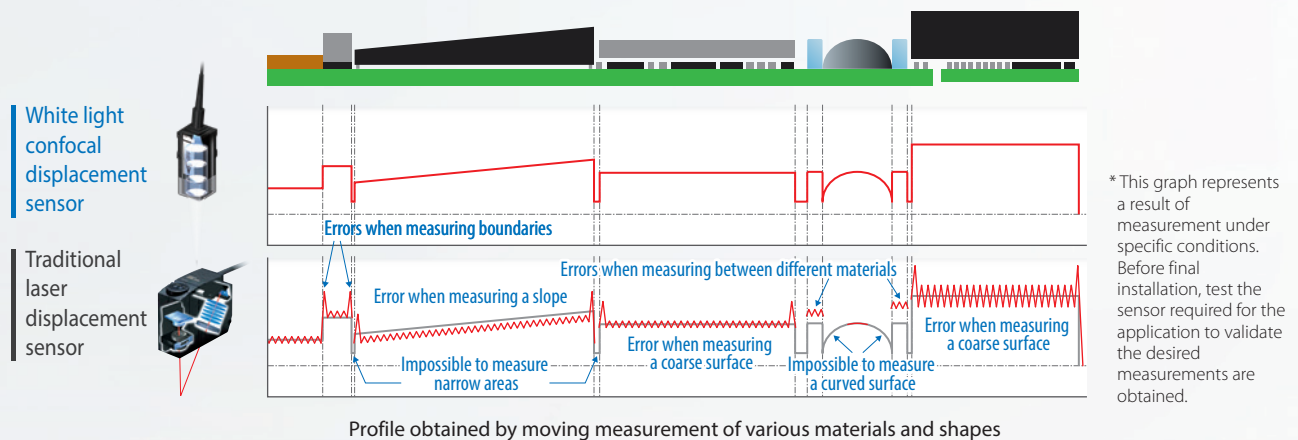


Stable measurements of coarse surfaces

Only the light reflected from the measurement point enters the pinhole even if excessive light reflected from the object changes during movement. This enables stable and precise measurement without being affected by multiple reflection light.

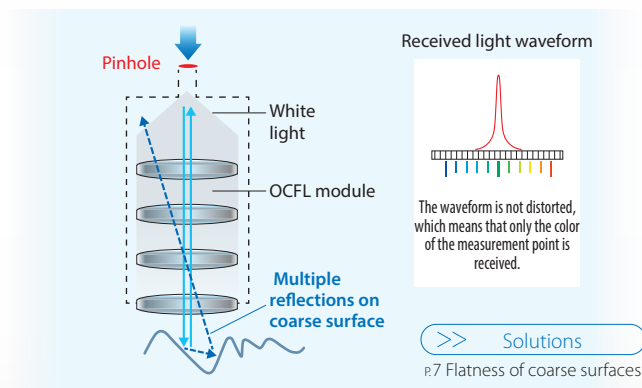

Laser triangulation principle


Reflected light is received on a receiver, and height is measured from the waveform of light received on the receiver. The waveform is distorted due to the effect of excessive reflection, resulting in a measurement error. The effect of excessive reflection changes during movement, which causes unstable measurements.

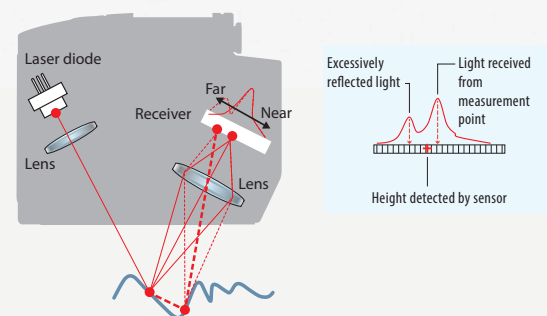


measurements during movement

High angle characteristic

Because light is emitted directly from above, the reflected light is not widely diffused. The sensor can measure by stably receiving a part of the reflected light.

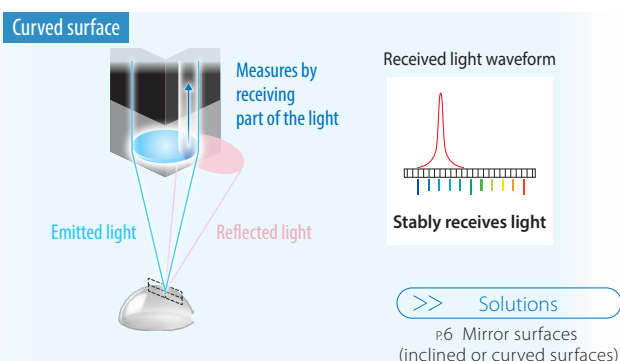

The wavelength (position) can be obtained from a part of the received light even if the reflected light amount is reduced. This enables stable height measurements.

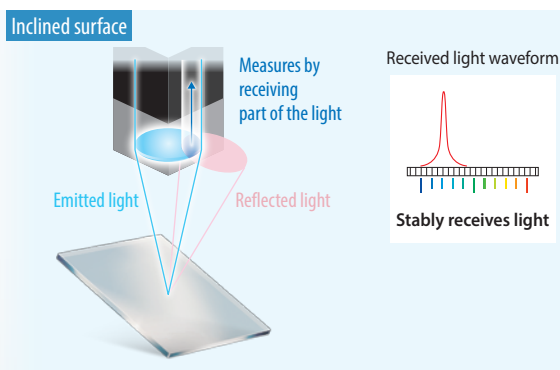


Laser triangulation principle

A laser spot beam is emitted obliquely from above. When the position of a glossy, regular-reflective object, where the beams are reflected in one direction, is shifted, the light reflected from the curved surface cannot be received.




Even if the light can be received, the received light waveform is distorted due to lens aberration as a result the measurement becomes unstable.

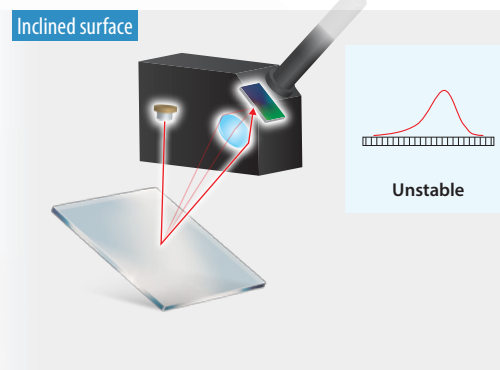


Direction free

Stable measurement is not affected by the movement direction of objects or the sensor. This is achieved by emitting and receiving a cone-shaped beam of white light. This slim beam is also suitable for measurements in narrow areas.

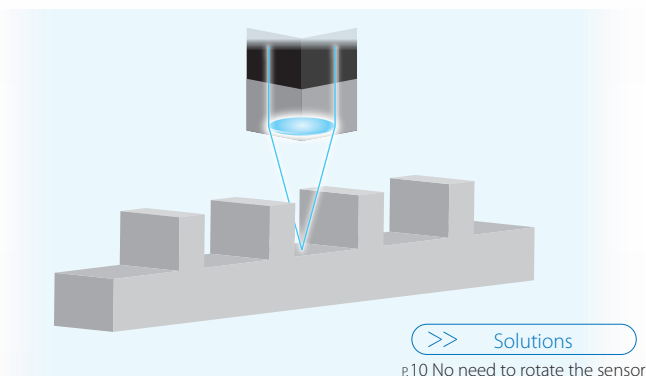

Laser triangulation principle

The reflected light is detected obliquely from above. Depending on the installation direction, the sensor cannot measure the object because the reflected light is blocked.

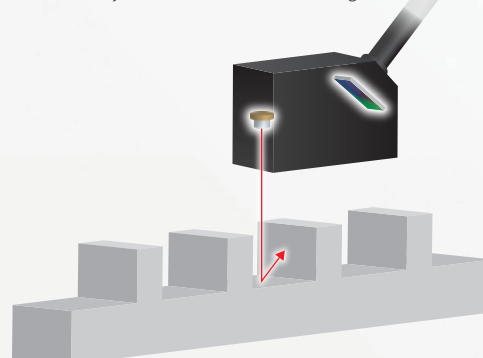

Selection

Find the right controller and sensor head

STEP1 Select controller based on measurement object and situation

Measure rattling or inclined
“transparent objects or mirror
surfaces” such as thin film
sheets or glass



Ultra high-precision type **ZW-8000 Series**

Sensor Controller
ZW-8000T



Measure accurate shapes of
“coarse surfaces” while the
sensor head is moving



Ultra high-speed type **ZW-7000 Series**

Sensor Controller
ZW-7000T



Cost-effectively integrate stable
and reliable measurement using
the white light confocal principle
into production lines









Standard type **ZW-5000 Series**




Sensor Controller
ZW-5000T



STEP2 Select head based on installation space

| | | |
|--|--|--|
| Width is limited |  | Pen-shaped straight type ZW-SP80□□ |
| Height is limited |  | Pen-shaped right angle type ZW-SPR80□□ |
| Precision is more important than space |  | Square-shaped straight type ZW-S80□□ |

| | | |
|--|---|--|
| Width is limited |  | Pen-shaped straight type ZW-SP70□□ |
| Height is limited |  | Pen-shaped right angle type ZW-SPR70□□ |
| Precision is more important than space |  | Square-shaped straight type ZW-S70□□ |

| | | |
|--|---|--|
| Width is limited |  | Pen-shaped straight type ZW-SP50□□ |
| Height is limited |  | Pen-shaped right angle type ZW-SPR50□□ |
| Precision is more important than space |  | Square-shaped straight type ZW-S50□□ |

STEP3 Select model based on distance

| | | Measuring range | Static resolution |
|-------|-------------------|-----------------|-------------------|
| Short | ZW-SP8007 | 7±0.3 mm | 0.25 μm |
| Long | ZW-SP8010 | 10±0.7 mm | |
| Short | ZW-SPR8007 | 7±0.3 mm | |
| Long | ZW-SPR8010 | 10±0.7 mm | |
| Short | ZW-S8010 | 10±0.5 mm | |
| Long | ZW-S8030 | 30±2 mm | |

| | | Measuring range | Static resolution |
|-------|-------------------|-----------------|-------------------|
| Short | ZW-SP7007 | 7±0.3 mm | 0.25 μm |
| Long | ZW-SP7010 | 10±0.7 mm | |
| Short | ZW-SPR7007 | 7±0.3 mm | |
| Long | ZW-SPR7010 | 10±0.7 mm | |
| Short | ZW-S7010 | 10±0.5 mm | |
| Long | ZW-S7040 | 40±3 mm | |

| | | Measuring range | Static resolution |
|-------|-------------------|-----------------|-------------------|
| Short | ZW-SP5007 | 7±0.3 mm | 0.25 μm |
| Long | ZW-SP5010 | 10±0.7 mm | |
| Short | ZW-SPR5007 | 7±0.3 mm | |
| Long | ZW-SPR5010 | 10±0.7 mm | |
| Short | ZW-S5010 | 10±0.5 mm | |
| Long | ZW-S5030 | 30±2 mm | |

The sensor controller is compatible with sensor heads. When the sensor head is broken, replace only the broken sensor head, instead of both the sensor head and controller, and connect a new head to the existing controller.

Patented
Calibration ROM ensures compatibility and precision

Application

ZW Series for a variety of applications

Smart phone (component process)

Parallelism measurement between parts before module part assembly




Parallelism measurement between parts before module part assembly




Groove measurement of camera modules



Nozzle gap inspection during resin application

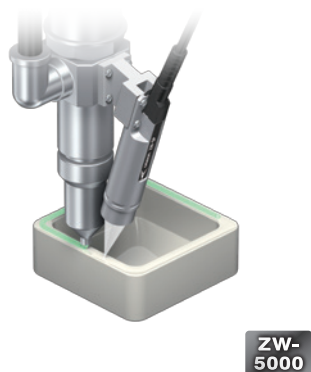

Gap inspection after module part assembly

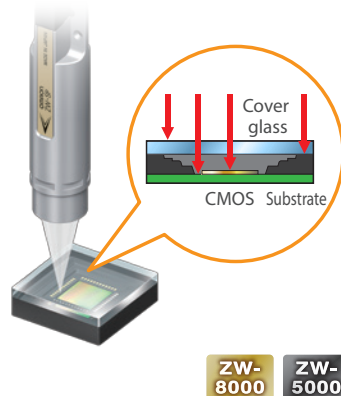

Flatness measurement of cover glass




Smart phone (assembly process)


Height measurement of assembled parts



Case width measurement

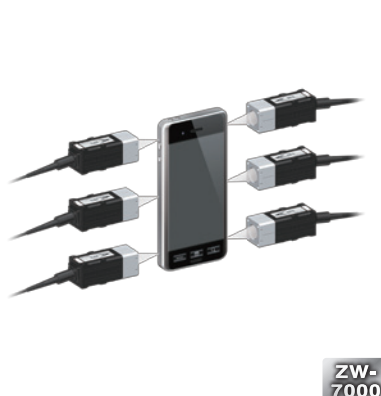


Level difference measurement between buttons and case

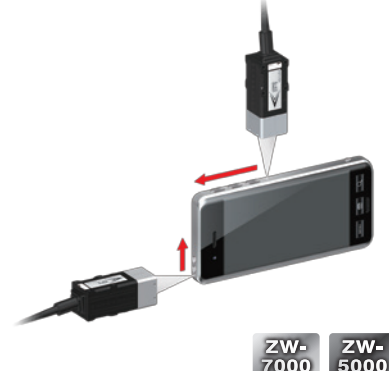


Note: The most suitable model will vary depending on the object material and surface.
Before final installation, test the sensor required for the application to validate the desired measurements are obtained.


Level measurement of cases

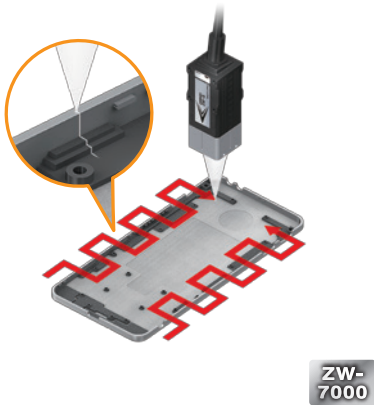


Thickness measurement of battery sheets

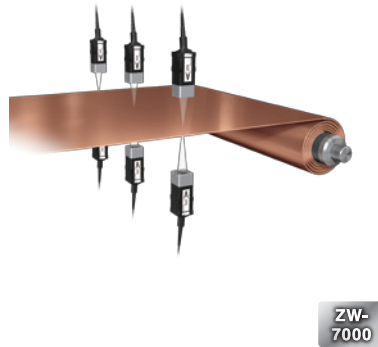

LED potting shape measurement

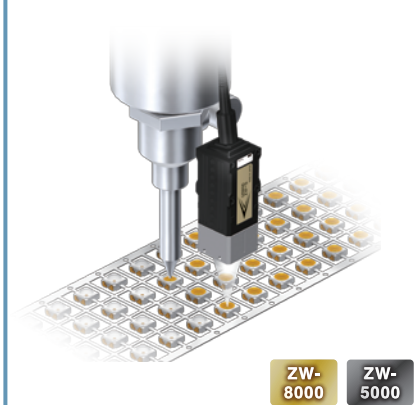


Flatness measurement of cases

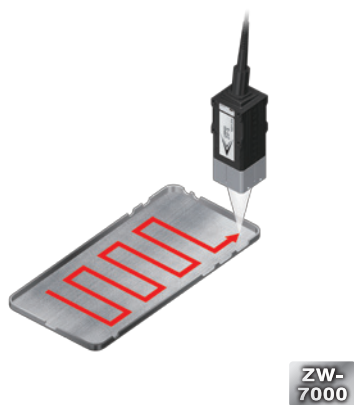

Flatness measurement of batteries



Coplanarity measurement of connector pins

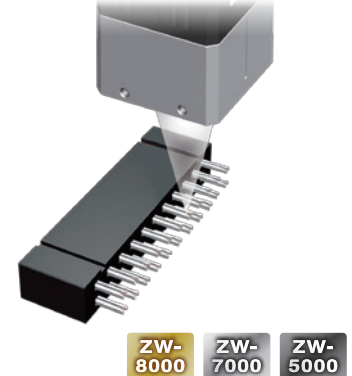


Level difference measurement of logos




SEMI/FPD

Abrasion profile measurement of target material




ZW-7000

Height measurement of wafers



ZW-8000 ZW-5000

Gap measurement of electronic chips




ZW-8000 ZW-5000

Z axis adjustment of chip moulder




ZW-7000

Profile measurement of solder on substrates



ZW-8000 ZW-5000

Profile measurement of silicon



ZW-8000 ZW-5000


Automotive parts

Inner diameter measurement




ZW-7000

Profile inspection of sealing materials for assembled parts




ZW-5000

Operation inspection of relay contacts




ZW-7000 ZW-5000

Surface deflection and flatness measurement of rotary parts




ZW-7000

Depth measurement of holes on metal components



ZW-7000


Profile inspection of friction materials for clutches



ZW-7000


Pharmaceuticals

Glass thickness measurement on rollers

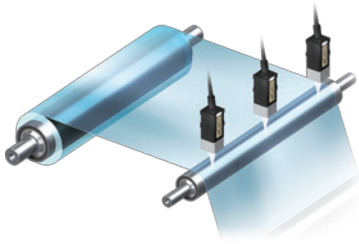

ZW-8000 ZW-5000

Thickness measurement of lenses




ZW-8000 ZW-5000

Liquid level measurement in small-diameter vessels




ZW-5000

Position inspection of film lamination




ZW-8000 ZW-5000

Assembly measurement of ECU boards



ZW-7000

Curvature measurement of glass surfaces



ZW-7000

Thickness measurement of motor cores



ZW-7000

Eccentricity measurement of motors



ZW-7000

This image shows a full page of white paper with horizontal grey ruling lines. The word "MEMO" is printed at the top center in bold black capital letters. The rest of the page is filled with evenly spaced horizontal lines, typical of a notebook or memo pad.

Reliable measurements for any material and surface types




- Measuring shiny objects with an inclination of $\pm 25^\circ$
- $\pm 0.3 \mu\text{m}$ or less linearity for various materials
- Sampling rate as fast as $20 \mu\text{s}$
- Small spot diameter of $4 \mu\text{m}$ or less

Note: Angle characteristic, linearity, sampling period and spot diameter given in the cover differ among models. Please ask OMRON sales representative for details.




System Configuration

EtherCAT connections

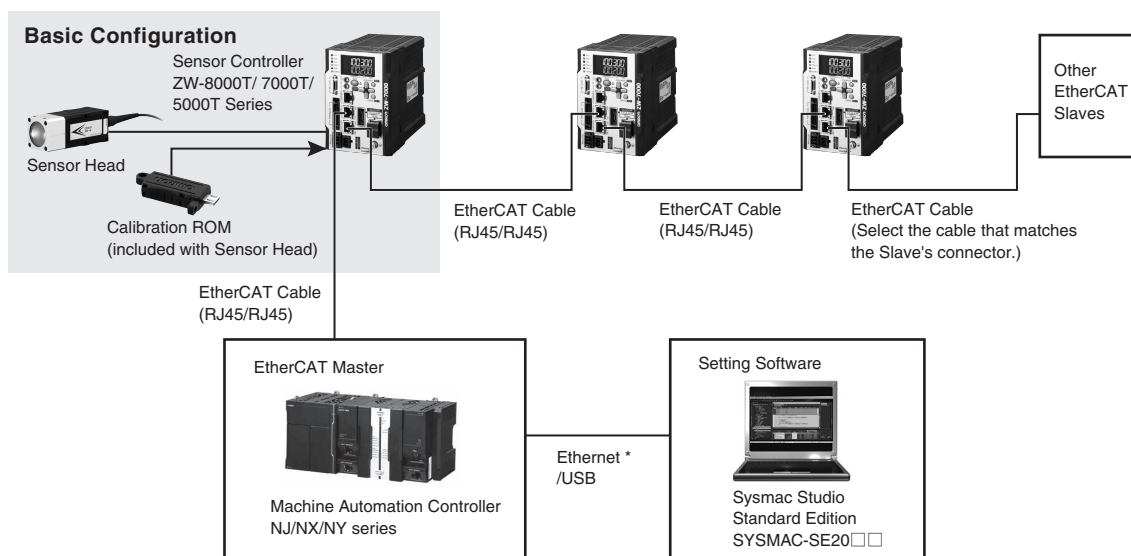

Analog, EtherNet/IP, Ethernet, RS-232C and Parallel connections

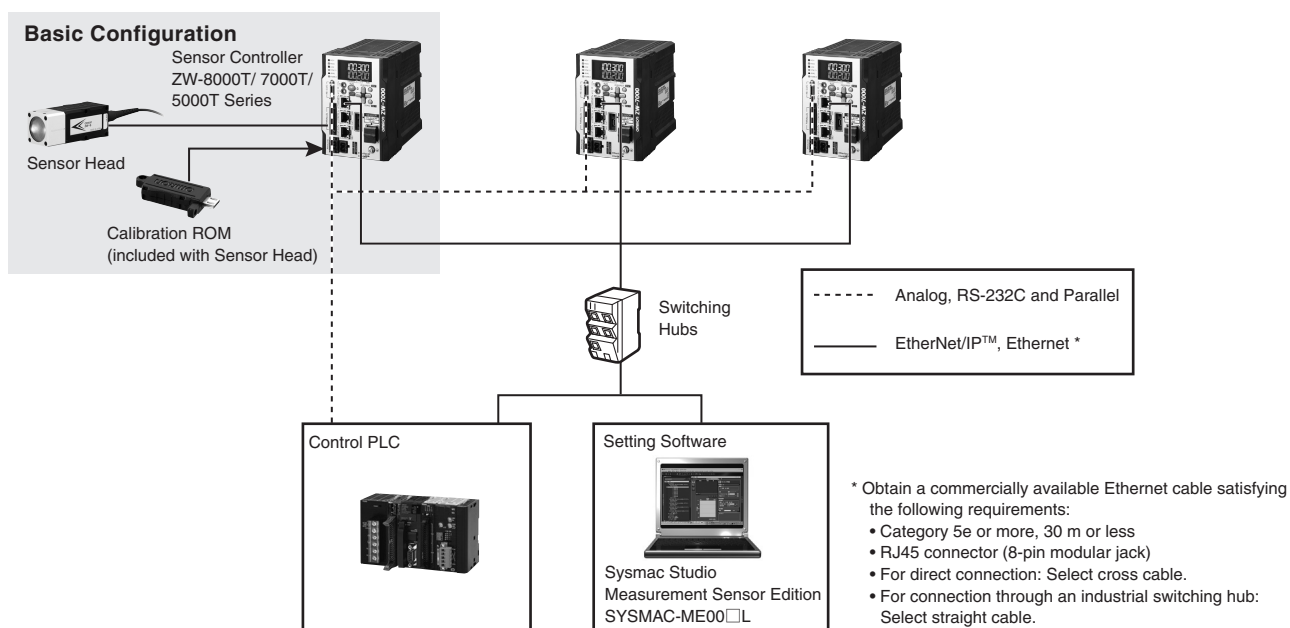





ZW-8000/7000/5000 Series

Order Information

ZW-8000




●Sensor Head

Square-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|---|---------------|---------------------|--------------|---------------|
|  |  <p>0 mm 9.5 mm 10 mm 10.5 mm</p> <p>← Measuring range 10±0.5 mm</p> | 4 μm dia. | 0.25 μm | 2 m | ZW-S8010 2M |
| | | | | 0.3 m | ZW-S8010 0.3M |
| |  <p>0 mm 19 mm 20 mm 21 mm</p> <p>← Measuring range 20±1mm</p> | 7 μm dia. | 0.25 μm | 2 m | ZW-S8020 2M |
| | | | | 0.3 m | ZW-S8020 0.3M |
| |  <p>0 mm 28 mm 30 mm 32 mm</p> <p>← Measuring range 30±2mm</p> | 10 μm dia. | 0.25 μm | 2 m | ZW-S8030 2M |
| | | | | 0.3 m | ZW-S8030 0.3M |




* Values when the Sensor Controller ZW-8000T is used.

Pen-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|---|---------------|---------------------|--------------|----------------|
|  |  <p>0 mm 6.7 mm 7 mm 7.3 mm</p> <p>← Measuring range 7±0.3 mm</p> | 7 μm dia. | 0.25 μm | 2 m | ZW-SP8007 2M |
| | | | | 0.3 m | ZW-SP8007 0.3M |
| |  <p>0 mm 9.3 mm 10 mm 10.7 mm</p> <p>← Measuring range 10±0.7mm</p> | 10 μm dia. | 0.25 μm | 2 m | ZW-SP8010 2M |
| | | | | 0.3 m | ZW-SP8010 0.3M |


* Values when the Sensor Controller ZW-8000T is used.

Pen-shaped right angle type



| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|---|--|---------------|---------------------|--------------|-----------------|
|  |  <p>← Measuring range 7±0.3 mm</p> <p>0 mm 7.3 mm 7 mm 6.7 mm</p> | 8 μm dia. | 0.25 μm | 2 m | ZW-SPR8007 2M |
| | | | | 0.3 m | ZW-SPR8007 0.3M |
| |  <p>← Measuring range 10±0.7mm</p> <p>0 mm 10.7 mm 10 mm 9.3 mm</p> | 11 μm dia. | 0.25 μm | 2 m | ZW-SPR8010 2M |
| | | | | 0.3 m | ZW-SPR8010 0.3M |

* Values when the Sensor Controller ZW-8000T is used.

●Sensor Controller with EtherCAT

| Appearance | Power supply | Output type | Model |
|---|--------------|-------------|----------|
|  | 24 VDC | NPN/PNP | ZW-8000T |

●Cable






| Appearance | Item | Cable length | Model |
|---|--|--------------|------------|
|  | Extension Fiber Cable (from Sensor Head to Sensor Controller), (Fiber Adapter ZW-XFCS is included) | 2 m | ZW-XF8002R |
| | | 5 m | ZW-XF8005R |
| | | 10 m | ZW-XF8010R |
| | | 20 m | ZW-XF8020R |
| | | 30 m | ZW-XF8030R |
|  | Fiber Adapter (used between Sensor Head pre-wired cable and Extension Fiber Cable) | — | ZW-XFCS |

Note: Extension Fiber Cable ZW-XF80□□R can be used with the firmware version 3.000 or later. If you have an old version Sensor Controller, register as a Sysmac member and download the latest firmware and tools to update your Sensor Controller. Refer to the Sysmac member registration sheet that is enclosed with the Sensor Controller for details on member registration and firmware download.

ZW-7000




●Sensor Head

Square-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|---|--|---------------|---------------------|--------------|---------------|
|  |  0 mm, 9.5 mm, 10 mm, 10.5 mm Measuring range 10±0.5 mm | 50 μm dia. | 0.25 μm | 2 m | ZW-S7010 2M |
| | | | | 0.3 m | ZW-S7010 0.3M |
| |  0 mm, 19 mm, 20 mm, 21 mm Measuring range 20±1mm | 70 μm dia. | 0.25 μm | 2 m | ZW-S7020 2M |
| | | | | 0.3 m | ZW-S7020 0.3M |
| |  0 mm, 28 mm, 30 mm, 32 mm Measuring range 30±2mm | 100 μm dia. | 0.25 μm | 2 m | ZW-S7030 2M |
| | | | | 0.3 m | ZW-S7030 0.3M |
| |  0 mm, 37 mm, 40 mm, 43 mm Measuring range 40±3mm | 120 μm dia. | 0.25 μm | 2m | ZW-S7040 2M |
| | | | | 0.3m | ZW-S7040 0.3M |




* Values when the Sensor Controller ZW-7000T is used.

Pen-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|---|---------------|---------------------|--------------|----------------|
|  |  0 mm, 6.7 mm, 7 mm, 7.3 mm Measuring range 7±0.3 mm | 130 μm dia. | 0.25 μm | 2 m | ZW-SP7007 2M |
| | | | | 0.3 m | ZW-SP7007 0.3M |
| |  0 mm, 9.3 mm, 10 mm, 10.7 mm Measuring range 10±0.7mm | 170 μm dia. | 0.25 μm | 2 m | ZW-SP7010 2M |
| | | | | 0.3 m | ZW-SP7010 0.3M |


* Values when the Sensor Controller ZW-7000T is used.

Pen-shaped right angle type



| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|---|---|---------------|---------------------|--------------|-----------------|
|  |  Measuring range 7±0.3 mm 0 mm, 7.3 mm, 7 mm, 6.7 mm | 150 μm dia. | 0.25 μm | 2 m | ZW-SPR7007 2M |
| | | | | 0.3 m | ZW-SPR7007 0.3M |
| |  Measuring range 10±0.7mm 0 mm, 10.7 mm, 10 mm, 9.3 mm | 190 μm dia. | 0.25 μm | 2 m | ZW-SPR7010 2M |
| | | | | 0.3 m | ZW-SPR7010 0.3M |

* Values when the Sensor Controller ZW-7000T is used.

●Sensor Controller with EtherCAT

| Appearance | Power supply | Output type | Model |
|---|--------------|-------------|----------|
|  | 24 VDC | NPN/PNP | ZW-7000T |

●Cable

| Appearance | Item | Cable length | Model |
|---|--|--------------|------------|
|  | Extension Fiber Cable (from Sensor Head to Sensor Controller), (Fiber Adapter ZW-XFCM is included) | 2 m | ZW-XF7002R |
| | | 5 m | ZW-XF7005R |
| | | 10 m | ZW-XF7010R |
| | | 20 m | ZW-XF7020R |
| | | 30 m | ZW-XF7030R |
|  | Fiber Adapter (used between Sensor Head pre-wired cable and Extension Fiber Cable) | — | ZW-XFCM |





Note: Cables of 10, 20, and 30 m can be used with the firmware version 2.100 or later. If you have an old version Sensor Controller, register as a Sysmac member and download the latest firmware and tools to update your Sensor Controller. Refer to the Sysmac member registration sheet that is enclosed with the Sensor Controller for details on member registration and firmware download.

ZW-8000/7000/5000 Series

ZW-5000




●Sensor Head

Square-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|--|---------------|---------------------|--------------|---------------|
|  |  0 mm 9.5 mm 10 mm 10.5 mm Measuring range 10±0.5 mm | 9 μm dia. | 0.25 μm | 2 m | ZW-S5010 2M |
| | | | | 0.3 m | ZW-S5010 0.3M |
| |  0 mm 19 mm 20 mm 21 mm Measuring range 20±1mm | 13 μm dia. | 0.25 μm | 2 m | ZW-S5020 2M |
| | | | | 0.3 m | ZW-S5020 0.3M |
| |  0 mm 28 mm 30 mm 32 mm Measuring range 30±2mm | 18 μm dia. | 0.25 μm | 2 m | ZW-S5030 2M |
| | | | | 0.3 m | ZW-S5030 0.3M |




* Values when the Sensor Controller ZW-5000T is used.

Pen-shaped straight type

| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|--|---------------|---------------------|--------------|----------------|
|  |  0 mm 6.7 mm 7 mm 7.3 mm Measuring range 7±0.3 mm | 13 μm dia. | 0.25 μm | 2 m | ZW-SP5007 2M |
| | | | | 0.3 m | ZW-SP5007 0.3M |
| |  0 mm 9.3 mm 10 mm 10.7 mm Measuring range 10±0.7mm | 18 μm dia. | 0.25 μm | 2 m | ZW-SP5010 2M |
| | | | | 0.3 m | ZW-SP5010 0.3M |


* Values when the Sensor Controller ZW-5000T is used.

Pen-shaped right angle type



| Appearance | Measuring range | Spot diameter | Static resolution * | Cable length | Model |
|--|---|---------------|---------------------|--------------|-----------------|
|  |  Measuring range 7±0.3 mm 0 mm 7.3 mm 7 mm 6.7 mm | 15 μm dia. | 0.25 μm | 2 m | ZW-SPR5007 2M |
| | | | | 0.3 m | ZW-SPR5007 0.3M |
| |  Measuring range 10±0.7mm 0 mm 10.7 mm 10 mm 9.3 mm | 20 μm dia. | 0.25 μm | 2 m | ZW-SPR5010 2M |
| | | | | 0.3 m | ZW-SPR5010 0.3M |

* Values when the Sensor Controller ZW-5000T is used.

●Sensor Controller with EtherCAT




| Appearance | Power supply | Output type | Model |
|---|--------------|-------------|----------|
|  | 24 VDC | NPN/PNP | ZW-5000T |

●Cable

| Appearance | Item | Cable length | Model |
|---|--|--------------|------------|
|  | Extension Fiber Cable (from Sensor Head to Sensor Controller), (Fiber Adapter ZW-XFC2 is included) | 2 m | ZW-XF5002R |
| | | 5 m | ZW-XF5005R |
| | | 10 m | ZW-XF5010R |
| | | 20 m | ZW-XF5020R |
| | | 30 m | ZW-XF5030R |
|  | Fiber Adapter (used between Sensor Head pre-wired cable and Extension Fiber Cable) | — | ZW-XFC2 |

Note: Extension Fiber Cable ZW-XF50□□R can be used with the firmware version 2.100 or later. If you have an old version Sensor Controller, register as a Sysmac member and download the latest firmware and tools to update your Sensor Controller. Refer to the Sysmac member registration sheet that is enclosed with the Sensor Controller for details on member registration and firmware download.





Common cables

| Appearance | Item | Cable length | Model |
|---|---|--------------|----------|
|  | Parallel cable for ZW-8000T/7000T/5000T 32-pole (included with Sensor Controller ZW-8000T/7000T/5000T) | 2 m | ZW-XCP2E |
|  | RS-232C Cable for personal computer | 2 m | ZW-XRS2 |
|  | RS-232C Cable for PLC/programmable terminal | 2 m | ZW-XPT2 |

Recommended EtherCAT Communications Cables

Use Straight STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT.

Cable with Connectors

| Item | Appearance | Recommended manufacturer | Cable length(m) *1 | Model |
|--|---|--------------------------|--------------------|----------------------|
| Standard type Cable with Connectors on Both Ends (RJ45/RJ45) Wire Gauge and Number of Pairs: AWG26, 4-pair Cable Cable Sheath material: LSZH *2 Cable color: Yellow *3 |  | OMRON | 0.3 | XS6W-6LSZH8SS30CM-Y |
| | | | 0.5 | XS6W-6LSZH8SS50CM-Y |
| | | | 1 | XS6W-6LSZH8SS100CM-Y |
| | | | 2 | XS6W-6LSZH8SS200CM-Y |
| | | | 3 | XS6W-6LSZH8SS300CM-Y |
| | | | 5 | XS6W-6LSZH8SS500CM-Y |
| Rugged type Cable with Connectors on Both Ends (RJ45/RJ45) Wire Gauge and Number of Pairs: AWG22, 2-pair Cable |  | OMRON | 0.3 | XS5W-T421-AMD-K |
| | | | 0.5 | XS5W-T421-BMD-K |
| | | | 1 | XS5W-T421-CMD-K |
| | | | 2 | XS5W-T421-DMD-K |
| | | | 5 | XS5W-T421-GMD-K |
| | | | 10 | XS5W-T421-JMD-K |
| Rugged type Cable with Connectors on Both Ends (M12 Straight/RJ45) Wire Gauge and Number of Pairs: AWG22, 2-pair Cable |  | OMRON | 0.3 | XS5W-T421-AMC-K |
| | | | 0.5 | XS5W-T421-BMC-K |
| | | | 1 | XS5W-T421-CMC-K |
| | | | 2 | XS5W-T421-DMC-K |
| | | | 5 | XS5W-T421-GMC-K |
| | | | 10 | XS5W-T421-JMC-K |
| Rugged type Cable with Connectors on Both Ends (M12 Right-angle/RJ45) Wire Gauge and Number of Pairs: AWG22, 2-pair Cable |  | OMRON | 0.3 | XS5W-T422-AMC-K |
| | | | 0.5 | XS5W-T422-BMC-K |
| | | | 1 | XS5W-T422-CMC-K |
| | | | 2 | XS5W-T422-DMC-K |
| | | | 5 | XS5W-T422-GMC-K |
| | | | 10 | XS5W-T422-JMC-K |

Note: For details, refer to Cat.No.G019.

*1. Standard type cables length 0.2, 0.3, 0.5, 1, 1.5, 2, 3, 5, 7.5, 10, 15 and 20m are available.

Rugged type cables length 0.3, 0.5, 1, 2, 3, 5, 10 and 15m are available.

*2. The lineup features Low Smoke Zero Halogen cables for in-cabinet use and PUR cables for out-of-cabinet use.

*3. Cables colors are available in blue, yellow, or Green


Cables / Connectors

Wire Gauge and Number of Pairs: AWG24, 4-pair Cable

| Item | Appearance | Recommended manufacturer | Model |
|-----------------|------------|------------------------------|-------------------------------|
| Cables | — | Hitachi Metals, Ltd. | NETSTAR-C5E SAB 0.5 × 4P CP * |
| | — | Kuramo Electric Co. | KETH-SB * |
| | — | SWCC Showa Cable Systems Co. | FAE-5004 * |
| RJ45 Connectors | — | Panduit Corporation | MPS588-C * |

* We recommend to use above cable and connector together.

Wire Gauge and Number of Pairs: AWG22, 2-pair Cable



| Item | Appearance | Recommended manufacturer | Model |
|-------------------------|---|--------------------------|----------------|
| Cables | — | Kuramo Electric Co. | KETH-PSB-OMR * |
| | — | JMACS Japan Co.,Ltd. | PNET/B * |
| RJ45 Assembly Connector |  | OMRON | XS6G-T421-1 * |

Note: Connect both ends of cable shielded wires to the connector hoods.

* We recommend to use above cable and connector together.



ZW-8000/7000/5000 Series

●Industrial switching hubs for Ethernet

| Appearance | Number of ports | Failure detection | Current consumption | Model |
|---|-----------------|-------------------|---------------------|----------|
|  | 3 | None | 0.22A | W4S1-03B |
|  | 5 | None | 0.22A | W4S1-05B |
| | | Supported | | W4S1-05C |

Note: Industrial switching hubs are cannot be used for EtherCAT.

●EtherCAT junction slaves

| Appearance | Number of ports | Power supply voltage | Current consumption | Model |
|---|-----------------|---|---------------------|---------|
|  | 3 | 20.4 to 28.8 VDC (24 VDC -15 to 20%) | 0.08A | GX-JC03 |
|  | 6 | | 0.17A | GX-JC06 |

Note: 1. Please do not connect EtherCAT junction slave with OMRON position control unit, Model CJ1W-NC□81/□82.
2. EtherCAT junction slaves cannot be used for EtherNet/IP™ and Ethernet.

●Automation Software Sysmac Studio

Please purchase a DVD and required number of licenses the first time you purchase the Sysmac Studio. DVDs and licenses are available individually.

Each model of licenses does not include DVD.

| Item | Specifications | Model | | Standards |
|--|--|--------------------|-------|---------------|
| | | Number of licenses | Media | |
| Sysmac Studio Standard Edition Ver.1□□ *2 | The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCat Slave, and the HMI. Sysmac Studio runs on the following OS. Windows 7 (32-bit/64-bit version)/Windows 8 (32-bit/64-bit version)/ Windows 8.1 (32-bit/64-bit version)/Windows 10 (32-bit/64-bit version) This software provides functions of the Measurement Sensor Edition. Refer to your OMRON website for details. | — (Media only) | DVD | SYSMAC-SE200D |
| | | 1 license*1 | — | SYSMAC-SE201L |
| Sysmac Studio Measurement Sensor Edition Ver.1.□□ | Sysmac Studio Measurement Sensor Edition is a limited license that provides selected functions required for ZW-series Displacement Sensor settings. Because this product is a license only, you need the Sysmac Standard Edition DVD media to install it. | 1 license | — | SYSMAC-ME001L |
| | | 3 license | — | SYSMAC-ME003L |

*1. Multiple licenses are available for the Sysmac Studio (3, 10, 30, or 50 licenses).

*2. ZW-8000/7000/5000 is supported by Sysmac Studio version 1.22 or higher.

●Fiber Cleaner

| Item | Recommended manufacturer | Model | Applicable Model | | | Contacts |
|----------------------------|--|-----------|---------------------------|---------|---------------------------|----------|
| | | | ZW-8000 | ZW-7000 | ZW-5000 | |
| Fiber Connector Cleaner *1 | OMRON | ZW-XCL | Yes | Yes | Yes | OMRON |
| NEOCLEAN-M | NTT Advanced Technology Corporation | ATC-NE-M1 | No | Yes | No | *2 |
| OPTIPOP R1 | | ATC-RE-01 | Yes (Sensor Head only) | No | Yes (Sensor Head only) | |

*1. Place orders in units of boxes (contacting 10 units).

*2. Contacts

[Request for an Estimate]

http://www.ntt-at.com/product/optical_cleaner/Distributors.html

[Request for Information]

NTT Advanced Technology Corporation

Muza Kawasaki Central Tower, 1310 Omiya-cho Saiwai-ku, Kawasaki-shi, Kanagawa, 212-0014, Japan

TEL: +81 44 589 5894

http://www.ntt-at.com/product/optical_cleaner/

Specifications

●Sensor Head

ZW-S8010/S8020/S8030/SP8007/SP8010/SPR8007/SPR8010

| Item | Specifications | | | | | | |
|---|---|--------------------------|--------------------------|--|--------------------------|--|--------------------------|
| | ZW-S8010 | ZW-S8020 | ZW-S8030 | ZW-SP8007 | ZW-SP8010 | ZW-SPR8007 | ZW-SPR8010 |
| Sensor controller | ZW-8000T | | | | | | |
| Sensor head type | Square-shaped straight type | | | Pen-shaped straight type | | Pen-shaped right angle type | |
| Measurement center distance *1 | 10 mm | 20 mm | 30 mm | 7 mm | 10 mm | 7 mm | 10 mm |
| Measuring range *2 | ±0.5 mm | ±1mm | ±2mm | ±0.3 mm | ±0.7 mm | ±0.3 mm | ±0.7 mm |
| Static resolution *3 | 0.25 μm | | | | | | |
| Linearity *4 | ±0.3 μm | ±0.6 μm | ±1.3 μm | ±0.3 μm | ±0.45 μm | ±0.45 μm | ±0.7 μm |
| Spot diameter (Total measurent range) *5 | 4 μm dia. | 7 μm dia. | 10 μm dia. | 7 μm dia. | 10 μm dia. | 8 μm dia. | 11 μm dia. |
| Measurement cycle *6 | 60 μs to 7,500 μs | | | | | | |
| Operating ambient illumination | Illumination on object surface max.30000 Lx: (incandescent light) | | | | | | |
| Ambient temperature range | Operation: 0 to 50°C, Storage: -15 to +60°C (No freezing and condensation) | | | | | | |
| Ambient humidity range | Operation/storage: 35 or 85%RH (No condensation) | | | | | | |
| Degree of protection | IP40 (IEC60529) | | | | | | |
| Vibration resistance (destructive) | 10 to 150 Hz (half amplitude 0.35 mm), 80 mins in each of X/Y/Z directions | | | | | | |
| Shock resistance (destructive) | 150 m/s ² , 6 direction, 3 times each (up/down, left/right, forward/backward) | | | | | | |
| Temperature characteristic *7 | 0.6 μm/°C (0.2 μm/°C) | 1.1 μm/°C (0.5 μm/°C) | 1.8 μm/°C (1.0 μm/°C) | 0.8 μm/°C (0.4 mm/°C) | 0.8 μm/°C (0.4 mm/°C) | 0.8 μm/°C (0.4 mm/°C) | 0.8 μm/°C (0.4 mm/°C) |
| LED Safety | Risk Group 3 (IEC62471) | | | | | | |
| Material | Chassis: aluminum die cast Fiber cable sheath: PVC Calibration ROM: PC | | | Chassis: SUS Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | | Chassis: SUS, aluminum Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | |
| Fiber cable length | 0.3 m, 2 m (flex-resistant cable) | | | | | | |
| Fiber cable minimum bend radius | 20 mm | | | | | | |
| Insulation resistance (Calibration ROM) | Between case and all terminals: 20 MΩ (by 250 VDC) | | | | | | |
| Dielectric strength (Calibration ROM) | Between case and all terminals: 1000 VAC, 50/60 Hz, 1 min | | | | | | |
| Weight | Fiber cable length 0.3m Approx. 170g Fiber cable length 2m Approx. 180g | | | Fiber cable length 0.3m Approx. 27 g Fiber cable length 2m Approx. 37 g | | Fiber cable length 0.3m Approx. 31 g Fiber cable length 2m Approx. 41 g | |
| Accessories | Calibration ROM fixing screw (M2×5mm) × 1, Fiber cable protective cap × 1, Strap × 1, Instruction Manual, Precautions | | | Installation plate × 1, Unit fixing screws (M2 × 10 mm) × 4, Calibration ROM fixing screw (M2 × 5 mm) × 1, Fiber cable protective cap × 1, Strap × 1, Instruction Manual, Precautions | | | |

*1. Indicates the distance from the front of the sensor head. The pen-shaped right angle type has a maximum individual difference of ±0.15 mm in the distance from the front of the sensor head.

*2. The measurement range is higher 100 μs than measurement cycle.

*3. Capacity value when OMRON standard mirror surface target is measured at the measurement center distance as the average of 16,384 times. The value when the Sensor Controller ZW-8000T is connected.

*4. Material setting for the OMRON standard mirror surface target: Error from an ideal straight line when measuring on mirror surface.

*5. Capacity value defined by $1/e^2$ (13.5%) of the peak optical intensity of the measurement wavelength.

*6. When an extension fiber cable of 2 m or longer is connected, the setting range of the measurement cycle (exposure time) changes. For details, refer to *Setting Measurement Cycle* in the *ZW-8000/7000/5000 User's Manual (Cat. No. Z362)*.

*7. Actual value of the change in measurement value at the measurement center distance when fastened with an aluminum jig between the Sensor Head and the target, and with the Sensor Head and the Sensor Controller set in the same temperature environment.

The value in parentheses is the actual value when using an SUS304 jig.

When measuring the thickness, the value is calculated from the difference between the heights of the surface and rear surface, so there is no effect on the temperature change.

ZW-8000/7000/5000 Series

ZW-S7010/S7020/S7030/S7040/SP7007/SP7010/SPR7007/SPR7010

| Item | Specifications | | | | | | | |
|---|---|--------------------------|--------------------------|--------------------------|--|--------------------------|--|--------------------------|
| | ZW-S7010 | ZW-S7020 | ZW-S7030 | ZW-S7040 | ZW-SP7007 | ZW-SP7010 | ZW-SPR7007 | ZW-SPR7010 |
| Sensor controller | ZW-7000T | | | | | | | |
| Sensor head type | Square-shaped straight type | | | | Pen-shaped straight type | | Pen-shaped right angle type | |
| Measurement center distance *1 | 10 mm | 20 mm | 30 mm | 40 mm | 7 mm | 10 mm | 7 mm | 10 mm |
| Measuring range *2 | ±0.5 mm | ±1 mm | ±2 mm | ±3 mm | ±0.3 mm | ±0.7 mm | ±0.3 mm | ±0.7 mm |
| Static resolution *3 | 0.25 μm | | | | | | | |
| Linearity *4 | ±0.45 μm | ±0.9 μm | ±2.0 μm | ±3.0 μm | ±0.45 μm | ±0.7 μm | ±0.7 μm | ±1.1 μm |
| Spot diameter (Total measurent range) *5 | 50 μm dia. | 70 μm dia. | 100 μm dia. | 120 μm dia. | 130 μm dia. | 170 μm dia. | 150 μm dia. | 190 μm dia. |
| Measurement cycle *6 | 20 μs to 400 μs | | | | | | | |
| Operating ambient illumination | Illumination on object surface max.30000 Lx: (incandescent light) | | | | | | | |
| Ambient temperature range | Operation: 0 to 50°C, Storage: -15 to +60°C (No freezing and condensation) | | | | | | | |
| Ambient humidity range | Operation/storage: 35 or 85%RH (No condensation) | | | | | | | |
| Degree of protection | IP40 (IEC60529) | | | | | | | |
| Vibration resistance (destructive) | 10 to 150 Hz (half amplitude 0.35 mm), 80 mins in each of X/Y/Z directions | | | | | | | |
| Shock resistance (destructive) | 150 m/s ² , 6 direction, 3 times each (up/down, left/right, forward/backward) | | | | | | | |
| Temperature characteristic *7 | 0.6 μm/°C (0.2 μm/°C) | 1.1 μm/°C (0.5 μm/°C) | 1.8 μm/°C (1.0 μm/°C) | 2.1 μm/°C (1.2 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) |
| LED Safety | Risk Group 3 (IEC62471) | | | | | | | |
| Material | Chassis: aluminum die cast Fiber cable sheath: PVC Calibration ROM: PC | | | | Chassis: SUS Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | | Chassis: SUS, aluminum Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | |
| Fiber cable length | 0.3 m, 2 m (flex-resistant cable) | | | | | | | |
| Fiber cable minimum bend radius | 20 mm | | | | | | | |
| Insulation resistance (Calibration ROM) | Between case and all terminals: 20 MΩ (by 250 VDC) | | | | | | | |
| Dielectric strength (Calibration ROM) | Between case and all terminals: 1000 VAC, 50/60 Hz, 1 min | | | | | | | |
| Weight | Fiber cable length 0.3m Approx. 170g Fiber cable length 2m Approx. 180g | | | | Fiber cable length 0.3m Approx. 27 g Fiber cable length 2m Approx. 37 g | | Fiber cable length 0.3m Approx. 31 g Fiber cable length 2m Approx. 41 g | |
| Accessories | Calibration ROM fixing screw (M2×5mm) × 1, Fiber cable protective cap × 1, Strap × 2, Instruction Manual, Precautions | | | | Installation plate × 1, Unit fixing screws (M2 × 10 mm) × 4, Calibration ROM fixing screw (M2 × 5 mm) × 1, Fiber cable protective cap × 1, Strap × 2, Instruction Manual, Precautions | | | |

- *1. Indicates the distance from the front of the sensor head. The pen-shaped right angle type has a maximum individual difference of ±0.15 mm in the distance from the front of the sensor head.
- *2. The measurement range is higher 28 μs than measurement cycle.
- *3. Capacity value when OMRON standard mirror surface target is measured at the measurement center distance as the average of 16,384 times.
The value when the Sensor Controller ZW-7000T is connected.
- *4. Material setting for the OMRON standard mirror surface target: Error from an ideal straight line when measuring on mirror surface.
- *5. Capacity value defined by 1/e² (13.5%) of the peak optical intensity of the measurement wavelength.
- *6. When an extension fiber cable of 10 m or longer is connected, the setting rage of the measurement cycle (exposure time) changes. For details, refer to *Setting Measurement Cycle* in the *ZW-8000/7000/5000 User's Manual (Cat. No. Z362)*.
- *7. Actual value of the change in measurement value at the measurement center distance when fastened with an aluminum jig between the Sensor Head and the target, and with the Sensor Head and the Sensor Controller set in the same temperature environment.
The value in parentheses is the actual value when using an SUS304 jig.
When measuring the thickness, the value is calculated from the difference between the heights of the surface and rear surface, so there is no effect on the temperature change.

ZW-S5010/S5020/S5030/SP5007/SP5010/SPR5007/SPR5010

| Item | Specifications | | | | | | |
|--|---|--------------------------|--------------------------|--|--------------------------|--|--------------------------|
| | ZW-S5010 | ZW-S5020 | ZW-S5030 | ZW-SP5007 | ZW-SP5010 | ZW-SPR5007 | ZW-SPR5010 |
| Sensor controller | ZW-5000T | | | | | | |
| Sensor head type | Square-shaped straight type | | | Pen-shaped straight type | | Pen-shaped right angle type | |
| Measurement center distance *1 | 10 mm | 20 mm | 30 mm | 7 mm | 10 mm | 7 mm | 10 mm |
| Measuring range | ±0.5 mm | ±1 mm | ±2 mm | ±0.3 mm | ±0.7 mm | ±0.3 mm | ±0.7 mm |
| Static resolution *2 | 0.25 μm | | | | | | |
| Linearity *3 | ±0.45 μm | ±0.9 μm | ±2.0 μm | ±0.45 μm | ±0.7 μm | ±0.7 μm | ±1.1 μm |
| Spot diameter (Total measurent range) *4 | 9 μm dia. | 13 μm dia. | 18 μm dia. | 13 μm dia. | 18 μm dia. | 15 μm dia. | 20 μm dia. |
| Measurement cycle *5 | 80 μs to 1,600 μs | | | | | | |
| Operating ambient illumination | Illumination on object surface max.30000 Lx: (incandescent light) | | | | | | |
| Ambient temperature range | Operation: 0 to 50°C, Storage: -15 to +60°C (No freezing and condensation) | | | | | | |
| Ambient humidity range | Operation/storage: 35 or 85%RH (No condensation) | | | | | | |
| Degree of protection | IP40 (IEC60529) | | | | | | |
| Vibration resistance (destructive) | 10 to 150 Hz (half amplitude 0.35 mm), 80 mins in each of X/Y/Z directions | | | | | | |
| Shock resistance (destructive) | 150 m/s ² , 6 direction, 3 times each (up/down, left/right, forward/backward) | | | | | | |
| Temperature characteristic *6 | 0.6 μm/°C (0.2 μm/°C) | 1.1 μm/°C (0.5 μm/°C) | 1.8 μm/°C (1.0 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) | 0.8 μm/°C (0.4 μm/°C) |
| LED Safety | Risk Group 3 (IEC62471) | | | | | | |
| Material | Chassis: aluminum die cast Fiber cable sheath: PVC Calibration ROM: PC | | | Chassis: SUS Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | | Chassis: SUS, aluminum Fiber cable sheath: PVC Calibration ROM: PC Mounting Plate: Aluminum | |
| Fiber cable length | 0.3 m, 2 m (flex-resistant cable) | | | | | | |
| Fiber cable minimum bend radius | 20 mm | | | | | | |
| Insulation resistance (Calibration ROM) | Between case and all terminals: 20 MΩ (by 250 VDC) | | | | | | |
| Dielectric strength (Calibration ROM) | Between case and all terminals: 1000 VAC, 50/60 Hz, 1 min | | | | | | |
| Weight | Fiber cable length 0.3m Approx. 170g Fiber cable length 2m Approx. 180g | | | Fiber cable length 0.3m Approx. 29 g Fiber cable length 2m Approx. 39 g | | Fiber cable length 0.3m Approx. 33g Fiber cable length 2m Approx. 43g | |
| Accessories | Calibration ROM fixing screw (M2×5mm) × 1, Fiber cable protective cap × 1, Strap × 1, Instruction Manual, Precautions | | | Installation plate × 1, Unit fixing screws (M2 × 10 mm) × 4, Calibration ROM fixing screw (M2 × 5 mm) × 1, Fiber cable protective cap × 1, Strap × 1, Instruction Manual, Precautions | | | |

- *1. Indicates the distance from the front of the sensor head. The pen-shaped right angle type has a maximum individual difference of ±0.15 mm in the distance from the front of the sensor head.
- *2. Capacity value when OMRON standard mirror surface target is measured at the measurement center distance as the average of 16,384 times.
The value when the Sensor Controller ZW-5000T is connected.
- *3. Material setting for the OMRON standard mirror surface target: Error from an ideal straight line when measuring on mirror surface.
- *4. Capacity value defined by 1/e² (13.5%) of the peak optical intensity of the measurement wavelength.
- *5. When an extension fiber cable of 5 m or longer is connected, the setting range of the measurement cycle (exposure time) changes. For details, refer to *Setting Measurement Cycle* in the *ZW-8000/7000/5000 User's Manual (Cat. No. Z362)*.
- *6. Actual value of the change in measurement value at the measurement center distance when fastened with an aluminum jig between the Sensor Head and the target, and with the Sensor Head and the Sensor Controller set in the same temperature environment.
The value in parentheses is the actual value when using an SUS304 jig.
When measuring the thickness, the value is calculated from the difference between the heights of the surface and rear surface, so there is no effect on the temperature change.

ZW-8000/7000/5000 Series

●Sensor Controller

| Item | | Specifications | | |
|----------------------------------|------------------------------|---|--|------------------------------------|
| | | ZW-8000T | ZW-7000T | ZW-5000T |
| Input/output type | | NPN/PNP dual type | | |
| Number of connected sensor heads | | 1 | | |
| Sensor head compatibility | | ZW-S80□□/ ZW-SP80□□/ ZW-SPR80□□ | ZW-S70□□/ ZW-SP70□□/ ZW-SPR70□□ | ZW-S50□□/ ZW-SP50□□/ ZW-SPR50□□ |
| LED Safety | | Risk Group 3 (IEC62471) | | |
| Segment Display | Main display | 11-segment white display, 6 digits | | |
| | Sub-display | 11-segment green display, 6 digits | | |
| LED display | Status indicators | HIGH (orange), PASS (green), LOW (orange), STABILITY (green), ZERO (green), ENABLE (green), THRESHOLD-H (orange), THRESHOLD-L (orange), RUN (green) | | |
| | EtherCAT indicator | ECAT RUN (green), L/A IN (Link/Activity IN) (green), L/A OUT (Link/Activity OUT) (green), ECAT ERR (red) | | |
| External I/F | Ethernet | | 100BASE-TX/10BASE-T, Non-procedure (TCP/UDP), EtherNet/IP | |
| | EtherCAT | | EtherCAT exclusive protocol 100BASE-TX | |
| | RS-232C | | Max. 115,200 bps | |
| | Analog output terminal block | Analog voltage output (OUT V) | -10 V to +10 V, output impedance: 100 Ω | |
| | | Analog current output (OUT A) | 4 mA to 20 mA, max. load resistance: 300 Ω | |
| | 32-pole expansion connector | Judgment output (HIGH/PASS/LOW) | Transistor output system Output voltage: 21.6 to 30 VDC Load current: 50 mA or less Residual voltage when turning ON: 2 V or less Leakage voltage when turning OFF: 0.1 mA or less | |
| | | Busy output (BUSY) | | |
| | | Alarm output (ALARM) | | |
| | | Enable output (ENABLE) | | |
| | | Sync flag output (SYNFLG) | | |
| | | Trigger busy output (TRIGBUSY) | | |
| | | Logging state output (LOGSTAT) | | |
| | | Logging error output (LOGERR) | | |
| | | Stability output (STABILITY) | DC input system Input voltage: 24 VDC ± 10% (21.6 to 26.4 VDC) Input current: 7 mA Type. (24 VDC) ON voltage/ON current: 19 V/3 mA or less ON voltage/ON current: 5 V/1 mA or less | |
| | | Task state output (TASKSTAT) | | |
| | | LIGHT OFF input (LIGHT OFF) | | |
| | | Zero reset input (ZERO) | | |
| | | Timing input (TIMING) | | |
| | | Reset input (RESET) | | |
| | | Sync input (SYNC) | | |
| | | Trigger input (TRIG) | | |
| | | Logging input (LOGGING) | Transistor output system Output voltage: 21.6 to 30 VDC Load current: 50 mA or less Residual voltage when turning ON: 2 V or less Leakage voltage when turning OFF: 0.1 mA or less | |
| | Bank | Currently selected bank output (BANK_OUT 1 to 3) | | |
| | | Bank Selection input (BANK_SEL 1 to 3) | DC input system Input voltage: 24 VDC ± 10% (21.6 to 26.4 VDC) Input current: 7 mA Type. (24 VDC) ON voltage/ON current: 19 V/3 mA or more OFF voltage/OFF current: 5 V/1 mA or less | |

| Item | | Specifications | | |
|--------------------------|------------------------------------|---|---|---|
| | | ZW-8000T | ZW-7000T | ZW-5000T |
| Main functions | Exposure time | Automatic/Fixed | | |
| | Measuring cycle *1 | 60 μs to 7,500 μs | 20 μs to 400 μs | 80 μs to 1,600 μs |
| | Material setting | Standard/Mirror/Rough surfaces | | |
| | Measurement item | Height/Thickness of transparent object/Calculation | | |
| | Filtering | Median/Average/Differentiation/High pass/Low pass/Band pass | | |
| | Output | Scaling/Different holds/Zero reset/Logging for a measured value/Keep, Clamp | | |
| | Display | Measured value/Threshold value/Analog output voltage or current value/Judgment result/Resolution/Light power/Internal logging condition/Peak amount of received light | | |
| | Number of configurable banks | NORMAL mode: Max. 8 banks JUDGMENT mode: Max. 32 banks | | |
| | Task process | Multi-task (up to 4 tasks per bank) | | |
| | System | Save/Initialization/Display measured information/Communication settings/ Sensor head calibration/Key-lock/Zero reset memory/Timing input | | |
| Rating | Power supply voltage | 21.6 to 26.4 VDC (including ripple) | | |
| | Current consumption | 700 mA or less | 800 mA or less | |
| | Insulation resistance | Across all lead wires and FG terminal: 20 MΩ (by 250 VDC) | | |
| | Dielectric strength | Between all lead wires and FG terminal: 500 VAC, 50/60 Hz, 1 minute | | |
| Environmental resistance | Degree of protection | IP20 (IEC60529) | | |
| | Vibration resistance (destructive) | 10 to 55 Hz (half amplitude 0.35 mm), 50 mins in each of X/Y/Z directions | | |
| | Shock resistance (destructive) | 150 m/s ² , 6 direction, 3 times each (up/down, left/right, forward/backward) | | |
| | Ambient temperature range | Operation: 0 to 40°C, Storage: -15 to +60°C (No freezing and condensation) | | |
| | Ambient humidity range | Operation/storage: 35 to 85%RH (No condensation) | | |
| Grounding | | D-type grounding (grounding resistance of 100 Ω or less) Note: For conventional Class D grounding | | |
| Material | | Chassis: PC | | |
| Weight | | Approx. 950g (main unit only), Approx. 150 g (Parallel cable) | Approx. 900g (main unit only), Approx. 150 g (Parallel cable) | |
| Accessories | | Parallel cable (ZW-XCP2E) × 1 10 Fiber cleaners (ZW-XCL) × 1 Instruction Manual Member registration sheet Precautions | | Parallel cable (ZW-XCP2E) × 1 10 Fiber cleaners (ZW-XCL) × 1 Fiber adapter cap × 1 Strap × 1 Instruction Manual Member registration sheet Precautions |

Note: The Export Trade Control Order compatible Sensor Controller (ZW-8000T/7000T/5000T) is available.

When using this Controller, the minimum resolution is 0.25 μm regardless of the connected Sensor Head and setting conditions.

*1. When an extension fiber cable of 2 m or longer (on the ZW-8000 series), 10 m or longer (on the ZW-7000 series) or 5 m or longer (on the ZW-5000 series) is connected, the setting range of the measurement cycle (exposure time) changes. For details, refer to *Setting Measurement Cycle* in the *ZW-8000/7000/5000 User's Manual* (Cat. No. Z362).

ZW-8000/7000/5000 Series

●EtherCAT Communications Specifications

| Item | Specification |
|-------------------------|---|
| Communications standard | IEC61158 Type12 |
| Physical layer | 100BASE-TX(IEEE802.3) |
| Connectors | RJ45 × 2 ECAT IN: EtherCAT input ECAT OUT: EtherCAT output |
| Communications media | Category 5 or higher (cable with double, aluminum tape and braided shielding) is recommended. |
| Communications distance | Distance between nodes: 100 m max. |
| Process data | Variable PDO mapping |
| Mailbox (CoE) | Emergency messages, SDO requests, SDO responses, and SDO information |
| Distributed clock | Synchronization in DC mode. |
| LED display | L/A IN (Link/Activity IN) × 1, AL/A OUT (Link/Activity OUT) × 1, AECAT RUN × 1, AECAT ERR × 1 |

●Automation Software Sysmac Studio

| Item | Operating environment *3 |
|--------------------------|--|
| Operating system (OS) *1 | Windows 7 (32-bit/64-bit version)/Windows 8 (32-bit/64-bit version)/Windows 8.1 (32-bit/64-bit version)/Windows 10(32-bit/64-bit version) |
| CPU | Windows computers with Intel® Celeron® processor 540 (1.8 GHz) or faster CPU. Intel® Core™ i5 M520 processor (2.4 GHz) or equivalent or faster recommended. |
| Main memory | 2 GB min. 4 GB min. recommended |
| Hard disk | Minimum 4.6 GB of Hard disk space is required to install. *2 |
| Display | XGA 1024 × 768, 16,000,000 colors WXGA 1280 × 800 dots or higher resolution is recommended. |
| Disk drive | DVD-ROM drive |
| Communications ports | USB port corresponded to USB 2.0, or Ethernet port *4 |
| Supported languages | Japanese, English, German, French, Italian, Spanish, simplified Chinese, traditional Chinese, Korean |

*1. Note about Sysmac Studio compatible operating systems: The required system and hard disk capacity differs according to the system environment.

*2. Separate logging memory is required to use the file logging function.

*3. Describes System Requirements and notes of Sysmac Studio Measurement Sensor Edition.

For details on System Requirements and notes of Sysmac Studio Measurement Sensor Edition, refer to Sysmac Studio Version 1 Operation Manual.

*4. For information on how to connect a personal computer with the controller or other hardware and information on required cables, refer to manuals for each hardware.

●Version Information

Sensor Head/Cable, Sensor Controller, and Sysmac Studio

The applicable version of the Sensor Controller varies depending on the Sensor Head or Cable. The versions are listed below.

Use the latest version of Sysmac Studio Standard Edition/Measurement Sensor Edition.

| Sensor head/Cable | | ZW Series | Version of Sensor Controller | Corresponding version of Sysmac Studio Standard Edition/Measurement Sensor Edition |
|-----------------------------|--|-----------|------------------------------|--|
| Type | Model | | | |
| Square-shaped straight type | ZW-S80□□□M | ZW-8000□ | Version 3.000 or later | Version 1.22 or higher |
| Pen-shaped straight type | ZW-SP8007 □M ZW-SP8010 □M | | | |
| Pen-shaped right-angle type | ZW-SPR8007 □M ZW-SPR8010 □M | | | |
| Extension Fiber Cable | ZW-XF80□□R | | | |
| Square-shaped straight type | ZW-S70□□□M | ZW-7000□ | Version 2.030 or later | Version 1.15 or higher |
| Pen-shaped straight type | ZW-SP7007 □M ZW-SP7010 □M | | Version 2.110 or later | |
| Pen-shaped right-angle type | ZW-SPR7007 □M ZW-SPR7010 □M | | Version 2.030 or later | |
| Extension Fiber Cable | ZW-XF7002R ZW-XF7005R | | Version 2.100 or later | |
| | ZW-XF7010R ZW-XF7020R ZW-XF7030R | | Version 2.100 or later | |
| Square-shaped straight type | ZW-S50□□□M | ZW-5000□ | Version 2.100 or later | Version 1.18 or higher |
| Pen-shaped straight type | ZW-SP5007 □M ZW-SP5010 □M | | Version 2.110 or later | |
| Pen-shaped right-angle type | ZW-SPR5007 □M ZW-SPR5010 □M | | Version 2.100 or later | |
| Extension Fiber Cable | ZW-XF50□□R | | Version 2.100 or later | |

Note: Refer to the *Firmware Update* in the *ZW-8000/7000/5000 User's Manual* (Cat. No. Z362) for how to update the Sensor Controller.


External Dimensions

(Unit: mm)

Sensor Head

Square-shaped straight type

ZW-S8010 □M/S8020 □M/S8030 □M

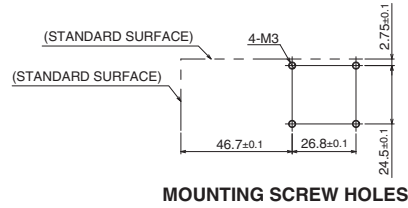


*1.

| Type | W.D. | M |
|----------|------|-----|
| ZW-S8010 | 10 | 0.5 |
| ZW-S8020 | 20 | 1 |
| ZW-S8030 | 30 | 2 |



*2.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

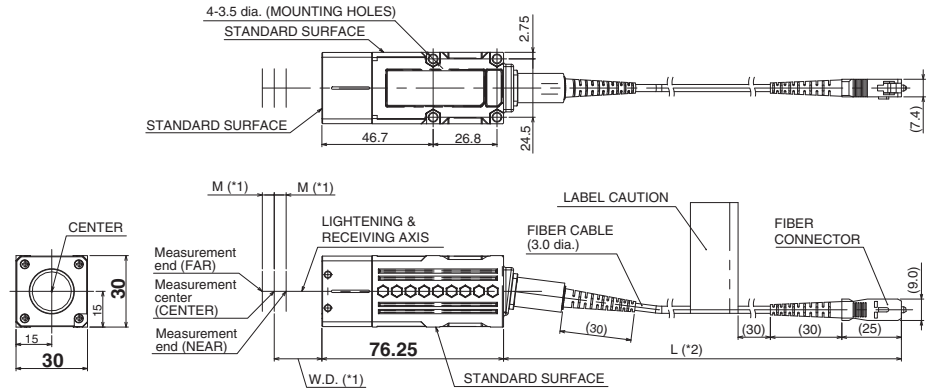

Pen-shaped straight type


ZW-SP8007 □M

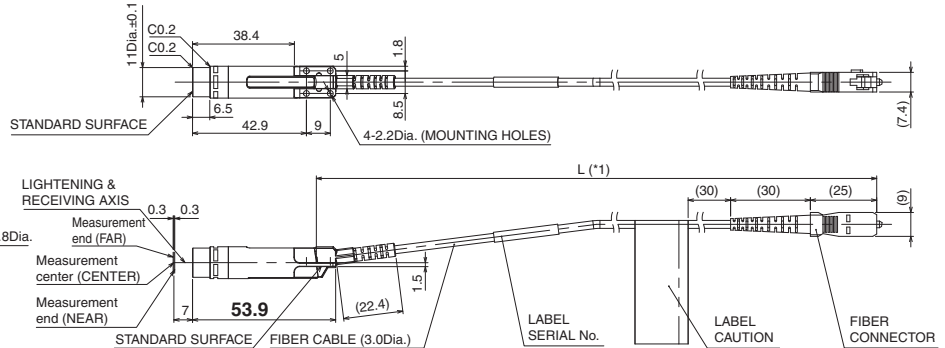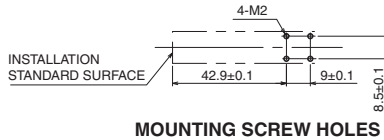


*1.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |


<MOUNTING PLATE>
MATERIAL: ALUMINUM

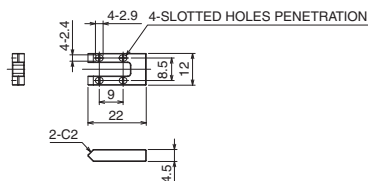


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

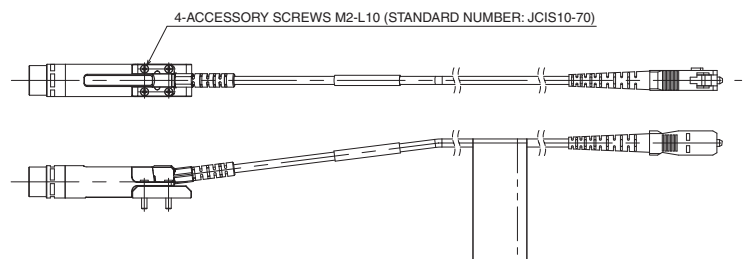


ZW-SP8010 □M

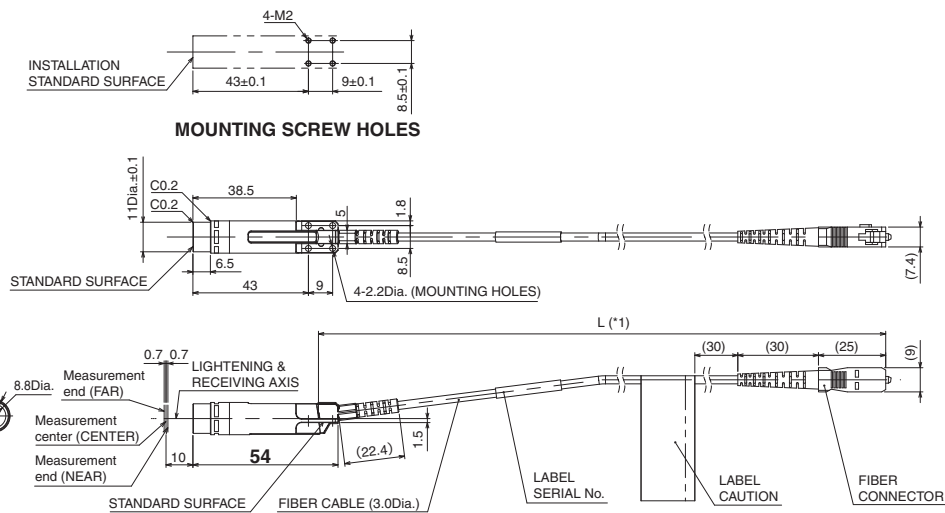

<MOUNTING PLATE>
MATERIAL: ALUMINUM

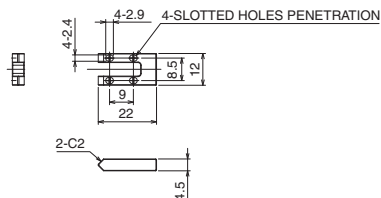

<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

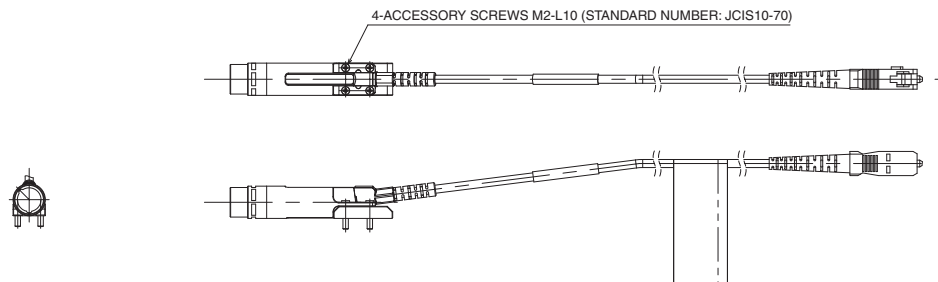


Pen-shaped right angle type ZW-SPR8007 □M




*1.


| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

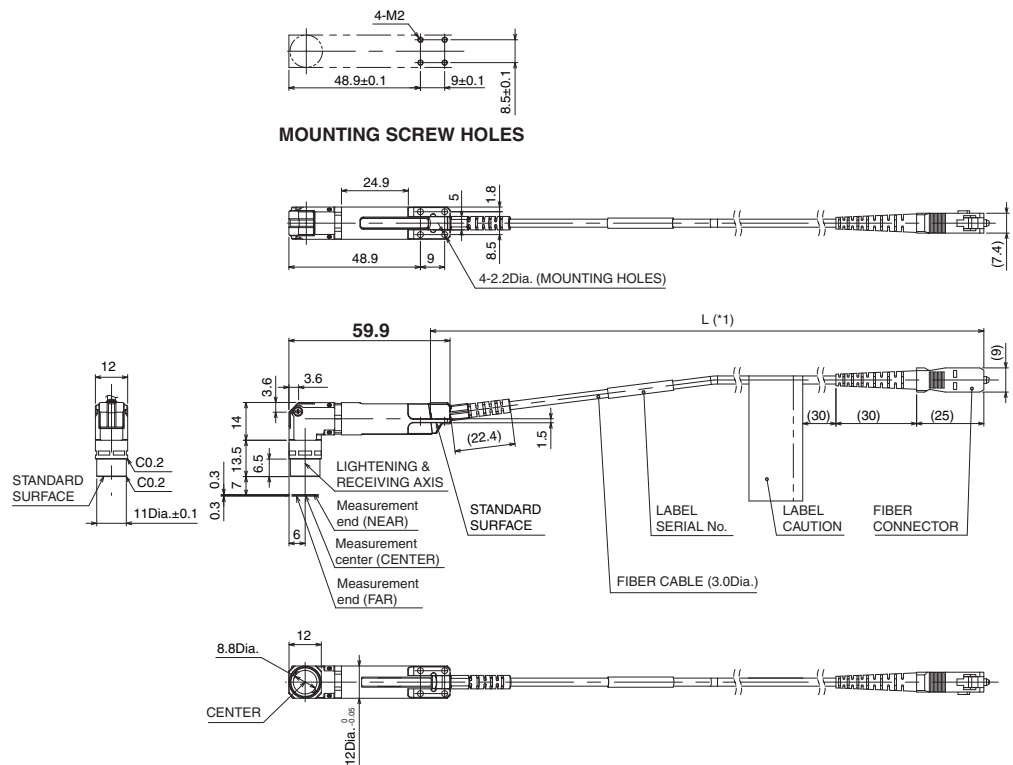

<MOUNTING PLATE>
MATERIAL: ALUMINUM

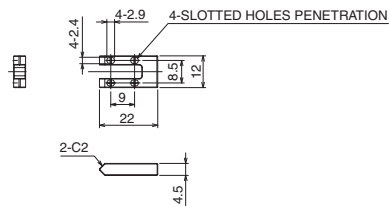

<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

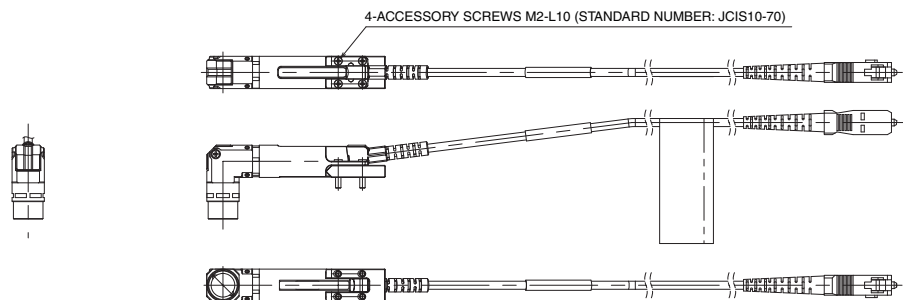


ZW-8000/7000/5000 Series

ZW-SPR8010 □M




*1.


| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

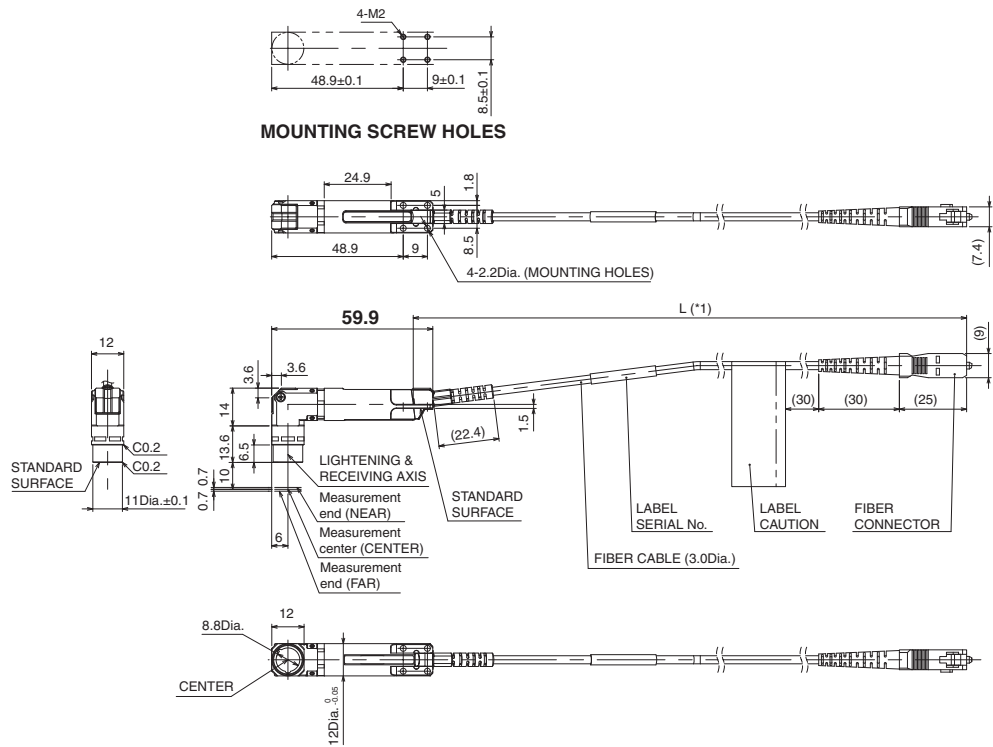

<MOUNTING PLATE>
MATERIAL: ALUMINUM

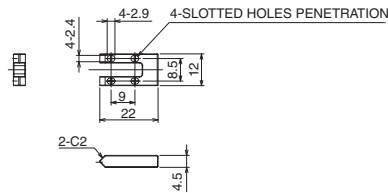


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

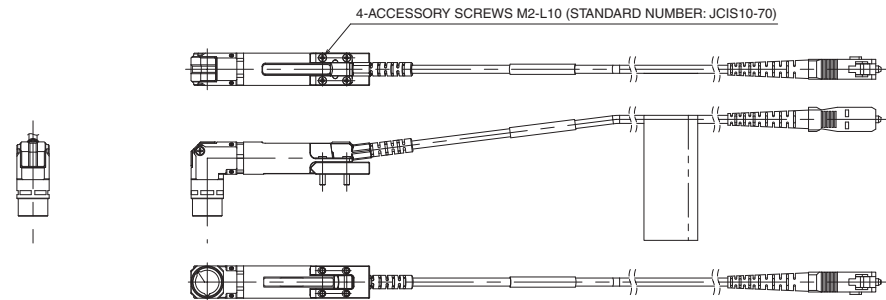

Square-shaped straight type

ZW-S7010 □M/S7020 □M/S7030 □M/S7040 □M

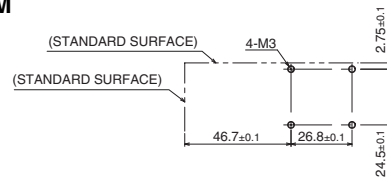


MOUNTING SCREW HOLES

*1.

| Type | W.D. | M |
|----------|------|-----|
| ZW-S7010 | 10 | 0.5 |
| ZW-S7020 | 20 | 1 |
| ZW-S7030 | 30 | 2 |
| ZW-S7040 | 40 | 3 |


*2.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

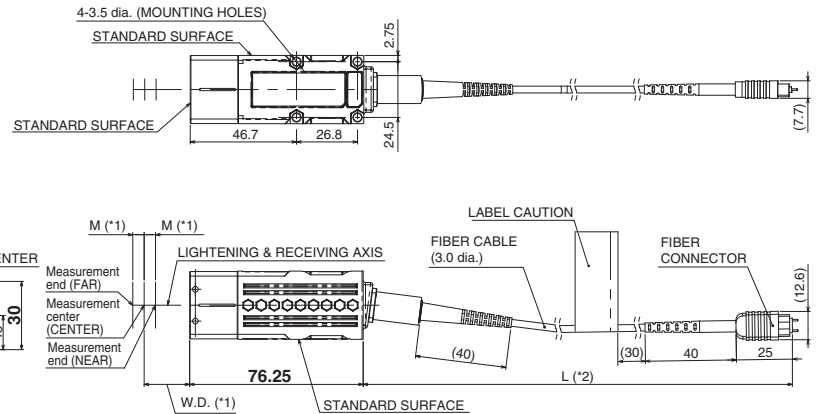


Pen-shaped straight type

ZW-SP7007 □M




MOUNTING SCREW HOLES

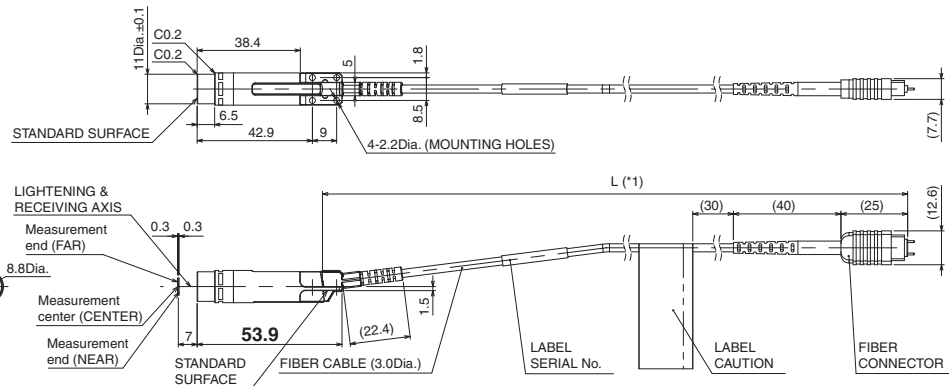


*1.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

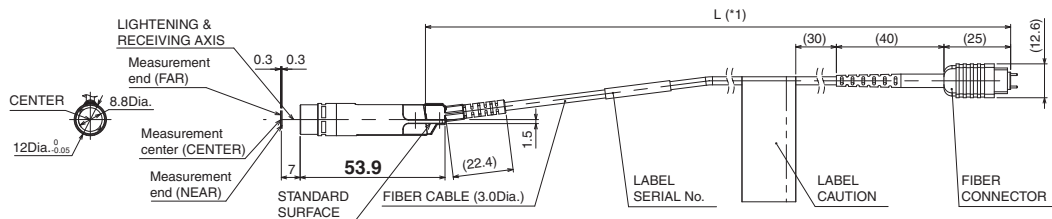


<MOUNTING PLATE>
MATERIAL: ALUMINUM


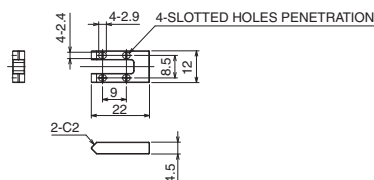


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS


4-ACCESSORY SCREWS M2-L10 (STANDARD NUMBER: JCIS10-70)

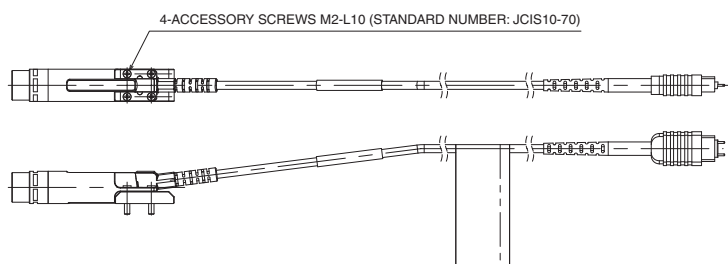

ZW-SP7010 □M

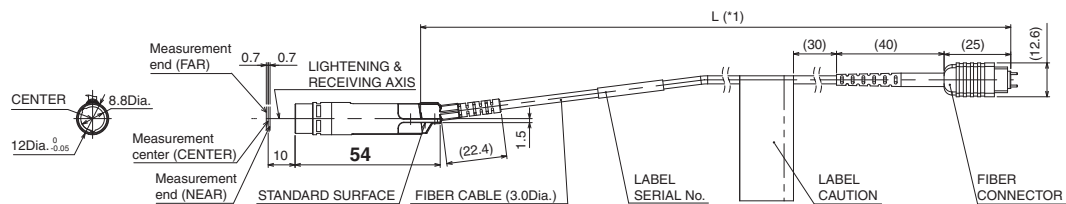


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

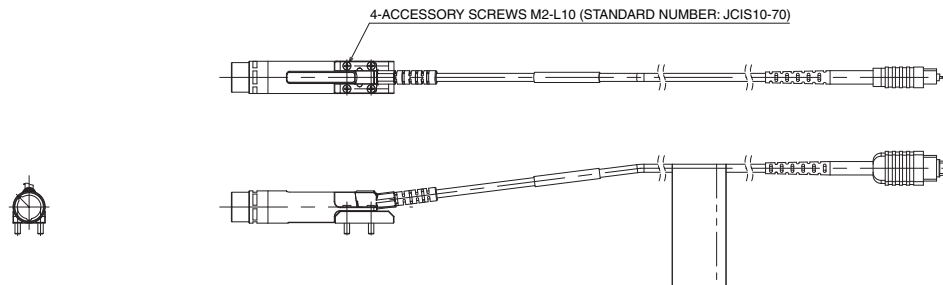


Pen-shaped right angle type
ZW-SPR7007 □M




| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

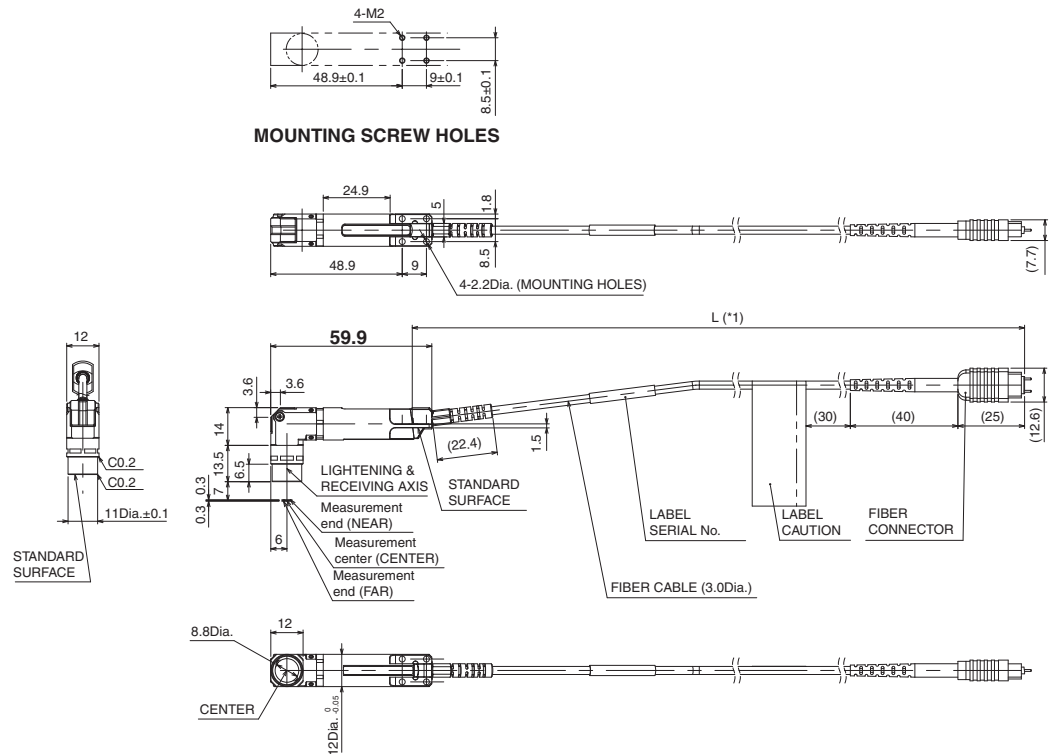


<MOUNTING PLATE>
MATERIAL: ALUMINUM

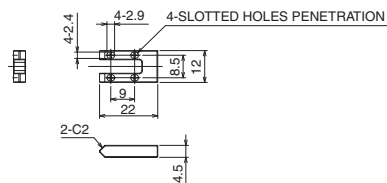


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

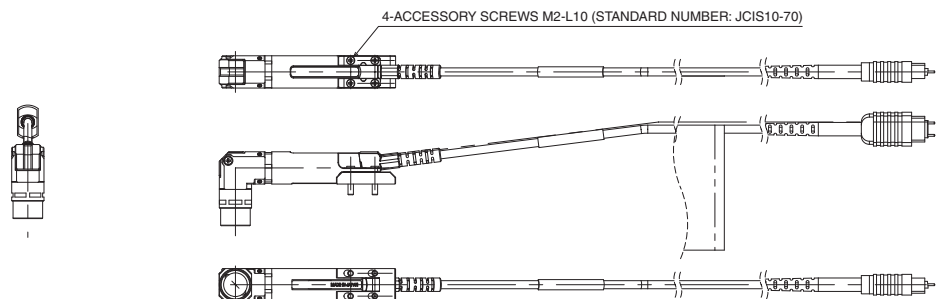


ZW-SPR7010 ☐ M


| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

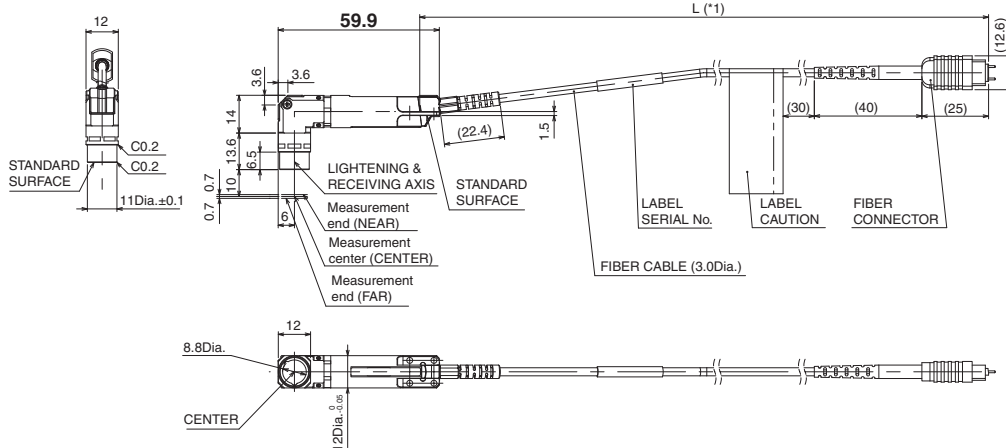

<MOUNTING PLATE>
MATERIAL: ALUMINUM

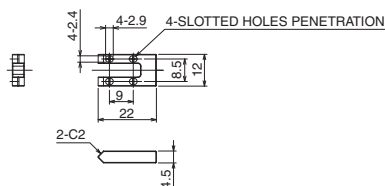


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

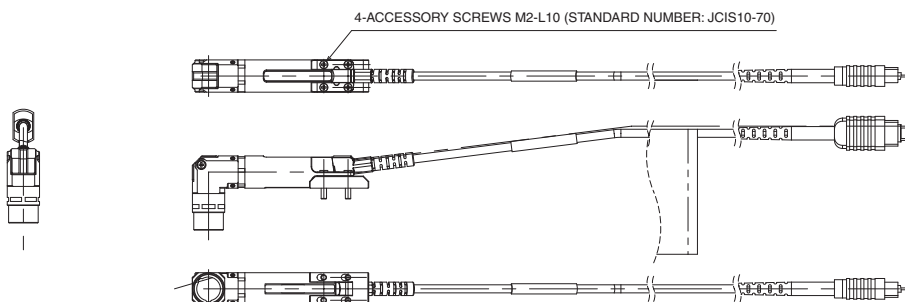


Square-shaped straight type

ZW-S5010 □M/S5020 □M/S5030 □M

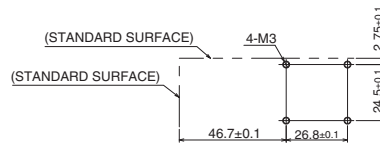

MOUNTING SCREW HOLES

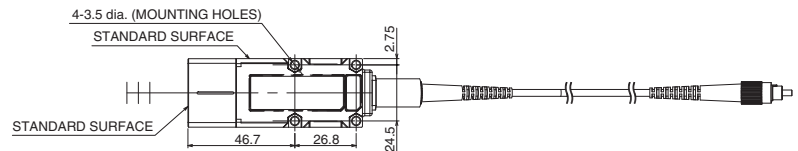


*1.

| Type | W.D. | M |
|----------|------|-----|
| ZW-S5010 | 10 | 0.5 |
| ZW-S5020 | 20 | 1 |
| ZW-S5030 | 30 | 2 |


*2.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

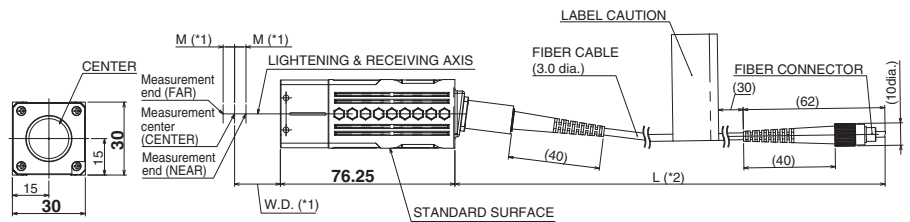


Pen-shaped straight type

ZW-SP5007 □M




MOUNTING SCREW HOLES

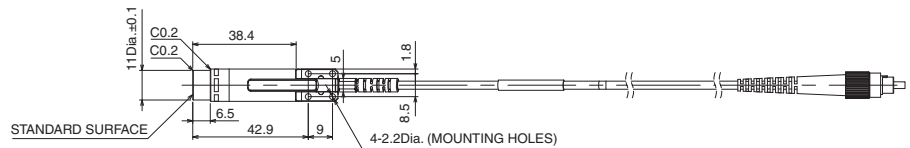


*1.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

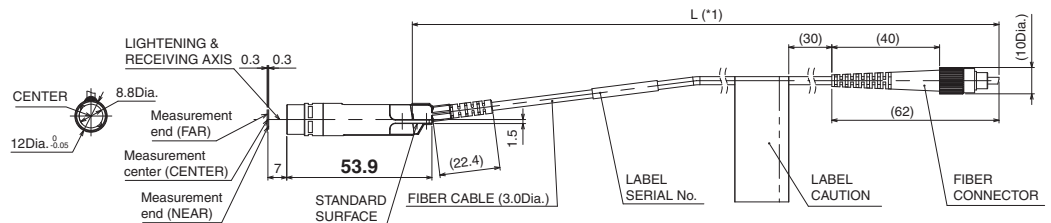


<MOUNTING PLATE>
MATERIAL: ALUMINUM

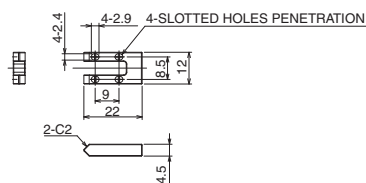

<USE SITUATION OF MOUNTING PLATE>


SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

4-ACCESSORY SCREWS M2-L10 (STANDARD NUMBER: JCIS10-70)

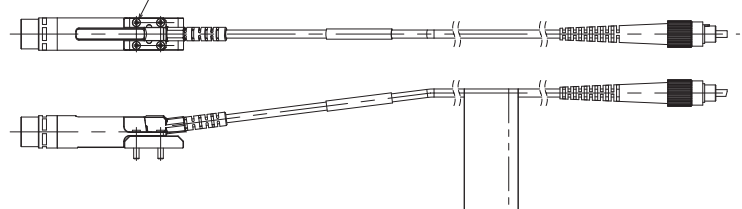



ZW-8000/7000/5000 Series

ZW-SP5010 □M

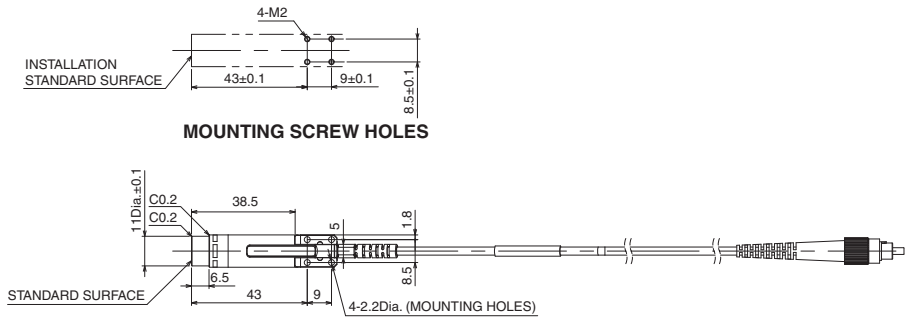


*1.

| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

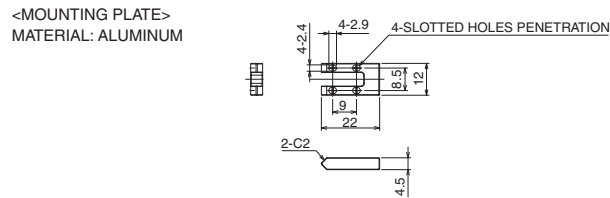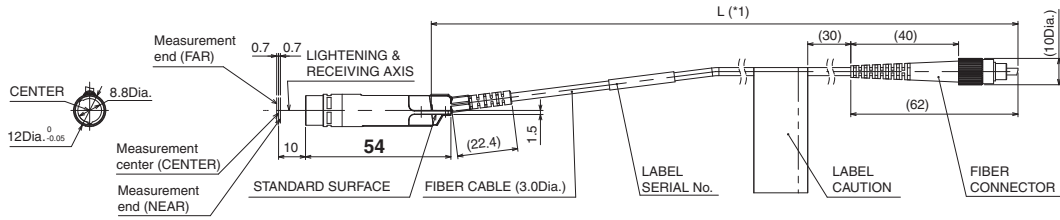

<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

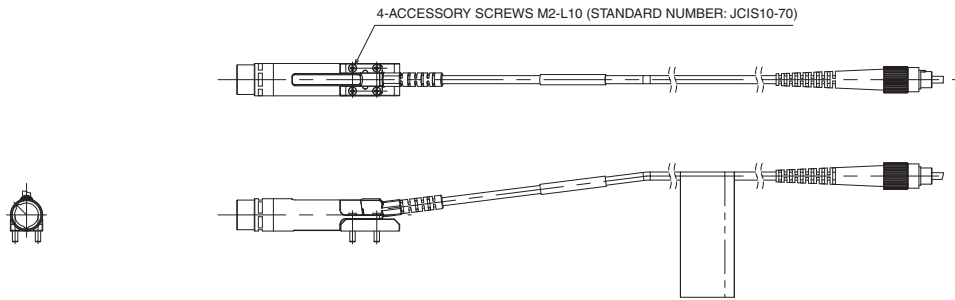


Pen-shaped right angle type ZW-SPR5007 □M




*1.


| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

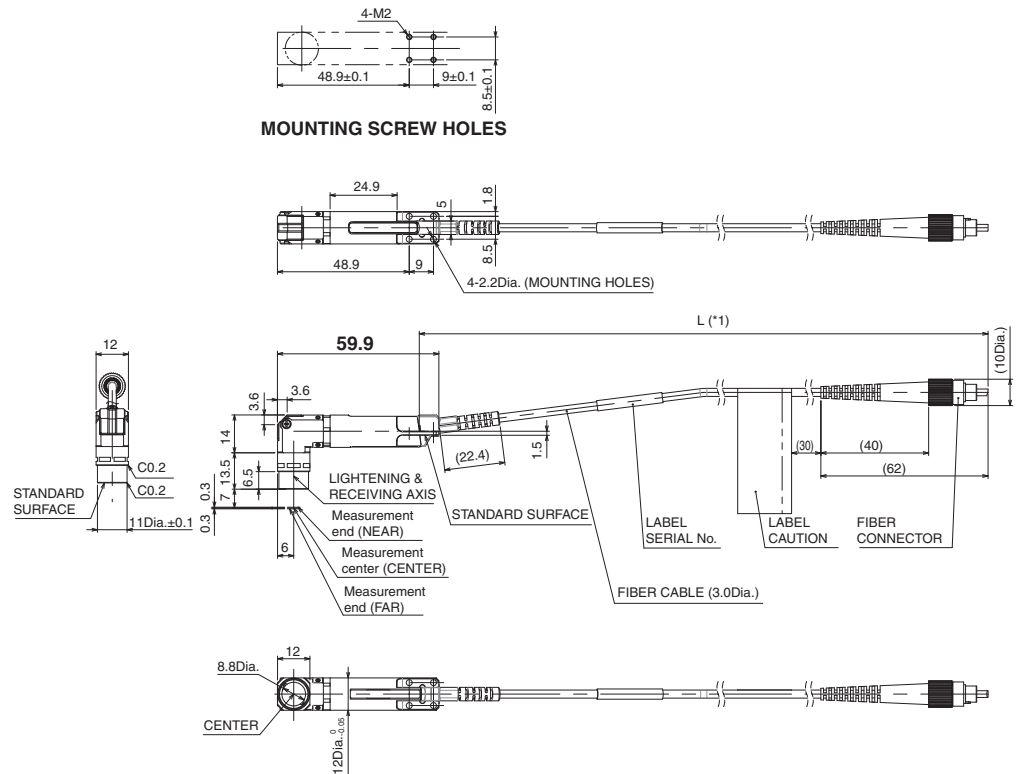

<MOUNTING PLATE>
MATERIAL: ALUMINUM

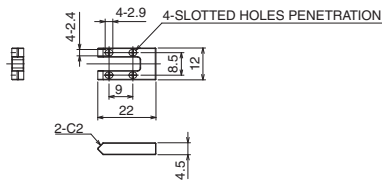


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

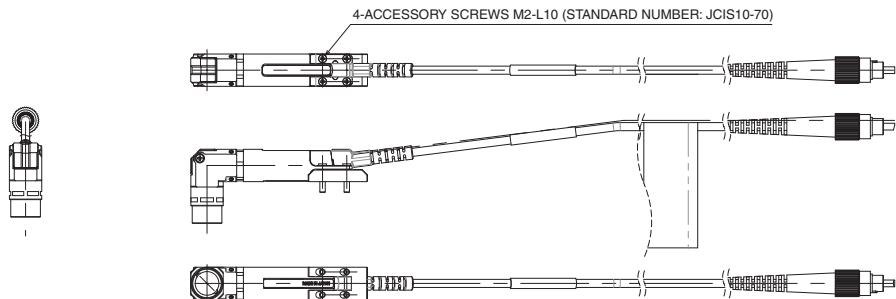


ZW-8000/7000/5000 Series

ZW-SPR5010 □M




MOUNTING SCREW HOLES




*1.


| Length | L |
|--------|--------|
| 0.3 m | (300) |
| 2 m | (2000) |

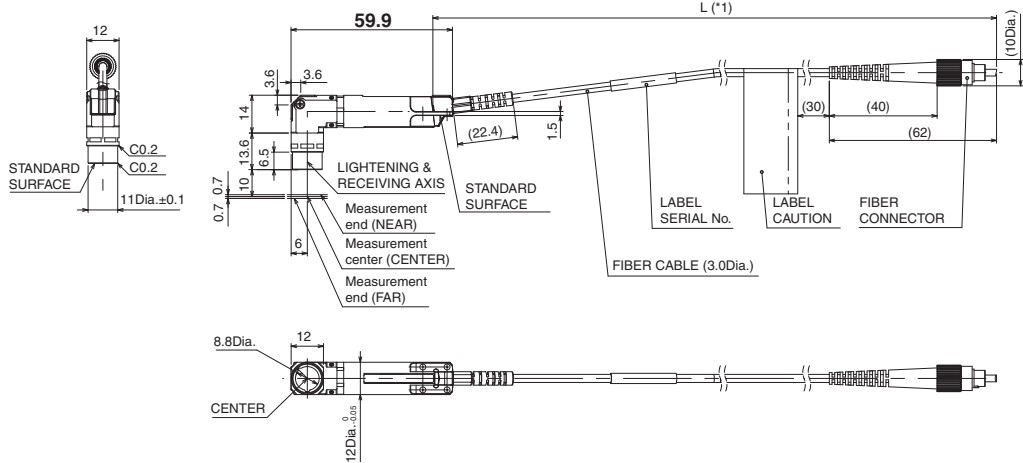

<MOUNTING PLATE>
MATERIAL: ALUMINUM

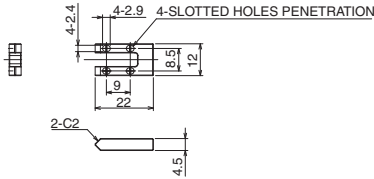


<USE SITUATION OF MOUNTING PLATE>
SENSOR HEAD IS FASTENED WITH MOUNTING PLATE BY USING THE ACCESSORY SCREWS

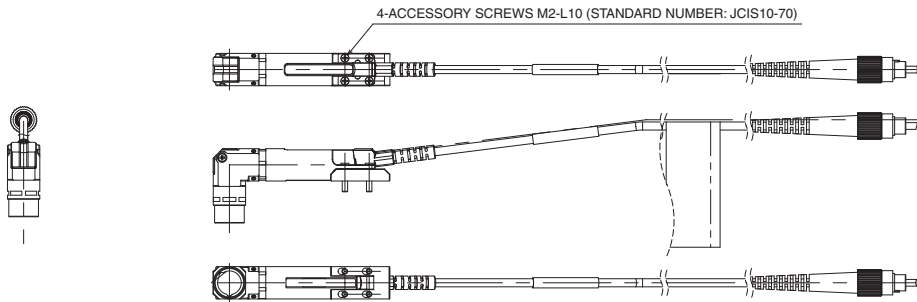


Sensor Controller

ZW-8000T

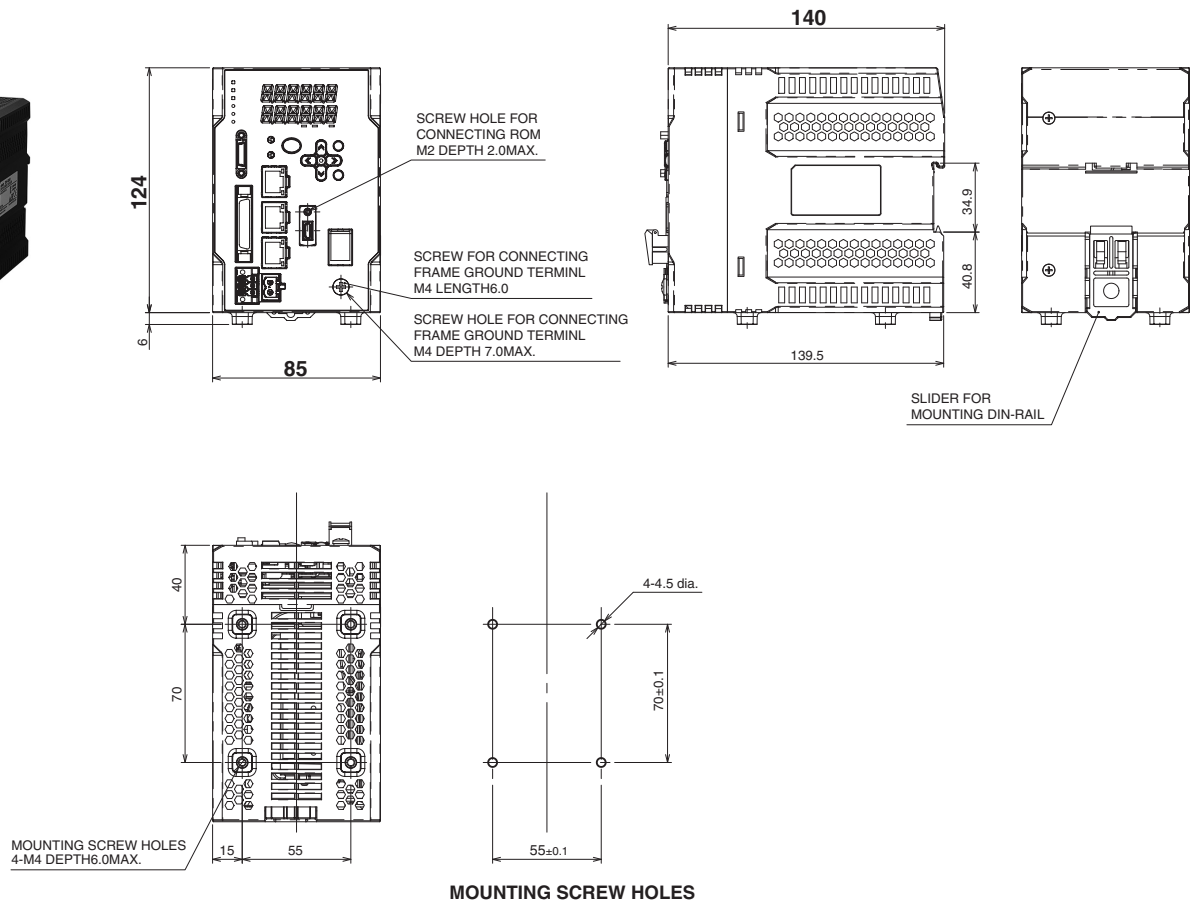


ZW-7000T

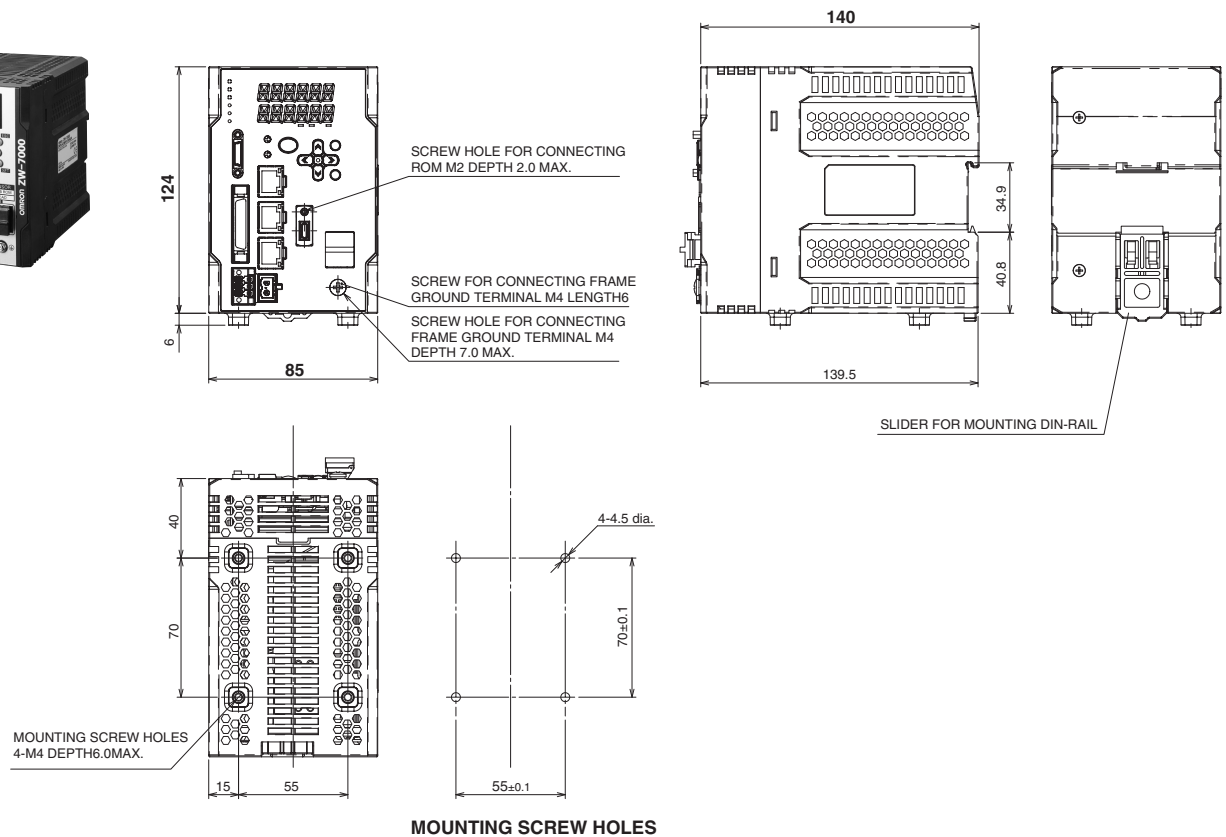



ZW-8000/7000/5000 Series

ZW-5000T

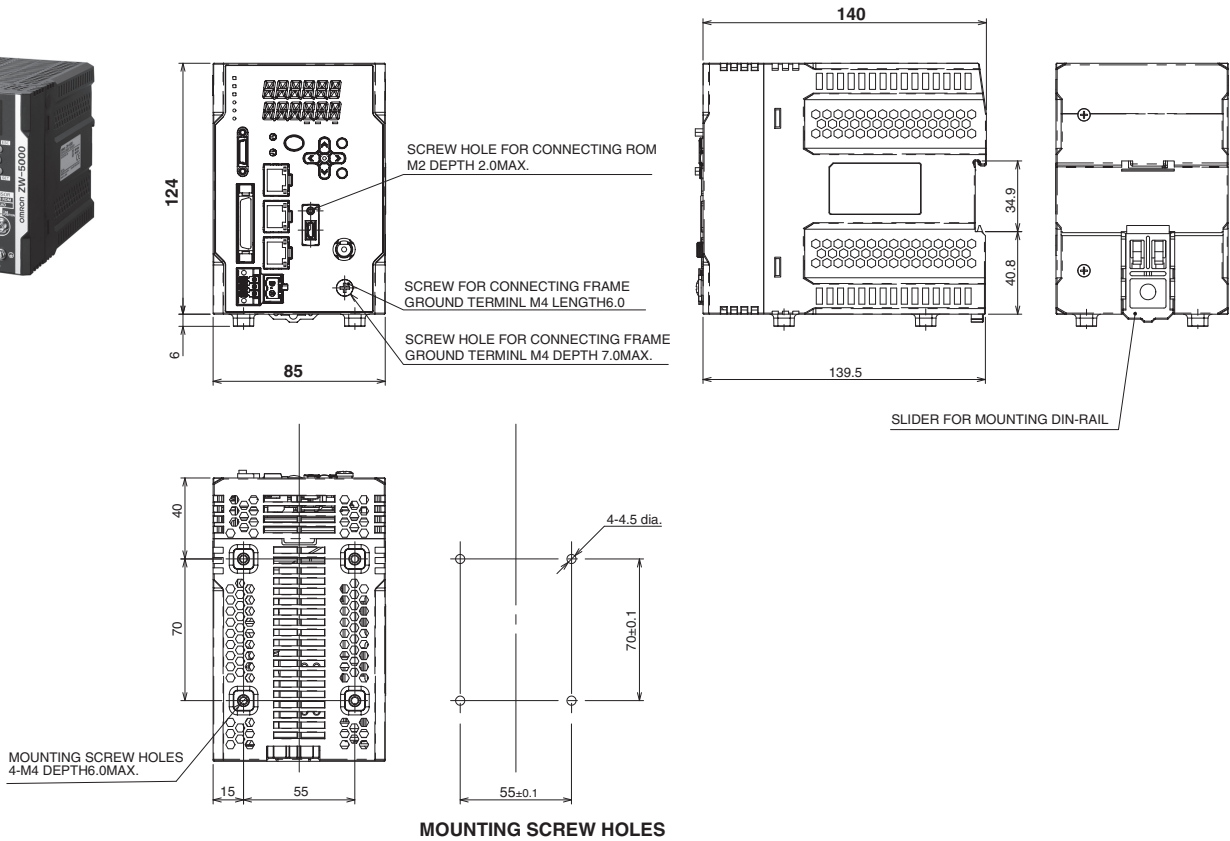

Extension Fiber Cable



ZW-XF8002R/XF8005R/XF8010R/XF8020R/XF8030R

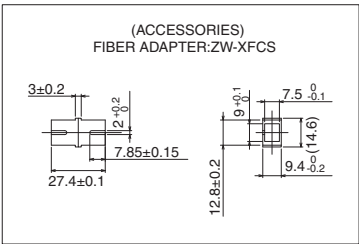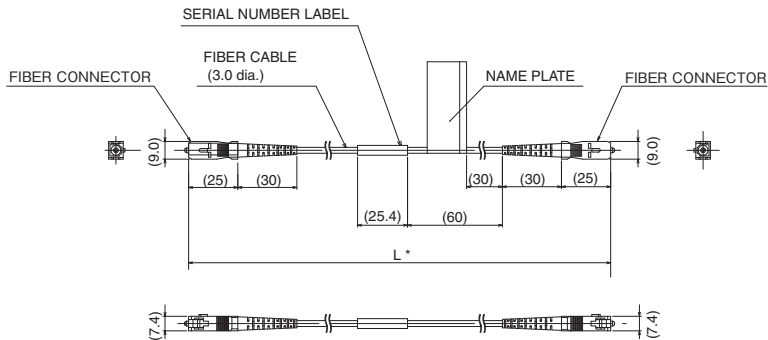

* The following table lists cable lengths per models.

| Type | Specification | L |
|------------|---------------|-------------|
| ZW-XF8002R | 2 m | 2000+40/0 |
| ZW-XF8005R | 5 m | 5000+100/0 |
| ZW-XF8010R | 10 m | 10000+200/0 |
| ZW-XF8020R | 20 m | 20000+400/0 |
| ZW-XF8030R | 30 m | 30000+600/0 |



ZW-XF7002R/XF7005R/XF7010R/XF7020R/XF7030R

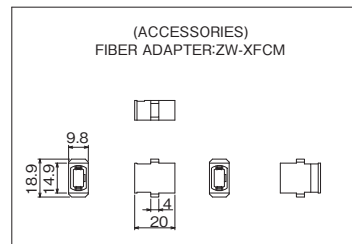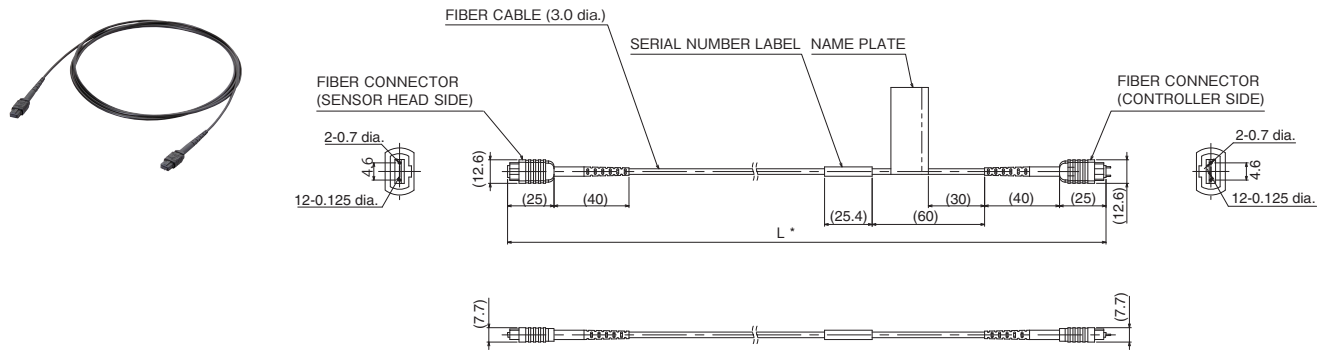

* The following table lists cable lengths per models.

| Type | Specification | L |
|------------|---------------|-------------|
| ZW-XF7002R | 2 m | 2000+40/0 |
| ZW-XF7005R | 5 m | 5000+100/0 |
| ZW-XF7010R | 10 m | 10000+200/0 |
| ZW-XF7020R | 20 m | 20000+400/0 |
| ZW-XF7030R | 30 m | 30000+600/0 |

ZW-XF5002R/XF5005R/XF5010R/XF5020R/XF5030R

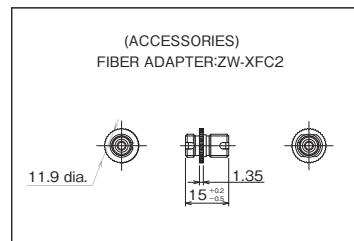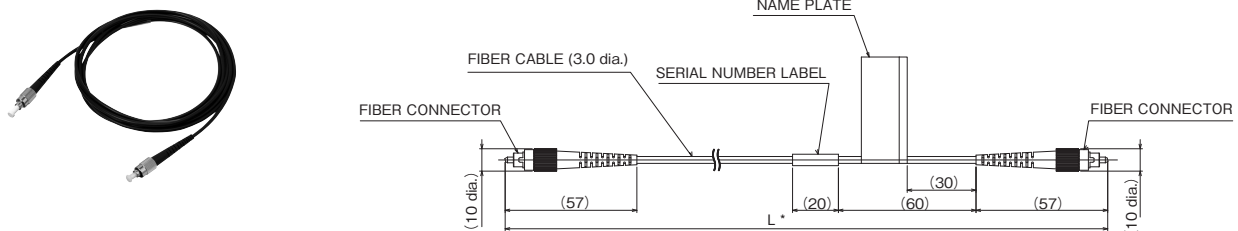

* The following table lists cable lengths per models.

| Type | Specification | L |
|------------|---------------|-------------|
| ZW-XF5002R | 2 m | 2000+200/0 |
| ZW-XF5005R | 5 m | 5000+200/0 |
| ZW-XF5010R | 10 m | 10000+200/0 |
| ZW-XF5020R | 20 m | 20000+500/0 |
| ZW-XF5030R | 30 m | 30000+500/0 |

Related Manuals

| Man.No. | Model number | Manual |
|---------|----------------------|---|
| Z362 | ZW-8000□/7000□/5000□ | Displacement Sensor ZW-8000/7000/5000 User's Manual |
| Z363 | ZW-8000□/7000□/5000□ | Displacement Sensor ZW-8000/7000/5000 User's Manual for Communications Settings |
| W504 | SYSMAC-SE2 | Sysmac Studio Version 1 Operation Manual |

- EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
- EtherNet/IP™ is a trademark of ODVA.
- Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.
- Windows is a registered trademark of Microsoft Corporation in the USA and other countries.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.
- Microsoft product screen shot(s) are reprinted with permission from Microsoft Corporation.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2016-2018 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.
CSM_6_1_1218

Cat. No. Q250-E1-04

1218 (0316)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[ZW-S7020 2M](#) [ZW-7000T](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru