

MCP14A0051/2

0.5A MOSFET Driver With Low Threshold Input And Enable

Features

- · High Peak Output Current: 0.5A (typical)
- Wide Input Supply Voltage Operating Range:
 - 4.5V to 18V
- Low Shoot-Through/Cross-Conduction Current in Output Stage
- · High Capacitive Load Drive Capability:
 - 1000 pF in 40 ns (typical)
- Short Delay Times: 33 ns (t_{D1}), 24 ns (t_{D2}) (typical)
- Low Supply Current: 375 μA (typical)
- Low Voltage Threshold Input and Enable with Hysteresis
- Latch-Up Protected: Withstands 500 mA Reverse Current
- · Space-Saving Packages:
 - 6L SOT-23
 - 6L2x2DFN

Applications

- · Switch Mode Power Supplies
- · Pulse Transformer Drive
- Line Drivers
- Level Translator
- Motor and Solenoid Drive

General Description


The MCP14A0051/2 devices are high-speed MOSFET drivers that are capable of providing up to 0.5A of peak current while operating from a single 4.5V to 18V supply. The inverting (MCP14A0051) or non-inverting (MCP14A0052) single-channel output is directly controlled from either TTL or CMOS (2V to 18V) logic. These devices also feature low shoot-through current, matched rise and fall times, and short propagation delays which make them ideal for high switching frequency applications.

The MCP14A0051/2 family of devices offer enhanced control with Enable functionality. The active-high Enable pin can be driven low to drive the output of the MCP14A0051/2 low regardless of the status of the Input pin. An integrated pull-up resistor allows the user to leave the Enable pin floating for standard operation.

Additionally, the MCP14A0051/2 devices feature separate ground pins (A_{GND} and GND), allowing greater noise isolation between the level-sensitive Input/ Enable pins and the fast, high-current transitions of the push-pull output stage.


These devices are highly latch-up resistant under any condition within their power and voltage ratings. They can accept up to 500 mA of reverse current being forced back into their outputs without damage or logic upset. All terminals are fully protected against electrostatic discharge (ESD) up to 1.75 kV (HBM) and 100V (MM).

Package Types

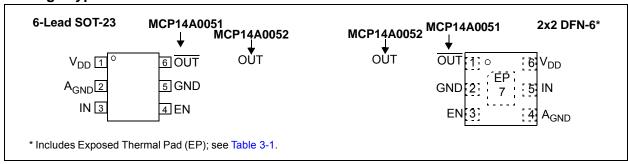

MCP14A0051/2

Functional Block Diagram

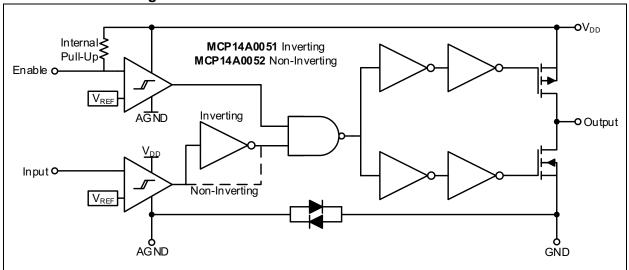

1.0 ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings †

V _{DD} , Supply Voltage	+20V
V_{IN} , Input Voltage(V_{DD} + 0.3V) to	(GND - 0.3V)
V _{EN} , Enable Voltage(V _{DD} + 0.3V) to	(GND - 0.3V)
Package Power Dissipation ($T_A = +50^{\circ}C$))
6L SOT-23	0.52 W
6L 2 x 2 DFN	1.09 W
ESD Protection on all Pins1	.75 kV (HBM)
	100V (MM)

† Notice: Stresses above those listed under "Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

DC CHARACTERISTICS

Electrical Specifications: Unless otherwise noted, $T_A = +25^{\circ}C$, with $4.5V \le V_{DD} \le 18V$.								
Parameters	Sym.	Min.	Тур.	Max.	Units	Conditions		
Input	•							
Input Voltage Range	V _{IN}	GND - 0.3V	_	V _{DD} + 0.3	V			
Logic '1' High Input Voltage	V _{IH}	2.0	1.6	_	V			
Logic '0' Low Input Voltage	V _{IL}	_	1.2	0.8	V			
Input Voltage Hysteresis	V _{HYST(IN)}	_	0.4	_	V			
Input Current	I _{IN}	-1	_	+1	μA	$0V \leq V_{IN} \leq V_{DD}$		
Enable								
Enable Voltage Range	V _{EN}	GND - 0.3V	_	V _{DD} + 0.3	V			
Logic '1' High Enable Voltage	V _{EH}	2.0	1.6	_	V			
Logic '0' Low Enable Voltage	V _{EL}	_	1.2	0.8	V			
Enable Voltage Hysteresis	V _{HYST(EN)}	_	0.4	_	V			
Enable Pin Pull-Up Resistance	R _{ENBL}	_	1.8	_	ΜΩ	V_{DD} = 18V, ENB = A_{GND}		
Enable Input Current	I _{EN}	_	10	_	μΑ	V_{DD} = 18V, ENB = A_{GND}		
Propagation Delay	t _{D3}	_	35	43	ns	V _{DD} = 18V, V _{EN} = 5V, see Figure 4-3, (Note 1)		
Propagation Delay	t _{D4}	_	23	31	ns	V _{DD} = 18V, V _{EN} = 5V, see Figure 4-3, (Note 1)		
Output								
High Output Voltage	V _{OH}	V _{DD} - 0.025	_	_	V	I _{OUT} = 0A		
Low Output Voltage	V _{OL}	_	_	0.025	V	I _{OUT} = 0A		
Output Resistance, High	R _{OH}	_	12.5	17	Ω	I _{OUT} = 10 mA, V _{DD} = 18V		
Output Resistance, Low	R _{OL}	_	7.5	10	Ω	I _{OUT} = 10 mA, V _{DD} = 18V		
Peak Output Current	I _{PK}	_	0.5	_	Α	V _{DD} = 18V (Note 1)		
Latch-Up Protection Withstand Reverse Current	I _{REV}	0.5		_	Α	Duty cycle \leq 2%, t \leq 300 μ s (Note 1)		
Switching Time (Note 1)					•			
Rise Time	t _R	_	40	51	ns	V _{DD} = 18V, C _L = 1000 pF, se Figure 4-1, Figure 4-2 (Note 1)		
Fall Time	t _F	_	28	39	ns	V _{DD} = 18V, C _L = 1000 pF, se Figure 4-1, Figure 4-2 (Note 1)		

Note 1: Tested during characterization, not production tested.

DC CHARACTERISTICS (CONTINUED)

Electrical Specifications: Unless otherwise noted, T_A = +25°C, with 4.5V \leq V _{DD} \leq 18V.							
Parameters	Sym.	Min.	Тур.	Max.	Units	Conditions	
Delay Time	t _{D1}	-	33	41	ns	V _{DD} = 18V, V _{IN} = 5V, see Figure 4-1, Figure 4-2, (Note 1)	
Delay Time	t _{D2}	_	24	32	ns	V _{DD} = 18V, V _{IN} = 5V, see Figure 4-1, Figure 4-2, (Note 1)	
Power Supply							
Supply Voltage	V_{DD}	4.5	_	18	V		
	I_{DD}	ı	330	560	μA	$V_{IN} = 3V$, $V_{EN} = 3V$	
Power Supply Current	I_{DD}	_	360	580	μA	$V_{IN} = 0V$, $V_{EN} = 3V$	
	I_{DD}		360	580	μΑ	$V_{IN} = 3V$, $V_{EN} = 0V$	
	I_{DD}	_	375	600	μA	$V_{IN} = 0V$, $V_{EN} = 0V$	

Note 1: Tested during characterization, not production tested.

DC CHARACTERISTICS (OVER OPERATING TEMP. RANGE) (Note 1)

Electrical Specifications: Unless otherwise indicated, over the operating range with $4.5V \le V_{DD} \le 18V$.								
Parameters	Sym.	Min.	Тур.	Max.	Units	Conditions		
Input								
Input Voltage Range	V _{IN}	GND - 0.3V	_	$V_{DD} + 0.3$	V			
Logic '1' High Input Voltage	V_{IH}	2.0	1.6	_	V			
Logic '0' Low Input Voltage	V_{IL}	_	1.2	0.8	V			
Input Voltage Hysteresis	V _{HYST(IN)}	_	0.4	_	V			
Input Current	I _{IN}	-10	_	+10	μA	$0V \le V_{IN} \le V_{DD}$		
Enable								
Enable Voltage Range	V _{EN}	GND - 0.3V	_	V _{DD} + 0.3	V			
Logic '1' High Enable Voltage	V_{EH}	2.0	1.6	_	V			
Logic '0' Low Enable Voltage	V _{EL}	_	1.2	0.8	V			
Enable Voltage Hysteresis	V _{HYST(EN)}	_	0.4	_	V			
Enable Input Current	I _{EN}	_	12	_	μA	V _{DD} = 18V, ENB = A _{GND}		
Propagation Delay	t _{D3}	_	33	41	ns	V_{DD} = 18V, V_{EN} = 5V, T_{A} = +125°C, see Figure 4-3		
Propagation Delay	t _{D4}	_	25	33	ns	V_{DD} = 18V, V_{EN} = 5V, T_{A} = +125°C, see Figure 4-3		
Output								
High Output Voltage	V _{OH}	V _{DD} - 0.025	_	_	V	DC Test		
Low Output Voltage	V _{OL}	_	_	0.025	V	DC Test		
Output Resistance, High	R _{OH}		_	24	Ω	I _{OUT} = 10 mA, V _{DD} = 18V		
Output Resistance, Low	R _{OL}	_	_	15	Ω	I _{OUT} = 10 mA, V _{DD} = 18V		

Note 1: Tested during characterization, not production tested.

DC CHARACTERISTICS (OVER OPERATING TEMP. RANGE) (Note 1) (CONTINUED)

Electrical Specifications: Unless otherwise indicated, over the operating range with $4.5 \text{V} \le \text{V}_{DD} \le 18 \text{V}$.								
Parameters	Sym.	Min.	Тур.	Max.	Units	Conditions		
Switching Time (Note 1)								
Rise Time	t _R	1	45	56	ns	$V_{DD} = 18V, C_L = 1000 \text{ pF},$ $T_A = +125^{\circ}C, \text{ see Figure 4-1},$ Figure 4-2		
Fall Time	t _F		34	45	ns	$V_{DD} = 18V, C_L = 1000 \text{ pF},$ $T_A = +125^{\circ}C, \text{ see Figure 4-1},$ Figure 4-2		
Delay Time	t _{D1}	_	32	40	ns	V _{DD} = 18V, V _{IN} = 5V, T _A = +125°C, see Figure 4-1, Figure 4-2		
Delay Time	t _{D2}	_	27	35		V _{DD} = 18V, V _{IN} = 5V, T _A = +125°C, see Figure 4-1, Figure 4-2		
Power Supply								
Supply Voltage	V_{DD}	4.5	_	18	V			
	I _{DD}	_	_	760	uA	V _{IN} = 3V, V _{EN} = 3V		
Power Supply Current	I_{DD}	_	_	780	uA	V _{IN} = 0V, V _{EN} = 3V		
Power Supply Current	I_{DD}		_	780	uA	$V_{IN} = 3V$, $V_{EN} = 0V$		
	I_{DD}	_		800	uA	$V_{IN} = 0V, V_{EN} = 0V$		

Note 1: Tested during characterization, not production tested.

TEMPERATURE CHARACTERISTICS

Electrical Specifications: Unless otherwise noted, all parameters apply with $4.5V \le V_{DD} \le 18V$							
Parameter	Sym.	Min.	Тур.	Max.	Units	Comments	
Temperature Ranges							
Specified Temperature Range	T _A	-40	_	+125	°C		
Maximum Junction Temperature	TJ		_	+150	°C		
Storage Temperature Range	T _A	-65	_	+150	°C		
Package Thermal Resistances							
Thermal Resistance, 6LD 2x2 DFN	$\theta_{\sf JA}$	_	91	_	°C/W		
Thermal Resistance, 6LD SOT-23	$\theta_{\sf JA}$	_	192	_	°C/W		

2.0 TYPICAL PERFORMANCE CURVES

Note: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.




FIGURE 2-1: Rise Time vs. Supply Voltage.




FIGURE 2-2: Rise Time vs. Capacitive Load.




FIGURE 2-3: Fall Time vs. Supply Voltage.




FIGURE 2-4: Fall Time vs. Capacitive Load.




FIGURE 2-5: Rise and Fall Time vs. Temperature.




FIGURE 2-6: Crossover Current vs. Supply Voltage.




FIGURE 2-7: Input Propagation Delay vs. Supply Voltage.




FIGURE 2-8: Input Propagation Delay Time vs. Input Amplitude.




FIGURE 2-9: Input Propagation Delay vs. Temperature.




FIGURE 2-10: Enable Propagation Delay vs. Supply Voltage.




FIGURE 2-11: Enable Propagation Delay Time vs. Enable Voltage Amplitude.




FIGURE 2-12: Enable Propagation Delay vs. Temperature.




FIGURE 2-13: Quiescent Supply Current vs. Supply Voltage.




FIGURE 2-14: Quiescent Supply Current vs. Temperature.




FIGURE 2-15: Input Threshold vs. Temperature.




FIGURE 2-16: Input Threshold vs Supply Voltage.




FIGURE 2-17: Enable Threshold vs. Temperature.




FIGURE 2-18: Enable Threshold vs Supply Voltage.




FIGURE 2-19: Output Resistance (Output High) vs. Supply Voltage.




FIGURE 2-20: Output Resistance (Output Low) vs. Supply Voltage.




FIGURE 2-21: Supply Current vs. Capacitive Load ($V_{DD} = 18V$).




FIGURE 2-22: Supply Current vs. Capacitive Load ($V_{DD} = 12V$).




FIGURE 2-23: Supply Current vs. Capacitive Load ($V_{DD} = 6V$).




FIGURE 2-24: Supply Current vs. Frequency ($V_{DD} = 18V$).

MCP14A0051/2




FIGURE 2-25: Supply Current vs. Frequency $(V_{DD} = 12V)$.




FIGURE 2-26: Supply Current vs. Frequency $(V_{DD} = 6V)$.




FIGURE 2-27: Enable Current vs. Supply Voltage.

3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 3-1.

TABLE 3-1: PIN FUNCTION TABLE

Pin	No.	Symbol	Description
6L 2x2 DFN	6L SOT-23	Symbol	Description
1	6	OUT/OUT	Push-Pull Output
2	5	GND	Power Ground
3	4	EN	Device Enable
4	2	A _{GND}	Analog Ground
5	3	IN Control Input	
6	1	V_{DD}	Supply Input
EP	_	EP	Exposed Thermal Pad (GND)

3.1 Output Pin (OUT, OUT)

The Output is a CMOS push-pull output that is capable of sourcing and sinking 0.5A of peak current (V_{DD} = 18V). The low output impedance ensures the gate of the external MOSFET stays in the intended state even during large transients. This output also has a reverse current latch-up rating of 500 mA.

3.2 Power Ground Pin (GND)

GND is the device return pin for the output stage. The GND pin should have a low-impedance connection to the bias supply source return. When the capacitive load is being discharged, high peak currents will flow out of the ground pin.

3.3 Device Enable Pin (EN)

The MOSFET driver Device Enable is a high-impedance, TTL/CMOS compatible input. The Enable input also has hysteresis between the high and low-input levels, allowing them to be driven from slow rising and falling signals and to provide noise immunity. Driving the Enable pin below the threshold will disable the output of the device, pulling \overline{OUT}/OUT low, regardless of the status of the Input pin. Driving the Enable pin above the threshold allows normal operation of the \overline{OUT}/OUT pin based on the status of the Input pin. The Enable pin utilizes an internal pull up resistor, allowing the pin to be left floating for standard driver operation.

3.4 Analog Ground Pin (A_{GND})

AGND is the device return pin for the input and enable stages of the MOSFET driver. The AGND pin should be connected to an electrically "quiet" ground node to provide a low noise reference for the input and enable pins.

3.5 Control Input Pin (IN)

The MOSFET driver Control Input is a high-impedance, TTL/CMOS compatible input. The Input also has hysteresis between the high and low-input levels, allowing them to be driven from slow rising and falling signals and to provide noise immunity.

3.6 Supply Input Pin (V_{DD})

 V_{DD} is the bias supply input for the MOSFET driver and has a voltage range of 4.5V to 18V. This input must be decoupled to ground with a local capacitor. This bypass capacitor provides a localized low-impedance path for the peak currents that are provided to the load.

3.7 Exposed Metal Pad Pin (EP)

The exposed metal pad of the DFN package is not internally connected to any potential. Therefore, this pad can be connected to a ground plane, or other copper plane on a printed circuit board, to aid in heat removal from the package.

4.0 APPLICATION INFORMATION

4.1 General Information

MOSFET drivers are high-speed, high-current devices which are intended to source/sink high peak currents to charge/discharge the gate capacitance of external MOSFETs or Insulated-Gate Bipolar Transistors (IGBTs). In high-frequency switching power supplies, the Pulse-Width Modulation (PWM) controller may not have the drive capability to directly drive the power MOSFET. A MOSFET driver such as the MCP14A0051/2 family can be used to provide additional source/sink current capability.

4.2 MOSFET Driver Timing

The ability of a MOSFET driver to transition from a fully-off state to a fully-on state is characterized by the driver's rise time (t_R), fall time (t_F) and propagation delays (t_{D1} and t_{D2}). Figure 4-1 and Figure 4-2 show the test circuit and timing waveform used to verify the MCP14A0051/2 timing.

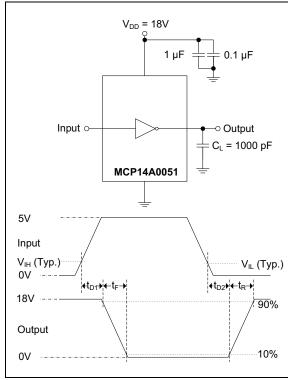


FIGURE 4-1: Inverting Driver Timing Waveform.

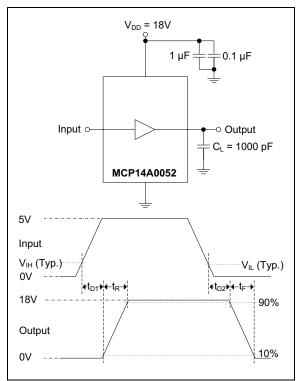


FIGURE 4-2: Non-Inverting Driver Timing Waveform.

4.3 Enable Function

The enable pin (EN) provides additional control of the output pin (OUT). This pin is active high and is internally pulled up to V_{DD} so that the pin can be left floating to provide standard MOSFET driver operation.

When the enable pin's voltage is above the Enable pin high-voltage threshold, (V_{EN_H}) , the output is enabled and allowed to react to the status of the Input pin. However, when the voltage applied to the Enable pin falls below the low threshold voltage (V_{EN_L}) , the driver output is disabled and doesn't respond to changes in the status of the Input pin. When the driver is disabled, the output is pulled down to a low state. Refer to Table 4-1 for enable pin logic. The threshold voltage levels for the Enable pin are similar to the threshold voltage levels of the Input pin, and are TTL and CMOS compatible. Hysteresis is provided to help increase the noise immunity of the enable function, avoiding false triggers of the enable signal during driver switching.

There are propagation delays associated with the driver receiving an enable signal and the output reacting. These propagation delays, t_{D3} and t_{D4} , are graphically represented in Figure 4-3.

TABLE 4-1: ENABLE PIN LOGIC

ENB	IN	MCP <u>14A</u> 0051 OUT	MCP14A0052 OUT
Н	Н	L	Н
Н	L	Н	L
L	Х	L	L




FIGURE 4-3: Enable Timing Waveform.

4.4 **Decoupling Capacitors**

Careful PCB layout and decoupling capacitors are required when using power MOSFET drivers. Large current is required to charge and discharge capacitive loads quickly. For example, approximately 720 mA are needed to charge a 1000 pF load with 18V in 25 ns.

To operate the MOSFET driver over a wide frequency range with low supply impedance, it is recommended to place 1.0 μF and 0.1 μF low ESR ceramic capacitors in parallel between the driver V_{DD} and GND. These capacitors should be placed close to the driver to minimize circuit board parasitics and provide a local source for the required current.

4.5 **PCB Layout Considerations**

Proper Printed Circuit Board (PCB) layout is important in high-current, fast switching circuits to provide proper device operation and robustness of design. Improper component placement may cause errant switching, excessive voltage ringing or circuit latch-up. The PCB trace loop length and inductance should be minimized by the use of ground planes or traces under the MOSFET gate drive signal, separate analog and power grounds, and local driver decoupling.

Placing a ground plane beneath the MCP14A0051/2 devices will help as a radiated noise shield, as well as providing some heat sinking for power dissipated within the device.

4.6 **Power Dissipation**

The total internal power dissipation in a MOSFET driver is the summation of three separate power dissipation elements, as shown in Equation 4-1.

EQUATION 4-1:

 $P_T = P_L + P_Q + P_{CC}$

Where:

 P_T = Total power dissipation P_I = Load power dissipation Quiescent power dissipation

 P_{CC} Operating power dissipation

4.6.1 CAPACITIVE LOAD DISSIPATION

The power dissipation caused by a capacitive load is a direct function of the frequency, total capacitive load and supply voltage. The power lost in the MOSFET driver for a complete charging and discharging cycle of a MOSFET is shown in Equation 4-2.

EQUATION 4-2:

 $P_L = f \times C_T \times V_{DD}^2$

Where:

Switching frequency

Total load capacitance

MOSFET driver supply voltage V^{DD}

4.6.2 QUIESCENT POWER DISSIPATION

The power dissipation associated with the quiescent current draw depends on the state of the Input and Enable pins. Refer to Section 1.0 "Electrical Characteristics" for typical quiescent current draw values in different operating states. The quiescent power dissipation is shown in Equation 4-3.

EQUATION 4-3:

 $P_{Q} = (I_{QH} \times D + I_{QL} \times (1 - D)) \times V_{DD}$ Where:

Quiescent current in the High state I_{QH}

D Duty cycle

Quiescent current in the Low state I_{QL}

MOSFET driver supply voltage V_{DD}

MCP14A0051/2

4.6.3 OPERATING POWER DISSIPATION

The operating power dissipation occurs each time the MOSFET driver output transitions because, for a very short period of time, both MOSFETs in the output stage are on simultaneously. This cross-conduction current leads to a power dissipation described in Equation 4-4.

EQUATION 4-4:

 $P_{CC} = CC \times f \times V_{DD}$

Where:

CC = Cross-Conduction constant

(Ampere x second)


f = Switching frequency


 V_{DD} = MOSFET driver supply voltage

5.0 PACKAGING INFORMATION

5.1 Package Marking Information


6-Lead DFN (2x2x0.9 mm)






Example

6-Lead SOT-23





Standard Markings for SOT-23					
Part Number	Code				
MCP14A0051T-E/MAY	ABG				
MCP14A0052T-E/MAY	ABH				
MCP14A0051T-E/CH	AAAQY				
MCP14A0052T-E/CH	AAARY				

Legend: XX...X Customer-specific information

Y Year code (last digit of calendar year)
YY Year code (last 2 digits of calendar year)
WW Week code (week of January 1 is week '01')

NNN Alphanumeric traceability code

e3 Pb-free JEDEC® designator for Matte Tin (Sn)

This package is Pb-free. The Pb-free JEDEC designator (e3)


can be found on the outer packaging for this package.

Note:

In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

6-Lead Plastic Dual Flat, No Lead Package (MA[Y]) - 2x2x0.9mm Body [DFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

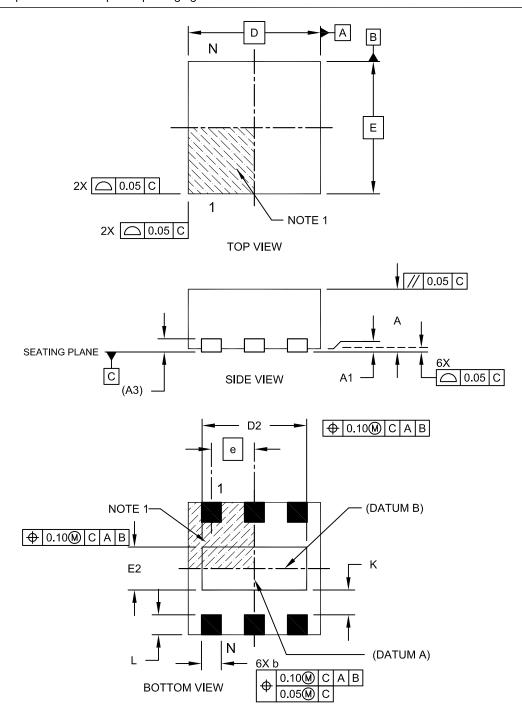

Microchip Technology Drawing C04-120C Sheet 1 of 2

6-Lead Plastic Dual Flat, No Lead Package (MA[Y]) - 2x2x0.9mm Body [DFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

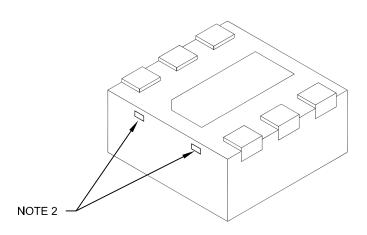

	Units	MILLIMETERS			
Dime	Dimension Limits			MAX	
Number of Pins	N		6		
Pitch	е		0.65 BSC		
Overall Height	А	0.80	0.85	0.90	
Standoff	A1	0.00	0.02	0.05	
Contact Thickness	A3	0.20 REF			
Overall Length	D	2.00 BSC			
Overall Width	E	2.00 BSC			
Exposed Pad Length	D2	1.50	1.60	1.70	
Exposed Pad Width	E2	0.90	1.00	1.10	
Contact Width	b	0.25	0.30	0.35	
Contact Length	L	0.20	0.25	0.30	
Contact-to-Exposed Pad	К	0.20	-	-	

Notes:

- 1. Pin 1 visual index feature may vary, but must be located within the hatched area.
- 2. Package may have one or more exposed tie bars at ends.
- 3. Package is saw singulated.
- 4. Dimensioning and tolerancing per ASME Y14.5M.


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-120C Sheet 2 of 2

6-Lead Plastic Dual Flat, No Lead Package (MA) - 2x2x0.9mm Body [DFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

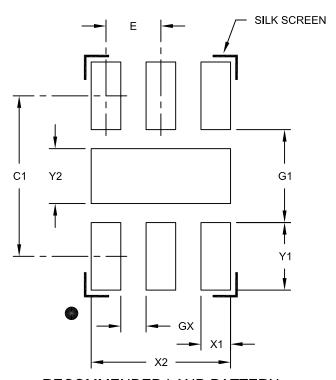

RECOMMENDED LAND PATTERN

	N	IILLIMETER	S		
Dimension	Limits	MIN	NOM	MAX	
Contact Pitch	E		0.65 BSC		
Optional Center Pad Width	Y2			1.00	
Optional Center Pad Length	X2			1.70	
Contact Pad Spacing	C1		2.10		
Contact Pad Width (X6)	X1			0.35	
Contact Pad Length (X6)	Y1			0.65	
Distance Between Pads	GX	0.20			
Distance Between Pads	G1	1.10			

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2120A

6-Lead Plastic Small Outline Transistor (CH) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

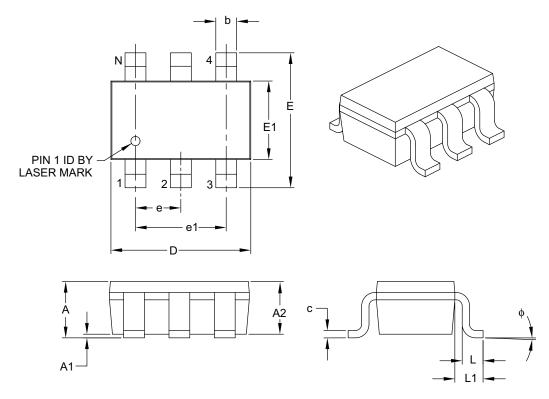

	Units			
Dimensio	Dimension Limits			MAX
Number of Pins	N		6	
Pitch	е		0.95 BSC	
Outside Lead Pitch	e1		1.90 BSC	
Overall Height	Α	0.90	_	1.45
Molded Package Thickness	A2	0.89	_	1.30
Standoff	A1	0.00	_	0.15
Overall Width	Е	2.20	_	3.20
Molded Package Width	E1	1.30	_	1.80
Overall Length	D	2.70	_	3.10
Foot Length	L	0.10	_	0.60
Footprint	L1	0.35	_	0.80
Foot Angle	ф	0°	_	30°
Lead Thickness	С	0.08	_	0.26
Lead Width	b	0.20	_	0.51

Notes:


- 1. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127 mm per side.
- 2. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-028B

6-Lead Plastic Small Outline Transistor (CH) [SOT-23]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

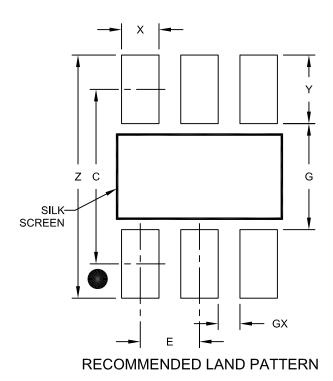

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	Е	0.95 BSC		
Contact Pad Spacing	U		2.80	
Contact Pad Width (X6)	X			0.60
Contact Pad Length (X6)	Υ			1.10
Distance Between Pads	G	1.70		
Distance Between Pads	GX	0.35		
Overall Width	Z			3.90

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2028A

APPENDIX A: REVISION HISTORY

Revision A (December 2014)

• Original Release of this Document.

PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO. [XI⁽¹⁾ -X /XX |
Device Tape and Reel Temperature Package Range

Device: MCP14A0051T: High-Speed MOSFET Driver

(Tape and Reel)

MCP14A0052T: High-Speed MOSFET Driver

(Tape and Reel)

Temperature Range: E = -40°C to +125°C (Extended)

Package: CH = Plastic Small Outline Transistor (SOT-23), 6-lead

AY = Plastic Dual Flat, No Lead Package -

2 x 2 x 0.9 mm Body (DFN) 6-lead

Examples:

a) MCP14A0051T-E/CH: Tape and Reel,

Extended temperature, 6LD SOT-23 package

a) MCP14A0052T-E/MAY:Tape and Reel

Extended temperature, 6LD DFN package

Note 1:

Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELoQ, KEELoQ logo, Kleer, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC³² logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KleerNet, KleerNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

 $\ensuremath{\mathsf{SQTP}}$ is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2014, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63276-908-4

QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO/TS 16949=

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



Worldwide Sales and Service

AMERICAS

Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199

Tel: 480-792-7200 Fax: 480-792-7277 Technical Support:

http://www.microchip.com/

support

Web Address: www.microchip.com

Atlanta

Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455

Austin, TX Tel: 512-257-3370

Boston

Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088

Chicago Itasca, IL

Tel: 630-285-0071 Fax: 630-285-0075

Cleveland

Independence, OH Tel: 216-447-0464 Fax: 216-447-0643

Dallas

Addison, TX Tel: 972-818-7423 Fax: 972-818-2924

Detroit Novi. MI

Tel: 248-848-4000

Houston, TX Tel: 281-894-5983

Indianapolis Noblesville, IN Tel: 317-773-8323 Fax: 317-773-5453

Los Angeles

Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608

New York, NY Tel: 631-435-6000

San Jose, CA Tel: 408-735-9110

Canada - Toronto Tel: 905-673-0699 Fax: 905-673-6509 ASIA/PACIFIC

Asia Pacific Office Suites 3707-14, 37th Floor Tower 6, The Gateway Harbour City, Kowloon

Hong Kong Tel: 852-2943-5100

Fax: 852-2401-3431

Australia - Sydney Tel: 61-2-9868-6733 Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8569-7000 Fax: 86-10-8528-2104

China - Chengdu Tel: 86-28-8665-5511

Fax: 86-28-8665-7889

China - Chongqing

Tel: 86-23-8980-9588 Fax: 86-23-8980-9500

China - Hangzhou

Tel: 86-571-8792-8115 Fax: 86-571-8792-8116

China - Hong Kong SAR

Tel: 852-2943-5100 Fax: 852-2401-3431

China - Nanjing

Tel: 86-25-8473-2460 Fax: 86-25-8473-2470

China - Qingdao

Tel: 86-532-8502-7355 Fax: 86-532-8502-7205

China - Shanghai Tel: 86-21-5407-5533

Fax: 86-21-5407-5066

China - Shenyang

Tel: 86-24-2334-2829 Fax: 86-24-2334-2393

China - Shenzhen

Tel: 86-755-8864-2200 Fax: 86-755-8203-1760

China - Wuhan

Tel: 86-27-5980-5300 Fax: 86-27-5980-5118

China - Xian

Tel: 86-29-8833-7252 Fax: 86-29-8833-7256

China - Xiamen

Tel: 86-592-2388138 Fax: 86-592-2388130

China - Zhuhai

Tel: 86-756-3210040 Fax: 86-756-3210049 ASIA/PACIFIC

India - Bangalore Tel: 91-80-3090-4444

Fax: 91-80-3090-4123

India - New Delhi

Tel: 91-11-4160-8631 Fax: 91-11-4160-8632

India - Pune

Tel: 91-20-3019-1500

Japan - Osaka

Tel: 81-6-6152-7160 Fax: 81-6-6152-9310

Japan - Tokyo

Tel: 81-3-6880- 3770 Fax: 81-3-6880-3771

Korea - Daegu

Tel: 82-53-744-4301 Fax: 82-53-744-4302

Korea - Seoul

Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857 Fax: 60-3-6201-9859

Malaysia - Penang

Tel: 60-4-227-8870 Fax: 60-4-227-4068

Philippines - Manila

Tel: 63-2-634-9065 Fax: 63-2-634-9069

Singapore

Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan - Hsin Chu

Tel: 886-3-5778-366 Fax: 886-3-5770-955

Taiwan - Kaohsiung

Tel: 886-7-213-7830

Taiwan - Taipei

Tel: 886-2-2508-8600 Fax: 886-2-2508-0102

Thailand - Bangkok

Tel: 66-2-694-1351 Fax: 66-2-694-1350 **EUROPE**

Austria - Wels

Tel: 43-7242-2244-39 Fax: 43-7242-2244-393

Denmark - Copenhagen

Tel: 45-4450-2828 Fax: 45-4485-2829

France - Paris

Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany - Dusseldorf

Tel: 49-2129-3766400

Germany - Munich

Tel: 49-89-627-144-0 Fax: 49-89-627-144-44

Germany - Pforzheim Tel: 49-7231-424750

Italy - Milan

Tel: 39-0331-742611 Fax: 39-0331-466781

Italy - Venice

Tel: 39-049-7625286

Netherlands - Drunen

Tel: 31-416-690399 Fax: 31-416-690340

Poland - Warsaw

Tel: 48-22-3325737

Spain - Madrid

Tel: 34-91-708-08-90 Fax: 34-91-708-08-91

Sweden - Stockholm

Tel: 46-8-5090-4654

UK - Wokingham Tel: 44-118-921-5800

Fax: 44-118-921-5820

03/25/14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

MCP14A0051T-E/CH MCP14A0051T-E/MAY



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru