

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0736443211

Status:


Active

Overview:

[hdm](#)

Description:

2.00mm (.079") Pitch HDM® Board-to-Board Backplane Header, Vertical, SMC, Press-Fit, Guide Post Location A, Polarizing Key Position F, 144 Circuits

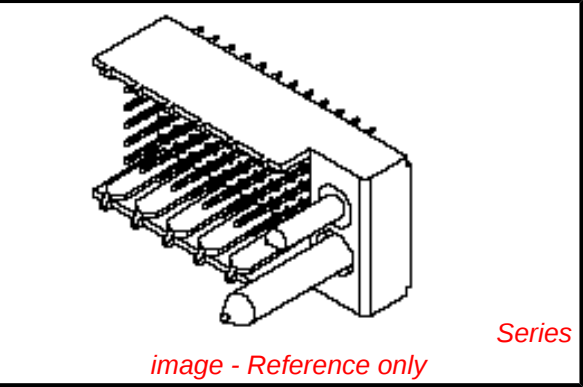

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Backplane Connectors
Series	73644
Application	Backplane
Comments	Standard Press-Fit, Tin/Lead (SnPb)
Component Type	PCB Header
Overview	hdm
Product Name	HDM®
Style	N/A
Physical	
Circuits (Loaded)	144
Circuits (maximum)	144
Color - Resin	Black, Natural
Durability (mating cycles max)	250
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Material - Metal	Phosphor Bronze, Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Columns	24
Number of Pairs	Open Pin Field
Number of Rows	6
Orientation	Vertical
PC Tail Length (in)	0.138 In
PC Tail Length (mm)	3.50 mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.098 In
PCB Thickness Recommended (mm)	2.50 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	15
Plating min: Termination (µm)	0.375
Polarized to PCB	No

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

73644Series

Mates With

73632 HDM PLUS® Board-to-Board Daughtercard Receptacle. [73780](#) HDM® Board-to-Board Daughtercard Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Flat Rock Tooling for Pneumatic Press	0622013700
HDM® Backplane Insertion Signal Contact Tool	0621001400
HDM® Backplane Insertion Head for 144 Positions	0622005703

Stackable	No	Extraction Tool	0621001000
Surface Mount Compatible (SMC)	Yes		
Temperature Range - Operating	-55°C to +105°C		
Termination Interface: Style	Through Hole - Compliant Pin		
Electrical			
Current - Maximum per Contact	1A		
Data Rate	1.0 Gbps		
Real Signals (per 25mm)	75		
Shielded	No		
Voltage - Maximum	250V AC		
Material Info			
Reference - Drawing Numbers			
Packaging Specification	PK-70873-0818		
Sales Drawing	SDA-73644-****		
HDM and High Density Metric are trademarks of Amphenol Corporation			

This document was generated on 05/14/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

73644	4	3	2	73644
1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0, COLOR: BLACK, TERMINAL - PHOSPHOR BRONZE. 2. FINISHES: SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MINIMUM THICKNESS; NICKEL (Ni) AND GOLD FLASH OVERALL SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MIN. THICKNESS; SELECTIVE TIN/LEAD (Sb/Pb) IN TAIL AREA; NICKEL (Ni) OVERALL.				

NOTES:

F

E

D

C

B

10 9 8 7 6

Technical drawing of a 73644-**** WW/YY connector. The drawing includes an isometric view of the connector assembly, a top view showing dimensions (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z), and a side view showing dimensions (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z). The drawing also includes a table of dimensions and a list of notes.

Symbol	Value
$\oplus \varnothing 0.20$	X Y Z
$\oplus \varnothing 0.15$	M X Y Z
$\oplus \varnothing 0.30$	M X Y Z

SEE NOTE 8

A					I	REVISED ECR UDT2000-0348 BINGHAM 99/10/12	DIMENSIONS SHOWN (IMPERIAL) INCH		▽ = 0 ▼ = 0		REVISE ONLY ON CAD SYSTEM																	
					H	REVISED ECR UDT1999-0662 BINGHAM 99/05/18	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		TITLE SALES ASSY, HDM BACKPLANE MODULE, POLAR/GUIDE OPTION																			
					J	REVISED ECR UCP2003-2260 THOMAS 03/04/25	<table border="1"> <thead> <tr> <th></th> <th>INCH</th> <th>METRIC</th> </tr> </thead> <tbody> <tr> <td>3 PLACE</td> <td>± N/A</td> <td>---</td> </tr> <tr> <td>2 PLACE</td> <td>± N/A</td> <td>± 0.05</td> </tr> <tr> <td>1 PLACE</td> <td>---</td> <td>± 0.10</td> </tr> </tbody> </table>			INCH	METRIC	3 PLACE	± N/A	---	2 PLACE	± N/A	± 0.05	1 PLACE	---	± 0.10	MOLEX INCORPORATED LITTLE, ILL. 60532 U.S.A.				SHEET NO. 1 OF 2		DATE 96/12/18	
		INCH	METRIC																									
	3 PLACE	± N/A	---																									
2 PLACE	± N/A	± 0.05																										
1 PLACE	---	± 0.10																										
				G	REVISED ECR UDT1999-0476 BINGHAM 98/12/21	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. SEE CHART		DRWG. NO. SDA-73644-*****																		
LTR.					REVISIONS	LTR.		REVISIONS		FILE NAME S73644X1 DGN		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		DIV. DA		SIZE B												

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---

DIMENSIONS SHOWN (METRIC/INCH)			$\nabla = 0$ $\blacktriangledown = 0$		REVISE ONLY ON CAD SYSTEM													
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 1/2^\circ$			TITLE															
<table><tr><td colspan="2">INCH</td><td>METRIC</td></tr><tr><td>3 PLACE</td><td>$\pm N/A$</td><td>---</td></tr><tr><td>2 PLACE</td><td>$\pm N/A$</td><td>± 0.05</td></tr><tr><td>1 PLACE</td><td>---</td><td>± 0.10</td></tr></table>			INCH		METRIC	3 PLACE	$\pm N/A$	---	2 PLACE	$\pm N/A$	± 0.05	1 PLACE	---	± 0.10	SALES ASSY, HDM BACKPLANE MODULE, POLAR/GUIDE OPTION			
INCH		METRIC																
3 PLACE	$\pm N/A$	---																
2 PLACE	$\pm N/A$	± 0.05																
1 PLACE	---	± 0.10																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			 MOLEX INCORPORATED LISLE, ILL. 60532 U.S.A.		SHEET NO. 1 OF 2 DATE 96/12/18													
DRWG. JRR CHK'D. SMR BY CAB SCALE 2 : 1			PART NO. SEE CHART DRWG. NO. SDA-73644-****		FILE NAME S73644X1 JCN													
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					DIV. DA SIZE B													

10		9	8	7	6		7364
F	MATERIAL NUMBER	NUMBER OF SIGNAL CONTACTS	PLATING		DIM "A"	DIM "B"	DIM "M"
	73644-00**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.00
	73644-01**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.50
	73644-02**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	6.00
	73644-10**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.00
	73644-11**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.50
	73644-12**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	6.00
E	73644-20**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.00
	73644-21**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.50
	73644-22**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	6.00
	73644-30**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.00
	73644-31**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.50
	73644-32**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	6.00

MATERIAL NUMBER ASSIGNMENT

73644- * * * *

0 = 72-CIRCUIT, GOLD/GOLD FLASH
1 = 144-CIRCUIT, GOLD/GOLD FLASH
2 = 72-CIRCUIT, GOLD/TIN-LEAD
3 = 144-CIRCUIT, GOLD/TIN-LEAD

```
0 = 5.00 MATING LENGTH
1 = 5.50 MATING LENGTH
2 = 6.00 MATING LENGTH
```



REF. MATERIAL NUMBER 73644-0009
GUIDE PIN IS IN LOCATION A
POLARIZING KEY IS IN LOCATION B. POSITION F



REF. MATERIAL NUMBER 73644-0008
GUIDE PIN IS IN LOCATION B
POLARIZING KEY IS IN LOCATION A, POSITION E

NUMBER	GUIDE POST LOCATION	POLAR KEY POSITION
00	B	A
01	A	
02	B	B
03	A	
04	B	C
05	A	
06	B	D
07	A	
08	B	E
09	A	
10	B	F
11	A	
12	B	G
13	A	
14	B	H
15	A	
16	B	N/A
17	A	
18	N/A	

[illegible]

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru