



NEC's 1.5W GaAs MMIC POWER AMPLIFIER

UPG2118K

FEATURES

- **E-MODE HJ-FET TECHNOLOGY**
- **SINGLE +3.2V POWER SUPPLY**
- **HIGH EFFICIENCY:** PAE = 42% MIN
- **HIGH SATURATED POWER:** Pout = +31.5 dBm MIN
- **FLEXIBLE FREQUENCY RANGE**
- **20-PIN QFN PACKAGE:**
(4.15 x 4.15 x 0.9 mm)

DESCRIPTION

NEC's UPG2118K is a 1.5W, 3 stage power amplifier developed primarily for DCS/PCS1800 applications. With modified external matching the UPG2118K can be tuned from 800 to 2500 MHz.

Use of E-mode FET technology delivers high efficiency and high linearity with a single positive low voltage supply.

APPLICATIONS

- **1800 MHz DCS/PCS**
- **915 AND 2450 ISM BAND USAGE**
- **AUTOMATIC METER READERS**
- **WIRELESS SECURITY**
- **SATELLITE UPLINK**

ORDERING INFORMATION

| PART NUMBER | MARKING | PACKAGE | SUPPLYING FORM |
|---------------|---------|------------|---|
| UPG2118K-E3-A | 2118 | 20-pin QFN | <ul style="list-style-type: none"> • Embossed tape 12mm wide • 4.5 K pcs/reel |

ABSOLUTE MAXIMUM RATINGS (TA = 25°C, unless otherwise specified)


| PARAMETERS | SYMBOL | RATINGS | UNIT |
|---------------------------------|---------------------------------|------------|------|
| Storage Temperature | T _{stg} | -45 to +85 | °C |
| Operating Temperature | T _{opt} | -45 to +85 | °C |
| Supply Voltage _{1,2,3} | V _D _{1,2,3} | 8.0 | V |
| Active Bias Circuit Voltage | V _{ABC} | 8.0 | V |
| Reference Voltage | V _{ref} | 5.0 | V |
| Junction Temperature | T _j | 150 | °C |
| Input Power | P _{in} | 15 | dBm |
| Total Power Dissipation | P _{tot} | 4.0 | W |

Caution This device is ESD sensitive. Please take ESD precautions.

The information contained in this document is being issued in advance of the production cycle for the device. The parameters for the device may change before final production or NEC Corporation, at its own discretion, may withdraw the device prior to its production.

PIN CONNECTIONS

| PIN NO. | CONNECTION | PIN NO. | CONNECTION |
|---------|-----------------|---------|------------|
| 1 | $V_{G1,2}$ | 11 | GND |
| 2 | $V_{ref1,2}$ | 12 | NC |
| 3 | V_{ABC} | 13 | NC |
| 4 | V_{ref3} | 14 | GND |
| 5 | V_{G3} | 15 | V_{D2} |
| 6 | GND | 16 | V_{D1} |
| 7 | $V_{D3}/RF OUT$ | 17 | GND |
| 8 | $V_{D3}/RF OUT$ | 18 | GND |
| 9 | $V_{D3}/RF OUT$ | 19 | V_{attn} |
| 10 | $V_{D3}/RF OUT$ | 20 | RF IN |

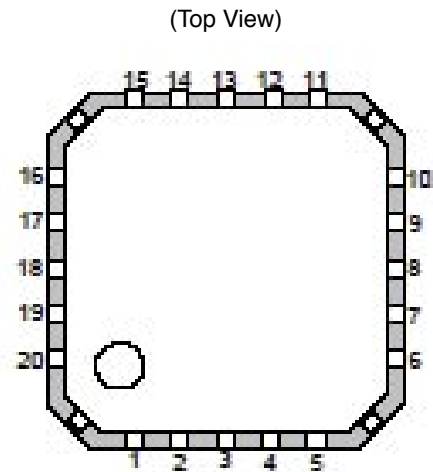

RECOMMENDED OPERATING CONDITIONS (TA = 25°C)


| PARAMETERS | SYMBOL | MIN | TYP | MAX | UNIT |
|-----------------------------|--------------|-------|------|------|------|
| Supply Voltage | $V_{D1,2,3}$ | +2.8 | +3.2 | +5.5 | V |
| Reference Voltage | V_{ref} | +0.04 | - | +1.8 | V |
| Active Bias Circuit Voltage | V_{ABC} | 0 | 2.6 | 5.5 | V |
| Input Power | P_{in} | 5 | - | 10 | dBm |

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, TA = +25°C, f = 1880MHz, $V_{D1,2,3} = +3.2V$, $V_{ABC} = +2.6V$, $V_{ref} = V_{attn} = 1.8V$, $P_{in} = +5dBm$)


| CHARACTERISTICS | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------------|-------------|--|-------|-----|------|---------------|
| Active Bias Circuit Current | I_{ABC} | $P_{out} = +31.5dBm$, $V_{ABC} = \text{Arbitrary}$ | - | - | 30 | mA |
| Reference Current | I_{ref} | $V_{ref} = V_{attn} = 0.04 \text{ to } 1.8V$ | - | - | 10 | mA |
| RF Leakage Current | I_{leak} | $V_{ref} = V_{attn} = 0.04 V$ $V_{ABC} = 10K \text{ ohm} + \text{Load}$ | - | - | 50 | mA |
| Output Power | P_{out} | | +31.5 | - | - | dBm |
| Power Added Efficiency | PAE | | 42.0 | - | - | % |
| Power Control Slope | P_{slope} | $V_{ref} = V_{attn} = 0.04 V \text{ to } 1.8V$ $\Delta V_{ref} = 0.01V$ | - | - | 50:1 | Vrms/ Vref |
| Minimum Output Power | M_{Pout} | $V_{ref} = V_{attn} = 0.04 V$ | - | - | -20 | dBc |

TEST CIRCUIT

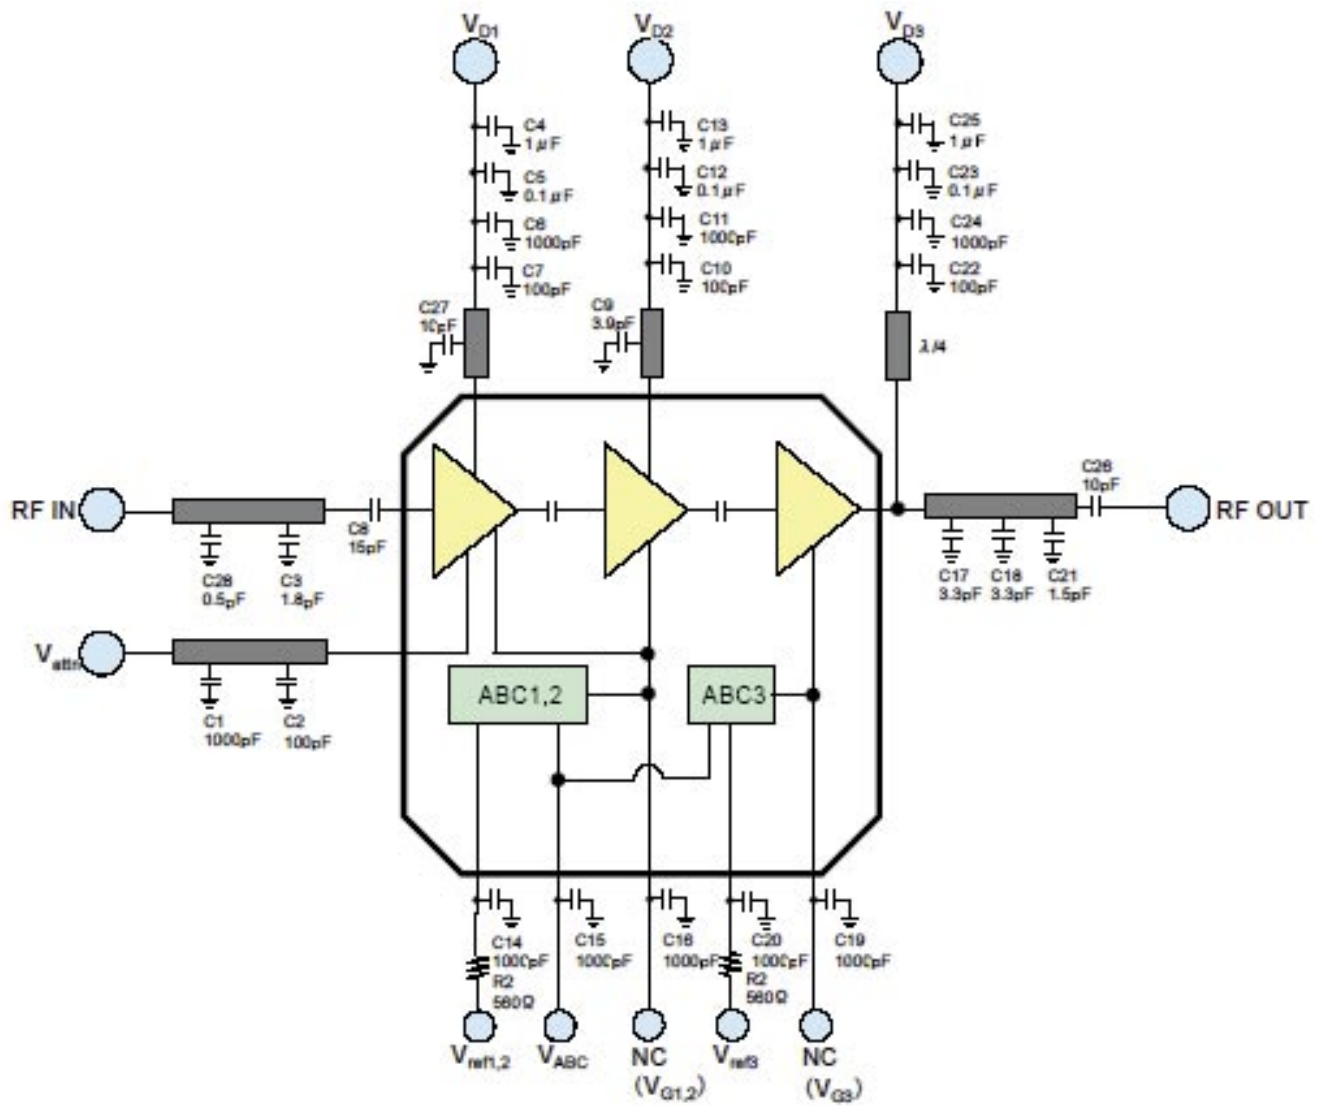

NC (VG1,2 VG3) These pins must be connected to ground via a 1000pF capacitor for stability.

PACKAGE DIMENSIONS (UNIT: mm)

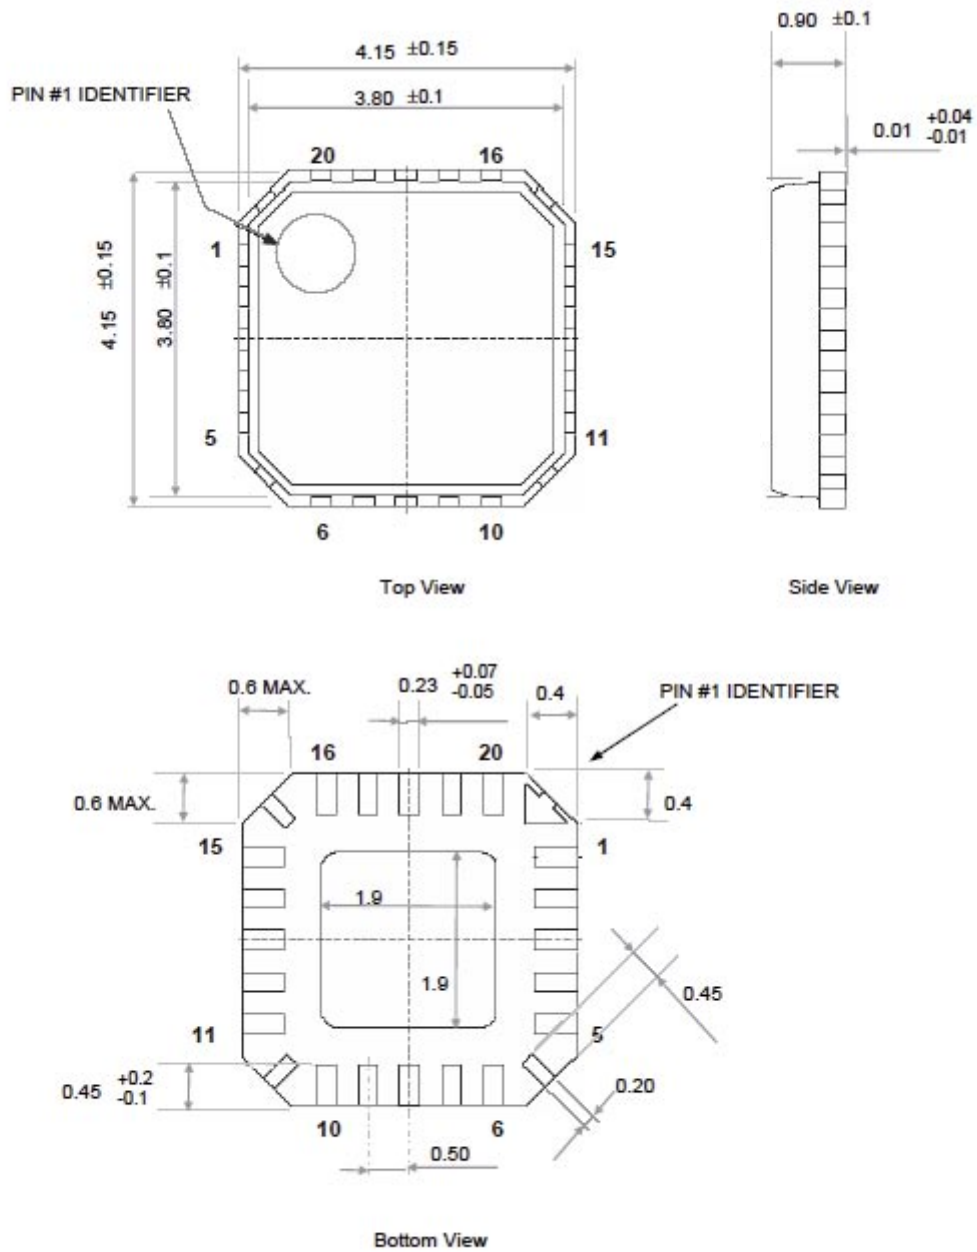

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

CEL California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com

DATA SUBJECT TO CHANGE WITHOUT NOTICE

02/08/2005

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

| Restricted Substance per RoHS | Concentration Limit per RoHS (values are not yet fixed) | Concentration contained in CEL devices | |
|-------------------------------|---|--|-----|
| | | -A | -AZ |
| Lead (Pb) | < 1000 PPM | Not Detected | (*) |
| Mercury | < 1000 PPM | Not Detected | |
| Cadmium | < 100 PPM | Not Detected | |
| Hexavalent Chromium | < 1000 PPM | Not Detected | |
| PBB | < 1000 PPM | Not Detected | |
| PBDE | < 1000 PPM | Not Detected | |

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru