


eala

**3D SURROUND AUDIO PROCESSOR FOR HEADPHONE****■ GENERAL DESCRIPTION**


The **NJM2704** is a high quality 3D surround audio processor designed for headphone applications.

It includes mode control switches for surround function and standby function and realizes low consumption power design by standby function.

It is suitable for portable telephone, PDA and any portable audio applications.

**■ PACKAGE OUTLINE****NJM2704V****■ FEATURES**


- |   |  |
|---|--|
| ● Operating Voltage                             | 1.8 to 6V  |
| ● Low Operating Current                         | 0.45mA typ. (at Active mode)<br>0.1μA typ. (at Standby mode) |
| ● Low Output Noise                              | 10μV typ. (at Surround mode, VR: max.)                       |
| ● Variable Surround Effect by external resistor |  |
| ● Internal Mode Control Switch                  |  |
| ● Bipolar Technology                            |  |
| ● Package Outline                               | SSOP14   |

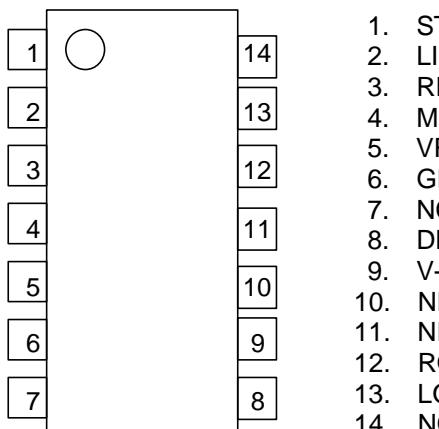**■ PIN CONFIGURATION**

1. STANDBY SW
2. LIN
3. RIN
4. MODE SW
5. VREF
6. GND
7. NC
8. DNC
9. V+
10. NFR
11. NFL
12. ROUT
13. LOUT
14. NC

# NJM2704

## ■ BLOCK DIAGRAM

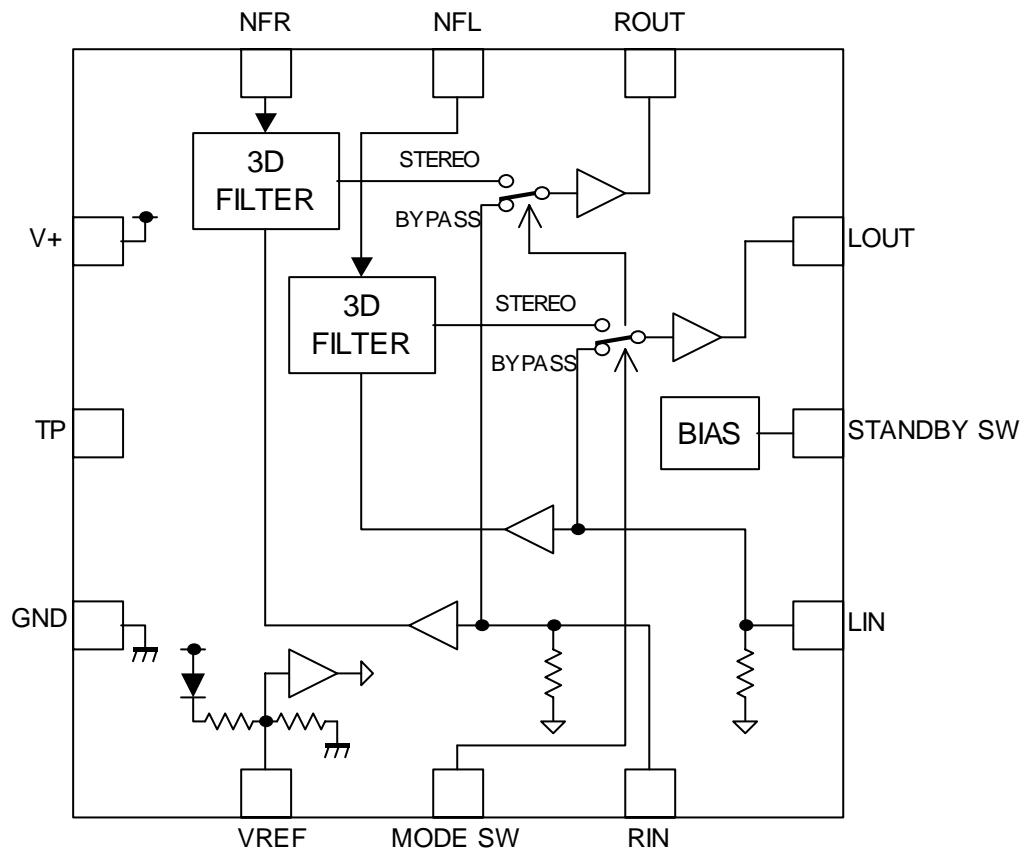

**■ABSOLUTE MAXIMUM RATING (Ta=25°C)**

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7	V
Power Dissipation	P <sub>D</sub>	320	mW
Operating Temperature Range	T <sub>opr</sub>	-20 to +75	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

**■OPERATING VOLTAGE**

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V <sub>+</sub>	-	1.8	3.0	6.0	V

**■ELECTRICAL CHARACTERISTICS (V<sub>+</sub>=3V, Ta=25°C unless otherwise specified)**

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT				
		INPUT		OUTPUT	MODE	VR									
		L	R												
Operating Current	I <sub>CC</sub>	No Signal	0	0	-	Active	-	-	450	700	μA				
			0	0	-	Standby	-	-	0.1	1.0					
Reference Voltage	V <sub>ref</sub>	No Signal	0	0	-	-	-	1.0	1.15	1.3	V				

**●AC CHARACTERISTICS**(V<sub>+</sub>=3V, Ta=25°C, V<sub>IN</sub>=-20dBV(100mVrms), f=1kHz, RL=10kΩ, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT				
		INPUT		OUTPUT	MODE	VR									
		L	R												
Maximum Input Voltage	V <sub>IM</sub>	f=1kHz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-	-2.0 (790)	-	dBV (mVrms)				
		f=100Hz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-	-16.0 (160)	-					
		V <sub>+</sub> =1.8V f=1kHz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-10.5 (300)	-8.5 (380)	-					
		V <sub>+</sub> =1.8V f=100Hz T.H.D.=1%	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-24.5 (60)	-22.5 (75)	-					
Output Noise	V <sub>NO</sub>	R <sub>g</sub> =0Ω A-Weighted	0	0	L R	Bypass	-	-	-112 (2.5)	-106 (5.0)	dBV (μVrms)				
		R <sub>g</sub> =0Ω A-Weighted	0	0	L R	Surround	MAX	-	-100 (10)	-94 (20)					
Total Harmonic Distortion	T.H.D	f=1kHz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-	0.02	0.05	%				
		f=1kHz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	-	0.1	0.5					

# NJM2704

## ●AC CHARACTERISTICS

(V<sub>+</sub>=3V, Ta=25°C, V<sub>IN</sub>=-20dBV(100mVrms), f=1kHz, RL=10kΩ, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT		
		INPUT		OUTPUT	MODE	VR							
L	R												
Bypass Gain	G <sub>VBYP</sub>	f=1kHz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Bypass	-	-1.0	0.0	1.0	dB		
Surround Gain	G <sub>VSUR</sub>	f=100Hz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MAX	12.5	14.5	16.5	dB		
		f=100Hz	0 V <sub>IN</sub>	V <sub>IN</sub> 0	L R	Surround	MAX	10.5	12.5	14.5			
		f=100Hz	V <sub>IN</sub> 0	0 V <sub>IN</sub>	L R	Surround	MIN	0.5	2.5	4.5			

## ●CONTROL CHARACTERISTICS (V<sub>+</sub>=3V, Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION						MIN.	TYP.	MAX.	UNIT		
		INPUT		OUTPUT	MODE	VR							
L	R												
Mode Select Control Voltage	V <sub>MODE</sub>	V <sub>IN</sub> = High Level	-	-	-	-	-	1.2	-	V+	V		
		V <sub>IN</sub> = Low Level	-	-	-	-	-	0.0	-	0.3			

## ■SWITCH FUNCTION

### MODE SW

MODE	Terminal Status	NOTES
Bypass	L, open	Input Through
Surround	H	Surround Mode (Stereo Input)

### STANDBY SW

MODE	Terminal Status	NOTES
Standby	L, open	IC is non-active
Active	H	IC is active


## ■ TERMINAL DESCRIPTION

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
1	STANDBY SW	Standby switch		0V
2 3	LIN RIN	Lch Input Rch Input		1.15V
4	MODE SW	Mode control switch		0V
5	VREF	Reference voltage		1.15V

# NJM2704

PIN No.	SYMBOL	FUNCTION	EQUIVALENT CIRCUIT	Voltage
6	GND	GND	—	0V
7 14	NC	No Connect	—	-
8	DNC	Do Not Connect	—	-
9	V+	Power Supply	—	V+
10 11	NFR NFL	Filter terminal Filter terminal		1.15V
12 13	ROUT LOUT	Rch Output Lch Output		1.15V

## ■APPLICATION CIRCUIT

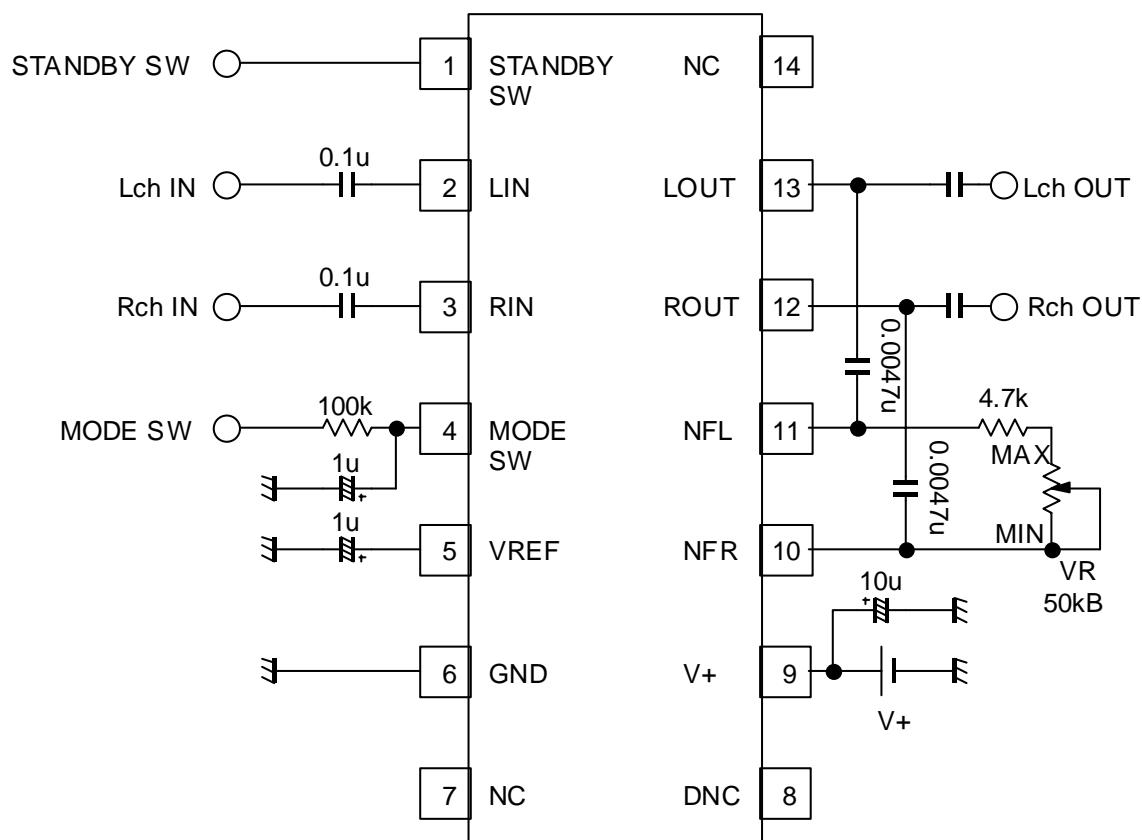


# NJM2704

## ■TYPICAL CHARACTERISTICS


Supply Current vs. Supply Voltage

T<sub>a</sub>=25degrees

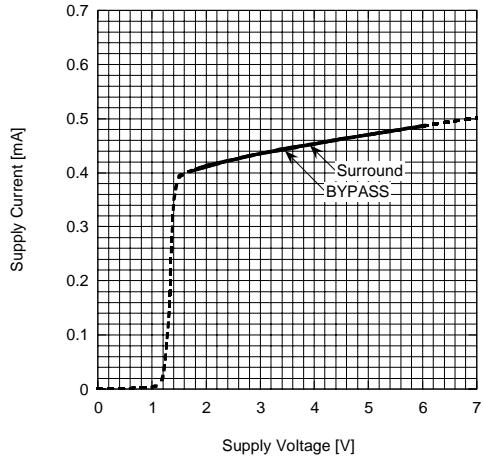


Supply Current vs. Ambient Temperature

V<sub>+=3V</sub>

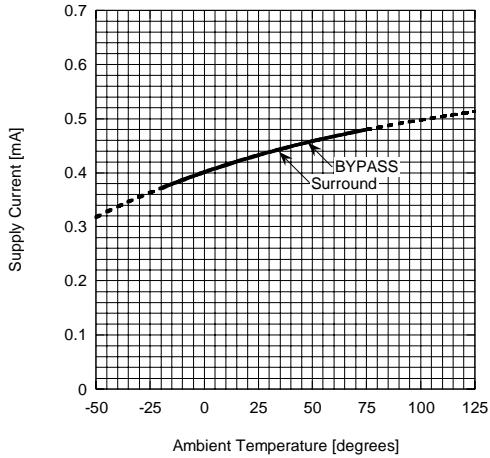


Reference Voltage vs. Supply Voltage

T<sub>a</sub>=25degrees

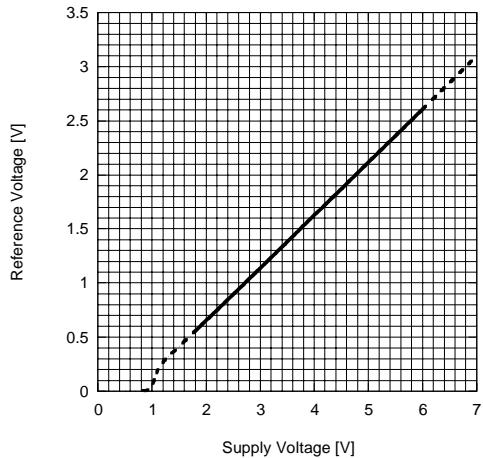


Reference Voltage vs. Ambient Temperature

V<sub>+=3V</sub>

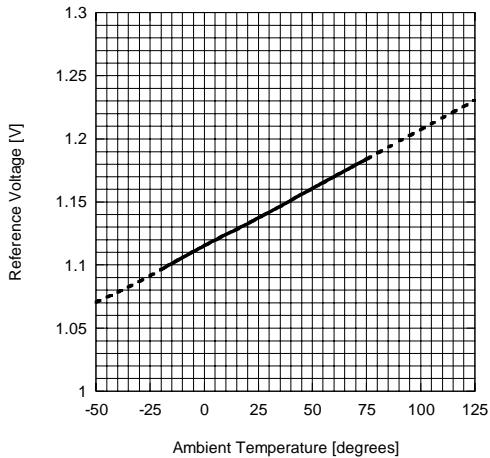


Maximum Input Voltage vs. Supply Voltage (BYPASS)

V<sub>in</sub>=Lch f=1kHz V<sub>out</sub>=Lch RL=10kohm THD=1% T<sub>a</sub>=25degrees

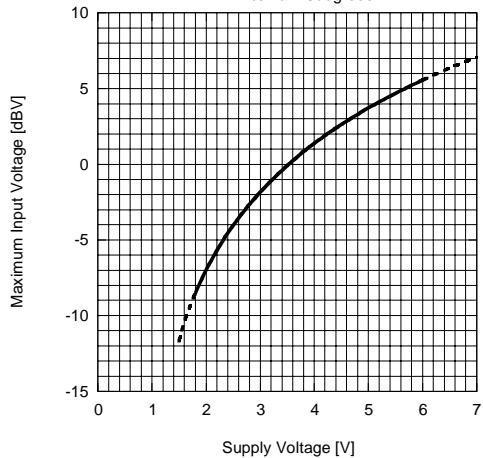


Maximum Input Voltage vs. Supply Voltage (Surround)

V<sub>in</sub>=Lch f=100Hz V<sub>out</sub>=Lch RL=10kohm VR=MAX THD=1% T<sub>a</sub>=25degrees

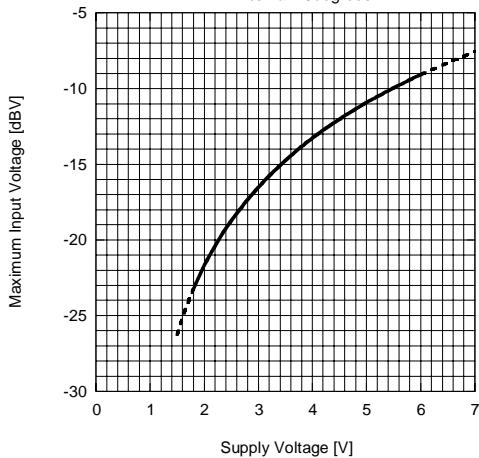


## ■TYPICAL CHARACTERISTICS


**Maximum Input Voltage vs. Ambient Temperature (BYPASS)**

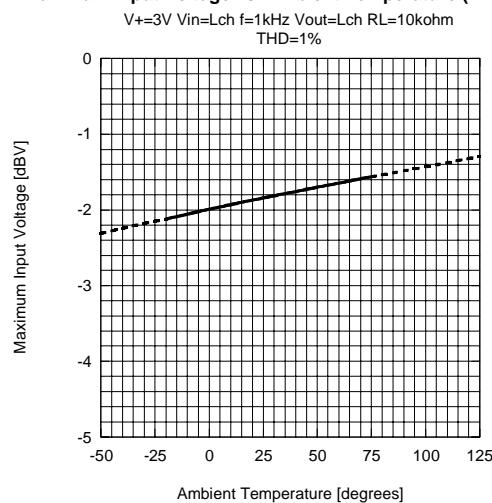


**Maximum Input Voltage vs. Ambient Temperature (Surround)**

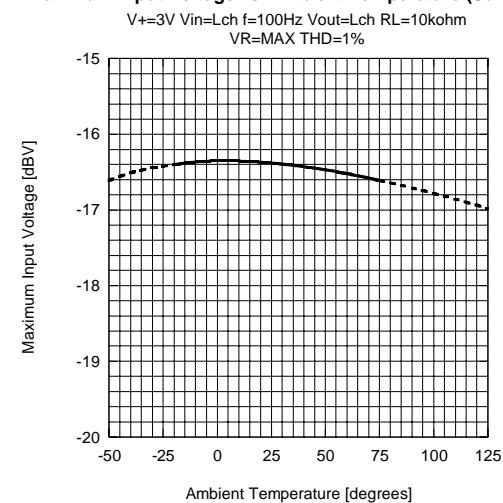


**Maximum Input Voltage vs. Ambient Temperature (BYPASS)**

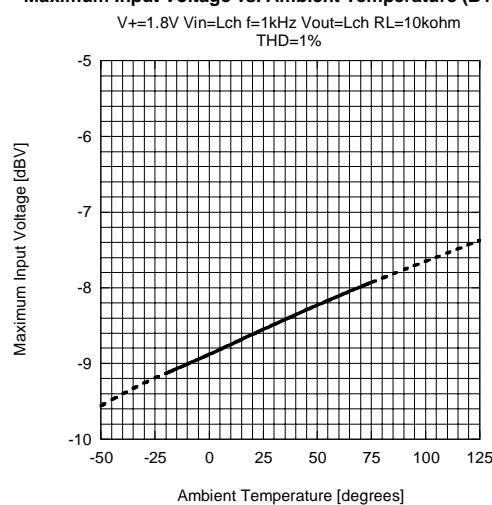


**Maximum Input Voltage vs. Ambient Temperature (Surround)**

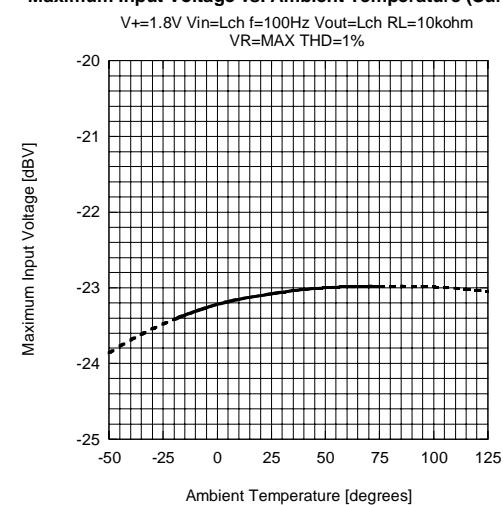

**Output Noise Voltage vs. Ambient Temperature**

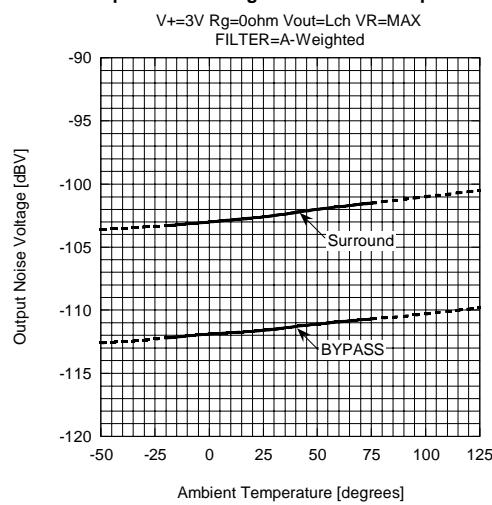


**Output Noise Voltage vs. Ambient Temperature**

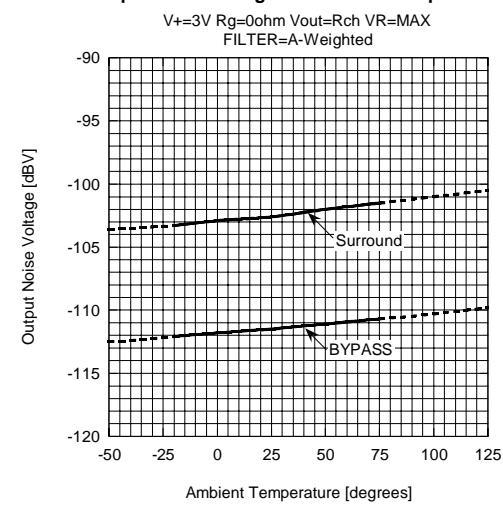


# NJM2704

## TYPICAL CHARACTERISTICS


**Total Harmonic Distortion vs. Input Voltage (BYPASS)**

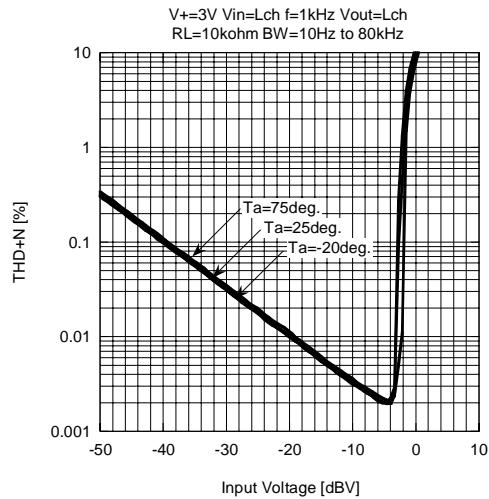


**Total Harmonic Distortion vs. Input Voltage (Surround)**

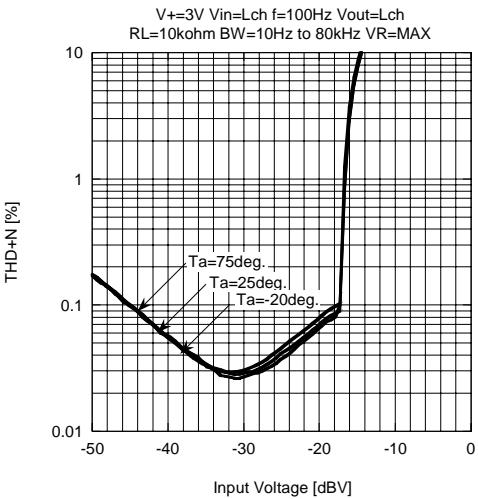


**Voltage Gain vs. Frequency (BYPASS)**

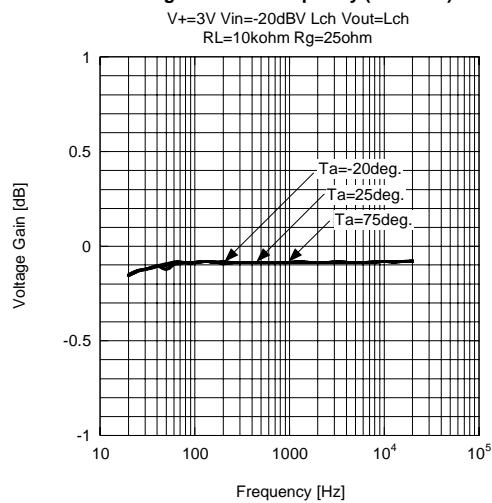


**Voltage Gain vs. Frequency (Surround)**

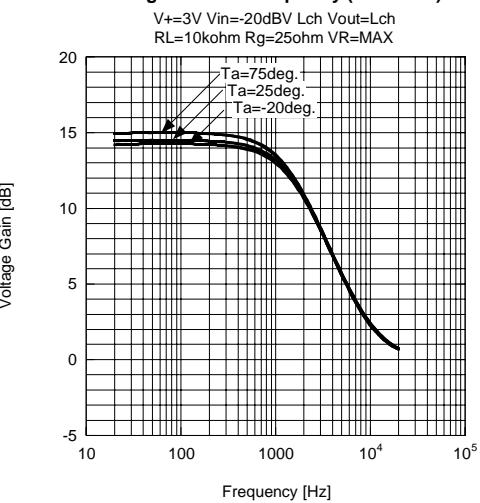



**Voltage Gain vs. Frequency (Surround)**

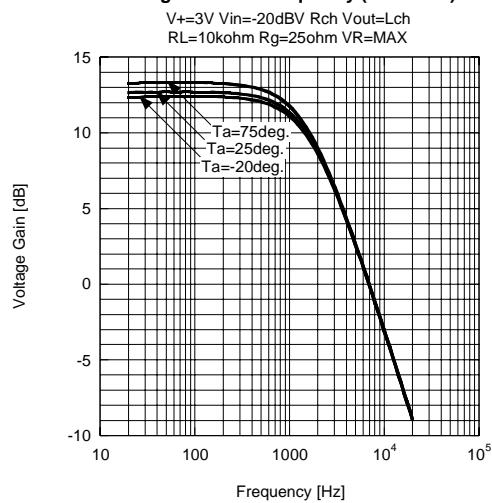

**Voltage Gain vs. Frequency (Surround)**

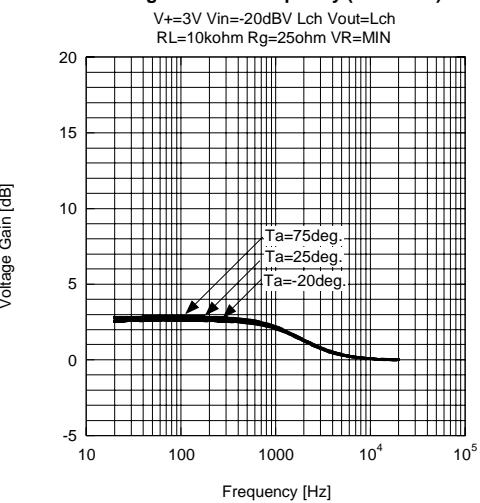

## ■TYPICAL CHARACTERISTICS

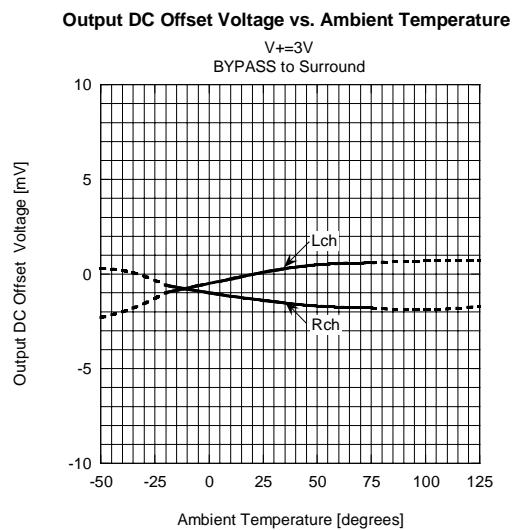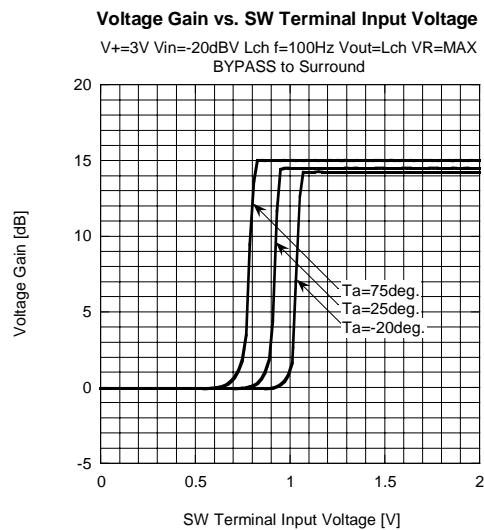

### [CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2704V-TE1](#)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru