


# 857145

## 1960 MHz SAW Filter

### Applications

- For filtering in DPD path
- For ultra wideband applications
- Wireless infrastructure

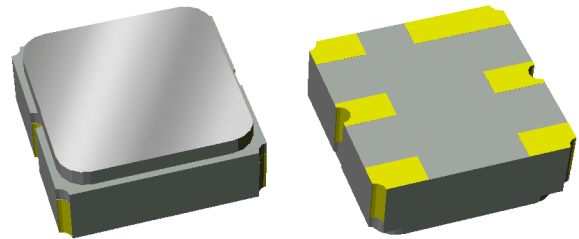

### Product Features

- Usable bandwidth 160 MHz
- Low Loss
- High attenuation,
- Excellent power handling
- Single-ended operation
- Matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically sealed
- RoHS compliant, Pb-free 


### General Description

857145 is a RF filter for wireless infrastructure applications. This filter was specifically designed for filtering in the digital pre-distortion path in Base Station applications. This filter is designed in a 3x3mm hermetic package and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with high attenuation and excellent power handling, makes this filter a natural choice for our customers Downlink RF filtering needs.

### Functional Block Diagram

Top view

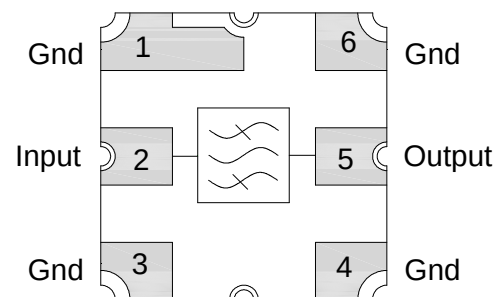

### Pin Configuration

| Pin # SE | Description |
|----------|-------------|
| 2        | Input       |
| 5        | Output      |
| 1,3,4,6  | Case Ground |

### Ordering Information

| Part No.   | Description      |
|------------|------------------|
| 857145     | packaged part    |
| 857145-EVB | evaluation board |

Standard T/R size = 5000 units/reel.

## Specifications

### Electrical Specifications <sup>(1)</sup>

Specified Temperature Range: <sup>(2)</sup> -40 to +85 °C

| Parameter <sup>(3)</sup>             | Conditions                                   | Min | Typical <sup>(4)</sup> | Max   | Units   |
|--------------------------------------|----------------------------------------------|-----|------------------------|-------|---------|
| Center Frequency                     |                                              | -   | 1960                   | -     | MHz     |
| Maximum Insertion Loss               | 1930 – 1990 MHz                              | -   | 3.0                    | 4.0   | dB      |
| Amplitude Variation <sup>(5)</sup>   | 1930 – 1990 MHz                              | -   | 0.7                    | 1.1   | dB p-p  |
|                                      | 1930 – 1990 MHz (Over any 5 MHz span)        | -   | 0.3                    | 0.6   | dB p-p  |
|                                      | 1880 – 2040 MHz                              | -   | 1.5                    | 2.5   | dB p-p  |
| Phase Ripple <sup>(5)</sup>          | 1930 – 1990 MHz                              | -   | 2.6                    | 6     | deg p-p |
|                                      | 1930 – 1990 MHz (Over any 5 MHz span)        | -   | 1.7                    | 3     | deg p-p |
|                                      | 1880 – 2040 MHz                              | -   | 21                     | 36    | deg p-p |
| Group Delay Variation <sup>(5)</sup> | 1930 – 1990 MHz                              | -   | 2.8                    | 6     | ns p-p  |
|                                      | 1880 – 2040 MHz                              | -   | 6.2                    | 12    | ns p-p  |
| Absolute Delay                       | Average over 1930 – 1990 MHz                 | -   | 4                      | 10    | ns      |
| EVM                                  | 1930 – 1990 MHz (Over any 3.84 MHz span)     | -   | 0.8                    | 1.5   | %       |
| IIP3 <sup>(6)</sup>                  | Tones 5 MHz separated, power > 5dBm per tone | 44  | 52                     | -     | dBm     |
| Temperature Drift <sup>(7)</sup>     | 1930 – 1990 MHz                              | -   | 0.22                   | 0.3   | dB      |
| Input/Output VSWR                    | 1930 – 1990 MHz                              | -   | 1.5                    | 2.0:1 | -       |
| Relative Attenuation <sup>(8)</sup>  | 10 – 704 MHz                                 | 45  | 53                     | -     | dB      |
|                                      | 704 – 1561 MHz                               | 25  | 29                     | -     | dB      |
|                                      | 1561 – 1622 MHz                              | 25  | 29                     | -     | dB      |
|                                      | 1622 – 1790 MHz                              | 25  | 29                     | -     | dB      |
|                                      | 2170 – 4000 MHz                              | 25  | 28                     | -     | dB      |
|                                      | 4000 – 6000 MHz                              | 20  | 25                     | -     | dB      |
| Source/Load Impedance <sup>(9)</sup> | Single-ended                                 | -   | 50                     | -     | Ω       |

Notes:

1. All specifications are based on the TriQuint schematic shown on page 3.
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature.
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances.
4. Typical values are based on average measurements at room temperature.
5. Variation is defined as the total peak to peak variation over the defined frequency range.
6. To be measured only during engineering development.
7. Temperature Drift specification is defined on Page 3 and is guaranteed by design and won't be measured in production
8. Relative to maximum insertion loss at center frequency.
9. This is the optimum impedance in order to achieve the performance shown.

### Absolute Maximum Ratings

| Parameter            | Rating                                  |
|----------------------|-----------------------------------------|
| Operable Temperature | -40 to +85 °C                           |
| Storage Temperature  | -40 to +85 °C                           |
| Input Power          | +22 dBm (max) CW for 24 hours at +55 °C |

Operation of this device outside the parameter ranges given above may cause permanent damage.

### Temperature Drift Specification

Temperature Drift Equations:

$$\text{Temp Drift}_{\text{high}} = \left| \frac{\max(T_{\text{ambient}} - T_{\text{hot}}) - \min(T_{\text{ambient}} - T_{\text{hot}})}{2} \right|$$

$$\text{Temp Drift}_{\text{low}} = \left| \frac{\max(T_{\text{ambient}} - T_{\text{cold}}) - \min(T_{\text{ambient}} - T_{\text{cold}})}{2} \right|$$

Temperature Drift Terms Defined:

$T_{\text{ambient}}$  - Transmission power in dB measured at +25 degrees C.


$T_{\text{hot}}$  - Transmission power in dB measured at +85 degrees C.

$T_{\text{cold}}$  - Transmission power in dB measured at -40 degrees C.


Temperature Drift - Greater of  $\text{Temp Drift}_{\text{high}}$  vs  $\text{Temp Drift}_{\text{low}}$

### Reference Design


#### Schematic

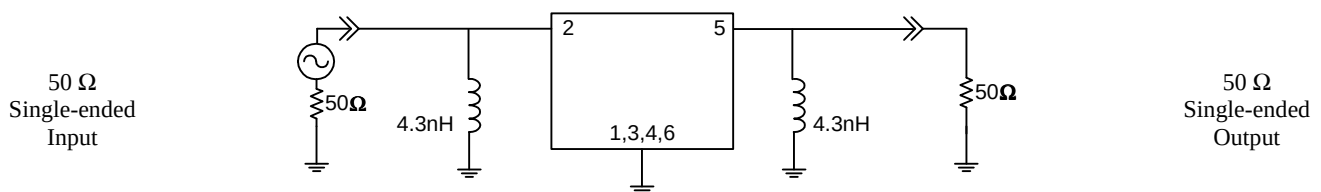

#### PC Board

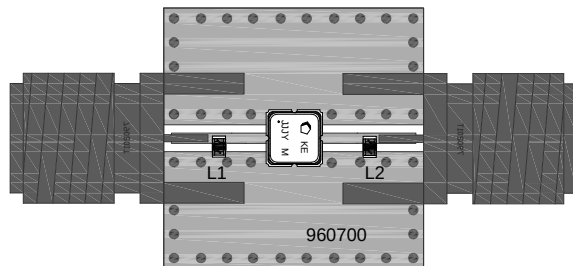

#### Mounting Configuration

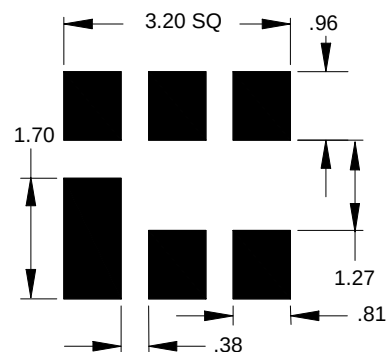

Notes:

- Top, middle & bottom layers: 1 oz copper
- Substrates: FR4 dielectric, .031" thick
- Finish plating: Nickel: 3-8 $\mu$ m thick, Gold: .03-.2 $\mu$ m thick
- Hole plating: Copper min .0008 $\mu$ m thick

Notes:

- 1. All dimensions are in millimeters.
- 2. This footprint represents a recommendation only.






### Bill of Material

| Reference Desg. | Value | Description               | Manufacturer     | Part Number   |
|-----------------|-------|---------------------------|------------------|---------------|
| L1              | 4.3nH | Coil Wire-wound, 0402, 5% | MuRata           | LQW15AN4N3D00 |
| L2              | 4.3nH | Coil Wire-wound, 0402, 5% | MuRata           | LQW15AN4N3D00 |
| SMA             | N/A   | SMA connector             | Radiall USA Inc. | 9602-1111-018 |
| PCB             | N/A   | 3-layer                   | multiple         | 960700        |


# 857145

## 1960 MHz SAW Filter

### Typical Performance (at room temperature)

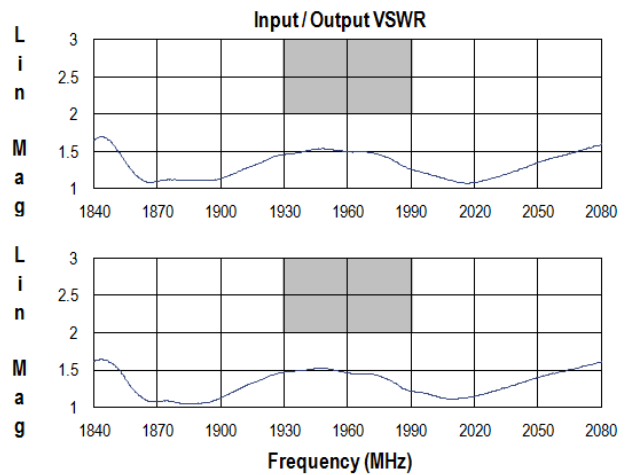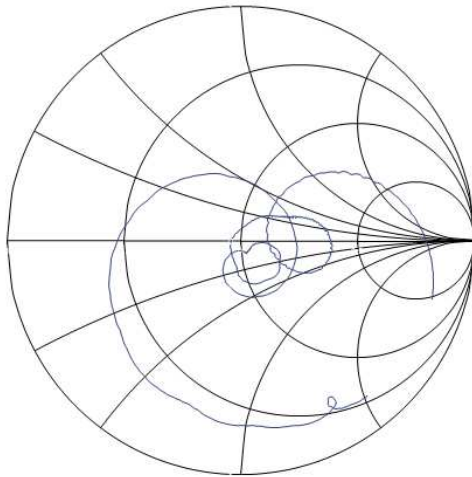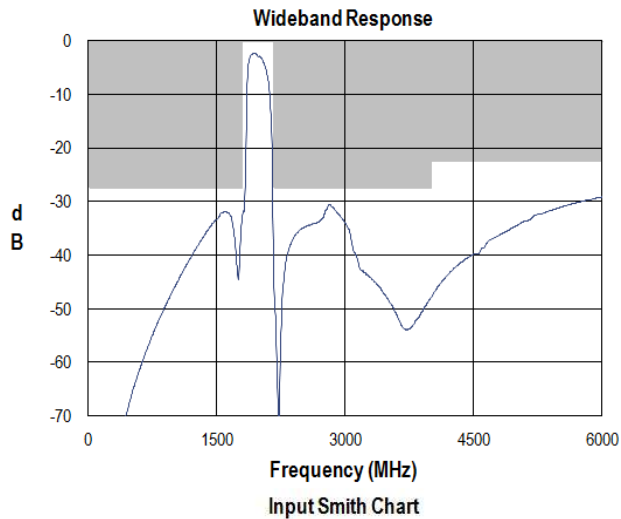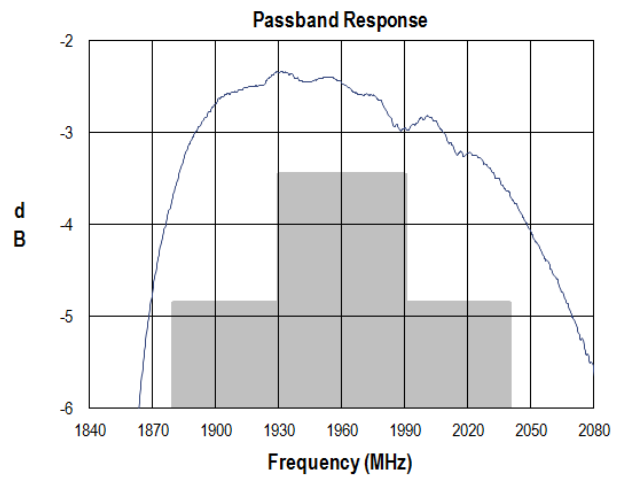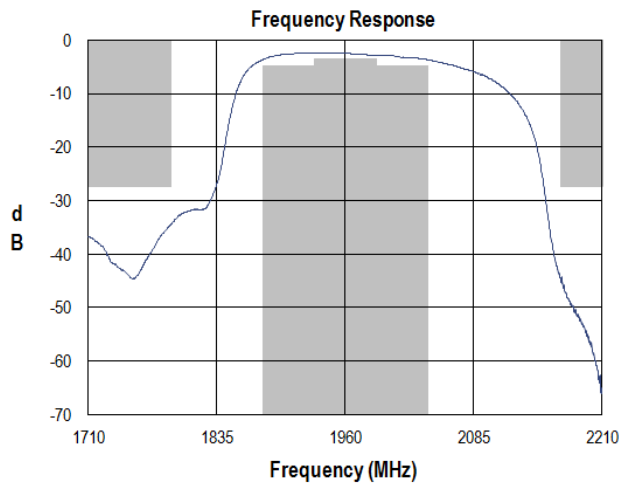


**Output Smith Chart**

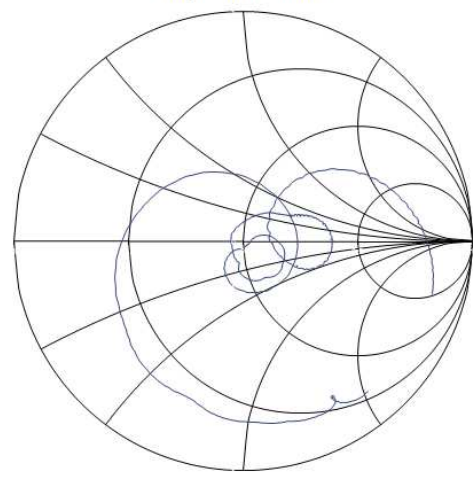

## Mechanical Information

## Package Information, Dimensions and Marking

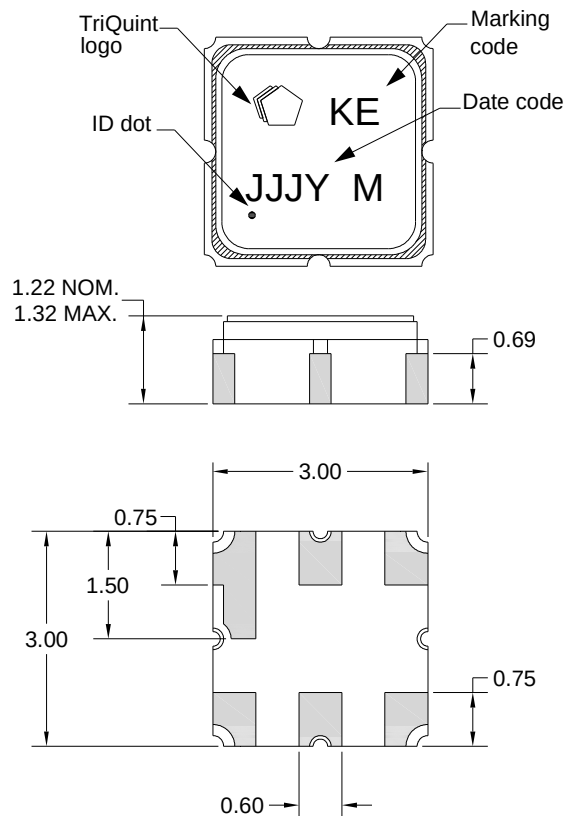

Package Style: SMP-12A  
Dimensions: 3.00 x 3.00 x 1.22 mm



Body:  $Al_2O_3$  ceramic  
Lid: Kovar, Ni plated  
Terminations: Au plating 0.5 - 1.0 $\mu$ m, over a 2-6 $\mu$ m Ni plating

All dimensions shown are nominal in millimeters  
All tolerances are  $\pm 0.15\text{mm}$  except overall length and width  
 $\pm 0.10\text{mm}$

The date code consists of day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

## Tape and Reel Information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

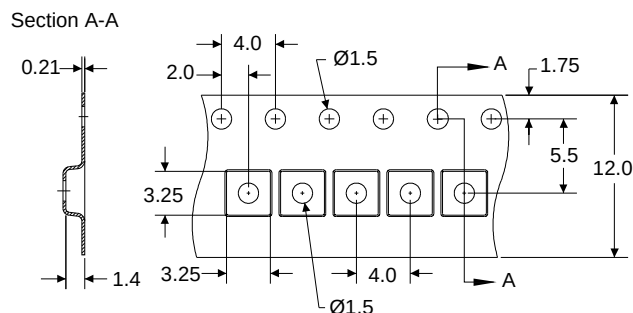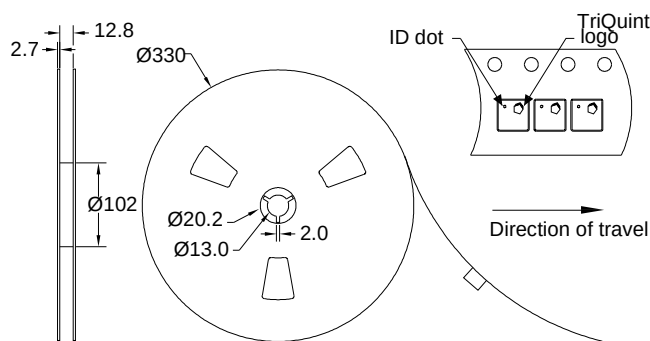

## Product Compliance Information

### ESD Information



#### Caution! ESD-Sensitive Device

ESD Rating: 1B

Value: Passes  $\geq 550$  V min.

Test: Human Body Model (HBM)

Standard: JEDEC Standard JESD22-A114

ESD Rating: B

Value: Passes  $\geq 200$  V min.

Test: Machine Model (MM)

Standard: JEDEC Standard JESD22-A115

### MSL Rating

Devices are Hermetic, therefore MSL is not applicable

### Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ( $C_{15}H_{12}Br_4O_2$ ) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)  
Email: [info-sales@tqs.com](mailto:info-sales@tqs.com)

Tel: +1.407.886.8860  
Fax: +1.407.886.7061

For technical questions and application information:

Email: [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)