



Low Power, 3.6 MHz, Low Noise, Rail-to-Rail Output, Operational Amplifiers

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

FEATURES

- Low power: 180 μ A typical**
- Very low input bias currents: 0.5 pA typical**
- Low noise: 16 nV/ $\sqrt{\text{Hz}}$ typical**
- 3.6 MHz bandwidth**
- Offset voltage: 500 μ V typical**
- Low offset voltage drift: 4 μ V/ $^{\circ}$ C maximum**
- Low distortion: 0.003% THD + N**
- 2.7 V to 5 V single supply or ± 1.35 V to ± 2.5 V dual supply**
- Available in very small 2 mm \times 2 mm LFCSP packages**

APPLICATIONS

- Photodiode amplifiers**
- Sensor amplifiers**
- Portable medical and instrumentation**
- Portable audio: MP3s, PDAs, and smartphones**
- Communications**
- Low-side current sense**
- ADC drivers**
- Active filters**
- Sample-and-hold**

GENERAL DESCRIPTION

The ADA4691-2/ADA4692-2 are dual and the ADA4691-4/ADA4692-4 are the quad rail-to-rail output, single-supply amplifiers featuring low power, wide bandwidth, and low noise. The ADA4691-2 has two independent shutdown pins, allowing further reduction in supply current. The ADA4691-4 is a quad with dual shutdown pins each controlling a pair of amplifiers and is available in the 16-lead LFCSP. The ADA4692-4 is a quad version without shutdown.

These amplifiers are ideal for a wide variety of applications. Audio, filters, photodiode amplifiers, and charge amplifiers, all benefit from this combination of performance and features. Additional applications for these amplifiers include portable consumer audio players with low noise and low distortion that provide high gain and slew rate response over the audio band at low power. Industrial applications with high impedance sensors, such as piezoelectric and IR sensors, benefit from the high impedance and low 0.5 pA input bias, low offset drift, and enough bandwidth and response for low gain applications.

Table 1.

| | Micropower | Low Power | Low Power with Shutdown | Standard Op Amp With Shutdown | High Bandwidth |
|--------|------------|-----------|-------------------------|-------------------------------|----------------|
| Single | AD8613 | | | AD8591 | AD8691 |
| Dual | AD8617 | ADA4692-2 | ADA4691-2 | AD8592 | AD8692 |
| Quad | AD8619 | ADA4692-4 | ADA4691-4 | AD8594 | AD8694 |

Rev. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

The ADA4691/ADA4692 family is fully specified over the extended industrial temperature range (-40°C to $+125^{\circ}\text{C}$). The ADA4691-2 is available in a 10-lead LFCSP and a 9-ball WLCSP. The ADA4692-2 is available in an 8-lead SOIC and 8-lead LFCSP. The ADA4691-4 is available in a 16-lead LFCSP. The ADA4692-4 is available in a 14-lead TSSOP. For pin configurations, see the [Pin Configurations](#) section.

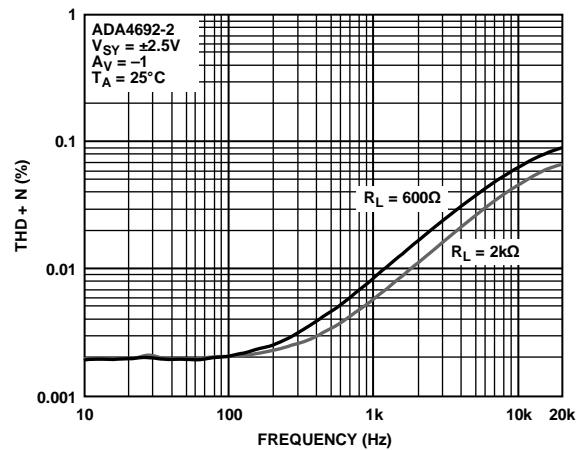


Figure 1. THD + Noise vs. Frequency

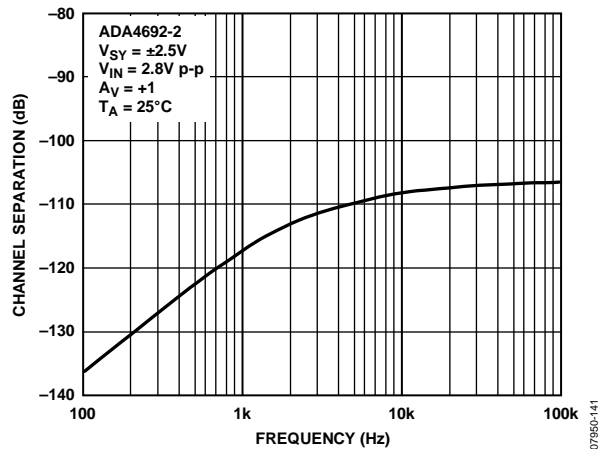


Figure 2. Channel Separation vs. Frequency

TABLE OF CONTENTS

| | | | |
|--|---|---|----|
| Features | 1 | ESD Caution..... | 6 |
| Applications..... | 1 | Pin Configurations..... | 7 |
| General Description | 1 | Typical Performance Characteristics | 8 |
| Revision History | 2 | Shutdown Operation..... | 16 |
| Specifications..... | 3 | Input Pin Characteristics..... | 16 |
| Electrical Characteristics—2.7 V Operation | 3 | Input Threshold..... | 16 |
| Electrical Characteristics—5 V Operation..... | 4 | Outline Dimensions | 17 |
| Absolute Maximum Ratings..... | 6 | Ordering Guide | 20 |
| Thermal Resistance | 6 | | |

REVISION HISTORY

12/09—Rev. B to Rev. C

| | |
|---|------------|
| Added ADA4691-4, 16-Lead LFCSP | Throughout |
| Added Figure 1, Figure 2, and Table 1; Renumbered Sequentially | 1 |
| Changes to Applications Section and General Description Section..... | 1 |
| Changes to Table 1..... | 3 |
| Changes to Table 2..... | 4 |
| Changes to Table 4..... | 6 |
| Updated Outline Dimensions | 17 |
| Changes to Ordering Guide | 20 |

9/09—Rev. A to Rev. B

| | |
|---|------------|
| Added ADA4691-2, 9-Ball WLCSP; ADA4692-2, 8-Lead LFCSP; and ADA4692-4, 14-Lead TSSOP | Throughout |
| Changes to General Description | 1 |
| Updated Outline Dimensions | 16 |
| Changes to Ordering Guide | 17 |

6/09—Rev. 0 to Rev. A

| | |
|---|------------|
| Added ADA4691-2, 10 Lead LFCSP | Throughout |
| Changes to Table 1..... | 3 |
| Changes to Table 2..... | 4 |
| Changes to Captions for Figure 40, Figure 41, Figure 43, and Figure 44 | 13 |
| Added Shutdown Operations Section | 15 |
| Updated Outline Dimensions | 16 |
| Changes to Ordering Guide | 16 |

3/09—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS—2.7 V OPERATION

$V_{SY} = 2.7\text{ V}$, $V_{CM} = V_{SY}/2$, $T_A = 25^\circ\text{C}$, unless otherwise specified.

Table 2.

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|--------------------------------|--------------------------|--|------|----------|------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $V_{CM} = -0.3\text{ V to }+1.6\text{ V}$ | | 0.5 | 2.5 | mV |
| Dual (ADA469x-2) | | $V_{CM} = -0.1\text{ V to }+1.6\text{ V}; -40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 3.5 | mV |
| Quad (ADA469x-4) | | $V_{CM} = -0.1\text{ V to }+1.6\text{ V}; -40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 4.0 | mV |
| Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1 | 4 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.5 | 5 | pA |
| Input Offset Current | I_{OS} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1 | 8 | pA |
| Input Voltage Range | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -0.3 | | +1.6 | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = -0.3\text{ V to }+1.6\text{ V}$ | 70 | 90 | | dB |
| Large Signal Voltage Gain | A_{VO} | $V_{CM} = -0.1\text{ V to }+1.6\text{ V}; -40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 62 | | | dB |
| | | $R_L = 2\text{ k}\Omega, V_{OUT} = 0.5\text{ V to }2.2\text{ V}$ | 90 | 100 | | dB |
| | | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ | 80 | | | dB |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 63 | | | dB |
| | | $R_L = 600\ \Omega, V_{OUT} = 0.5\text{ V to }2.2\text{ V}$ | 85 | 95 | | dB |
| Input Capacitance | C_{IN} | | | | | |
| Differential Mode | C_{INDM} | | | 2.5 | | pF |
| Common Mode | C_{INCM} | | | 7 | | pF |
| Logic High Voltage (Enabled) | V_{IH} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 1.6 | | | V |
| Logic Low Voltage (Power-Down) | V_{IL} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 0.5 | V |
| Logic Input Current (Per Pin) | I_{IN} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}, 0\text{ V} \leq V_{SD} \leq 2.7\text{ V}$ | | | 1 | μA |
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage High | V_{OH} | $R_L = 2\text{ k}\Omega\text{ to GND}$ | 2.65 | 2.67 | | V |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 2.6 | | | V |
| | | $R_L = 600\ \Omega\text{ to GND}$ | 2.55 | 2.59 | | V |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 2.5 | | | V |
| Output Voltage Low | V_{OL} | $R_L = 2\text{ k}\Omega\text{ to }V_{SY}$ | | 24 | 30 | mV |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 40 | mV |
| | | $R_L = 600\ \Omega\text{ to }V_{SY}$ | | 78 | 95 | mV |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 130 | mV |
| Short-Circuit Current | I_{SC} | $V_{OUT} = V_{SY}\text{ or GND}$ | | ± 15 | | mA |
| Closed-Loop Output Impedance | Z_{OUT} | $f = 1\text{ MHz}, A_V = -100$ | | 372 | | Ω |
| Output Pin Leakage Current | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}, \text{ shutdown active}, V_{SD} = V_{SS}$ | | 10 | | nA |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | $V_S = 2.7\text{ V to }5.5\text{ V}$ | 80 | 90 | | dB |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 75 | | | dB |
| Supply Current Per Amplifier | I_{SY} | $V_{OUT} = V_{SY}/2$ | | 165 | 200 | μA |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 240 | μA |
| Supply Current Shutdown Mode | I_{SD} | All amplifiers shut down, $V_{SD} = V_{SS}$ | | 10 | | nA |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 2 | μA |

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|----------------------------|-------------------|--|-----|-------|-----|------------------------|
| DYNAMIC PERFORMANCE | | | | | | |
| Slew Rate | SR | $R_L = 600 \Omega$, $C_L = 20 \text{ pF}$, $A_V = +1$ | | 1.1 | | V/ μs |
| | | $R_L = 2 \text{ k}\Omega$, $C_L = 20 \text{ pF}$, $A_V = +1$ | | 1.4 | | V/ μs |
| Settling Time to 0.1% | t_s | Step = 0.5 V, $R_L = 2 \text{ k}\Omega$, 600 Ω | | 1 | | μs |
| Gain Bandwidth Product | GBP | $R_L = 1 \text{ M}\Omega$, $C_L = 35 \text{ pF}$, $A_V = +1$ | | 3.6 | | MHz |
| Phase Margin | Φ_M | $R_L = 1 \text{ M}\Omega$, $C_L = 35 \text{ pF}$, $A_V = +1$ | | 49 | | Degrees |
| Turn-On/Turn-Off Time | | $R_L = 600 \Omega$ | | 1 | | μs |
| NOISE PERFORMANCE | | | | | | |
| Distortion | THD + N | $A_V = -1$, $R_L = 2 \text{ k}\Omega$, $f = 1 \text{ kHz}$, $V_{IN \text{ rms}} = 0.15 \text{ V rms}$ | | 0.009 | | % |
| | | $A_V = -1$, $R_L = 600 \Omega$, $f = 1 \text{ kHz}$, $V_{IN \text{ rms}} = 0.15 \text{ V rms}$ | | 0.01 | | % |
| | | $A_V = +1$, $R_L = 2 \text{ k}\Omega$, $f = 1 \text{ kHz}$, $V_{IN \text{ rms}} = 0.15 \text{ V rms}$ | | 0.006 | | % |
| | | $A_V = +1$, $R_L = 600 \Omega$, $f = 1 \text{ kHz}$, $V_{IN \text{ rms}} = 0.15 \text{ V rms}$ | | 0.009 | | % |
| Voltage Noise | $e_n \text{ p-p}$ | $f = 0.1 \text{ Hz to } 10 \text{ Hz}$ | | 3.1 | | $\mu\text{V p-p}$ |
| Voltage Noise Density | e_n | $f = 1 \text{ kHz}$ | | 16 | | nV/ $\sqrt{\text{Hz}}$ |
| | | $f = 10 \text{ kHz}$ | | 13 | | nV/ $\sqrt{\text{Hz}}$ |

ELECTRICAL CHARACTERISTICS—5 V OPERATION

$V_{SY} = 5 \text{ V}$, $V_{CM} = V_{SY}/2$, $T_A = 25^\circ\text{C}$, unless otherwise specified.

Table 3.

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|--------------------------------|--------------------------|---|------|-----|------|------------------------------|
| INPUT CHARACTERISTICS | | | | | | |
| Offset Voltage | V_{OS} | $V_{CM} = -0.3 \text{ V to } +3.9 \text{ V}$ | | 0.5 | 2.5 | mV |
| | | $V_{CM} = -0.1 \text{ V to } +3.9 \text{ V}$; $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 3.5 | mV |
| | | $V_{CM} = -0.1 \text{ V to } +3.9 \text{ V}$; $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | | 4.0 |
| Offset Voltage Drift | $\Delta V_{OS}/\Delta T$ | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1 | 4 | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current | I_B | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 0.5 | 5 | pA |
| | | | | | 360 | pA |
| Input Offset Current | I_{OS} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | 1 | 8 | pA |
| | | | | | 260 | pA |
| Input Voltage Range | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | -0.3 | | +3.9 | V |
| Common-Mode Rejection Ratio | CMRR | $V_{CM} = -0.3 \text{ V to } +3.9 \text{ V}$ | 75 | 98 | | dB |
| | | $V_{CM} = -0.1 \text{ V to } +3.9 \text{ V}$; $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 68 | | | dB |
| Large Signal Voltage Gain | A_{VO} | $R_L = 2 \text{ k}\Omega$, $V_O = 0.5 \text{ V to } 4.5 \text{ V}$, $V_{CM} = 0 \text{ V}$ | 95 | 110 | | dB |
| | | $-40^\circ\text{C} < T_A < +85^\circ\text{C}$ | 80 | | | dB |
| | | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 70 | | | dB |
| | | $R_L = 600 \Omega$, $V_O = 0.5 \text{ V to } 4.5 \text{ V}$, $V_{CM} = 0 \text{ V}$ | 90 | 100 | | dB |
| Input Capacitance | C_{INDM} | | | 2.5 | | pF |
| | | | | 7 | | pF |
| Logic High Voltage (Enabled) | V_{IH} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | 2.0 | | | V |
| Logic Low Voltage (Power-Down) | V_{IL} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$ | | | 0.8 | V |
| Logic Input Current (Per Pin) | I_{IN} | $-40^\circ\text{C} < T_A < +125^\circ\text{C}$, $0 \text{ V} \leq V_{SD} \leq 2.7 \text{ V}$ | | | 1 | μA |

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

| Parameter | Symbol | Test Conditions/Comments | Min | Typ | Max | Unit |
|-------------------------------|--------------------|---|------|-------|-----|---------|
| OUTPUT CHARACTERISTICS | | | | | | |
| Output Voltage High | V _{OH} | R _L = 2 kΩ | 4.95 | 4.97 | | V |
| | | -40°C ≤ T _A ≤ +125°C | 4.90 | | | V |
| Output Voltage Low | V _{OL} | R _L = 600 Ω to GND | 4.85 | 4.88 | | V |
| | | -40°C ≤ T _A ≤ +125°C | 4.80 | | | V |
| | | R _L = 2 kΩ | | 30 | 35 | mV |
| | | -40°C ≤ T _A ≤ +125°C | | | 50 | mV |
| Short-Circuit Limit | I _{SC} | R _L = 600 Ω | | 100 | 110 | mV |
| | | -40°C ≤ T _A ≤ +125°C | | | 155 | mV |
| Short-Circuit Limit | I _{SC} | V _{OUT} = V _{SY} or GND | | ±55 | | mA |
| Closed-Loop Output Impedance | Z _{OUT} | ADA4691-2, f = 1 MHz, A _V = -100 | | 364 | | Ω |
| | | ADA4691-2, f = 1 MHz, A _V = -100 | | 246 | | Ω |
| Output Pin Leakage Current | | -40°C < T _A < +125°C, shutdown active, V _{SD} = V _{SS} | | 10 | | nA |
| POWER SUPPLY | | | | | | |
| Power Supply Rejection Ratio | PSRR | V _{SY} = 2.7 V to 5.5 V | 80 | 90 | | dB |
| | | -40°C ≤ T _A ≤ +125°C | 75 | | | dB |
| Supply Current Per Amplifier | I _{SY} | V _{OUT} = V _{SY} /2 | | 180 | 225 | μA |
| Supply Current Shutdown Mode | I _{SD} | -40°C ≤ T _A ≤ +125°C | | | 275 | μA |
| | | All amplifiers shut down, V _{SD} = V _{SS} | | 10 | | nA |
| | | -40°C ≤ T _A ≤ +125°C | | | 2 | μA |
| DYNAMIC PERFORMANCE | | | | | | |
| Slew Rate | SR | R _L = 2 kΩ, 600 Ω, C _L = 20 pF, A _V = +1 | | 1.3 | | V/μs |
| Settling Time to 0.1% | t _s | V _{IN} = 2 V step, R _L = 2 kΩ or 600 Ω | | 1.5 | | μs |
| Gain Bandwidth Product | GBP | R _L = 1 MΩ, C _L = 35 pF, A _V = +1 | | 3.6 | | MHz |
| Phase Margin | Φ _M | R _L = 1 MΩ, C _L = 35 pF, A _V = +1 | | 52 | | Degrees |
| Turn-On/Turn-Off Time | | R _L = 600 Ω | | 1 | | μs |
| NOISE PERFORMANCE | | | | | | |
| Distortion | THD + N | A _V = -1, R _L = 2 kΩ, f = 1 kHz, V _{IN rms} = 0.8 V rms | | 0.006 | | % |
| | | A _V = -1, R _L = 600 Ω, f = 1 kHz, V _{IN rms} = 0.8 V rms | | 0.008 | | % |
| | | A _V = +1, R _L = 2 kΩ, f = 1 kHz, V _{IN rms} = 0.8 V rms | | 0.001 | | % |
| | | A _V = +1, R _L = 600 Ω, f = 1 kHz, V _{IN rms} = 0.8 V rms | | 0.003 | | % |
| Voltage Noise | e _n p-p | f = 0.1 Hz to 10 Hz | | 3.2 | | μV p-p |
| Voltage Noise Density | e _n | f = 1 kHz | | 16 | | nV/√Hz |
| | | f = 10 kHz | | 13 | | nV/√Hz |

ABSOLUTE MAXIMUM RATINGS

Table 4.

| Parameter | Rating |
|---|--|
| Supply Voltage | 6 V |
| Input Voltage | $V_{SS} - 0.3 \text{ V}$ to $V_{DD} + 0.3 \text{ V}$ |
| Input Current ¹ | $\pm 10 \text{ mA}$ |
| Shutdown Pin Rise/Fall Times | 50 μs maximum |
| Differential Input Voltage ² | $\pm V_{SY}$ |
| Output Short-Circuit Duration to GND | Indefinite |
| Temperature | |
| Storage Temperature Range | -65°C to $+150^\circ\text{C}$ |
| Operating Temperature Range | -40°C to $+125^\circ\text{C}$ |
| Junction Temperature Range | -65°C to $+150^\circ\text{C}$ |
| Lead Temperature (Soldering, 60 sec) | 300°C |

¹ Input pins have clamp diodes to the supply pins. Limit the input current to 10 mA or less whenever the input signal exceeds the power supply rail by 0.3 V.

² Differential input voltage is limited to 5 V or the supply voltage, whichever is less.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages and measured using a standard 4-layer board, unless otherwise specified.

Table 5. Thermal Resistance

| Package Type | θ_{JA} | θ_{JC} | Unit |
|--------------------------|---------------|------------------|---------------------------|
| 8-Lead SOIC_N (R-8) | 120 | 45 | $^\circ\text{C}/\text{W}$ |
| 8-Lead LFCSP (CP-8-6) | 125 | 40 | $^\circ\text{C}/\text{W}$ |
| 9-Ball WLCSP (CB-9-3) | 77 | N/A ¹ | $^\circ\text{C}/\text{W}$ |
| 10-Lead LFCSP (CP-10-11) | 115 | 40 | $^\circ\text{C}/\text{W}$ |
| 16-Lead LFCSP (CP-16-22) | 75 | 12 | $^\circ\text{C}/\text{W}$ |
| 14-Lead TSSOP (RU-14) | 112 | 35 | $^\circ\text{C}/\text{W}$ |

¹ N/A = not applicable.

ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS

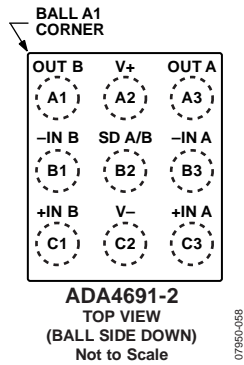


Figure 3. 9-Ball Wafer Level Chip Scale WLCSP (CB-9-3)


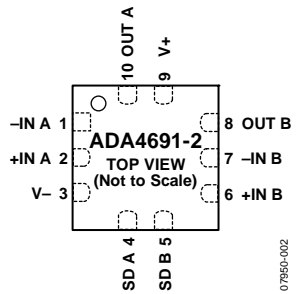


Figure 4. 10-Lead, 2 mm x 2 mm LFCSP (CP-10-11)

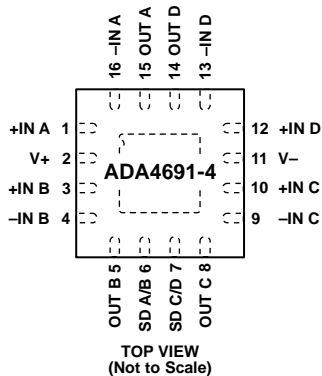

NOTES
1. IT IS RECOMMENDED THAT THE EXPOSED PAD BE CONNECTED TO V-.

Figure 5. 16-Lead, 3 mm x 3 mm LFCSP (CP-16-22)

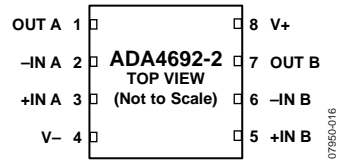


Figure 6. 8-Lead, 2 mm x 2 mm LFCSP (CP-8-6)

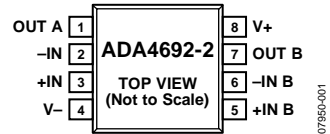


Figure 7. 8-Lead SOIC_N (R-8)

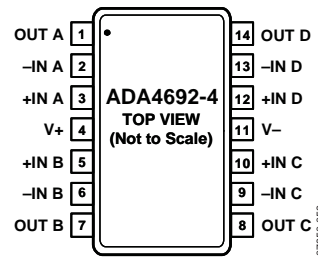


Figure 8. 14-Lead TSSOP (RU-14)

TYPICAL PERFORMANCE CHARACTERISTICS

T_A = 25°C, unless otherwise noted.

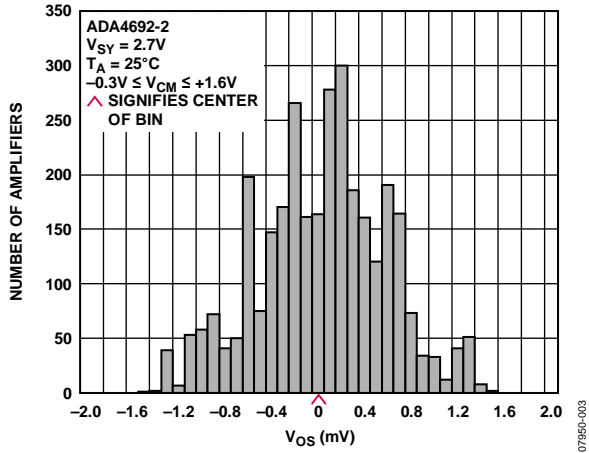


Figure 9. Input Offset Voltage Distribution

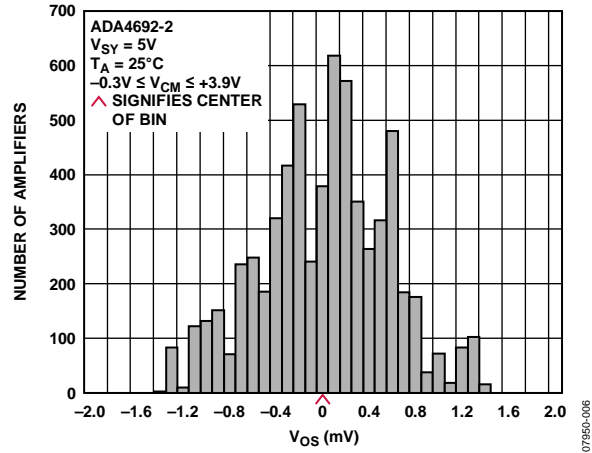


Figure 12. Input Offset Voltage Distribution

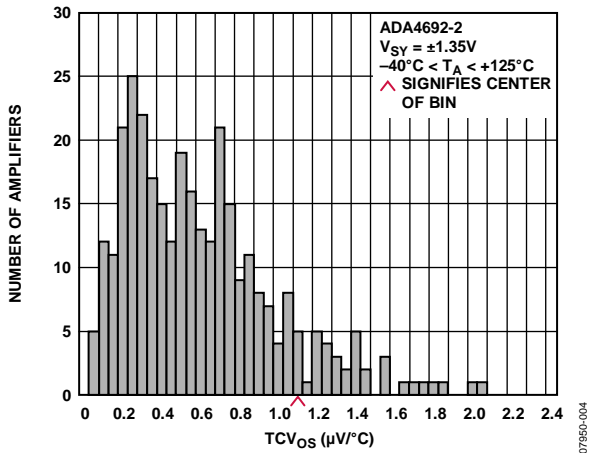


Figure 10. Input Offset Voltage Drift Distribution

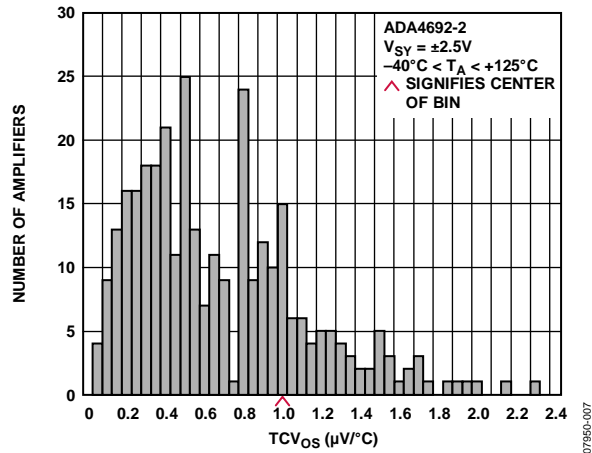


Figure 13. Input Offset Voltage Drift Distribution

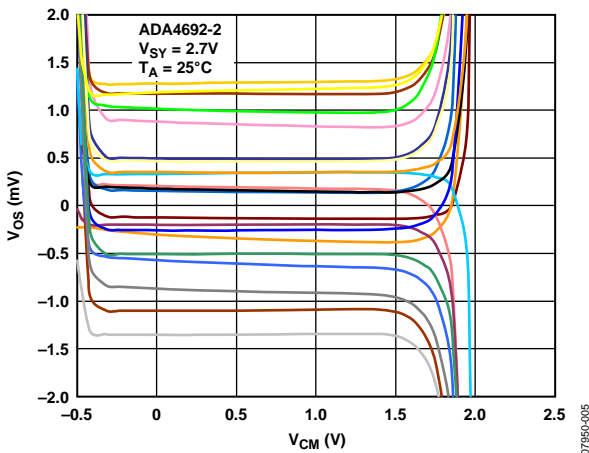


Figure 11. Input Offset Voltage vs. Common-Mode Voltage

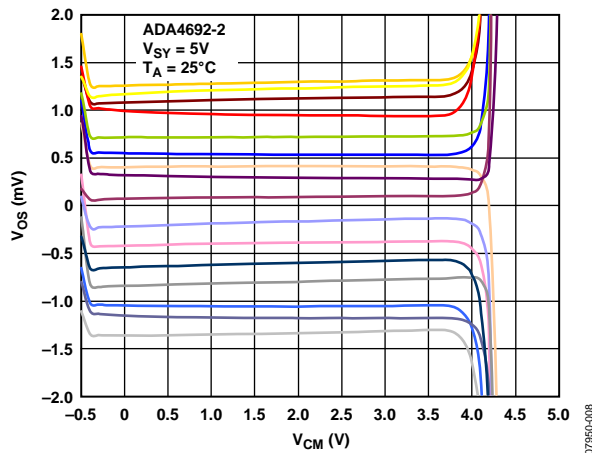


Figure 14. Input Offset Voltage vs. Common-Mode Voltage

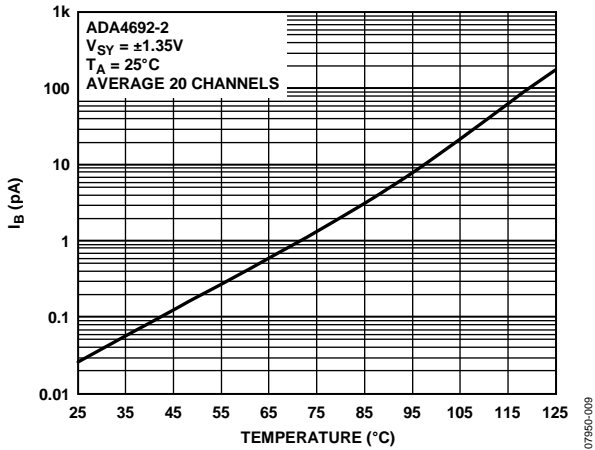


Figure 15. Input Bias Current vs. Temperature

07950-009

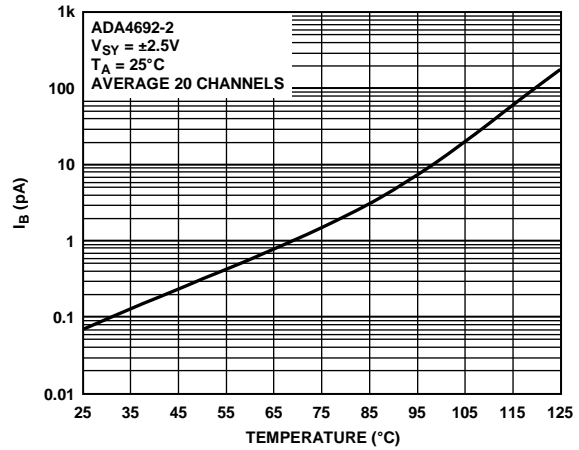


Figure 18. Input Bias Current vs. Temperature

07950-012

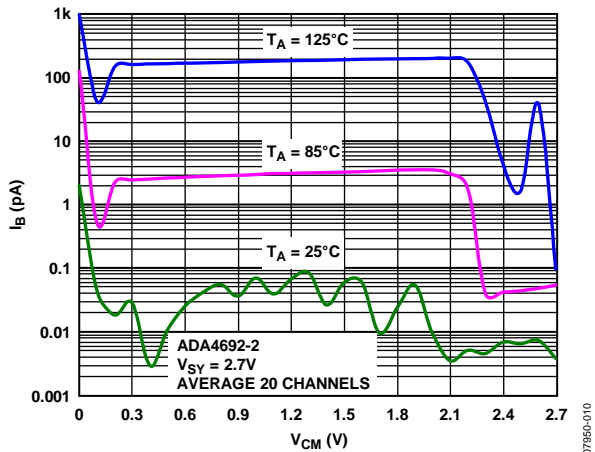


Figure 16. Input Bias Current vs. Common-Mode Voltage

07950-010

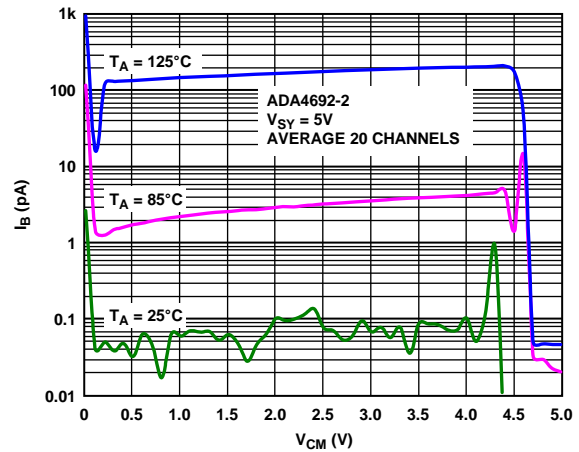


Figure 19. Input Bias Current vs. Common-Mode Voltage

07950-013

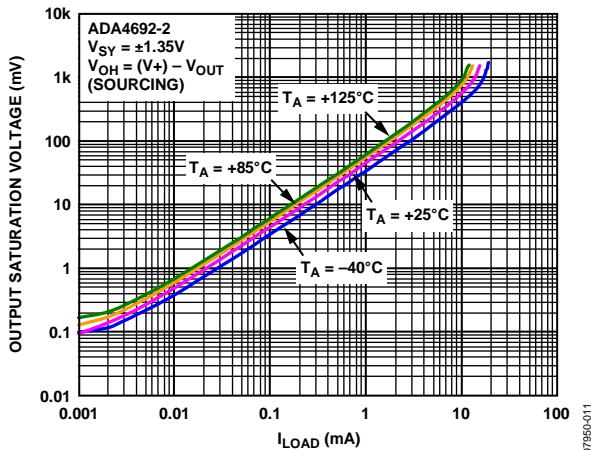


Figure 17. Output Voltage (V_{OH}) to Supply Rail vs. Load Current

07950-011

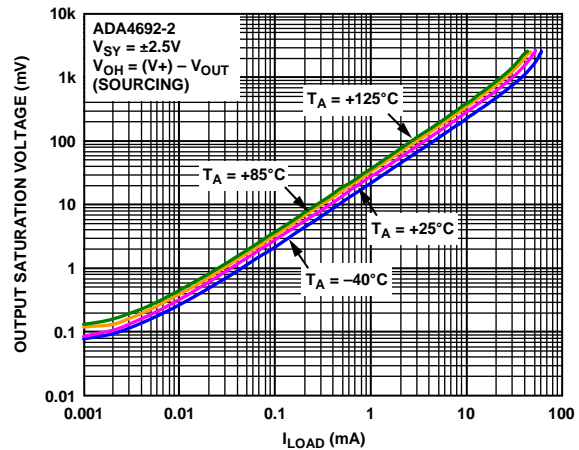


Figure 20. Output Voltage (V_{OH}) to Supply Rail vs. Load Current

07950-014

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

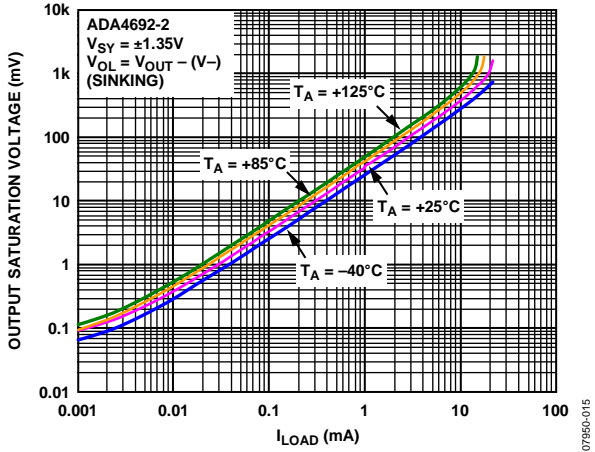


Figure 21. Output Voltage (V_{OL}) to Supply Rail vs. Load Current

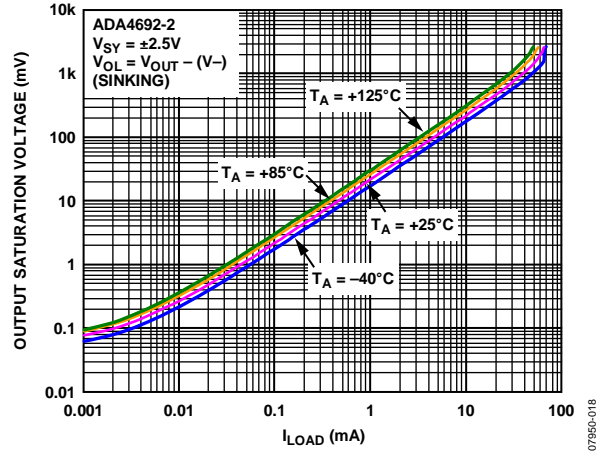


Figure 24. Output Voltage (V_{OL}) to Supply Rail vs. Load Current

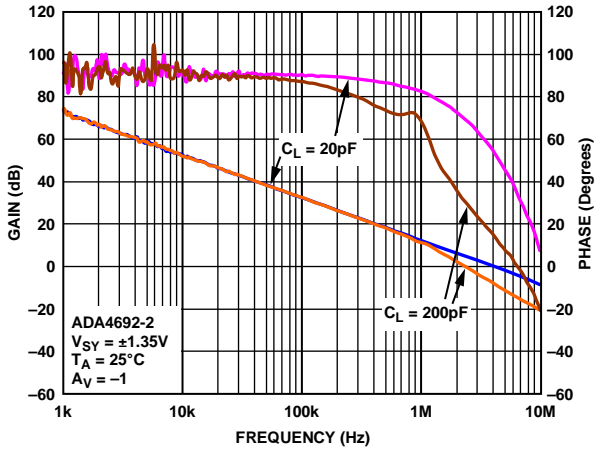


Figure 22. Open-Loop Gain and Phase vs. Frequency

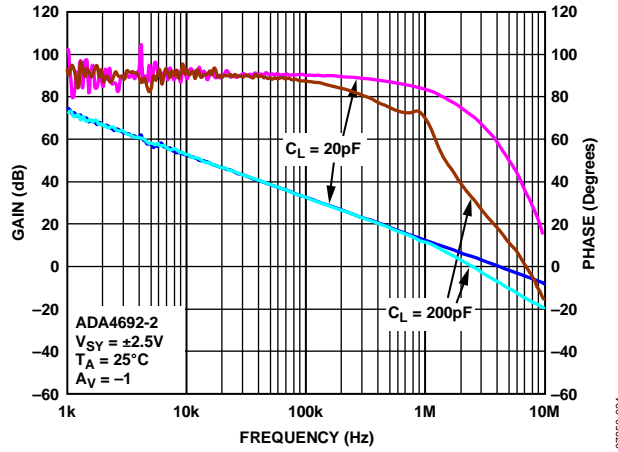


Figure 25. Open-Loop Gain and Phase vs. Frequency

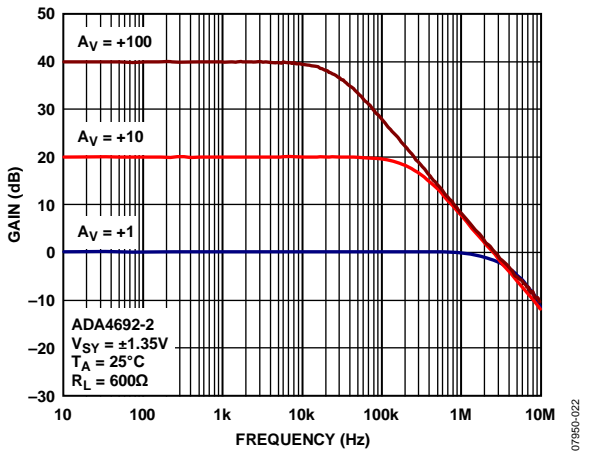


Figure 23. Closed-Loop Gain vs. Frequency

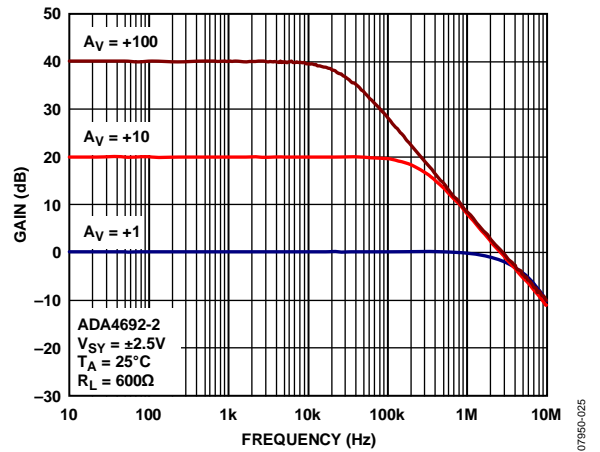


Figure 26. Closed-Loop Gain vs. Frequency

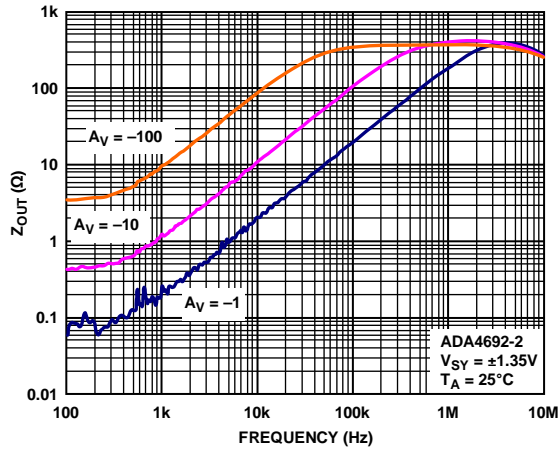


Figure 27. Output Impedance vs. Frequency

07950-023

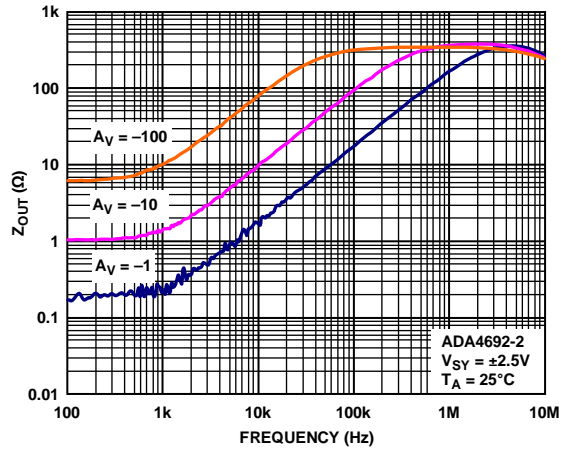


Figure 30. Output Impedance vs. Frequency

07950-026

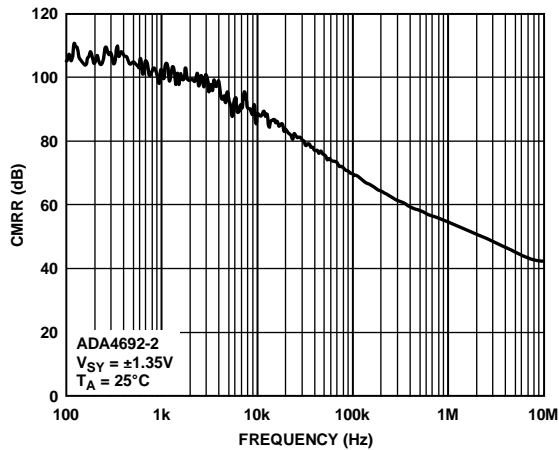


Figure 28. CMRR vs. Frequency

07950-027

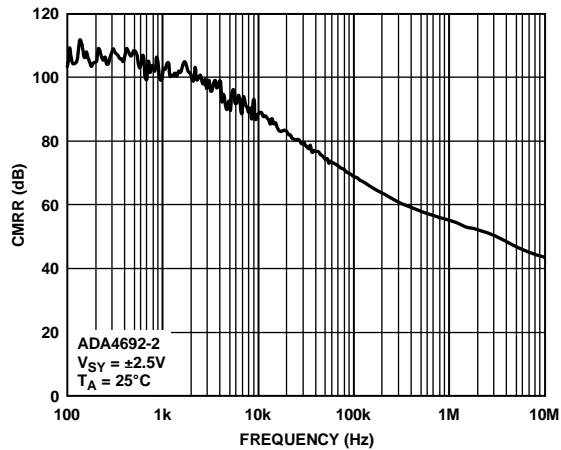


Figure 31. CMRR vs. Frequency

07950-030

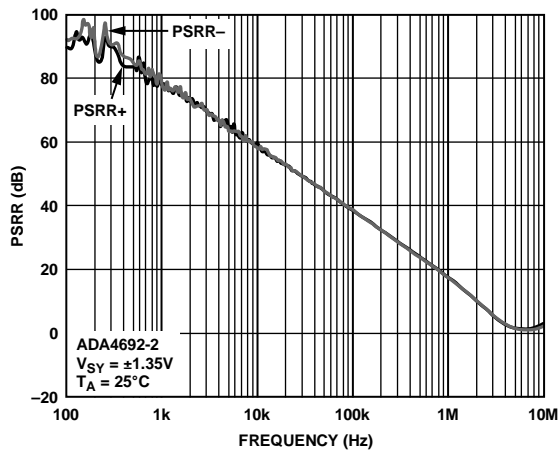


Figure 29. PSRR vs. Frequency

07950-028

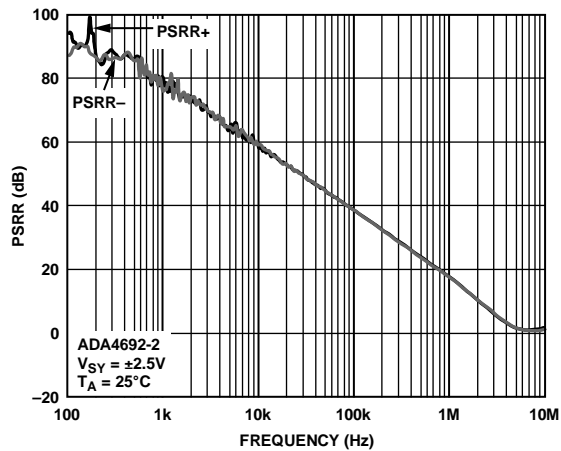


Figure 32. PSRR vs. Frequency

07950-031

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

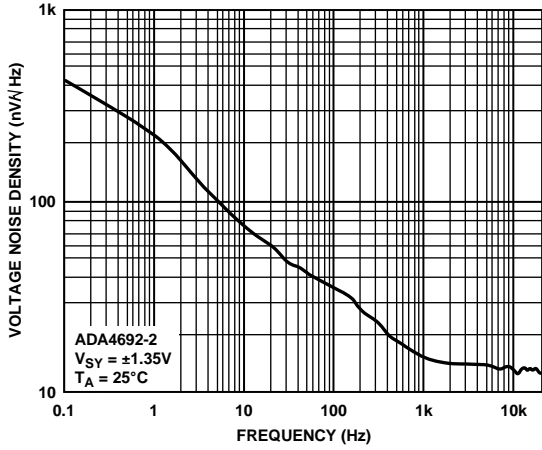


Figure 33. Voltage Noise Density vs. Frequency

07950-029

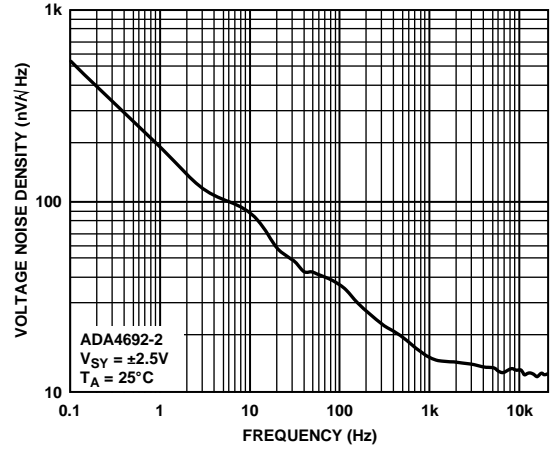


Figure 36. Voltage Noise Density vs. Frequency

07950-032

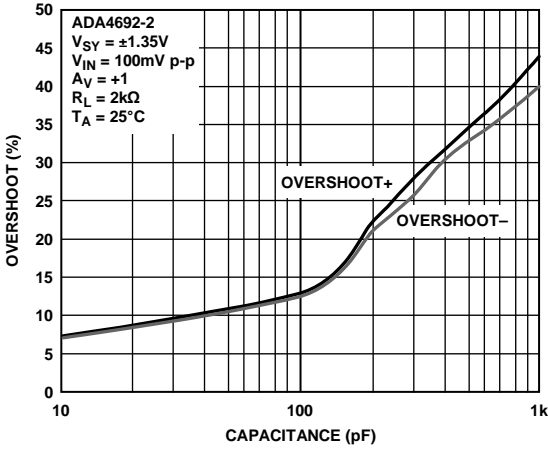


Figure 34. Small Signal Overshoot vs. Load Capacitance

07950-033

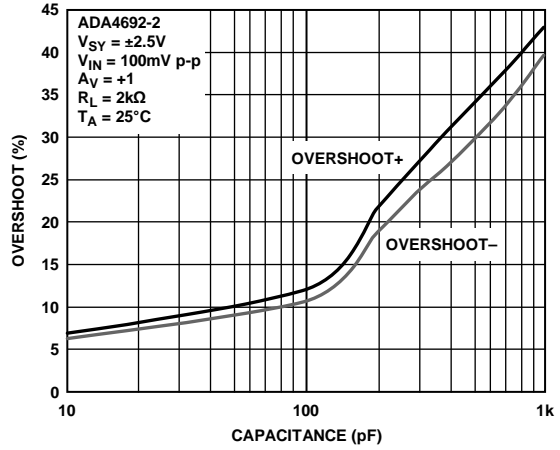


Figure 37. Small Signal Overshoot vs. Load Capacitance

07950-036

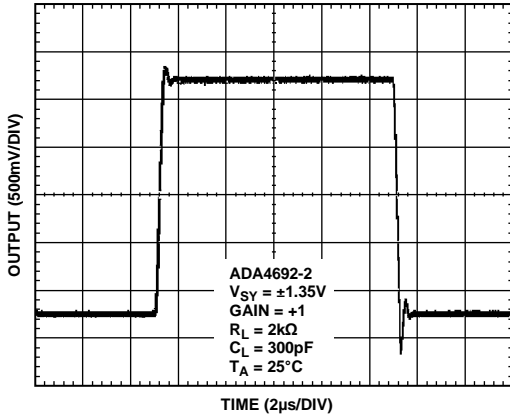


Figure 35. Large Signal Transient Response

07950-034

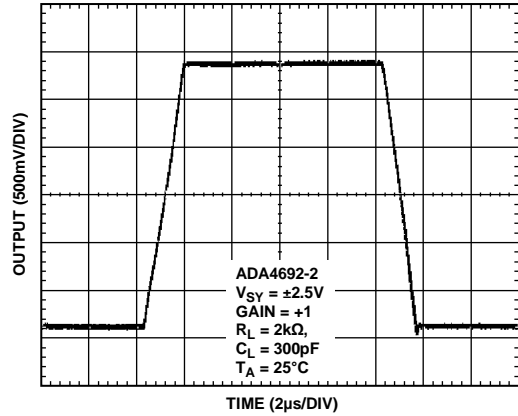


Figure 38. Large Signal Transient Response

07950-037

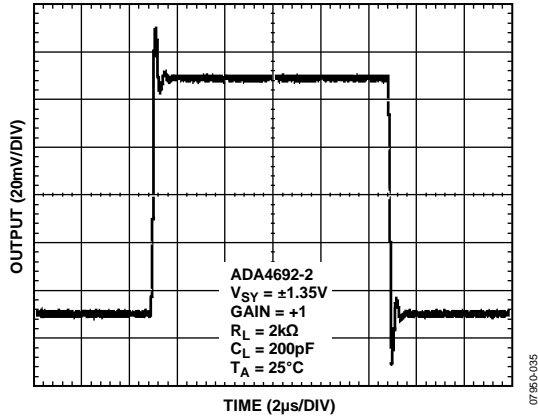


Figure 39. Small Signal Transient Response

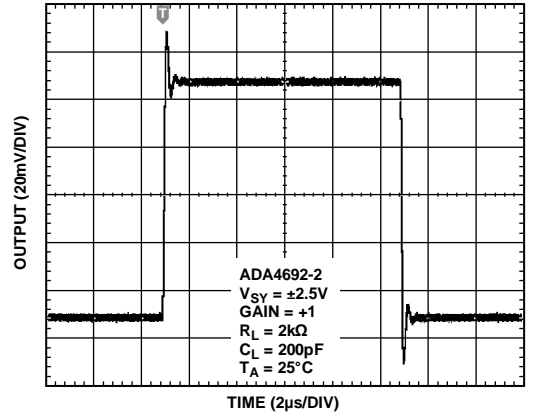


Figure 42. Small Signal Transient Response

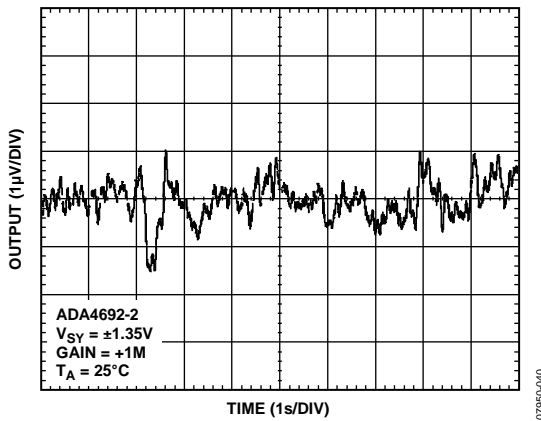


Figure 40. 0.1 Hz to 10 Hz Noise

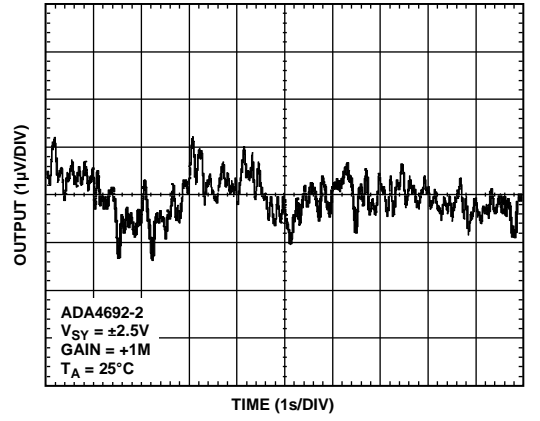


Figure 43. 0.1 Hz to 10 Hz Noise

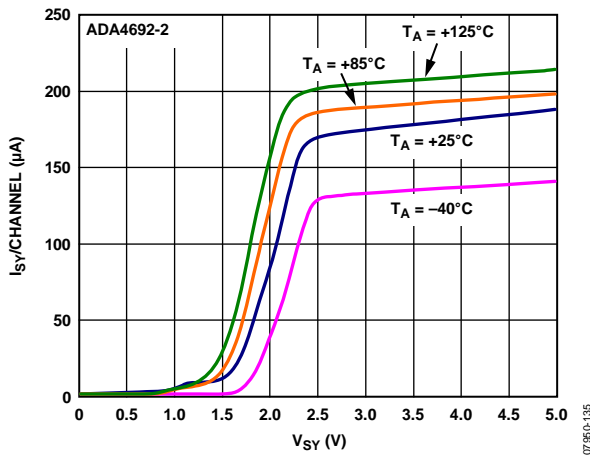


Figure 41. Supply Current per Amplifier vs. Supply Voltage

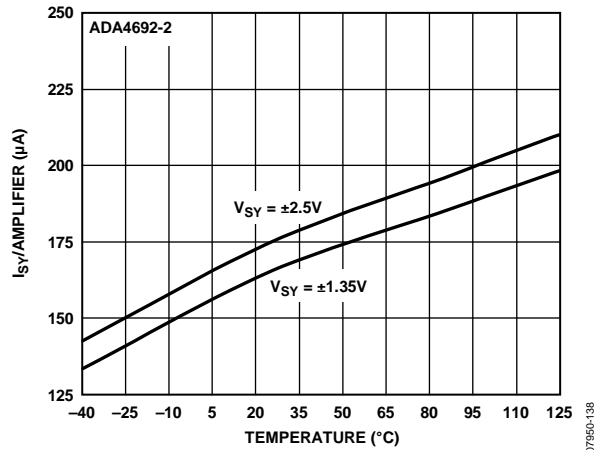


Figure 44. Supply Current per Channel vs. Temperature

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

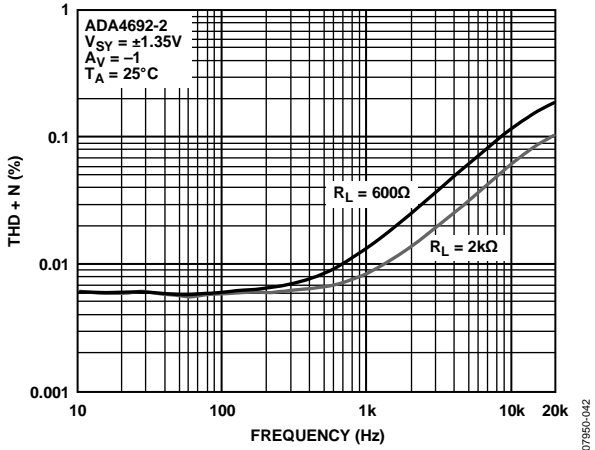


Figure 45. THD + Noise vs. Frequency

07950-042

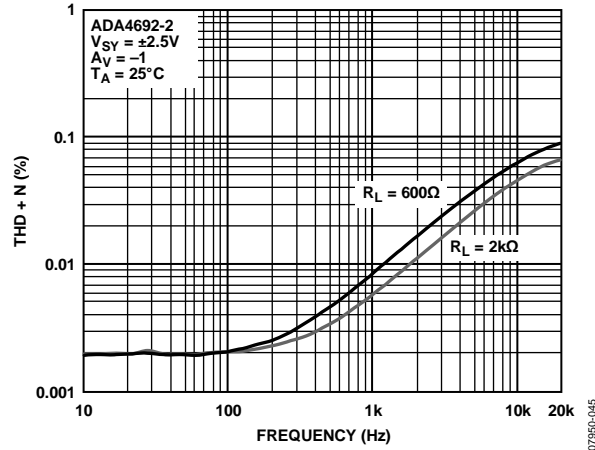


Figure 48. THD + Noise vs. Frequency

07950-045

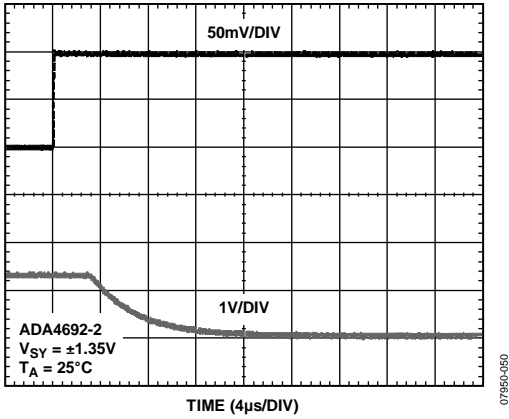


Figure 46. Positive Overload Recovery

07950-050

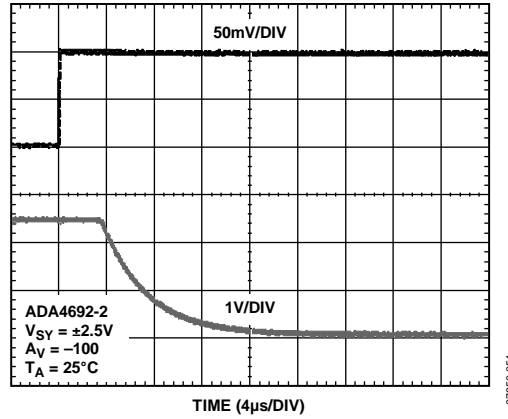


Figure 49. Positive Overload Recovery

07950-051

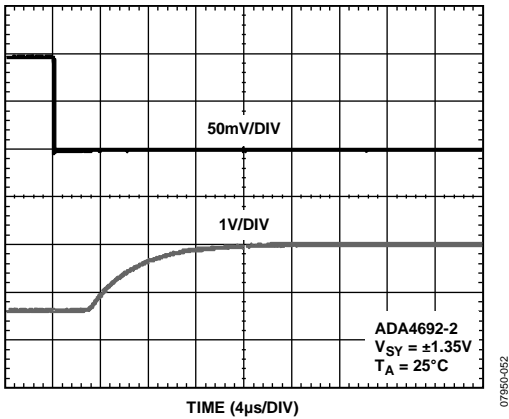


Figure 47. Negative Overload Recovery

07950-052


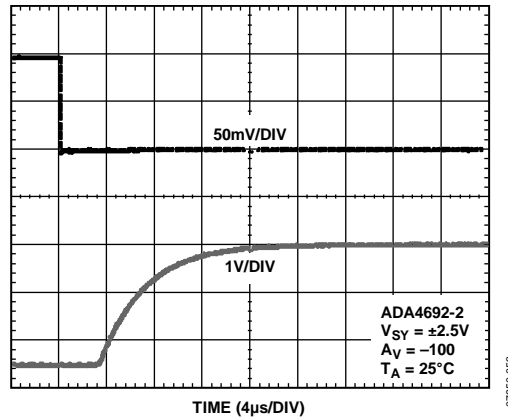


Figure 50. Negative Overload Recovery


07950-053

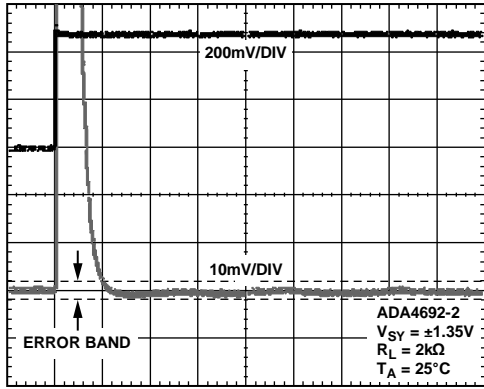

TIME (1 μs /DIV)

Figure 51. Positive Settling Time to 0.1%


07950-054

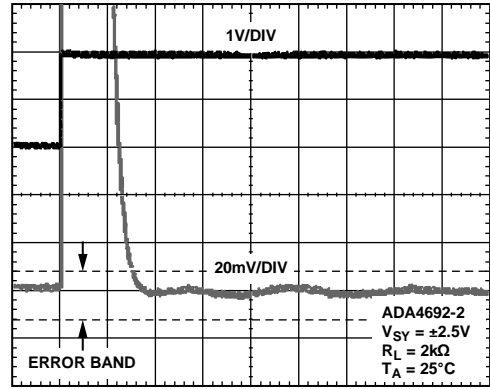

TIME (1 μs /DIV)

Figure 54. Positive Settling Time to 0.1%


07950-055

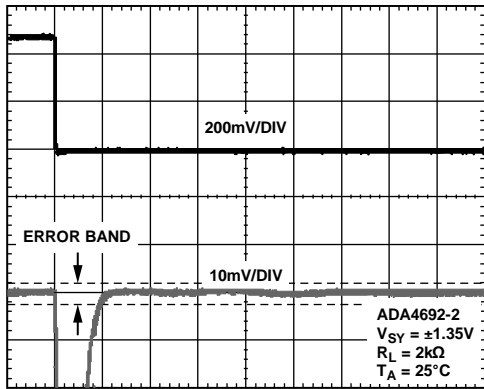

TIME (1 μs /DIV)

Figure 52. Negative Settling Time to 0.1%

07950-056

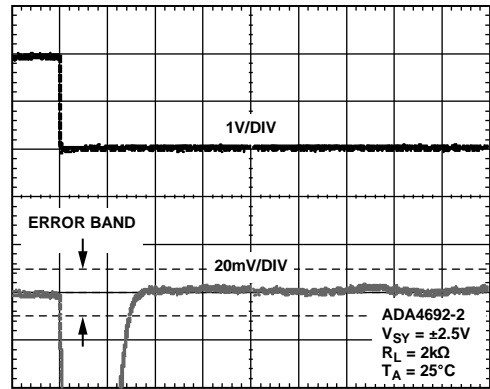

TIME (1 μs /DIV)

Figure 55. Negative Settling Time to 0.1%

07950-057

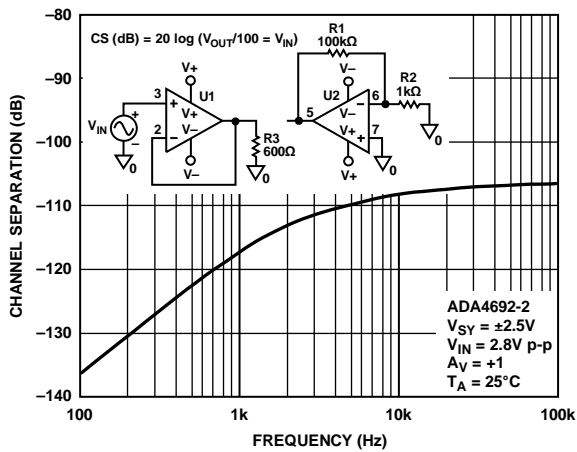


Figure 53. Channel Separation (CS) vs. Frequency

07950-140

SHUTDOWN OPERATION

INPUT PIN CHARACTERISTICS

The ADA4691-2 has a classic CMOS logic inverter input for each shutdown pin, as shown in Figure 56.

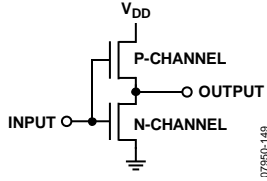


Figure 56. CMOS Inverter

With slowly changing inputs, the top transistor and bottom transistor may be slightly on at the same time, increasing the supply current. This can be avoided by driving the input with a digital logic output having fast rise and fall times. Figure 57 through Figure 59 show the supply current for both sections switching simultaneously with rise times of 1 μ s, 10 μ s, and 1 ms. Clearly, the rise and fall times should be faster than 10 μ s. Using an RC time constant to enable/disable shutdown is not recommended.

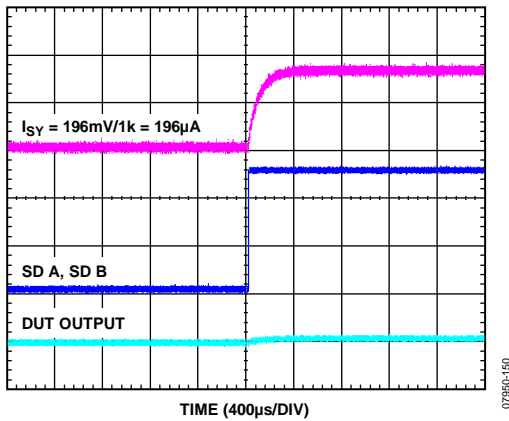


Figure 57. Shutdown Pin Rise Time = 1 μ s

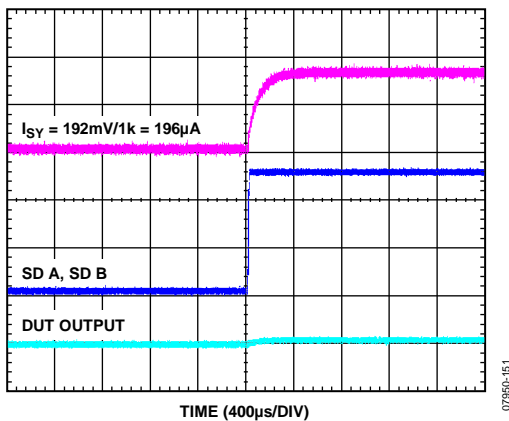


Figure 58. Shutdown Pin Rise Time = 10 μ s

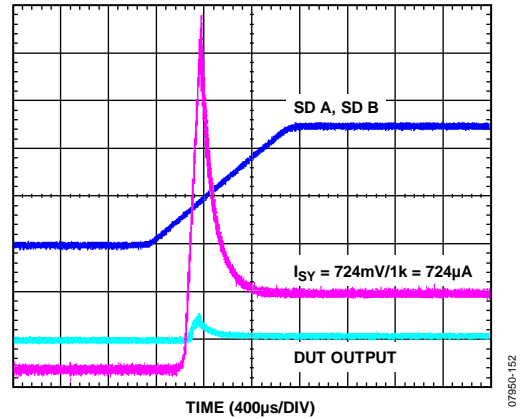


Figure 59. Shutdown Pin Rise Time = 1 ms

INPUT THRESHOLD

The input threshold is approximately 1.2 V above the V- pin when operating on ground and 5 V and 0.9 V when operating on 2.7 V (see Figure 60 and Figure 61). The threshold is relatively stable over temperature. For operation on split supplies, the logic swing may have to be level shifted.

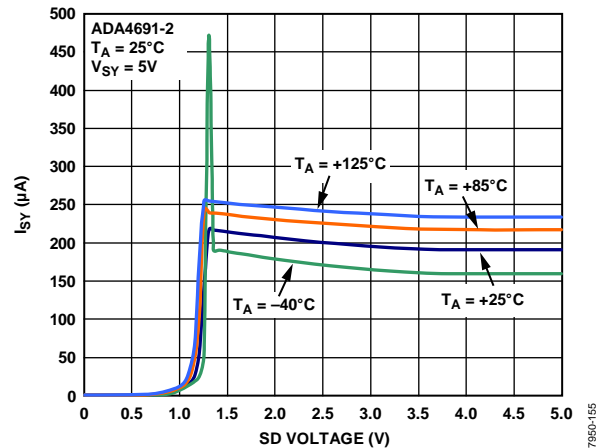


Figure 60. Supply Current vs. Temperature, $V_{SY} = 5 V$


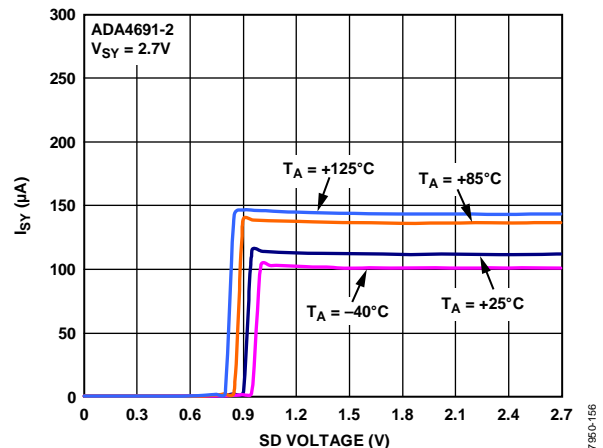


Figure 61. Supply Current vs. Temperature, $V_{SY} = 2.7 V$

OUTLINE DIMENSIONS

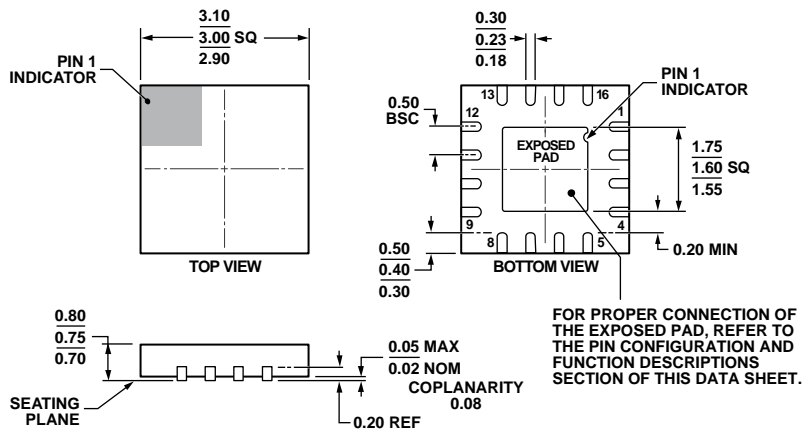

COMPLIANT TO JEDEC STANDARDS MO-220-WEED.

Figure 62. 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ]
3 mm × 3 mm Body, Very Very Thin Quad
(CP-16-22)

Dimensions shown in millimeters

070209-C


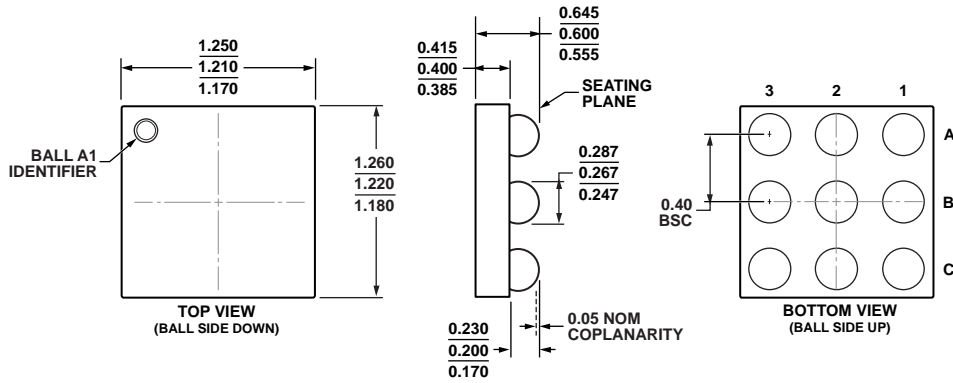


Figure 63. 9-Ball Wafer Level Chip Scale Package [WLCSP]
(CB-9-3)


Dimensions shown in millimeters

091709-A

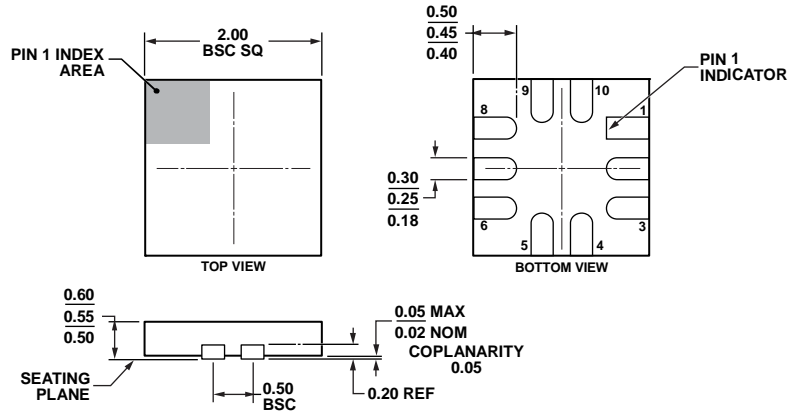


081308-D

Figure 64. 10-Lead Lead Frame Chip Scale Package [LFCSP_UQ]
 2 mm x 2 mm Body, Ultra Thin Quad
 (CP-10-11)
 Dimensions shown in millimeters

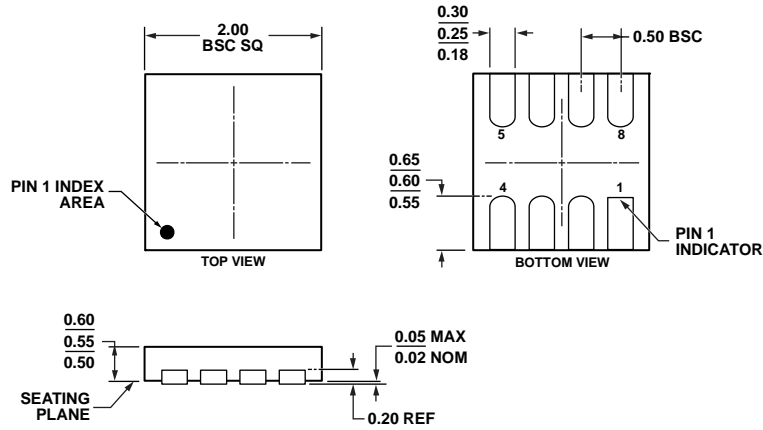

062409-A

Figure 65. 8-Lead Lead Frame Chip Scale Package [LFCSP_UD]
 2 mm x 2 mm Body, Ultra Thin, Dual Lead
 (CP-8-6)
 Dimensions shown in millimeters

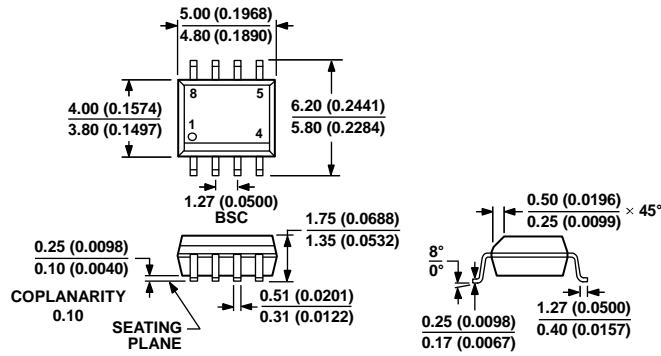


COMPLIANT TO JEDEC STANDARDS MS-012-A A
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 66. 8-Lead Standard Small Outline Package [SOIC_N]
 Narrow Body
 (R-8)

Dimensions shown in millimeters and (inches)

012A07-A

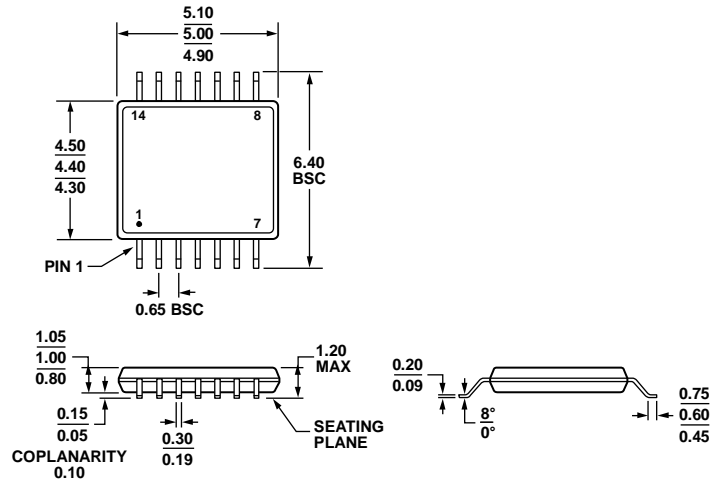

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 67. 14-Lead Thin Shrink Small Outline Package [TSSOP]
 (RU-14)

Dimensions shown in millimeters

061906-A

ADA4691-2/ADA4691-4/ADA4692-2/ADA4692-4

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Description | Package Option | Branding |
|--------------------|-------------------|---------------------|----------------|----------|
| ADA4691-2ACBZ-R7 | -40°C to +125°C | 9-Ball WLCSP | CB-9-3 | A2C |
| ADA4691-2ACBZ-RL | -40°C to +125°C | 9-Ball WLCSP | CB-9-3 | A2C |
| ADA4691-2ACPZ-R7 | -40°C to +125°C | 10-Lead LFCSP_UQ | CP-10-11 | A2 |
| ADA4691-2ACPZ-RL | -40°C to +125°C | 10-Lead LFCSP_UQ | CP-10-11 | A2 |
| ADA4691-4ACPZ-R2 | -40°C to +125°C | 16-Lead LFCSP_WQ | CP-16-22 | A2P |
| ADA4691-4ACPZ-R7 | -40°C to +125°C | 16-Lead LFCSP_WQ | CP-16-22 | A2P |
| ADA4691-4ACPZ-RL | -40°C to +125°C | 16-Lead LFCSP_WQ | CP-16-22 | A2P |
| ADA4692-2ACPZ-R7 | -40°C to +125°C | 8-Lead LFCSP_UD | CP-8-6 | A3 |
| ADA4692-2ACPZ-RL | -40°C to +125°C | 8-Lead LFCSP_UD | CP-8-6 | A3 |
| ADA4692-2ARZ | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| ADA4692-2ARZ-R7 | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| ADA4692-2ARZ-RL | -40°C to +125°C | 8-Lead SOIC_N | R-8 | |
| ADA4692-4ARUZ | -40°C to +125°C | 14-Lead TSSOP | RU-14 | |
| ADA4692-4ARUZ-RL | -40°C to +125°C | 14-Lead TSSOP | RU-14 | |

¹ Z = RoHS Compliant Part.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru