


# LeCroy

## MS Series Mixed Signal Oscilloscopes

Complete Embedded System Test  
Analog. Digital. Serial.

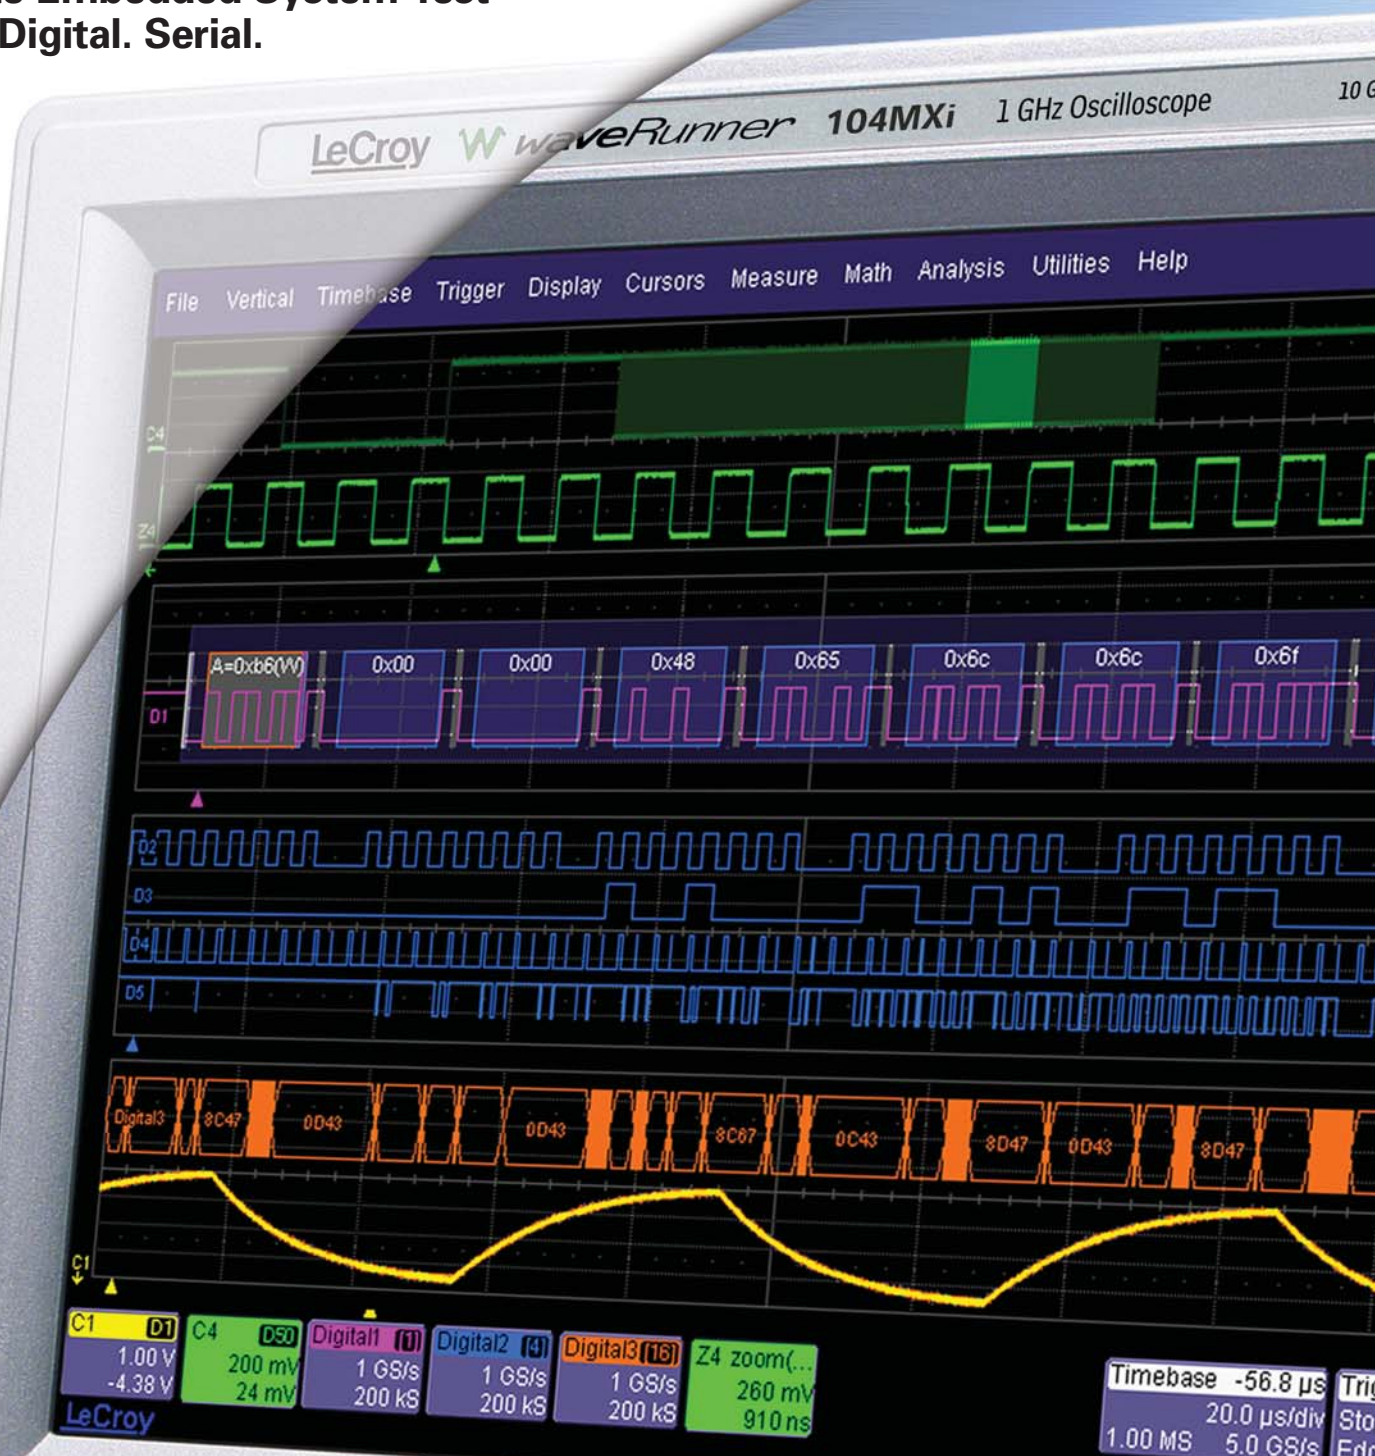

# The Ultimate Mixed Signal Oscilloscope

**A mixed signal oscilloscope (MSO) is the ideal tool for the design and debug of today's embedded systems providing the only way to see analog, digital and serial data signals simultaneously on one instrument as they occur in real time. Embedded system designers need to view signals into and out of devices such as microcontrollers, DSPs, FPGAs, ADCs, DACs, and transducers while ensuring proper timing and bus traffic.**

## **Unmatched Digital Performance**

The MS Series offers unmatched digital performance and is available in two models, the MS-500 and MS-250. Designed to capture long records of the fastest digital signals the MS-500 has a maximum input frequency of 500 MHz, while other MSOs are limited to only 250 MHz. The long memory of 50 Mpts/Ch means that these fast signals can be captured for up to 25 ms at up to 2 GS/s sampling rate. On top of this raw performance, the MS-500 supports up to 36 channels—enough for all the ADDR, DATA, control lines and serial data busses. This makes it the perfect tool for embedded systems with 16-bit or 32-bit microcontrollers.

The MS-250 is the ideal tool for testing embedded systems with 8-bit microcontrollers or slower digital signals. With 250 MHz max. input frequency, 18 channels and 10 Mpts/Ch memory the MS-250 is an outstanding value and provides a complete set of tools for embedded system testing.

## **Analog Performance Reimagined**

A great MSO must be built on a great oscilloscope and the WaveRunner® MXi and WaveSurfer® MXs are two of the best. With bandwidths from 200 MHz to 2 GHz, sampling rates up to 10 GS/s, 12.5 Mpts/Ch available memory, and a wide range of math, measurement and triggering capabilities the WaveRunner MXi and WaveSurfer MXs platforms are powerful and versatile. Both models feature a big, bright 10.4" color touch screen for easy viewing of all your analog and digital signals and both are only 6" deep.

## **The Best Serial Data Bus Testing**

Monitoring serial data busses is a major part of embedded system design and test. The ability to quickly locate and isolate specific messages on these busses is important for efficient testing. With LeCroy's unique color-coded overlay for decoded bus data and powerful, flexible conditional triggering, the MS Series captures all important bus traffic in your system and easily shows important data messages from I<sup>2</sup>C, SPI, UART, RS-232, and LIN busses.



# The Complete Mixed Signal Toolset


## Analog, Digital and Cross-pattern Triggering

The WaveRunner MXi and WaveSurfer MXs oscilloscopes come with an extensive set of triggering capabilities aimed at capturing a wide range of analog

signals. With the MS Series this triggering is enhanced, adding analog/digital cross-pattern trigger, analog/digital event triggering and the capability to select any digital channel as the source for an analog trigger.



Use the oscilloscope triggers with digital channels.


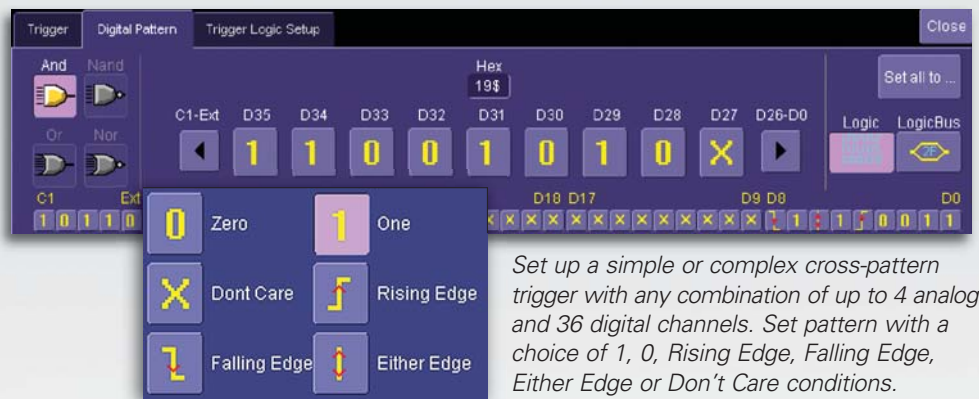


Set up a simple or complex cross-pattern trigger with any combination of up to 4 analog and 36 digital channels. Set pattern with a choice of 1, 0, Rising Edge, Falling Edge, Either Edge or Don't Care conditions.

## Easy-to-use Measurement Tools

Cursors and measurement parameters are an important part of any oscilloscope. When using the MS Series these tools measure digital channels as well analog channels.

Cursors read out hexadecimal bus values while parameters make timing measurements on a single digital channel, between two digital channels or even between an analog and a digital channel.

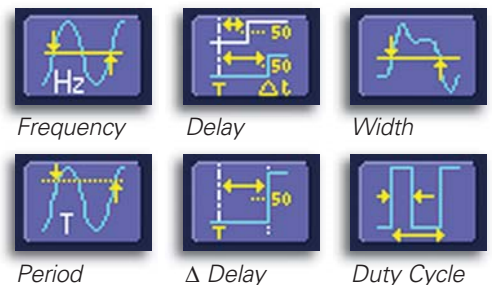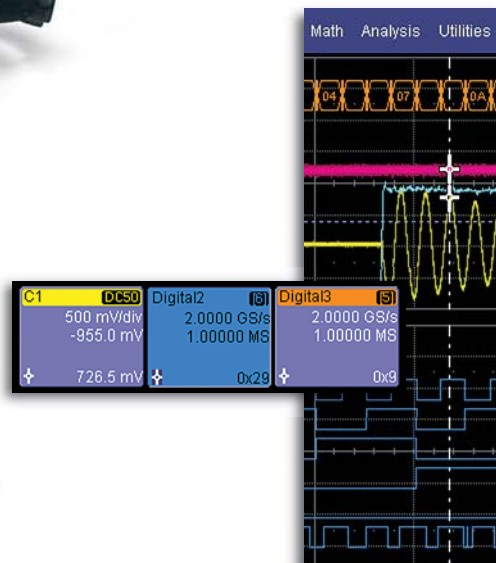



Use oscilloscope tools like horizontal and vertical cursors along with automatic measurements and statistics to measure analog and digital signals.

# Insight into Your Embedded System

The display of a mixed signal oscilloscope is your view into the analog, digital and serial data signals that drive your embedded system. The big 10.4" color touch screen of the WaveRunner MXi and WaveSurfer MXs simplifies how you use your MSO and makes seeing signal details easier especially when viewing a combination of up to 4 analog and 36 digital channels.

1. Trigger and decode serial data signals such as I<sup>2</sup>C, SPI, UART, RS-232, and LIN. The decoded data is presented with a unique color-coded overlay for easy identification. Zoom in closer to see even more data as each individual bit is decoded. Built-in search capability will quickly scan for specific messages on the bus.
2. Use cursors to read hexadecimal bus values or make manual timing measurements.
3. Automatic measurement parameters like period, frequency and duty cycle work on digital lines just as they would on oscilloscope channels. Statistics and Histograms provide detailed measurement information.
4. Analog bandwidths from 200 MHz to 2 GHz with sampling rates up to 10 GS/s.
5. Up to 50 Mpts/Ch digital memory provides very long capture times of all your digital signals, with sampling rates up to 2 GS/s.
6. Long oscilloscope memory enables capturing long records of analog signals while maintaining high sample rate for fast edges.
7. Complete analog/digital cross triggering. Set up a simple or complex pattern using any combination of up to 4 analog and 36 digital channels.
8. Sampling rate of 2 GS/s on digital lines.

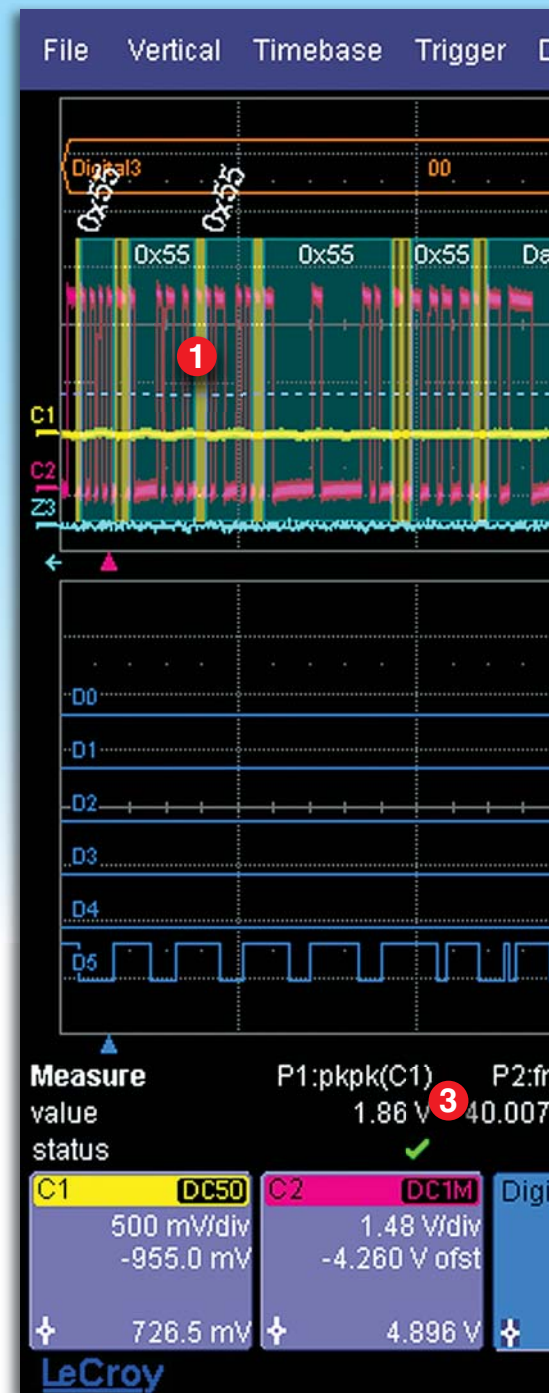

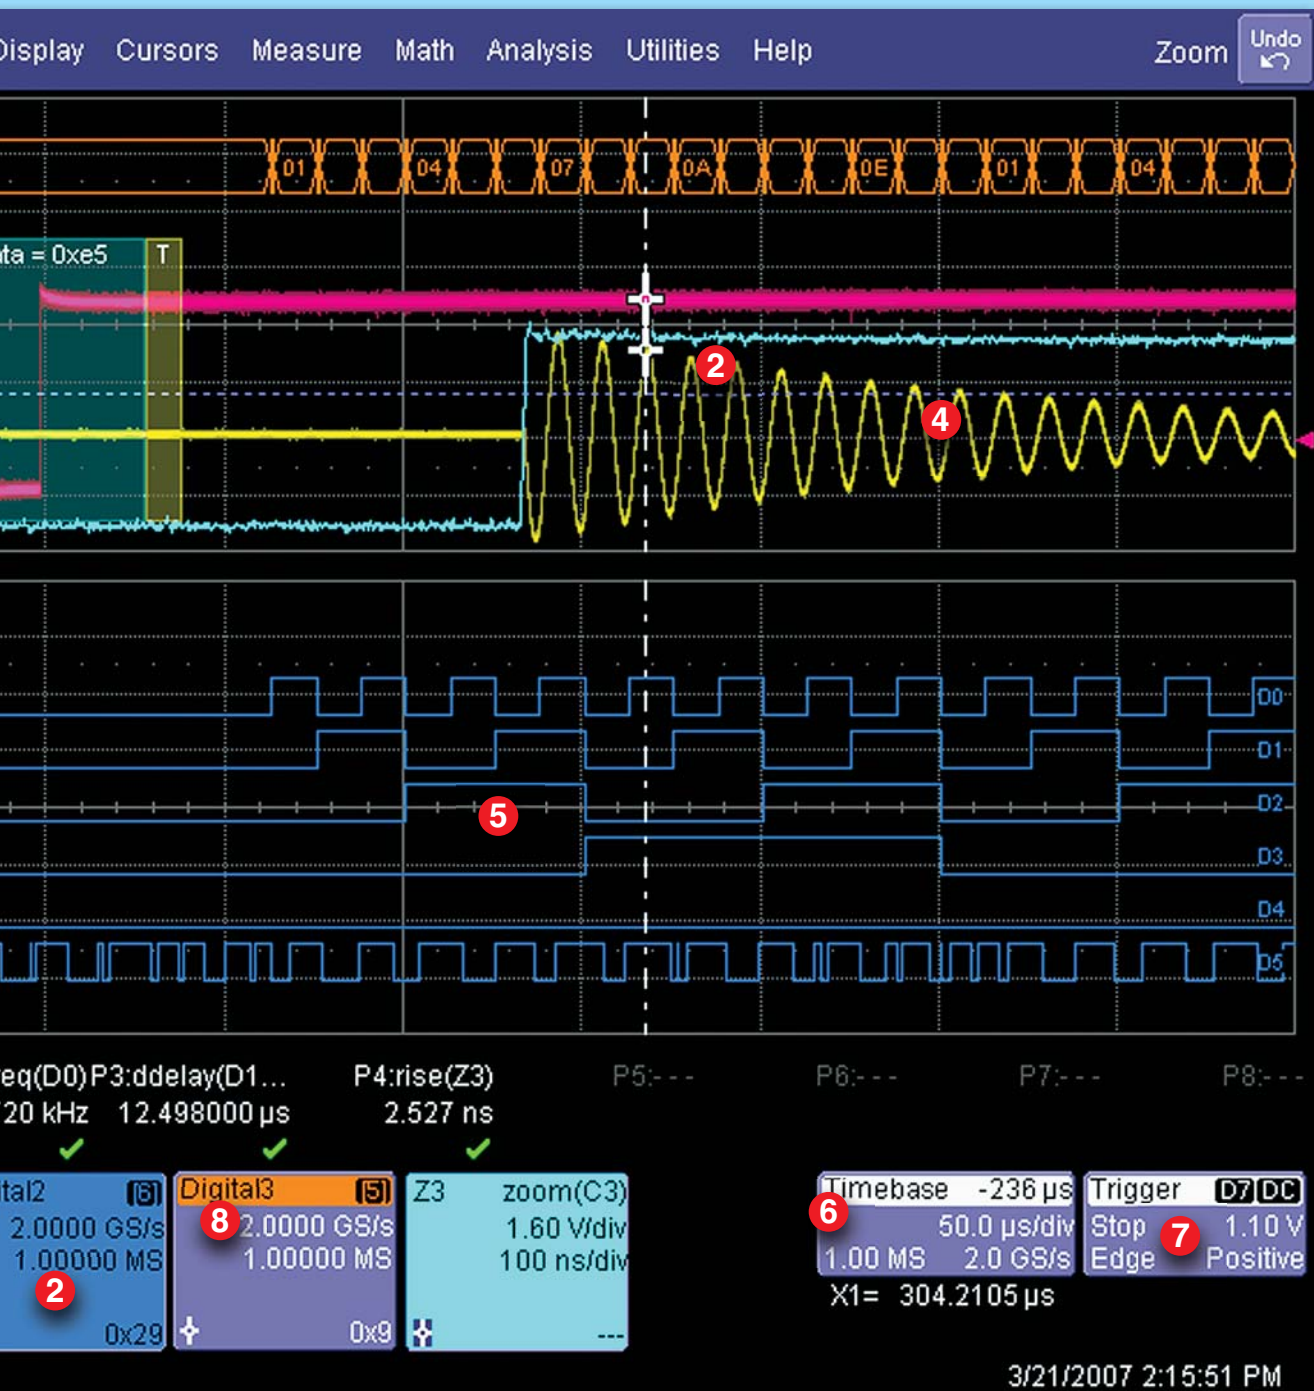

# Serial Data Bus Validation and Debug


## Complete I<sup>2</sup>C, SPI, UART, RS-232, LIN, CAN, and FlexRay™ Serial Triggering

Quickly and easily isolate specific serial data events on your embedded controller for better understanding and faster debug. Set up trigger conditions in binary, hexadecimal (Symbolic for CAN) formats. Use the MS-500 or MS-250 to capture serial data busses, keeping the analog oscilloscope channels open for other uses. Trigger on DATA in specific locations of long I<sup>2</sup>C EEPROM reads. Get complete control of your debug process and finish faster.



## Powerful Conditional Data Triggering

Completely isolate specific message events for better understanding and debug. Use a conditional I<sup>2</sup>C, CAN, FlexRay™, UART, RS-232, or LIN DATA trigger to select a range of DATA values to trigger on, not just a single DATA value. Oftentimes, I<sup>2</sup>C utilizes DATA bytes to specify sub-addresses for accessing memory locations in EEPROMs. Conditional DATA trigger allows triggering on a range of DATA bytes that correspond to reads or writes to specific sub-address memory blocks in the EEPROM.

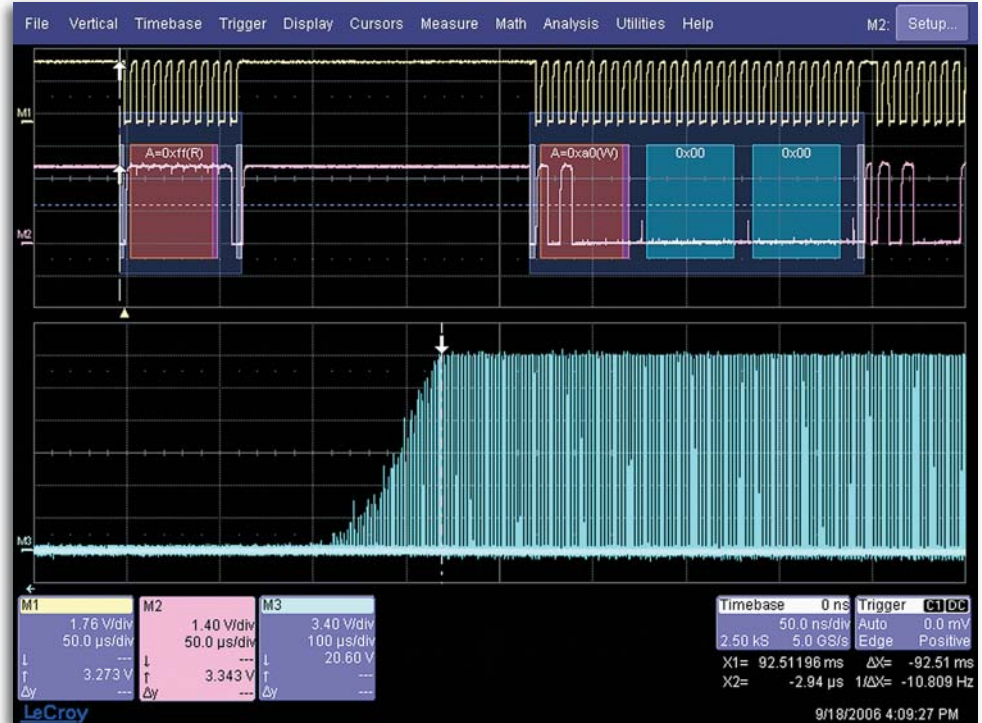

Conditional DATA triggering can also aid in monitoring DATA outputs from sensors, such as analog-to-digital converters, and triggering when DATA is outside a safe operating range. In both cases, verifying proper operation becomes a simple task.

## Intuitive, Color-coded Decode Overlay

Advanced software algorithms deconstruct the waveform into binary, hex, or ASCII protocol information, then overlay the decoded data on the waveform. Various sections of the protocol are color-coded to make it easy to understand. The decode operation is fast—even with long acquisitions.

## Table Summary and Search/Zoom

Turn your oscilloscope into a protocol analyzer with the Table display of protocol information. Customize the table, or export Table data to an Excel file. Touch a message in the table and automatically zoom in for detail. Search for specific address or data values in the acquisition.

Idx	Time	Addr	Length	Address	RW	Length	Data
8	240.494 ms	7	0x21	1	2	0xff	00 00
9	360.555 ms	7	0x21	0	1	0x08	
10	360.698 ms	7	0x21	1	2	0x49	00 00
11	481.865 ms	7	0x21	0	1	0x0a	
12	482.007 ms	7	0x21	1	2	0x00	00 00
13	606.284 ms	7	0x20	0	3	0x01	36 00
14	721.235 ms	7	0x20	0	1	0x00	
15	721.377 ms	7	0x20	1	2	0x12	36 00
16	841.266 ms	7	0x20	0	1	0x02	

# Analog Bandwidths from 200 MHz to 2 GHz

## WaveSurfer MXs



Designed for those requiring a basic oscilloscope for signal viewing and performing basic timing measurements.

<b>Bandwidth Range</b>	200 MHz – 1 GHz
<b># of Analog Channels</b>	2 or 4
<b>Analog Sample Rate</b>	Up to 5 GS/s
<b>Analog Memory</b>	10 Mpts/Ch
<b>Application Packages</b>	Electrical Telecom
<b>Serial Data Trigger and Decode</b>	I <sup>2</sup> C, SPI, UART, RS-232, LIN, CAN
<b>Display</b>	10.4" Color Touch Screen
<b>Operating System</b>	Windows® XPe

## WaveRunner MXi



Higher performance and advanced capabilities with longer standard and optional memory are intended for fast processing of long records, advanced analysis and some application based measurements.

<b>Bandwidth Range</b>	400 MHz – 2 GHz
<b># of Analog Channels</b>	2 or 4
<b>Analog Sample Rate</b>	Up to 10 GS/s
<b>Analog Memory</b>	12.5 Mpts/Ch, 25 Mpts/Ch Interleaved
<b>Application Packages</b>	PowerMeasure, EMC, Jitter and Timing, Digital Filter, Serial Data Mask, USB, Ethernet, Electrical Telecom, Disk Drive Measurements
<b>Serial Data Trigger and Decode</b>	I <sup>2</sup> C, SPI, UART, RS-232, LIN, FlexRay, CAN
<b>Display</b>	10.4" Color Touch Screen
<b>Operating System</b>	Windows® XP Pro

### PK400-1 Microgripper Set

Large gripper probe set for 0.10 inch (2.54 mm) pin pitch, includes 10 probes with color-coded leads.



### PK400-2 Microgripper Set

Medium gripper probe set for 0.04 inch (1.0 mm) pin pitch, includes 10 probes with color-coded leads.



### PK400-3 Microgripper Set

Small gripper probe set for 0.008 inch (0.2 mm) pin pitch, includes 10 probes with color-coded leads.



# Specifications and Ordering Information

## Specifications

	MS-500*	MS-500-36	MS-250
<b>Acquisition System</b>			
Maximum Input Frequency	500 MHz	250 MHz (500 MHz)	250 MHz
Sample Rate	2 GS/s	1 GS/s (2 GS/s)	1 GS/s
Acquisition Memory (per Channel)	50 Mpts/Ch <sup>†</sup>	25 Mpts/Ch (50 Mpts/Ch)	10 Mpts
<b>Digital Channels</b>			
Number of Channels	18	36 (18)	18
Threshold Groupings	D0–D8, D9–D17	D0–D8, D9–D17, D18–D25, D26–D35	D0–D8, D9–D17
Threshold Levels	TTL, ECL, CMOS (2.5 V, 3.3 V, 5 V), PECL, LVDS or User Defined		
<b>Trigger</b>			
Trigger Types	Edge, Width, Pattern, Glitch, Interval, Dropout		
Serial Data Triggers (Optional)	I <sup>2</sup> C, SPI, UART, RS-232, LIN		
Trigger Sources	C1–C4, D0–D17, EXT	C1–C4, D0–D35, EXT	C1–C4, D0–D17, EXT
<b>Physical Dimensions</b>			
Dimensions (W x L x D)	4.25" x 8.375" x 1.5" (10.8 x 21.3 x 3.8 cm)		
Net Weight	1.7 lbs. (.775 kg)		
Lead Set Length	16" (40.65 cm)		

\*MS-500 supports 36 channels with use of second lead set (MSO-DLS-36).

<sup>†</sup>10 Mpts/Ch max. memory when used with WaveSurfer Xs and WaveSurfer MXs.

## Ordering Information

### Description

Description	Product Code
500 MHz, 2 GS/s, 18 Ch, 50 Mpts/Ch Mixed Signal Oscilloscope Option	MS-500
250 MHz, 1 GS/s, 36 Ch, 25 Mpts/Ch (500 MHz, 18 Ch, 2 GS/s, 50 Mpts/Ch Interleaved) Mixed Signal Oscilloscope Option	MS-500-36
250 MHz, 1 GS/s, 18 Ch, 10 Mpts/Ch Mixed Signal Oscilloscope Option	MS-250

### Hardware Options and Accessories

18 Channel Lead Set Replacement (D0–D17)	MSO-DLS-18
18 Channel Lead Set (D18–D35) Enables 36 Channels on MS-500	MSO-DLS-36
Large Gripper Probe Set for 0.10" (2.54 mm) Pin Pitch, Includes 10 Color Coded Probes	PK400-1
Medium Gripper Probe Set for 0.04" (1.0 mm) Pin Pitch, Includes 10 Color Coded Probes	PK400-2
Small Gripper Probe Set for 0.008" (0.2 mm) Pin Pitch, Includes 10 Color Coded Probes	PK400-3
Ground Extender for Square Pin Header	MSO-GND-EXTEND
Flexible Ground Lead	MSO-GND-LEAD
36 Channel Mictor Connector for MS Series (Includes 1 MSO-MICTOR-SHROUD)	MSO-MICTOR
18-pin 3M Interface Cable (Mates with 3M Part Number 2520-6002)	MSO-3M
Replacement LeCroy Bus Cable	MSO-LBUS
Shroud for Mictor Connector, Kit of 3	MSO-MICTOR-SHROUD

### Included with Standard Configuration

Mixed Signal Oscilloscope Module
18 Channel Digital Lead Set (1 with MS-500 and MS-250, 2 with MS-500-36)
LeCroy Bus and USB2.0 Cables (1.3 m)
Ground Extenders (20 with MS-500 and MS-250, 40 with MS-500-36)
Flexible Ground Leads (5 with MS-500 and MS-250, 10 with MS-500-36)
Carrying Case
Operator's Manual (English)
Quick Reference Guide (English)
CE Conformance Certificate Contained in Manual

### Customer Service

LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years, and our probes are warranted for one year.

This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge



1-800-5-LeCroy  
www.lecroy.com

Local sales offices are located throughout the world.  
To find the most convenient one visit [www.lecroy.com](http://www.lecroy.com)



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)