


anti-surge power type leaded resistor



features

- Excellent anti-surge characteristics
- Stable characteristics of moisture resistance up to high resistance range
- RCR50 (+1M Ω - 12M Ω), RCR50EN (1M Ω - 12M Ω) and RCR60 (1M Ω - 12M Ω) are discharge resistors recognized by UL1676 and c-UL(CSA-C22.2 No.1-M94)
- RCR25EN (100 Ω ~33M Ω), RCR50EN (100k Ω - 33M Ω) and RCR60 (470k Ω - 56M Ω) is approved by EN60065 14.1 safety
- Marking: Blue-gray body color with color-coded bands
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- Surface mount style "N" forming is suitable for automatic mounting

dimensions and construction

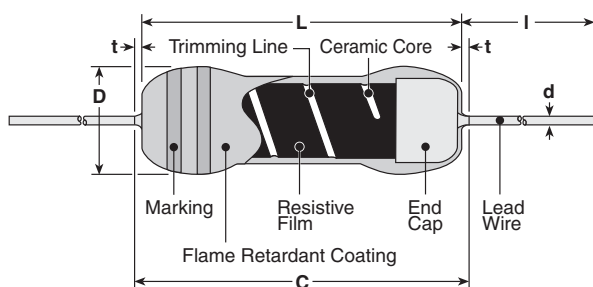

* Lead length changes depending on taping and forming.

Type	Dimensions inches (mm)					
	L	C (max.)	t (max.)	D	d (nom.)	I*
RCR16	.126 $\pm$.008 (3.2 $\pm$ 0.2)	.134 (3.4)	—	.067 $\pm$.008 (1.7 $\pm$ 0.2) -0.1	.018 (0.45)	.787 Min. (20.0 Min.)
RCR25 RCR25EN	.248 $\pm$.02 (6.3 $\pm$ 0.5)	.28 (7.1)	—	.098 $\pm$.02 (2.5 $\pm$ 0.5)	.024 (0.6)	
RCR50(+) RCR50EN	.374 $\pm$.039 (9.5 $\pm$ 1.0)	—	.118 (3.0)	.138 $\pm$.016 (3.5 $\pm$ 0.4)	.028 (0.7)	
RCR60	.374 $\pm$.039 (9.5 $\pm$ 1.0) -0.2	—	.118 (3.0)	.157 $\pm$.02 (4.0 $\pm$ 0.5)	.031 (0.8)	
RCR75	.472 $\pm$.039 (12 $\pm$ 1.0)	—	.118 (3.0)	.236 $\pm$.039 (6.0 $\pm$ 1.0) -0.4	.031 (0.8)	
RCR100	.610 $\pm$.039 (15.5 $\pm$ 1.0)	—	.118 (3.0)			

ordering information

New Part #	RCR	50	EN	C	T52	A	105	J
Type	RCR	Power Rating	Safety Appr. Marking	Termination Material	Taping and Forming	Packaging	Nominal Resistance	Tolerance
		16: 0.25W 25: 0.25W 50: 0.5W 60: 1W 75: 2W 100: 3W	RCR50+: + RCR25EN, RCR50EN: EN Blank: Others	C: SnCu	RCR16: T26, T52 RCR25, RCR25EN: T26, T52 RCR50(+, EN): T52 RCR60: T52 RCR75: T52 RCR100: T521, T631 L, M, N Forming	A: Ammo R: Reel TEB: Plastic embossed N forming	2 significant figures + 1 multiplier for $\pm 5\%$ 3 significant figures + 1 multiplier for $\pm 1\%$	F: $\pm 1\%$ J: $\pm 5\%$

applications and ratings

Part Designation	Power Rating @ 70°C	Minimum Dielectric Withstanding Voltage	Resistance Range E-24, E-96 (F±1%)	Resistance Range E-24 (J±5%)	Absolute Maximum Working Voltage	Absolute Maximum Overload Voltage	Operating Temperature Range
RCR16	0.25W	300V	100kΩ - 5.1MΩ	100kΩ - 5.1MΩ	500V	1000V	-55°C to +155°C
RCR25 NEW RCR25EN		700V	100kΩ - 9.1MΩ	100kΩ - 33MΩ	DC 1600V AC 1150V	DC 2000V AC 1500V	
RCR50	0.5W		3.3Ω - 910kΩ	3.3Ω - 910kΩ	2000V	2500V	
RCR50+				13MΩ - 33MΩ			
RCR50EN			1MΩ - 9.1MΩ	1MΩ - 12MΩ			
RCR50EN			100kΩ - 9.1MΩ	100kΩ - 33MΩ			
RCR60	1.0W		100kΩ - 9.1MΩ	100kΩ - 56MΩ	4000V	5000V	
RCR75	2.0W	100kΩ - 9.1MΩ	100kΩ - 100MΩ	5000V			
RCR100	3.0W	1000V	100kΩ - 9.1MΩ		100kΩ - 33MΩ		


For further information on packaging, please refer to Appendix C.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/03/14

environmental applications

Derating Curve

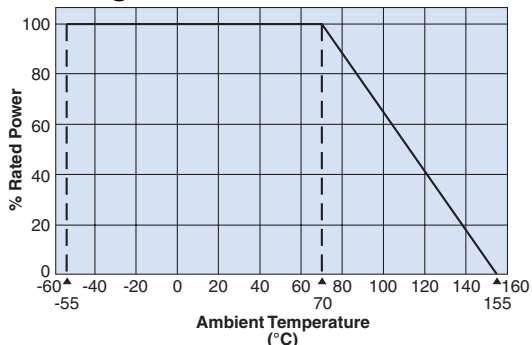


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Notice of Surge Load

Surge withstanding load voltage for the resistors cannot be guaranteed when the undermentioned 4 items get to a remarkable overload in comparison with the conditions shown by surge withstanding voltage in Anti-surge characteristics. Please contact KOA in advance if such a case is anticipated.

1. Peak voltage to be applied
2. Pulse width
3. Conditions of protecting insulation around the resistor
4. Situation of proximity conductivity object

For example: In the figure, a metal wire is placed less than 5mm away from the resistor body, there is such a case that causes an electric discharge by a surge load 10kV and then destroys the outer coating.



Performance Characteristics

Parameter	Requirement $\Delta R \pm(\% + 0.05\Omega)$			Typical	Test Method																	
	Limit																					
Resistance	Within regulated tolerance			—	Measuring points are 10mm ± 1mm from the end cap																	
T.C.R.	Type	T.C.R.	Resistance Range	—	Room temperature/100°C up																	
	RCR16	±200ppm/°C	100kΩ - 5.1MΩ																			
	RCR25 (EN)	±350ppm/°C	100kΩ - 33MΩ																			
	RCR50 (+)	±500ppm/°C	3.3Ω - 91kΩ																			
		±350ppm/°C	100kΩ - 33MΩ																			
	RCR50EN	±350ppm/°C	100kΩ - 33MΩ																			
	RCR60	±350ppm/°C	100kΩ - 56MΩ																			
	RCR75	±350ppm/°C	100kΩ - 100MΩ																			
RCR100	±200ppm/°C	100KΩ - 33MΩ																				
Overload	1%			0.5%	Rated voltage x 2.5 or maximum overload voltage for 5 seconds, whichever is less																	
Resistance to Solder Heat	1%			0.5%	260°C ± 5°C, 10 seconds ± 1 second or 350°C ± 10°C, 3.5 seconds ± 0.5 seconds																	
Terminal Strength	No mechanical damage			—	Twist 360°, 5 times																	
Rapid Change of Temperature	1%			0.5%	-55°C (30 minutes)/+155°C (30 minutes), 5 cycles																	
Moisture Resistance	5%			2.5%	40°C ± 2°C, 90-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle RCR16, 25, 50 (+), 60: W; RCR75, 100: Wx0.1																	
Endurance @ 70°C	5%			2.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle																	
Resistance to Solvent	No visible damage to protective coating and marking			—	Isopropyl alcohol with ultrasonic washing, 2 minutes Power: 0.3W/cm², f: 28kHz, Temperature: 35°C ± 5°C																	
Surge Withstanding	10%			2.5%	Discharge test: 2kV - 10kV, 0.01μF capacitor discharge pulse, 10 times (1 pulse/5 seconds maximum)																	
					<table><tr><td>Type</td><td>RCR16</td><td>RCR25 RCR25EN</td><td>RCR50, RCR50+</td><td>RCR50EN, RCR60, RCR75, RCR100</td></tr><tr><td rowspan="5">Applied Voltage</td><td rowspan="5">2kV</td><td rowspan="5">3kV</td><td>3.3Ω - 6.2Ω: 10kV</td><td rowspan="5">10kV</td></tr><tr><td>6.8Ω - 10Ω: 7kV</td></tr><tr><td>11Ω - 9.1kΩ: 5kV</td></tr><tr><td>10kΩ - 91kΩ: 7kV</td></tr><tr><td>100kΩ - 33MΩ: 10kV</td></tr></table>				Type	RCR16	RCR25 RCR25EN	RCR50, RCR50+	RCR50EN, RCR60, RCR75, RCR100	Applied Voltage	2kV	3kV	3.3Ω - 6.2Ω: 10kV	10kV	6.8Ω - 10Ω: 7kV	11Ω - 9.1kΩ: 5kV	10kΩ - 91kΩ: 7kV	100kΩ - 33MΩ: 10kV
					Type	RCR16	RCR25 RCR25EN	RCR50, RCR50+	RCR50EN, RCR60, RCR75, RCR100													
					Applied Voltage	2kV	3kV	3.3Ω - 6.2Ω: 10kV	10kV													
								6.8Ω - 10Ω: 7kV														
								11Ω - 9.1kΩ: 5kV														
10kΩ - 91kΩ: 7kV																						
100kΩ - 33MΩ: 10kV																						
EN60065 Test (RCR50EN, RCR60 only)	20%			—	Discharge test: 10kV, 1000pF capacitor discharge pulse, 50 times (1 pulse/5 seconds maximum)																	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru