

# 1N5711, 1N5712, 5082-2800 Series

## Schottky Barrier Diodes for General Purpose Applications



### Data Sheet

#### Description/Applications


The 1N5711, 1N5712, 5082-2800/10/11 are passivated Schottky barrier diodes which use a patented "guard ring" design to achieve a high breakdown voltage. Packaged in a low cost glass package, they are well suited for high level detecting, mixing, switching, gating, log or A-D converting, video detecting, frequency discriminating, sampling, and wave shaping.

The 5082-2835 is a passivated Schottky diode in a low cost glass package. It is optimized for low turn-on voltage. The 5082-2835 is particularly well suited for the UHF mixing needs of the CATV marketplace.

#### Features

- Low Turn-On Voltage As Low as 0.34 V at 1 mA
- Pico Second Switching Speed
- High Breakdown Voltage Up to 70 V
- Matched Characteristics Available

#### Outline 15

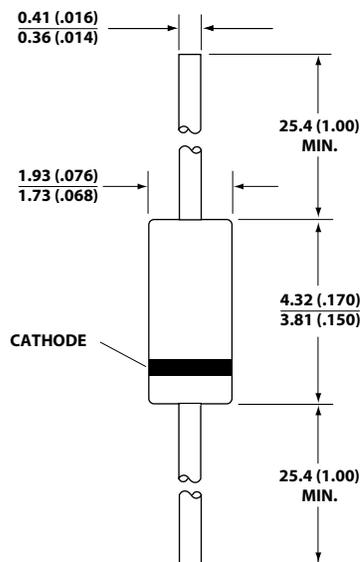

DIMENSIONS IN MILLIMETERS AND (INCHES).

#### Maximum Ratings

Junction Operating and Storage Temperature Range

1N5711, 1N5712, 5082-2800/10/11 ..... -65°C to +200°C

5082-2835 ..... -60°C to +150°C

DC Power Dissipation

(Measured in an infinite heat sink at  $T_{CASE} = 25^{\circ}C$ )

Derate linearly to zero at maximum rated temp.

1N5711, 1N5712, 5082-2800/10/11 ..... 250 mW

5082-2835 ..... 150 mW

Peak Inverse Voltage .....  $V_{BR}$

## Package Characteristics

### Outline 15

|                                  |                 |
|----------------------------------|-----------------|
| Lead Material .....              | Dumet           |
| Lead Finish .....                | 95-5% Tin-Lead  |
| Max. Soldering Temperature ..... | 260°C for 5 sec |
| Min. Lead Strength .....         | 4 pounds pull   |
| Typical Package Inductance       |                 |
| 1N5711, 1N5712:.....             | 2.0 nH          |
| 2800 Series:.....                | 2.0 nH          |
| Typical Package Capacitance      |                 |
| 1N5711, 1N5712:.....             | 0.2 pF          |
| 2800 Series:.....                | 0.2 pF          |

The leads on the Outline 15 package should be restricted so that the bend starts at least 1/16 inch from the glass body.

Outline 15 diodes are available on tape and reel. The tape and reel specification is patterned after RS-296-D.

## Electrical Specifications at $T_A = 25^\circ\text{C}$

### General Purpose Diodes

| Part Number     | Package Outline | Min. Breakdown Voltage $V_{BR}$ (V)                  | Max. Forward Voltage $V_F$ (mV) | $V_F = 1\text{ V Max. at Forward Current } I_F$ (mA) | Max. Reverse Leakage Current |           | Max. Capacitance $C_T$ (pF)                  |
|-----------------|-----------------|--|---------------------------------|--|------------------------------|-----------|--|
|                 |                 |  |                                 |  | $I_R$ (nA) at $V_R$ (V)      | $V_R$ (V) |  |
| 5082-2800       | 15              | 70   | 410                             | 15   | 200                          | 50        | 2.0  |
| 1N5711          | 15              | 70   | 410                             | 15   | 200                          | 50        | 2.0  |
| 5082-2810       | 15              | 20   | 410                             | 35   | 100                          | 15        | 1.2  |
| 1N5712          | 15              | 20   | 550                             | 35   | 150                          | 16        | 1.2  |
| 5082-2811       | 15              | 15   | 410                             | 20   | 100                          | 8         | 1.2  |
| 5082-2835       | 15              | 8*   | 340                             | 10*  | 100                          | 1         | 1.0  |
| Test Conditions |                 | $I_R = 10\ \mu\text{A}$<br>$*I_R = 100\ \mu\text{A}$ | $I_F = 1\ \text{mA}$            | $*V_F = 0.45\ \text{V}$                              |                              |           | $V_R = 0\ \text{V}$<br>$f = 1.0\ \text{MHz}$ |

Note: Effective Carrier Lifetime ( $\tau$ ) for all these diodes is 100 ps maximum measured with Krakauer method at 5 mA except for 5082-2835 which is measured at 20 mA.

## Matched Pairs and Quads

| Basic Part Number<br>5082- | Matched Pair<br>Unconnected               | Matched Quad<br>Unconnected               | Batch Matched <sup>[1]</sup>   | Test Conditions   |
|----------------------------|---|---|--|---|
| 2800                       | 5082-2804<br>$\Delta V_F = 20 \text{ mV}$ | 5082-2805<br>$\Delta V_F = 20 \text{ mV}$ |  | $\Delta V_F$ at $I_F = 0.5, 5 \text{ mA}$<br>* $I_F = 10 \text{ mA}$<br>$\Delta C_O$ at $f = 1.0 \text{ MHz}$ |
| 2811                       |   |   | 5082-2826<br>$\Delta V_F = 10 \text{ mV}$<br>$\Delta C_O = 0.1 \text{ pF}$ | $\Delta V_F$ at $I_F = 10 \text{ mA}$<br>$\Delta C_O$ at $f = 1.0 \text{ MHz}$                                |
| 2835                       |   |   | 5082-2080<br>$\Delta V_F = 10 \text{ mV}$<br>$\Delta C_O = 0.1 \text{ pF}$ | $\Delta V_F$ at $I_F = 10 \text{ mA}$<br>$\Delta C_O$ at $f = 1.0 \text{ MHz}$                                |


Note:

1. Batch matched devices have a minimum batch size of 50 devices.


## SPICE Parameters

| Parameter | Units    | 5082-2800             | 5082-2810             | 5082-2811             | 5082-2835             |
|-----------|----------|-----------------------|-----------------------|-----------------------|-----------------------|
| $B_V$     | V        | 75                    | 25                    | 18                    | 9                     |
| $C_{J0}$  | pF       | 1.6                   | 0.8                   | 1.0                   | 0.7                   |
| $E_G$     | eV       | 0.69                  | 0.69                  | 0.69                  | 0.69                  |
| $I_{BV}$  | A        | $10E-5$               | $10E-5$               | $10E-5$               | $10E-5$               |
| $I_S$     | A        | $2.2 \times 10E^{-9}$ | $1.1 \times 10E^{-9}$ | $0.3 \times 10E^{-8}$ | $2.2 \times 10E^{-8}$ |
| N         |          | 1.08                  | 1.08                  | 1.08                  | 1.08                  |
| $R_S$     | $\Omega$ | 25                    | 10                    | 10                    | 5                     |
| $P_B$     | V        | 0.6                   | 0.6                   | 0.6                   | 0.56                  |
| $P_T$     |          | 2                     | 2                     | 2                     | 2                     |
| M         |          | 0.5                   | 0.5                   | 0.5                   | 0.5                   |


## Typical Parameters

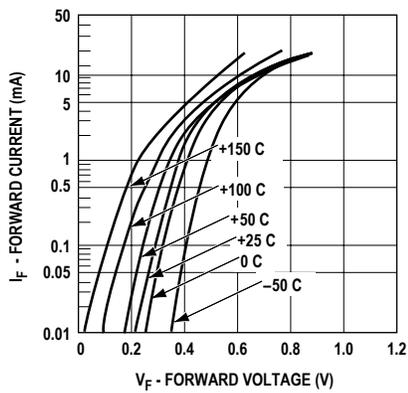


**Figure 1. I-V Curve Showing Typical Temperature Variation for 5082-2800 or 1N5711 Schottky Diodes.**

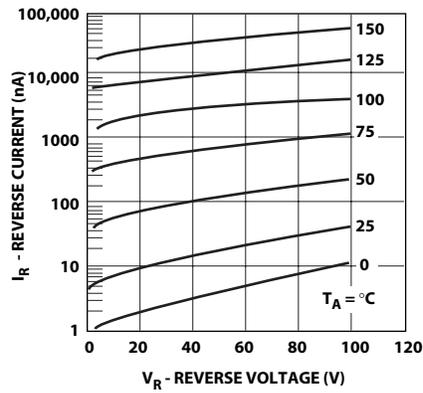


**Figure 2. (5082-2800 OR 1N5711) Typical Variation of Reverse Current ( $I_R$ ) vs. Reverse Voltage ( $V_R$ ) at Various Temperatures.**

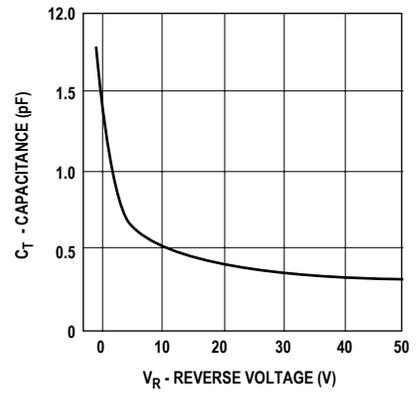

**Figure 3. (5082-2800 or 1N5711) Typical Capacitance ( $C_T$ ) vs. Reverse Voltage ( $V_R$ ).**

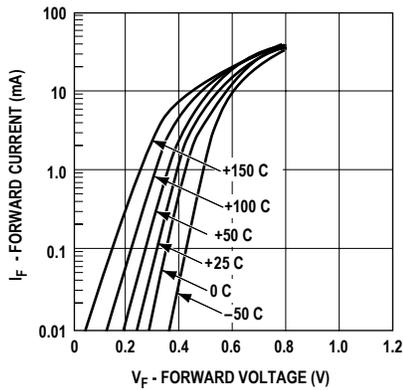

**Figure 4. I-V Curve Showing Typical Temperature Variation for the 5082-2810 or 1N5712 Schottky Diode.**

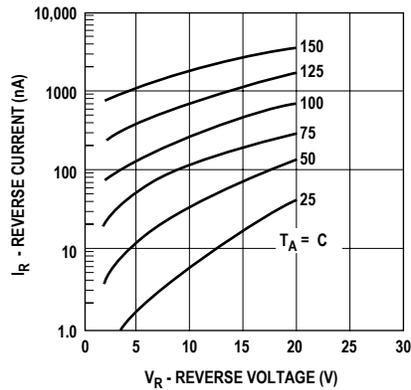

**Figure 5. (5082-2810 or 1N5712) Typical Variation of Reverse Current ( $I_R$ ) vs. Reverse Voltage ( $V_R$ ) at Various Temperatures.**

### Notes:

Typical values were derived using limited samples during initial product characterization and may not be representative of the overall distribution

Typical Parameters, *continued*

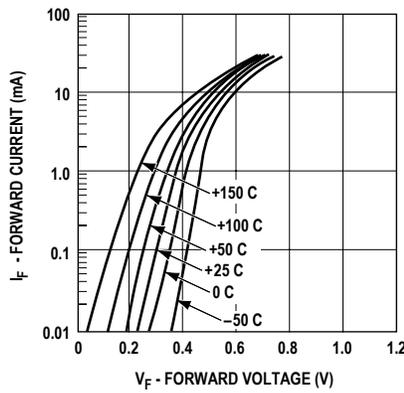


Figure 6. I-V Curve Showing Typical Temperature Variation for the 5082-2811 Schottky Diode.

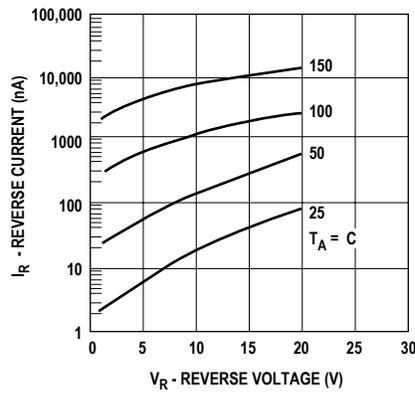


Figure 7. (5082-2811) Typical Variation of Reverse Current ( $I_R$ ) vs. Reverse Voltage ( $V_R$ ) at Various Temperatures.

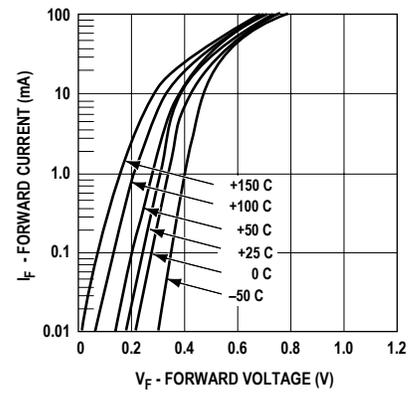


Figure 8. I-V Curve Showing Typical Temperature Variations for 5082-2835 Schottky Diode.

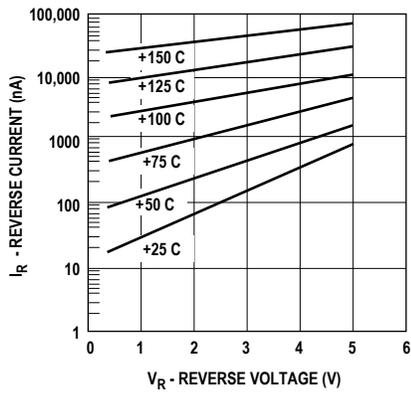


Figure 9. (5082-2835) Typical Variation of Reverse Current ( $I_R$ ) vs. Reverse Voltage ( $V_R$ ) at Various Temperatures.

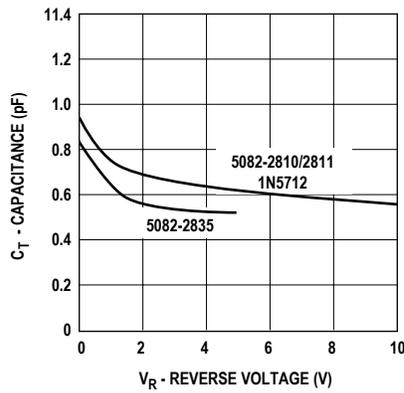


Figure 10. Typical Capacitance ( $C_T$ ) vs. Reverse Voltage ( $V_R$ ).

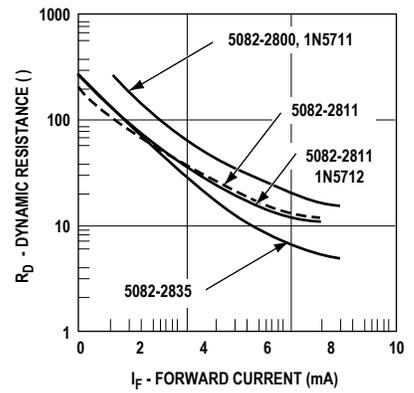


Figure 11. Typical Dynamic Resistance ( $R_D$ ) vs. Forward Current ( $I_F$ ).

Notes:

Typical values were derived using limited samples during initial product characterization and may not be representative of the overall distribution

### Tape Dimensions and Product Orientation

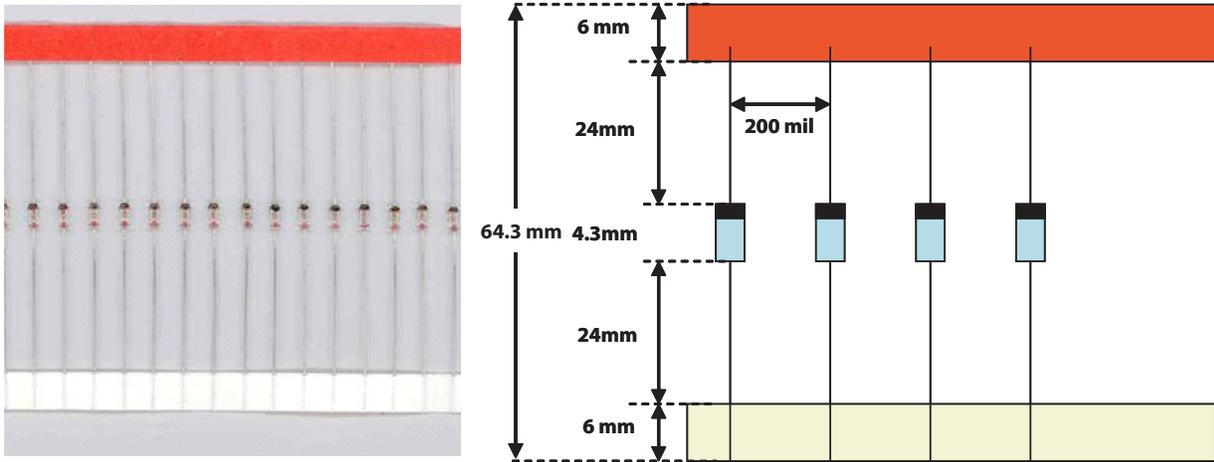


Figure 13.

### RFD Reel Dimensions for T25/T50

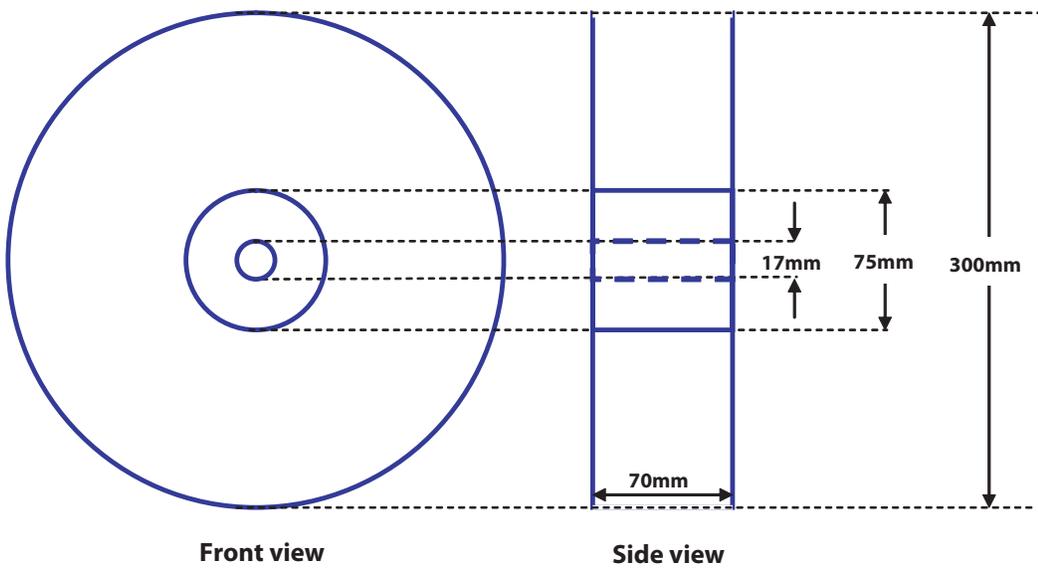


Figure 14.

### Diode Package Marking

1N5xxx                      5082-xxxx

would be marked:

1Nx                              xx

xxx                              xx

YWW                            YWW

where xxxx are the last four digits of the 1Nxxxx or the 5082-xxxx part number.

Y is the last digit of the calendar year. WW is the work week of manufacture.

Examples of diodes manufactured during workweek 45 of 1999:

1N5712                      5082-3080

would be marked:

1N5                              30

712                              80

945                              945

### Part Number Ordering Information

| Part Number               | No. of devices | Container      |
|---------------------------|----------------|----------------|
| 5082-28xx#T25/1N57xx#T25  | 2500           | Tape & Reel    |
| 5082-28xx#T50/ 1N57xx#T50 | 5000           | Tape & Reel    |
| 5082-28xx/ 1N57xx         | 100            | Antistatic bag |

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries. Data subject to change. Copyright © 2006 Avago Technologies, Limited. All rights reserved. Obsoletes 5989-3680EN AV02-0429EN - June 6, 2007



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)