

Film Dielectric Trimmers



FEATURES

- High temperature type
- Housing dimensions:
11 mm x 14 mm x 9 mm
- For a basic grid of 2.54 mm
- Top adjustment
- Mounting: radial
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912




APPLICATIONS


- Antennas
- Impedance matching circuits
- Medical
- RF
- For fine adjustment in professional applications

QUICK REFERENCE DATA

| | | |
|---|--------------------|--|
| Rated DC voltage | | 200 V _{DC} |
| Test DC voltage for 1 min | | 400 V _{DC} |
| Maximum contact resistance | | 5 mΩ |
| Minimum insulation resistance between stator and rotor | | 10 000 MΩ |
| Category temperature range | | -40 °C to +125 °C |
| Climatic category (IEC 60068) | | 40/125/21 |
| Minimum storage temperature | | -55 °C |
| Related specification | | IEC 60418-1 and 4 |
| Effective angle of rotation | | 180° (rotation in 180° only, see "Life of trimmer") |
| Operating torque | | 1.5 mNm to 25 mNm |
| Maximum axial thrust | | 2 N |
| Capacitance range (C _{min.} /C _{max.}) | Single stator type | 2.5 pF/20 pF to 7 pF/100 pF |
| | Differential type | 2 pF/12 pF to 7 pF/100 pF |
| Life of trimmer | | Maximum 10 cycles: rotation in 180° only (the electrical and mechanical performance is not guaranteed if rotated beyond 10 cycles) |
| Quality level | | <p>Sampling and data evaluation for quality level in accordance with "MIL-STD-105D" and "IEC 60410":</p> <p>< 0.15 % major defects < 0.65 % minor defects</p> <p>Each capacitor is tested for minimum C_{max.} and is also subjected to the full test voltage.</p> |

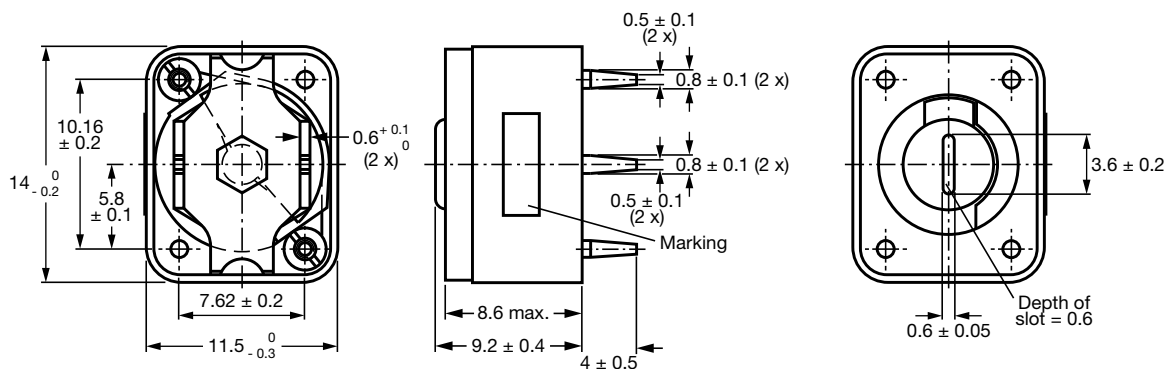DIMENSIONS in millimeters


Trimmers BFC2 809 070.. series



R = Rotor, S = Stator

Hole pattern

ADJUSTMENT

The trimmers can be adjusted with a screwdriver or trimming key. Capacitance increase is obtained with clockwise rotation.

MOUNTING

The trimmer can be mounted on printed-circuit boards with a grid of 2.54 mm and a minimum hole diameter of 1.25 mm.

MARKING

The trimmers are marked with the capacitance value in pF, followed by the letter “E” (single-stator type) or the letter “D” (differential type).

PACKAGING

Blister packs of 70 units each. For smallest packaging quantity (SPQ) see “Electrical Data” table.

| ORDERING INFORMATION | | |
|--|-------------------------------|-------------------|
| C _{min.} /C _{max.} (pF) | CATALOG NUMBER BFC2 809 070.. | |
| | TOP AND BOTTOM ADJUSTMENT | |
| | SINGLE STATOR TYPE | DIFFERENTIAL TYPE |
| 2/12 | - | 018 |
| 2.5/20 | 004 | 006 |
| 4/40 | 008 | 009 |
| 5/60 | 011 | 012 |
| 6/80 | 013 | 014 |
| 7/100 | 015 | 016 |



| ELECTRICAL DATA | | | | | | | |
|--|---------------|---------------------|--|-----------|---|-----|----------------------------------|
| GUARANTEED MAX. $C_{min.}$ / MIN. $C_{max.}$ AT 200 kHz (pF) | TYPE | DIEL. | tan δ AT $C_{max.} \times 10^{-4}$ | | TEMP. COEFF. ⁽²⁾ ($10^{-6}/K$) | SPQ | CATALOG NUMBER BFC2 |
| | | | 1 MHz | 100 MHz | | | |
| 2/12 | Differential | PTFE ⁽¹⁾ | ≤ 10 | ≤ 17 | 0 ± 200 | 350 | 809 07018 |
| 2.5/20 | Single stator | PTFE | ≤ 10 | ≤ 17 | 0 ± 200 | 350 | 809 07004 |
| | Differential | | | | | 350 | 809 07006 |
| 4/40 | Single stator | PTFE | ≤ 10 | ≤ 17 | 0 ± 200 | 350 | 809 07008 |
| | Differential | | | | | 350 | 809 07009 |
| 5/60 | Single stator | PTFE | ≤ 10 | ≤ 25 | 0 ± 200 | 350 | 809 07011 |
| | Differential | | | | | 350 | 809 07012 |
| 6/80 | Single stator | PTFE | ≤ 10 | ≤ 25 | 0 ± 200 | 350 | 809 07013 |
| | Differential | | | | | 350 | 809 07014 |
| 7/100 | Single stator | PTFE | ≤ 10 | ≤ 25 | 0 ± 200 | 350 | 809 07015 |
| | Differential | | | | | 350 | 809 07016 |

Notes⁽¹⁾ PTFE = Polytetrafluorethylene⁽²⁾ C: 60 % to 80 % of $C_{max.}$; $T_{amb.}$: from +20 °C to +125 °C**SOLDERING CONDITIONS**

For general soldering conditions and wave soldering profile, we refer to the application note "Soldering Guidelines for Film Capacitors": www.vishay.com/doc?28171

| TEST PROCEDURES AND REQUIREMENTS | | | | |
|----------------------------------|-----------------------------|-----------------------------|---|--|
| IEC 60418-1 CLAUSE | IEC 60068 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS |
| 4.2 | | Method of mounting | Method A | |
| 14 | | Capacitance drift | After TC measurement | $\Delta C/C: \leq 1 \%$ |
| 19 | | Thrust | Axial thrust of 2 N | $\Delta C/C: \leq 0.3 \%$ |
| 21 | | Robustness of terminations: | | |
| 21.1 | Ua | Tensile | 1 N | No damage |
| 21.2 | Ub | Bending | | Bending not allowed |
| 22 | Na | Rapid change of temperature | 1 cycle; 0.5 h at lower and 0.5 h at upper category temperature | $\Delta C/C: \leq 1 \%$ |
| 23 | T | Soldering: | | |
| | Ta | Solderability | Solder bath immersion 3 mm; 235 °C; 2 s | Good wetting, no mechanical damage |
| | Tb | Resistance to heat | Solder bath: 260 °C; 10 s | No mechanical damage |
| 24 | Eb | Impact bump | 4000 \pm 10 bumps; 40 g; 6 ms | $\Delta C/C: \leq 0.2 \%$; no mechanical damage |
| 25 | Fc | Vibration | Frequency 10 Hz to 55 Hz; amplitude 0.35 mm; 1.5 h | $\Delta C/C: \leq 0.25 \%$; no mechanical damage |

| TEST PROCEDURES AND REQUIREMENTS | | | | |
|----------------------------------|-----------------------------|--|---|---|
| IEC 60418-1 CLAUSE | IEC 60068 TEST METHOD | TEST | PROCEDURE | REQUIREMENTS |
| 26 | | Climatic sequence: | | $\Delta C/C: \leq 3$ |
| 26.1 | B | Dry heat | 16 h at upper category temperature | $\tan \delta: \leq 10 \times 10^{-4}$ $R_{ins}: \geq 10\,000\,M\Omega$; rotor contact R: $\leq 10\,m\Omega$ |
| 26.2 | D | Damp heat accelerated, first cycle | 1 cycle; 24 h; +40 °C; 95 % to 100 % RH | Voltage proof: 400 V for 1 min |
| 26.3 | Aa | Cold | 16 h; -40 °C | Visual examination: no mechanical damage |
| 26.5 | | Damp heat accelerated, remaining cycles | 1 cycle; 24 h; +40 °C; 95 % to 100 % RH | Operating torque: 1.5 mNm to 35 mNm |
| 27 | Ca | Damp heat steady state | 21 days; +40 °C; 90 % to 95 % RH | $\Delta C/C: \leq 3\, \%$ $\tan \delta: \leq 10 \times 10^{-4}$ $R_{ins}: \geq 10\,000\,M\Omega$; rotor contact R: $\leq 10\,m\Omega$ Voltage proof: 400 V for 1 min Visual examination: no mechanical damage Operating torque: 1.5 mNm to 35 mNm |
| 29 | | Mechanical endurance | 10 cycles Maximum 10 cycles: rotation in 180° only (the electrical and mechanical performance is not guaranteed if rotated beyond 10 cycles) | $\Delta C/C: \leq 0.3\, \%$ $\Delta C/C$ after axial thrust: $\leq 0.3\, \%$; rotor contact R: $\leq 10\,m\Omega$ Voltage proof: 400 V for 1 min Visual examination: no mechanical damage Operating torque: 1 mNm to 50 mNm |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru