


Applications

- Military Radar
- Electronic Warfare
- Test Equipment

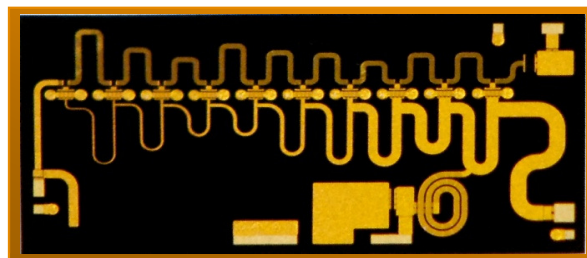

Product Features

- Frequency Range: 2 to 18 GHz
- P_{SAT} : 40 dBm at $V_D = 30$ V
- PAE: 20% Typical
- Small Signal Gain: 10 dB
- Return Loss: 15 dB
- Bias: $V_D = 30$ V, $I_{DQ} = 500$ mA, $V_G = -2.3$ V Typical
- Technology: 0.25- μ m GaN on SiC
- Dimensions: 5.66 x 2.67 x 0.5 mm

General Description

The Qorvo TGA2573-2-TS is a wideband, high power GaN HEMT amplifier fabricated on Qorvo's production 0.25- μ m GaN on SiC process. Operating from 2 to 18 GHz, it achieves 40 dBm saturated output power, 20% PAE, and 10 dB small signal gain at a drain bias of 30 V.

The TGA2573-2-TS is a 4-mil thick GaN die mounted on a 15 mil thick Cu-Mo-Cu carrier. This provides the customer a known good die attach to assist in thermal management and provide easier handling


Fully matched to 50 Ω and with integrated DC blocking caps on both RF ports, the TGA2573-2-TS is ideally suited to support both commercial and defense related applications.

The TGA2573-2-TS is 100% DC and RF tested on-wafer to ensure compliance to performance specifications.

Lead-free and RoHS compliant.

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Functional Block Diagram

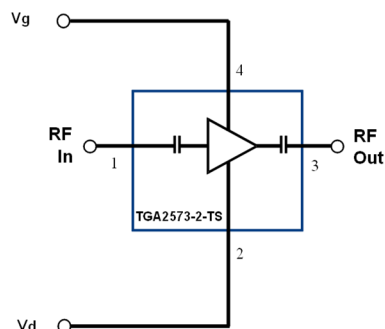

Pad Configuration

Pad No.	Symbol
1	RF In
2	V_D
3	RF Out
4	V_G

Ordering Information

Part	ECCN	Description
TGA2573-2-TS	3A611.x	Die on Thermal Spreader

Absolute Maximum Ratings

Parameter	Value
Drain Voltage (V_D) ⁽¹⁾	40 V
Gate Voltage Range (V_G)	-8 to 0 V
Drain-to-Gate Voltage (V_{DG})	80 V
Drain Current (I_D) ⁽¹⁾ ⁽²⁾	1.3 A
Gate Current (I_G) @ $T = 85^\circ\text{C}$	-4 to 11 mA
Power Dissipation (P_{DISS})	30 W
RF Input Power, CW, 50 Ω , $T = 25^\circ\text{C}$ (P_{IN}) ⁽¹⁾	35 dBm
Channel Temperature (T_{CH})	275 $^\circ\text{C}$
Mounting Temperature (30 Seconds)	320 $^\circ\text{C}$
Storage Temperature	-55 to 150 $^\circ\text{C}$

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Drain Voltage (V_D)		30	35	V
Drain Current (I_D)		500		mA
Drain Current Under RF Drive (I_{D_DRIVE}) ⁽¹⁾		1200		mA
Gate Voltage (V_G)		-2.3		V

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions unless otherwise noted: 25 $^\circ\text{C}$, $V_D = 30\text{ V}$, $I_{DQ} = 500\text{ mA}$, $V_G = -2.3\text{ V}$ Typical

Parameter	Typical	Units
Operational Frequency Range	2 to 18	GHz
Small Signal Gain	10	dB
Input Return Loss	15	dB
Output Return Loss	15	dB
Output Power at Saturation (Input Power = 35 dBm)	40	dBm
Output Power at 30 dBm Input Power	38	dBm
Power Added Efficiency	20	%
Output TOI at $P_{out}/\text{tone} = 25\text{ dBm}$	45	dBm
Noise Figure	6	dB
Small Signal Gain Temperature Coefficient	-0.02	dB/ $^\circ\text{C}$
Output Power Temperature Coefficient	-0.005	dBm/ $^\circ\text{C}$

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.




Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$P_{DISS} < 17\text{ W}$	5.4	$^{\circ}\text{C/W}$
	$17\text{ W} < P_{DISS} < 27\text{ W}$	6.0	$^{\circ}\text{C/W}$
	$P_{DISS} > 27\text{ W}$	6.2	$^{\circ}\text{C/W}$
Channel Temperature (T_{CH})	$V_D = 30\text{ V}$, $I_D = 500\text{ mA}$,	166	$^{\circ}\text{C}$
Median Lifetime (T_M)	$P_{DISS} = 15\text{ W}$, $T_{BASE} = 85\text{ }^{\circ}\text{C}$	3.2×10^8	Hrs
Maximum Channel Temperature (T_{CH}), Under RF Drive	See plots below		

Notes:






1. Thermal resistance measured to back of carrier.

Median Lifetime and Channel Temperature Rise

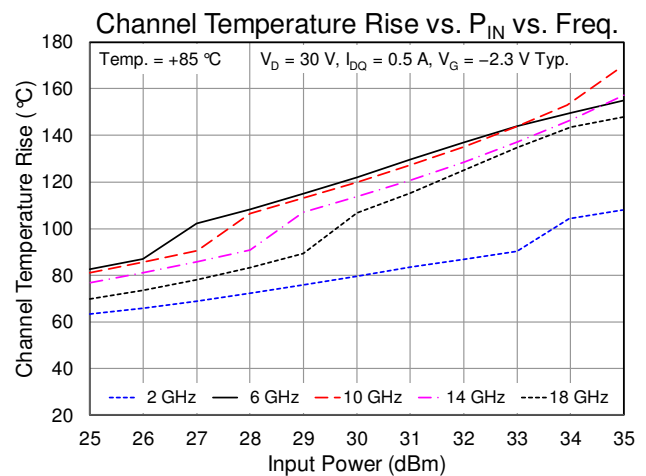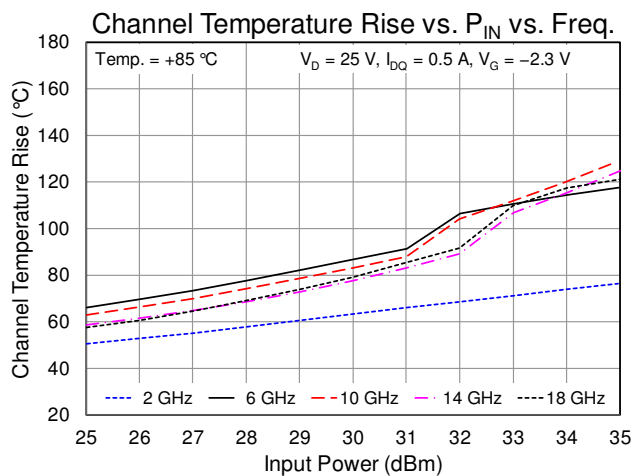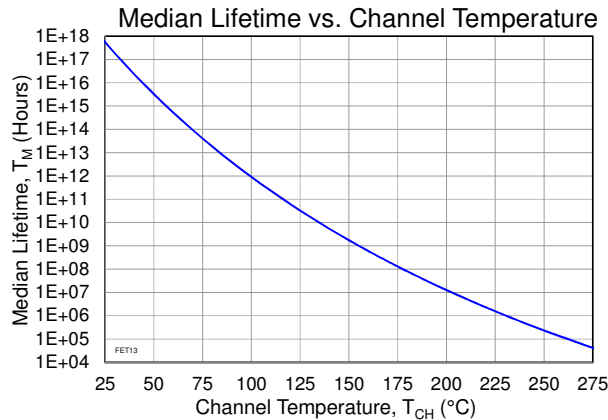







The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Typical Performance

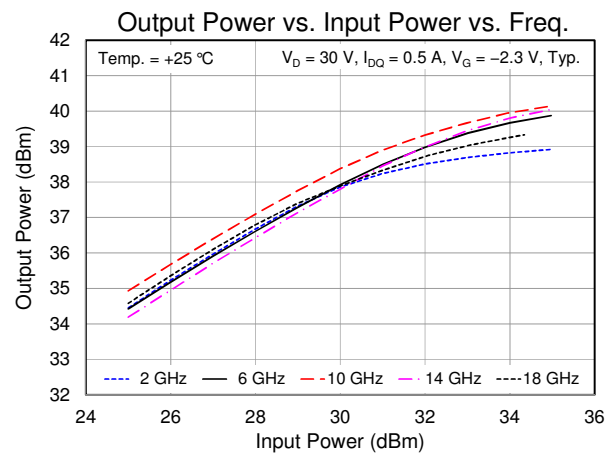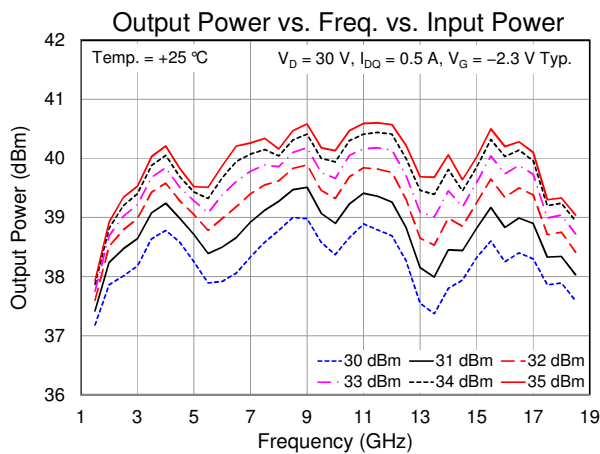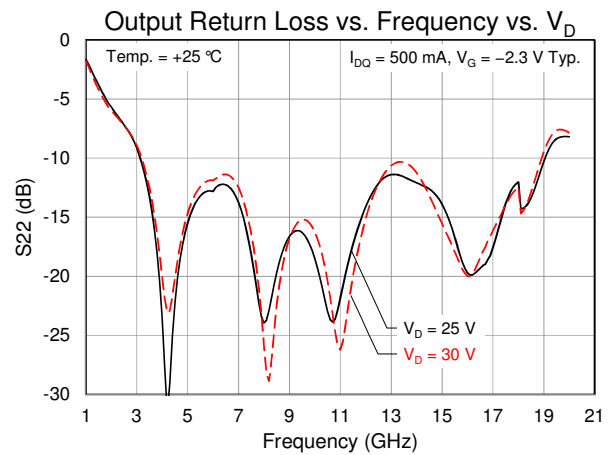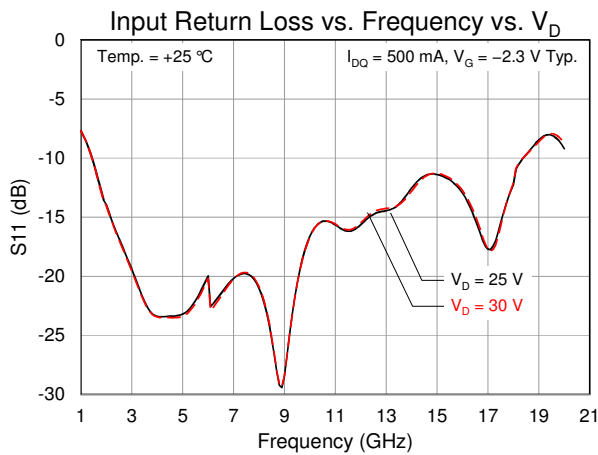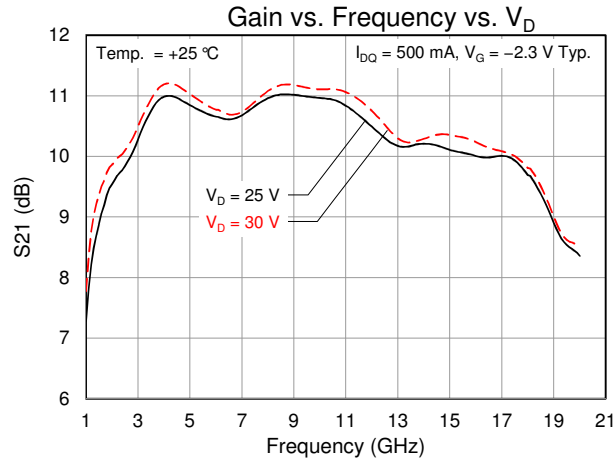







The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Typical Performance

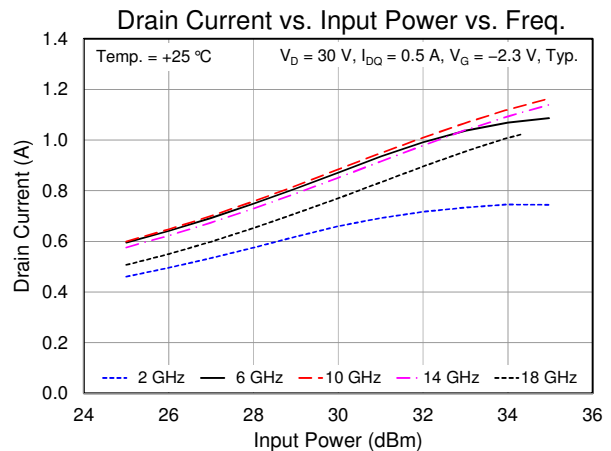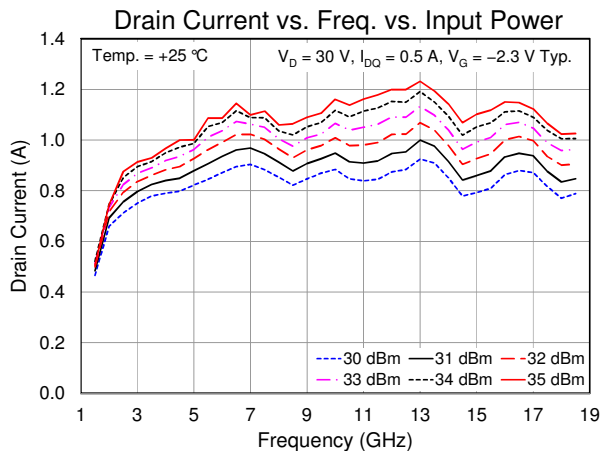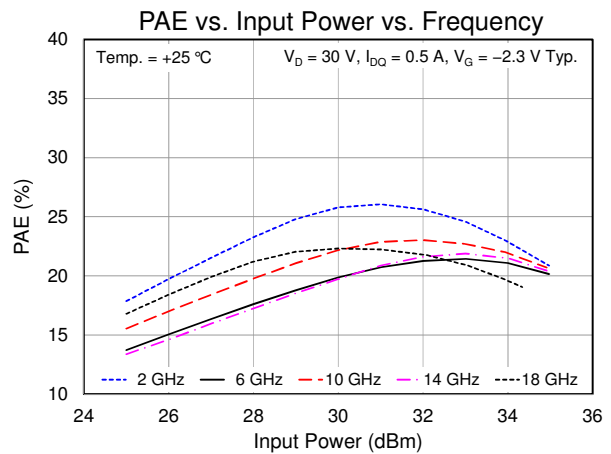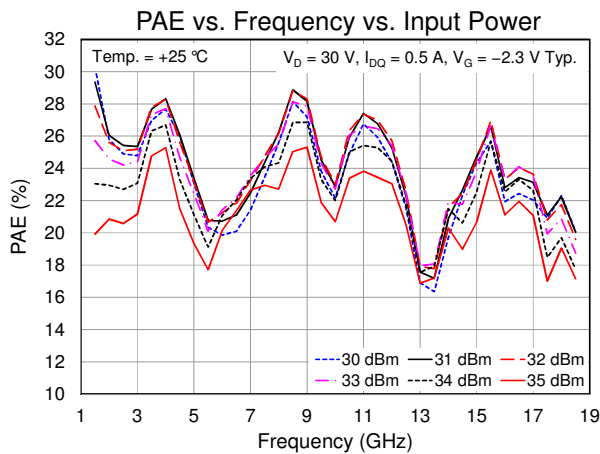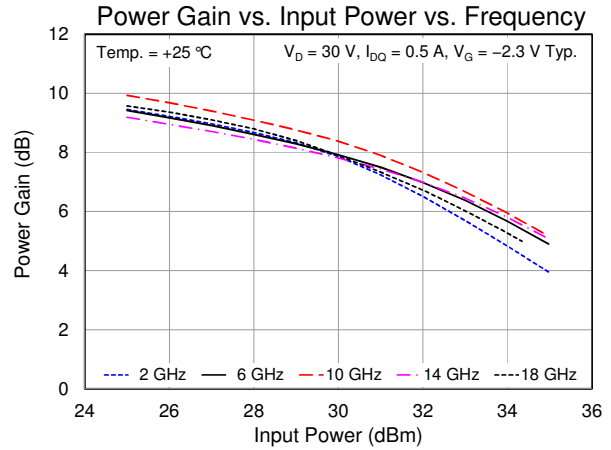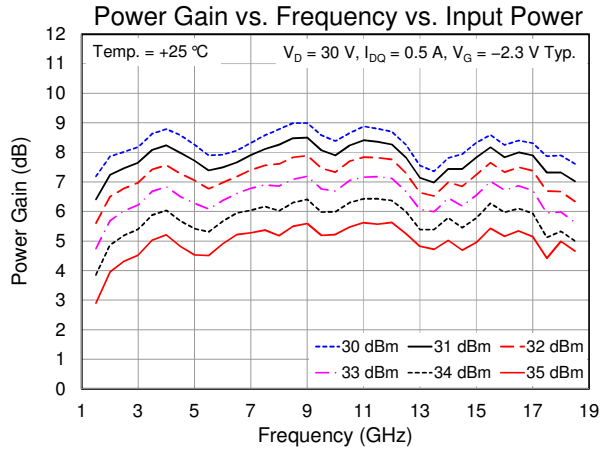





The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Typical Performance

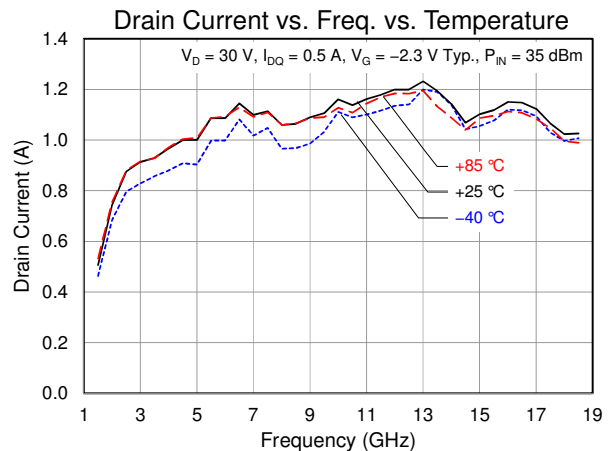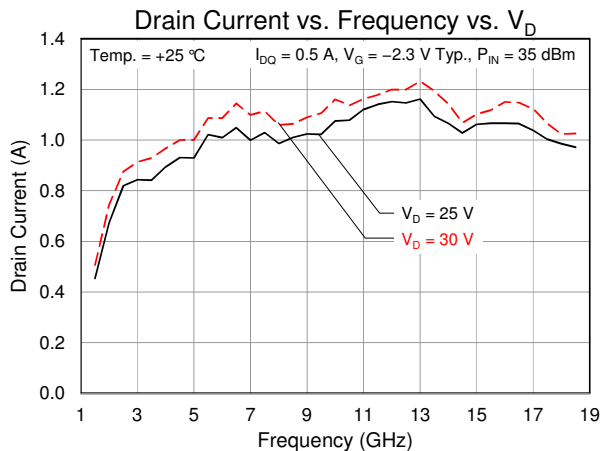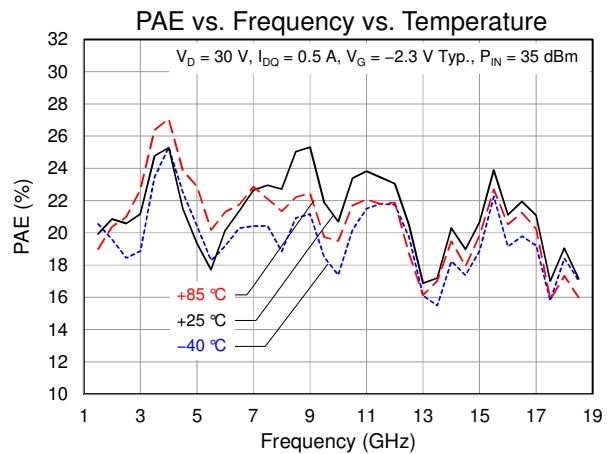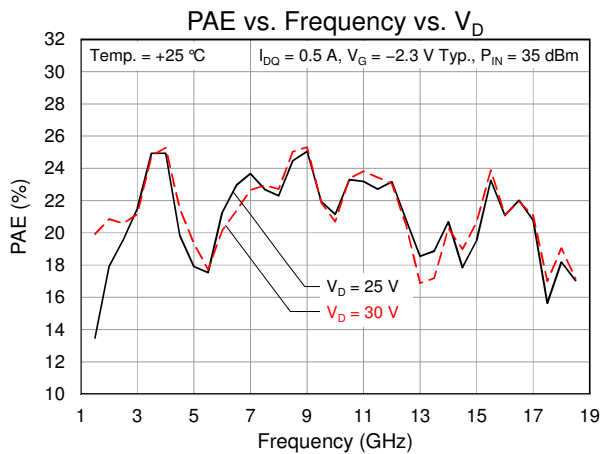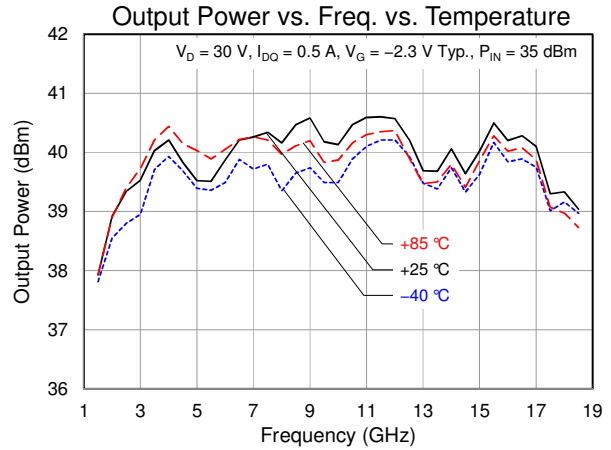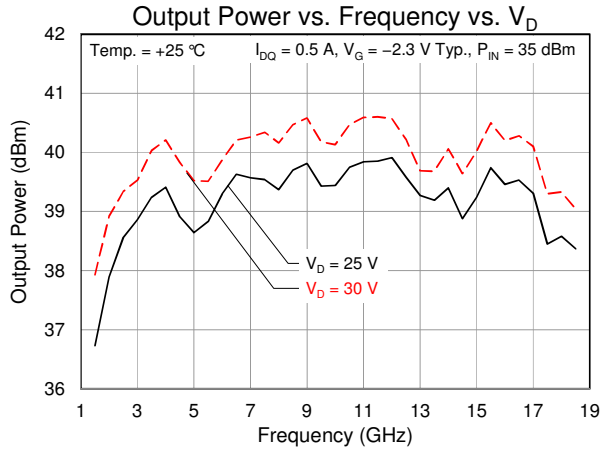


The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Typical Performance

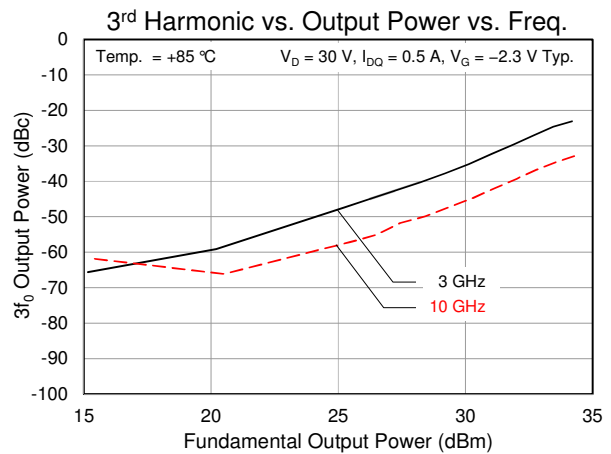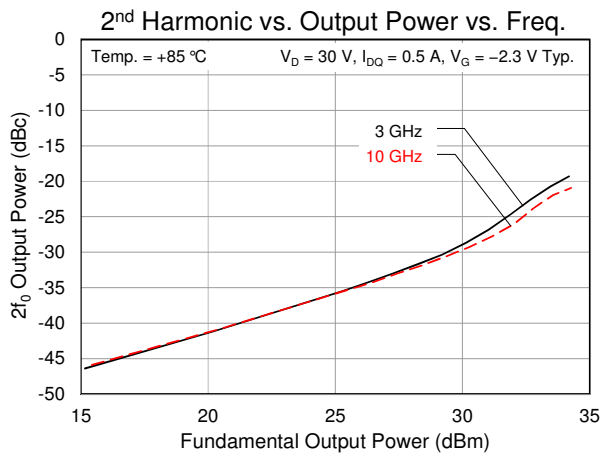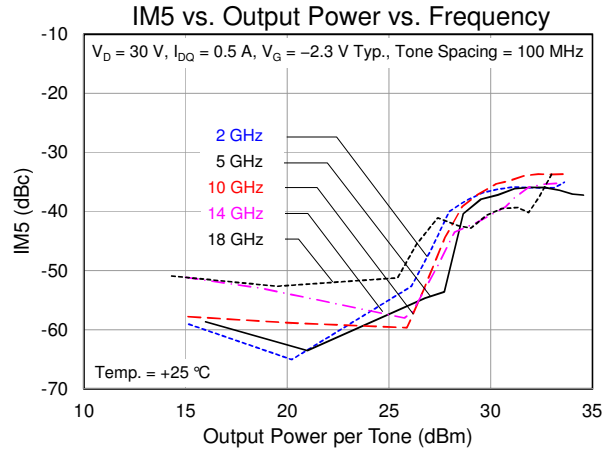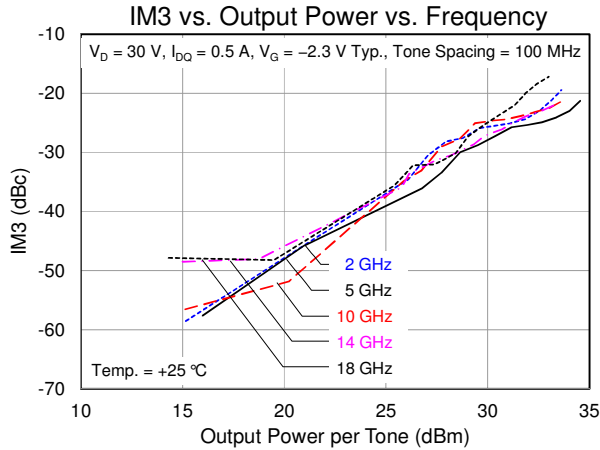

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Application Circuit

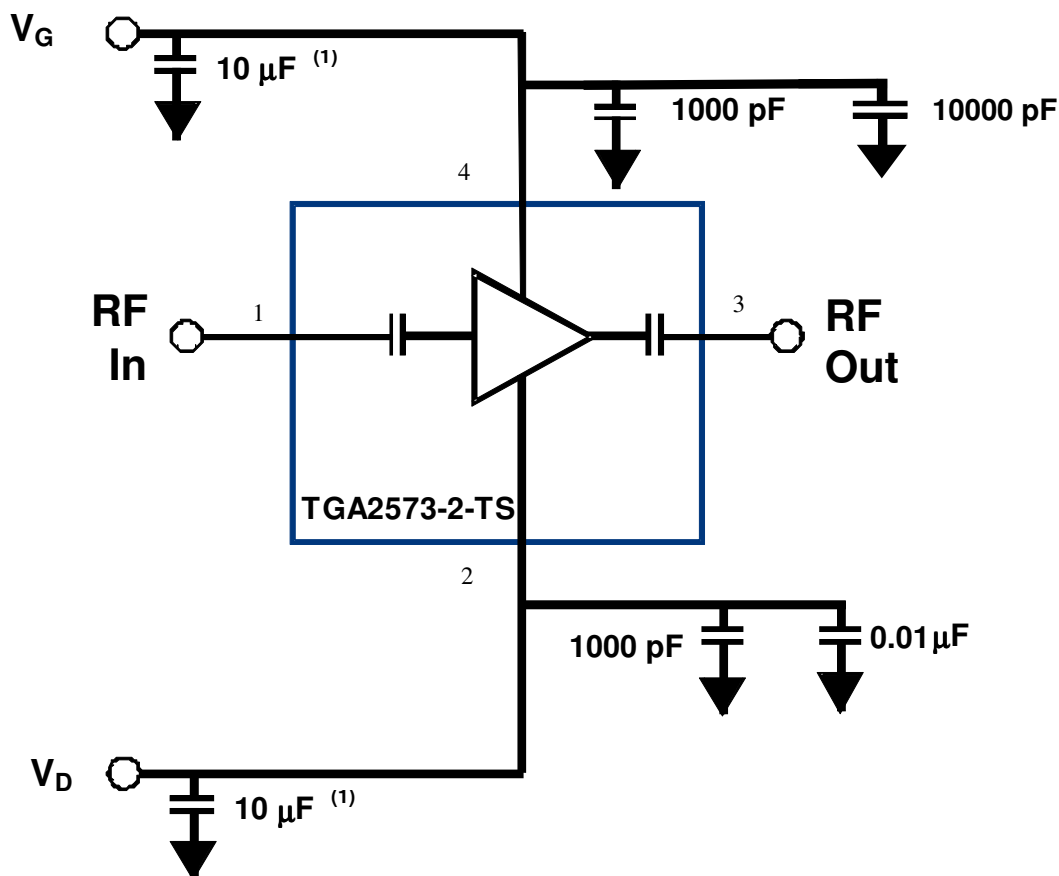

Notes:

1. Additional bypass capacitors may be required at this location. The value of these capacitors varies by application. Variables include power supply impedance, power supply stability with reactive loads, and the inductance from the power supply to this assembly. One to 47 uF tantalum capacitors are commonly used here.

Bias-up Procedure


1. Set I_D limit to 1.3 A, I_G limit to 3 mA
2. Apply -5.0 V to V_G
3. Apply +30 V to V_D
4. Adjust V_G more positive until $I_{DQ} = 500$ mA ($V_G \sim -2.3$ V Typical)
5. Apply RF signal

Bias-down Procedure

1. Turn off RF signal
2. Reduce V_G to -5.0 V. Ensure $I_{DQ} \sim 0$ mA
3. Set V_D to 0 V
4. Turn off V_D supply
5. Turn off V_G supply

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Bond Pad Description

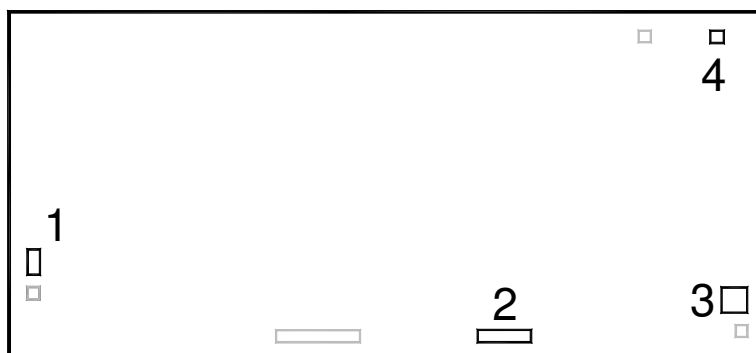


Bond Pads

Pad No.	Symbol	Description
1	RF In	Input; matched to 50 Ω
2	V _D	Drain voltage; bias network is required; see Application Circuit on page 8 as an example
3	RF Out	Output, matched to 50 Ω
4	V _G	Gate voltage; bias network is required; see Application Circuit on page 8 as an example
Backside	GND	Backside of carrier

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Assembly Drawing

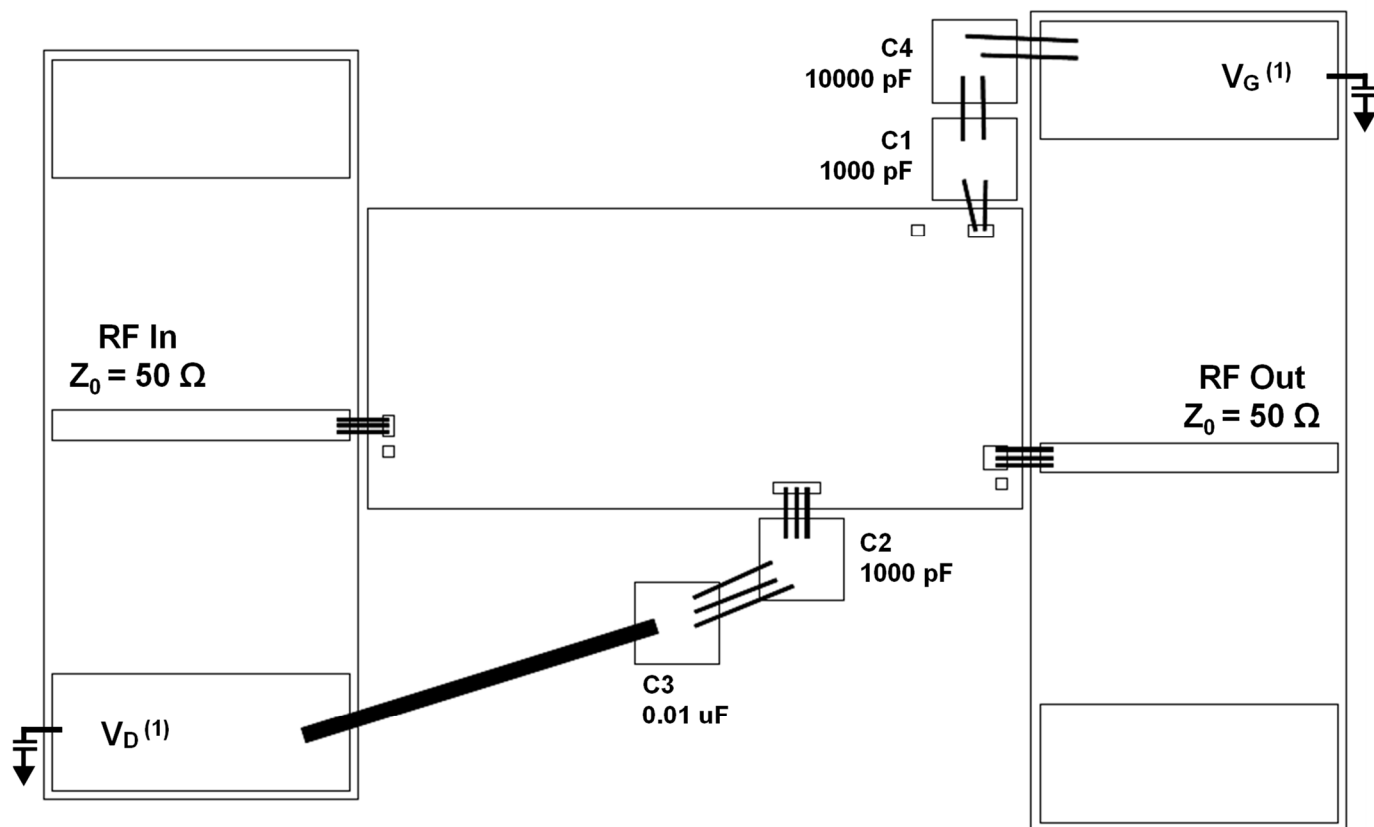

Notes:


1. See Application Circuit page 8 Note 1

Bill of Material

Ref Des.	Value	Description	Manufacturer	Part Number
C1, C2	1000 pF	Cap, 50 V, 10%, Single Layer	various	
C3	0.01 μF	Cap, 50 V, 10%, SMD	various	
C4	10000 pF	Cap, 50 V, 10%, Single Layer	various	

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Mechanical Information

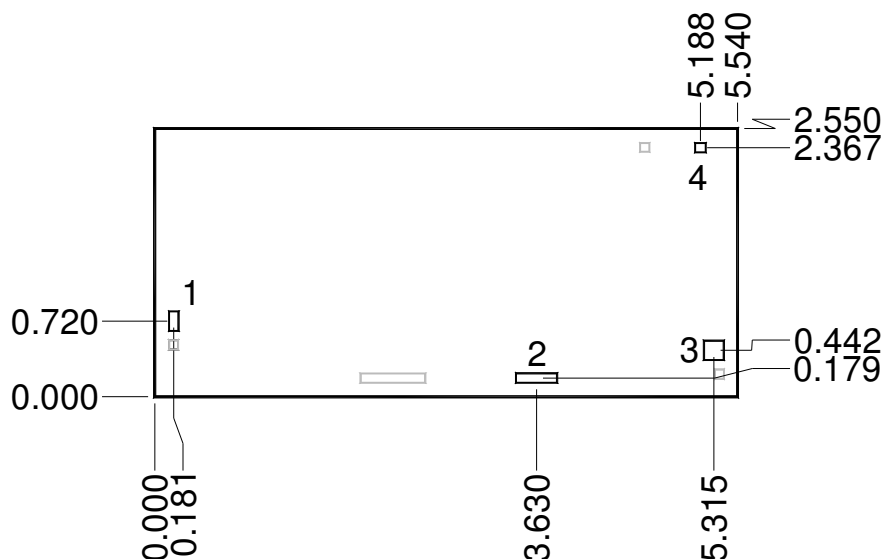

Unit: millimeters

Thickness: 0.10

Die x, y size tolerance: ± 0.050

Chip edge to bond pad dimensions are shown to center of pad


Ground is backside of die

Bond Pad Dimensions

Pad No.	Symbol	Pad Size
1	RF In	0.100 x 0.195
2	V _D	0.400 x 0.100
3	RF Out	0.200 x 0.195
4	V _G	0.110 x 0.100

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Mechanical Information – Die on Carrier

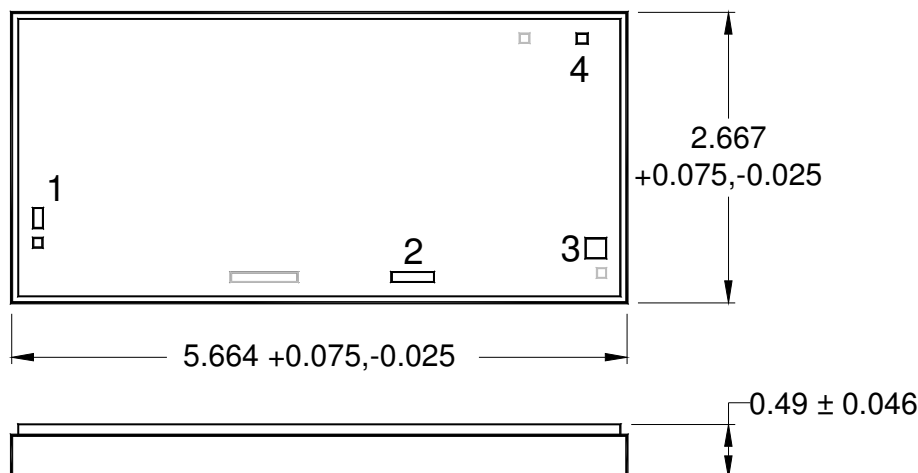

Unit: millimeters

Material for carrier:

Cu-Mo-Cu

Thickness: 0.381 ± 0.025

Plating for carrier:

Gold (Au) over Nickel (Ni)

MMIC die is attached to carrier using solder

MMIC die is nominally centered on carrier.

Assembly Notes

Component placement assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonics are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: TBD
Value: TBD
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ECCN

US Department of State 3A611.x

RoHS Compliance

This part is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

Web: www.qorvo.com
Email: info-sales@qorvo.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information: Email: info-products@qorvo.com

Important Notice

The information contained herein is believed to be reliable. Qorvo makes no warranties regarding the information contained herein. Qorvo assumes no responsibility or liability whatsoever for any of the information contained herein. Qorvo assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

The information contained on this data sheet is technical information as defined by 22 CFR 120.10 and is therefore US export controlled. Export or transfer contrary to US law is prohibited.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru