



**RO3164D  
RO3164D-1  
RO3164D-2**

- **Ideal for European 868.35 MHz Transmitters**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Complies with Directive 2002/95/EC (RoHS)**




The RO3164D is a true one-port, surface-acoustic-wave (SAW) resonator in a surface-mount ceramic case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 868.35 MHz. This SAW is designed specifically for remote-control and wireless security transmitters operating under ETSI-ETS 300 220 in Europe and under FTZ 17 TR 2100 in Germany.

**868.35 MHz  
SAW  
Resonator**

**Absolute Maximum Ratings**

| Rating   | Value      | Units |
|--|------------|-------|
| Input Power Level                                  | 0          | dBm   |
| DC Voltage   | 12         | VDC   |
| Storage Temperature                                | -40 to +85 | °C    |
| Soldering Temperature (10 seconds / 5 cycles max.) | 260        | °C    |



**SM3838-6 Case  
3.8 X 3.8**

**Electrical Characteristics**

| Characteristic   | Sym   | Notes              | Minimum    | Typical | Maximum | Units      |                     |
|--|---|--------------------|------------|---------|---------|------------|---------------------|
| Frequency (+25 °C) Nominal Frequency RO3164D             | $f_C$   | 2,3,4,5            | 868.150    |         | 868.550 | MHz        |                     |
|  |   |                    | 868.200    |         | 868.500 |            |                     |
|  |   |                    | 868.250    |         | 868.450 |            |                     |
| Tolerance from 868.35 MHz RO3164D                        | $\Delta f_C$  |                    |            |         | ±200    | kHz        |                     |
|  |   |                    |            |         | ±150    |            |                     |
|  |   |                    |            |         | ±100    |            |                     |
| Insertion Loss   | IL  | 2,5,6              |            | 1.3     | 2.0     | dB         |                     |
| Quality Factor   | Unloaded Q<br>50 $\Omega$ Loaded Q  |                    |            | 7100    |         |            |                     |
|  |   |                    |            | 970     |         |            |                     |
| Temperature Stability                                    | Turnover Temperature<br>Turnover Frequency<br>Frequency Temperature Coefficient | 6,7,8              | 10         | 25      | 40      | °C         |                     |
|  |   |                    | $f_O$      |         | $f_C$   |            | kHz                 |
|  |   |                    | FTC        |         | 0.032   |            | ppm/°C <sup>2</sup> |
| Frequency Aging  | Absolute Value during the First Year  | fA                 | 1          | <±10    |         | ppm/yr     |                     |
| DC Insulation Resistance between Any Two Terminals       |   | 5                  | 1.0        |         |         | M $\Omega$ |                     |
| RF Equivalent RLC Model                                  | Motional Resistance   | $R_M$              |            | 15.8    |         | $\Omega$   |                     |
|  | Motional Inductance   | $L_M$              | 5, 6, 7, 9 | 20.5    |         | $\mu$ H    |                     |
|  | Motional Capacitance  | $C_M$              |            | 1.6     |         | fF         |                     |
|  | Shunt Static Capacitance  | $C_O$              | 5, 6, 9    |         | 1.7     |            | pF                  |
| Test Fixture Shunt Inductance                            | $L_{TEST}$  | 2, 7               |            | 19.4    |         | nH         |                     |
| Lid Symbolization (in addition to Lot and/or Date Codes) | RO3164D 685, RO3164D-1 771, RO3164D-2 772 / YWWS                                |                    |            |         |         |            |                     |
| Standard Reel Quantity                                   | Reel Size 7 Inch  | 500 Pieces / Reel  |            |         |         |            |                     |
|  | Reel Size 13 Inch   | 3000 Pieces / Reel |            |         |         |            |                     |



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

**Notes:**


1. Frequency aging is the change in  $f_C$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
2. The center frequency,  $f_C$ , is measured at the minimum insertion loss point,  $IL_{MIN}$ , with the resonator in the 50  $\Omega$  test system (VSWR  $\leq$  1.2:1). The shunt inductance,  $L_{TEST}$ , is tuned for parallel resonance with  $C_O$  at  $f_C$ . Typically,  $f_{OSCILLATOR}$  or  $f_{TRANSMITTER}$  is approximately equal to the resonator  $f_C$ .
3. One or more of the following United States patents apply: 4,454,488 and 4,616,197.
4. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
5. Unless noted otherwise, case temperature  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ .
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters:  $f_C$ , IL, 3 dB bandwidth,  $f_C$  versus  $T_C$ , and  $C_O$ .
8. Turnover temperature,  $T_O$ , is the temperature of maximum (or turnover) frequency,  $f_O$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ . Typically *oscillator*  $T_O$  is approximately equal to the specified *resonator*  $T_O$ .
9. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_O$  is the static (nonmotional) capacitance between the two terminals measured at low frequency (10 MHz) with a capacitance meter. The measurement includes parasitic capacitance with "NC" pads unconnected. Case parasitic capacitance is approximately 0.05 pF. Transducer parallel capacitance can be calculated as:  $C_P \approx C_O - 0.05 \text{ pF}$ .

### Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.


| Pin | Connection |
|-----|------------|
| 1   | NC         |
| 2   | Terminal   |
| 3   | NC         |
| 4   | NC         |
| 5   | Terminal   |
| 6   | NC         |

### Power Test

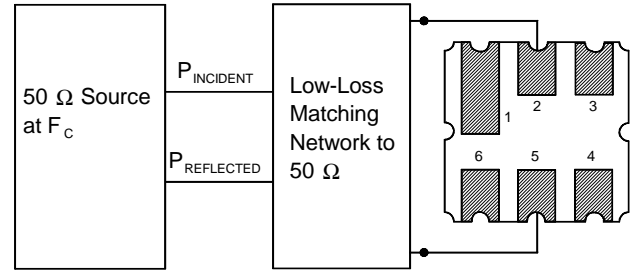


### Typical Application Circuits

Typical Low-Power Transmitter Application

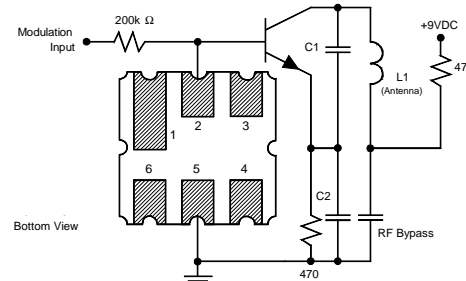

Typical Local Oscillator Application

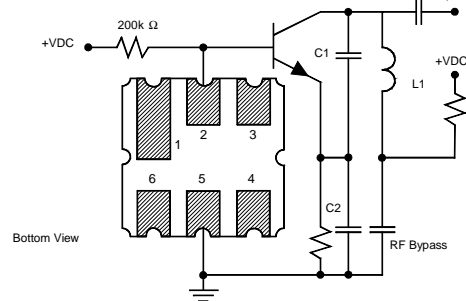


### Case Dimensions

| Dimension | mm   |      |      | Inches |       |       |
|-----------|------|------|------|--------|-------|-------|
|           | Min  | Nom  | Max  | Min    | Nom   | Max   |
| A         | 3.60 | 3.80 | 4.0  | 0.14   | 0.15  | 0.16  |
| B         | 3.60 | 3.80 | 4.0  | 0.14   | 0.15  | 0.16  |
| C         | 1.00 | 1.20 | 1.40 | 0.04   | 0.05  | 0.055 |
| D         | 0.95 | 1.10 | 1.25 | 0.033  | 0.043 | 0.05  |
| E         | 2.39 | 2.54 | 2.69 | 0.090  | 0.10  | 0.110 |
| G         | 0.90 | 1.0  | 1.10 | 0.035  | 0.04  | 0.043 |
| H         | 1.90 | 2.0  | 2.10 | 0.75   | 0.08  | 0.83  |
| I         | 0.50 | 0.6  | 0.70 | 0.020  | 0.024 | 0.028 |
| J         | 1.70 | 1.8  | 1.90 | 0.067  | 0.07  | 0.075 |


### Typical Test Circuit

The test circuit inductor,  $L_{TEST}$ , is tuned to resonate with the static capacitance,  $C_O$ , at  $F_C$ .

### Electrical Test

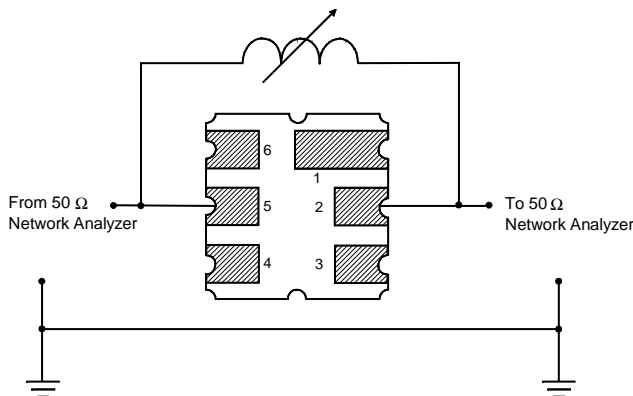


### Equivalent LC Model

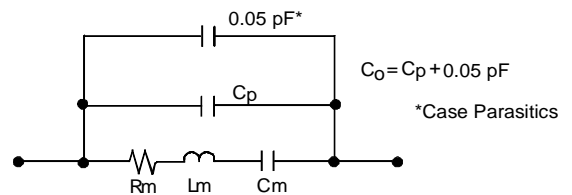

### Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

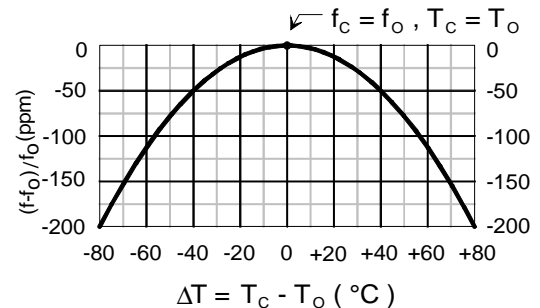

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)