

Your Search for Proximity Sensors Starts with the World-leading Performance and Quality of the E2E

- Standard Sensors for detecting ferrous metals.
- Wide array of variations. Ideal for a variety of applications.
- Models with different frequencies are also available to prevent mutual interference.
- Superior environment resistance with standard cable made of oil-resistant PVC and sensing surface made of material that resists cutting oil.
- Useful to help prevent disconnection.

Cable protector provided as a standard feature.



⚠ Be sure to read *Safety Precautions* on page 27.



CE ^{*1, *2}


*1: No AC/DC 2-wire models or AC 2-wire M8 models are compliant.

*2: Attach three ferrite clamps to the cable of the E2E-X3□□ and E2E-X8MD□. (Refer to information on TDK catalog number ZCAT2035-0930A.)

Features

2-Wire Models


Pre-wired Models with Oil-resistant Reinforced PUR Cables Added to the Lineup and Easy Differentiation with Orange Head




Differentiation from standard models: Orange Head



Oil Resistance (Insulation service life): twice or three times that of oil-resistant vinyl chloride




Cable Flexibility: approximately twice that of vinyl chloride cables



More Flexibility at -40°C

Lineup includes models with Smartclick pre-wired connectors for fast connection.

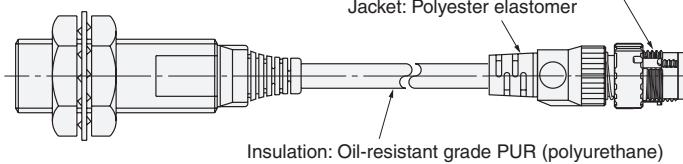Smartclick



Lineup includes models with self-diagnostic output to provide notification of failures and unstable detection conditions, such as coil burnout.

- Contributes to preventive maintenance to keep the line from stopping.

Reduced wiring, fewer resources, and low power consumption contribute to environmentalism.

- Wiring work and amount of copper wire used reduced to two thirds of that required for 3-wire models.
- Current consumption drastically reduced to less than 10% (when a DC 2-wire model is compared with a DC 3-wire model).

3-Wire Models**Lineup includes models with small diameter (3 dia., 4 dia., 5.4 dia., M5)**

- All small-diameter models use sealed construction. Operation is stable even when the Sensor is mounted in a small space or embedded in metal.
- Bright indicators enable easily checking the installation condition.

**Wide range of ambient operating temperatures: -40°C to 85°C (M8 to M30 models)**

- Wide range of ambient operating temperatures also for small-diameter models: -25°C to 70°C
- Suitable for low-temperature and high-temperature applications, which are troublesome for photoelectric sensors.

Lineup includes models with flexible cable (4-dia. to M30 models)

- Reduced risk of disconnection in applications with moving parts.

Models Listed by E2E Type

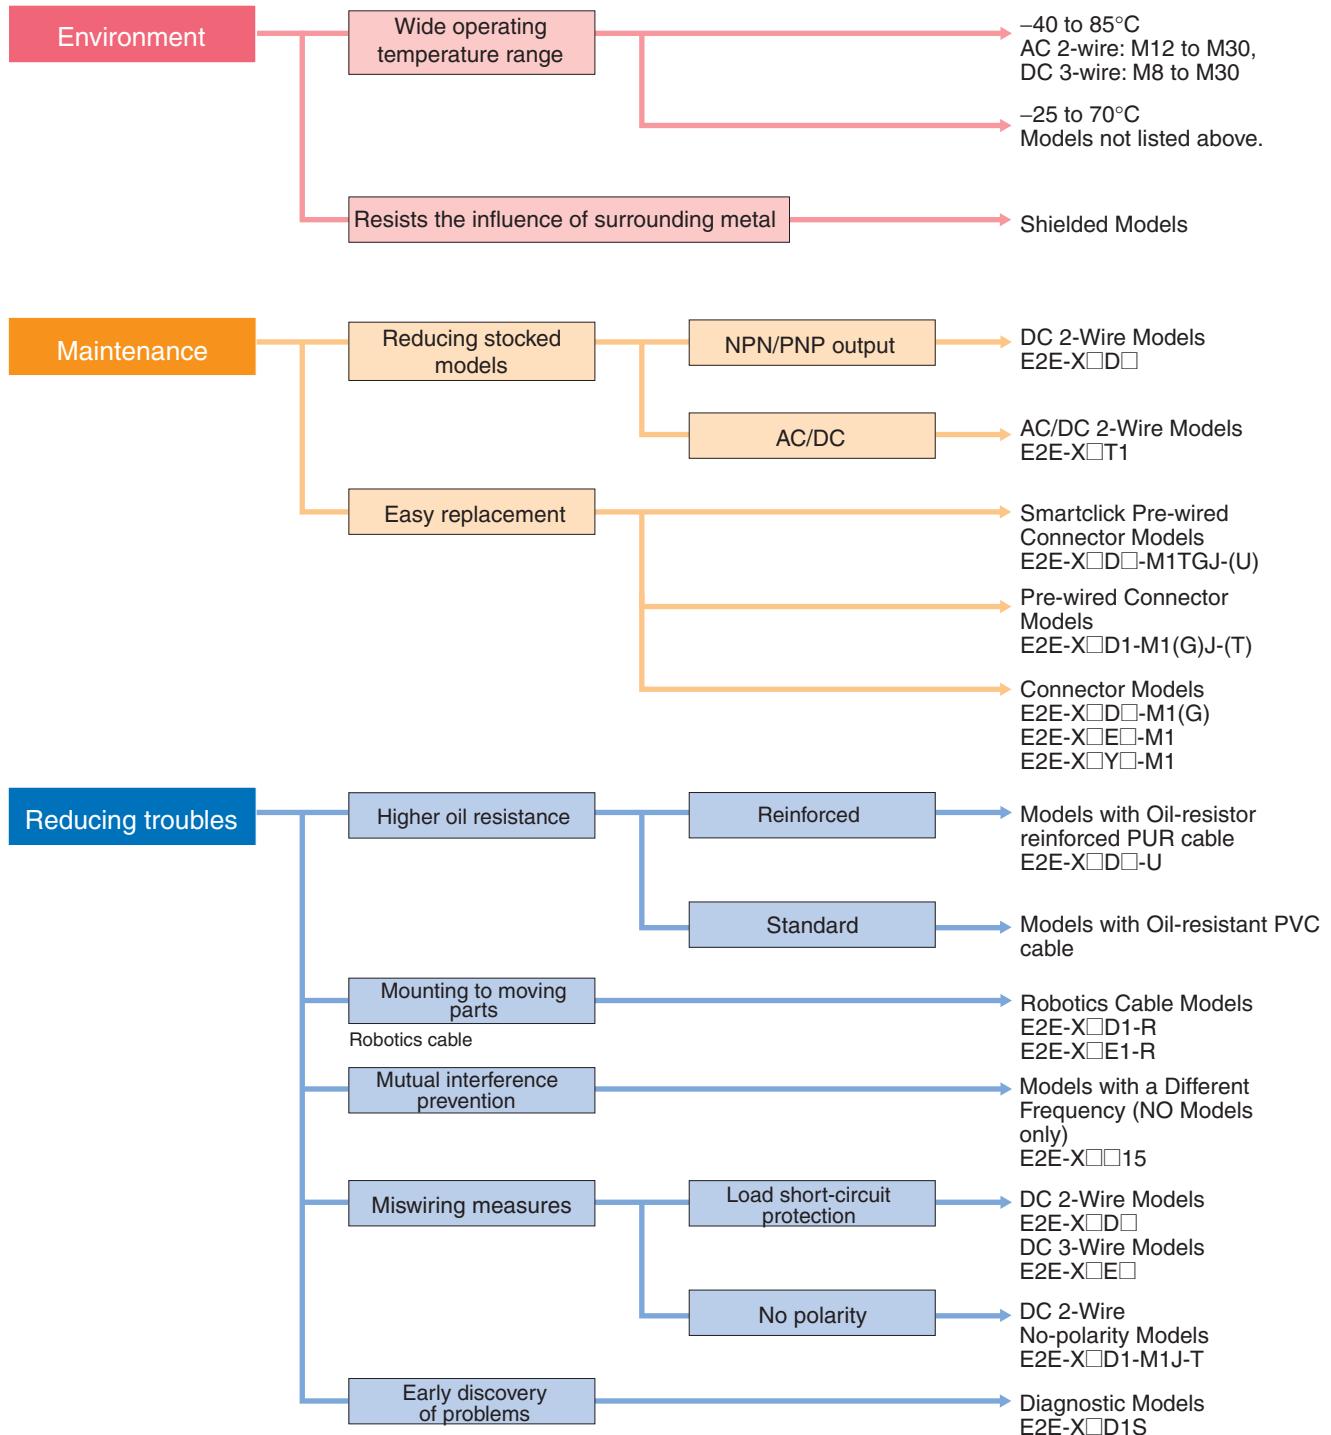
●: Standard Models, ▲: Different frequency, □: Self-diagnosis, ■: Different frequency and self-diagnosis,
---: Not listed

2-Wire Models																
Power supply	Shielding	Size and sensing distance	Polarity	Operation mode	Oil-resistant reinforced PUR cable	Standard cable and flexible cable (cable material: oil-resistant PVC)/Connector models						Page				
					M12 pre-wired smartclick connector models	Pre-wired model with 2-m cable	M12 pre-wired smartclick connector models	Pre-wired model with standard 2-m cable	Pre-wired model with flexible 2-m cable	Pre-wired model with standard 5-m cable	M12 connector (IEC pin arrangement)	M12 standard pre-wired connector models	M8 connector	M12 connector (old pin arrangement)	Ordering Information	Dimensions reference chart
DC	Shielded	M8 2 m	Yes	NO	●	●	●	●	●	●	●	---	●	●	Refer to page 7.	
		M12 3 mm	Yes	NC	●	●	●	---	●	---	●	---	●	●		
		M18 7 mm	Yes	NO	●	●	●	●	●	●	●	●	●	●		
		M18 7 mm	No	NC	●	●	---	---	●	---	●	●	●	●		
		M30 10 mm	Yes	NO	---	---	---	---	---	---	---	---	●	---		
		M30 10 mm	No	NC	---	---	---	---	---	---	---	---	---	---		
		M8 4 mm	Yes	NO	---	---	---	●	●	●	●	---	●	●	Refer to page 8.	
		M12 8 mm		NC	---	---	---	●	---	---	●	---	●	●		
		M18 14 mm		NO	---	---	●	●	●	●	●	●	●	●		
		M18 14 mm		NC	---	---	---	●	---	---	●	---	●	●		
		M30 20 mm		NO	---	---	●	●	●	●	●	●	●	●		
		M30 20 mm		NC	---	---	---	●	---	---	●	---	---	●		
AC	Shielded	M8 1.5 mm	---	NO	---	---	---	●	---	---	---	---	---	---	Refer to page 29.	
		M12 2 mm		NC	---	---	---	●	---	---	---	---	---	---		
		M18 5 mm		NO	---	---	---	●▲	---	●	●	---	---	---		
		M18 5 mm		NC	---	---	---	●	---	---	●	---	---	---		
		M30 10 mm		NO	---	---	---	●▲	---	●	●	---	---	---		
		M30 10 mm		NC	---	---	---	●	---	---	●	---	---	---		
	Unshielded	M8 2 mm		NO	---	---	---	●	---	---	---	---	---	---	Refer to page 10.	
		M12 5 mm		NC	---	---	---	●	---	---	---	---	---	---		
		M18 10 mm		NO	---	---	---	●▲	---	●	●	---	---	---		
		M18 10 mm		NC	---	---	---	●	---	---	●	---	---	---		
		M30 18 mm		NO	---	---	---	●▲	---	---	●	---	---	---		
		M30 18 mm		NC	---	---	---	●	---	---	●	---	---	---		
AC/DC	Shielded	M12 2 mm	---	NO	---	---	---	●	---	---	---	---	---	---	Refer to page 10.	
		M18 5 mm		NC	---	---	---	---	---	---	---	---	---	---		
		M30 10 mm		NO	---	---	---	●	---	●	---	---	---	---		
		M30 10 mm		NC	---	---	---	●	---	---	---	---	---	---		

●: Standard Models, ▲: Different frequency, ---: Not listed

3-Wire Models												Page			
Power supply	Shielding	Size and sensing distance	Polarity	Operation mode	Oil-resistant reinforced PUR cable	Standard cable and flexible cable (cable material: oil-resistant PVC)/Connector models						Page			
				M12 pre-wired smartclick connector models	Pre-wired model with 2-m cable	M12 pre-wired smartclick connector models	Pre-wired model with standard 2-m cable	Pre-wired model with flexible 2-m cable	Pre-wired model with standard 5-m cable	M12 connector (IEC pin arrangement)	M12 standard pre-wired connector models	M8 connector	e-CON pre-wired connector models	Ordering Information	Dimensions reference chart
DC NPN	Shielded	3 dia. 0.6 mm	Yes	NO	---	---	●	---	---	---	---	---	---	Refer to page 11.	
		4 dia. 0.8 mm		NC	---	---	●	---	---	---	---	---	---		
		M5 1 mm		NO	---	---	●	●	●	---	---	---	---		
		5.4 dia. 1 mm		NC	---	---	●	---	---	---	---	---	---		
		M8 1.5mm		NO	---	---	●	●	●	---	---	---	---		
		M12 2 mm		NC	---	---	●	---	---	---	---	●	---		
		M18 5 mm		NO	---	---	●▲	●	●	●	●	●	●		
		M30 10 mm		NC	---	---	●▲	●	●	●	●	●	●		
	Unshielded	M8 2 mm		NO	---	---	●	●	---	●	●	●	●	Refer to page 12.	
		M12 5 mm		NC	---	---	●	---	---	●	●	●	●		
		M18 10 mm		NO	---	---	●▲	●	●	●	●	●	●		
		M30 18 mm		NC	---	---	●▲	●	●	●	●	●	●		
DC PNP	Shielded	3 dia. 0.6 mm	Yes	NO	---	---	●	---	---	---	---	---	---	Refer to page 29.	
		4 dia. 0.8 mm		NC	---	---	●	---	---	---	---	---	---		
		M5 1 mm		NO	---	---	●	●	---	---	---	---	---		
		5.4 dia. 1 mm		NC	---	---	●	---	---	---	---	---	---		
		M8 1.5mm		NO	---	---	●	●	●	---	---	---	---		
		M12 2 mm		NC	---	---	●	---	---	●	●	●	●		
		M18 5 mm		NO	---	---	●▲	●	●	●	●	●	●		
		M30 10 mm		NC	---	---	●▲	●	●	●	●	●	●		
	Unshielded	M8 2 mm		NO	---	---	●	●	---	●	●	●	●	Refer to page 12.	
		M12 5 mm		NC	---	---	●	---	---	●	●	●	●		
		M18 10 mm		NO	---	---	●▲	●	●	●	●	●	●		
		M30 18 mm		NC	---	---	●▲	●	●	●	●	●	●		

E2E Guide to Selection by Purpose



Note: Refer to *Models Not Listed in this Catalog* for Long Body Models, Transmission Couplers, and Power Couplers.

E2E Model Number Legend

E2E- ① ② ③ ④ ⑤ ⑥ ⑦ - ⑧ ⑨ - ⑩ - ⑪ - ⑫ ⑬

No.	Classification	Code	Meaning	Remarks
①	Appearance	C	Cylindrical (not threaded)	
		X	Cylindrical (threaded)	
②	Sensing distance	Number	Sensing distance (Unit: mm)	Example: R6: 0.6 mm 1R5: 1.5 mm
		R	Indication of decimal point	
③	Shielding	Blank	Shielded Models	
		M	Unshielded Models	
④	Power supply and output specifications	B	DC 3-wire PNP open-collector output	Whether D models have polarity is defined by number ⑩.
		C	DC 3-wire NPN open-collector output	
		D	DC 2-wire polarity/no polarity	
		E	DC 3-wire NPN collector load built-in output	
		F	DC 3-wire PNP collector load built-in output	
		T	AC/DC 2-wire	
		Y	AC 2-wire	
⑤	Form of output switching element	1	Normally open (NO)	
		2	Normally closed (NC)	
⑥	Oscillation frequency type	Blank	Standard frequency	Used to prevent mutual interference.
		5	Different frequency	
⑦	Self-diagnosis	Blank	No	
		5	Yes	
⑧	Connection method	Blank	Pre-wired	These models are also available with e-CON connectors (0.3-m cable). Add "-ECON" to the end of the model number.
		M1	M12-size metal connector	
		M3	M8-size metal connector	
⑨	Connector specifications	Blank	Connector Models DC 3-wire and AC 2-wire, DC 2-wire with self-diagnosis output, DC 2-wire with old pin arrangement (polarity)	
		G	Connector Models DC 2-wire with IEC pin arrangement (polarity)	
		J	Pre-wired Connector Models DC 3-wire and AC 2-wire, DC 2-wire with IEC pin arrangement (polarity), DC 3-wire and AC 2-wire, DC 2-wire with self-diagnosis output, DC 2-wire with old pin arrangement (polarity)	
		GJ	Pre-wired Connector Models DC 2-wire with IEC pin arrangement (polarity)	
		TJ	Pre-wired Smartclick Connector Models DC 2-wire with IEC pin arrangement (no polarity)	
		TGJ	Pre-wired Smartclick Connector Models DC 2-wire with IEC pin arrangement (polarity)	
⑩	DC 2-wire polarity	Blank	Polarity	
		T	No polarity	
⑪	Cable specifications	Blank	Standard PVC cable (oil resistant)	
		R	Flexible PVC cable (oil resistant)	
		U	Polyurethane cable (oil resistant and reinforced)	
⑫	New model	N	New model (Applies only to DC 2-wire pre-wired and shielded models.)	This is blank if the cable specification in number ⑪ is R or U.
⑬	Cable length	Letter M	Cable length (Unit: m) (Applicable to Pre-wired Models and Pre-wired Connector Models.)	Example: 2M 0.3M

Note: The purpose of this model number legend is to provide understanding of the meaning of specifications from the model number.

Models are not available for all combinations of code numbers.

Ask your OMRON representative if you require a customized model.

Ordering Information

2-Wire Models

Shielded DC 2-wire Models with No Self-diagnostic Output [Refer to Dimensions on page 29.]



Appearance	Sensing distance			Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *4	Model	
M8	2 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X2D1-M1TGJ-U 0.3M	
					PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X2D2-M1TGJ-U 0.3M	
				Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X2D1-M1TGJ 0.3M	
					---		NC	---	E2E-X2D1-U 2M		
					PVC (oil-resistant)		NO	---	E2E-X2D2-U 2M		
				M12 Connector Models	---		NC	---	E2E-X2D1-N 2M *2*3		
					---		NO	1: +V, 4: 0 V	A	E2E-X2D2-N 2M *3	
				M8 Connector Models	---		NC	1: +V, 2: 0 V	D	E2E-X2D1-M1G	
					---		NO	1: +V, 4: 0 V	I	E2E-X2D2-M1G	
					---		NC	1: +V, 2: 0 V		E2E-X2D1-M3G	
					---					E2E-X2D2-M3G	
M12	3 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X3D1-M1TGJ-U 0.3M	
					PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X3D2-M1TGJ-U 0.3M	
				Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X3D1-M1TGJ 0.3M	
					---		NC	---	E2E-X3D1-U 2M		
					PVC (oil-resistant)		NO	---	E2E-X3D2-U 2M		
				M12 Connector Models	---		NC	1: +V, 2: 0 V	A	E2E-X3D1-N 2M *1*2*3	
					---		NO	1: +V, 4: 0 V	D	E2E-X3D2-N 2M *3	
				M12 Standard Pre-wired Connector Models (0.3 m) *6	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X3D1-M1GJ *1	
							NC	1: +V, 2: 0 V	D	E2E-X3D2-M1GJ 0.3M	
							NO	(3, 4): (+V, 0 V)	C	E2E-X3D1-M1J-T 0.3M	
							NC	(1, 2): (+V, 0 V)	D	---	
M18	7 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X7D1-M1TGJ-U 0.3M	
					PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X7D2-M1TGJ-U 0.3M	
				Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X7D1-M1TGJ 0.3M	
					---		NC	---	E2E-X7D1-U 2M		
					PVC (oil-resistant)		NO	---	E2E-X7D2-U 2M		
				M12 Connector Models	---		NC	1: +V, 2: 0 V	A	E2E-X7D1-N 2M *1*2*3	
					---		NO	1: +V, 4: 0 V	D	E2E-X7D2-N 2M *3	
				M12 Standard Pre-wired Connector Models (0.3 m) *6	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X7D1-M1GJ *1	
							NC	1: +V, 2: 0 V	D	E2E-X7D2-M1GJ 0.3M	
							NO	(3, 4): (+V, 0 V)	C	E2E-X7D1-M1J-T 0.3M	
							NC	(1, 2): (+V, 0 V)	D	E2E-X7D2-M1J-T 0.3M	
M30	10 mm			M12 Pre-wired Smart-click Connector Models (0.3m)	PUR (increased oil-resistant)	Yes	NO	1: +V, 4: 0 V	H	E2E-X10D1-M1TGJ-U 0.3M	
					PVC (oil-resistant)		NC	1: +V, 2: 0 V		E2E-X10D2-M1TGJ-U 0.3M	
				Pre-wired Models (2 m)	PUR (increased oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X10D1-M1TGJ 0.3M	
					---		NC	---	E2E-X10D1-U 2M		
					PVC (oil-resistant)		NO	---	E2E-X10D2-U 2M		
				M12 Connector Models	---		NC	1: +V, 4: 0 V	A	E2E-X10D1-N 2M *1*2*3	
					---		NO	1: +V, 2: 0 V	D	E2E-X10D2-N 2M	
				M12 Standard Pre-wired Connector Models (0.3 m) *6	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X10D1-M1GJ *1	
							NC	1: +V, 2: 0 V	D	E2E-X10D2-M1GJ 0.3M	
							NO	(3, 4): (+V, 0 V)	C	E2E-X10D1-M1J-T 0.3M	
							NC	(1, 2): (+V, 0 V)	D	E2E-X10D2-M1J-T 0.3M	

*1. Models with different frequencies are also available. The model number is E2E-X D15 (example: E2E-X3D15-N 2M).

*2. Models with a flexible cable are also available. Add "-R" rather than "-N" to the end of the model number (example: E2E-X2D1-R 2M).

*3. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X3D1-N 5M)

*4. Refer to page 24 for details.

*5. The residual voltage for models without polarity is 5 V, so use caution concerning the connection load interface conditions (e.g., PLC ON voltage). Refer to page 28.

*6. The standard cable length is 300 mm. Cables with a length of 500 mm and 1 m can also be manufactured.

2-Wire Models

Unshielded DC 2-Wire Models with No Self-diagnosis Output [Refer to Dimensions on page 29.]

Appearance	Sensing distance			Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *4	Model
M8	4 mm			Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X4MD1 2M *2*3
				M12 Connector Models	---		NC	---	---	E2E-X4MD2 2M
				M8 Connector Models	---		NO	1: +V, 4: 0 V	A	E2E-X4MD1 2M
							NC	1: +V, 2: 0 V	D	E2E-X4MD2-M1G
							NO	1: +V, 4: 0 V	I	E2E-X4MD1-M3G
							NC	1: +V, 2: 0 V	---	E2E-X4MD2-M3G
M12	8 mm			12M Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X8MD1-M1TGJ 0.3M
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X8MD1 2M *1*2*3
				M12 Connector Models	---		NC	---	---	E2E-X8MD2 2M
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X8MD1-M1G *1
							NC	1: +V, 2: 0 V	D	E2E-X8MD2-M1G
							NO	1: +V, 4: 0 V	A	E2E-X8MD1-M1GJ 0.3M
M18	14 mm			12M Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NC	1: +V, 2: 0 V	D	---
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X14MD1-M1TGJ 0.3M
				M12 Connector Models	---		NO	---	---	E2E-X14MD1 2M *1*2*3
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NC	1: +V, 4: 0 V	A	E2E-X14MD2 2M
							NC	1: +V, 2: 0 V	D	E2E-X14MD1-M1G *1
							NO	1: +V, 4: 0 V	A	E2E-X14MD2-M1G
M30	20 mm			12M Pre-wired Smart-click Connector Models (0.3m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	G	E2E-X20MD1-M1TGJ 0.3M
				Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X20MD1 2M *1*2*3
				M12 Connector Models	---		NC	---	---	E2E-X20MD2 2M
				M12 Standard Pre-wired Connector Models (0.3 m)	PVC (oil-resistant)		NO	1: +V, 4: 0 V	A	E2E-X20MD1-M1G *1
							NC	1: +V, 2: 0 V	D	E2E-X20MD2-M1G
							NO	1: +V, 4: 0 V	A	E2E-X20MD1-M1GJ 0.3M
							NC	1: +V, 2: 0 V	D	---

*1. Models with different frequencies are also available. The model number is E2E-X □D15 (example: E2E-X8MD15 2M).

*2. Models with a flexible cable are also available. Add -R to the end of the model number. (example: E2E-X4MD1-R 2M).

*3. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X4MD1 5M)

*4. Refer to page 24 for details.

Shielded DC 2-Wire Models with Self-diagnosis Output [Refer to Dimensions on page 29.]

Appearance	Sensing distance			Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model
M12	3 mm			Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X3D1S 2M *1
				M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X3D1S-M1
								---	---	E2E-X7D1S 2M *1
				Pre-wired Models (2 m)	PVC (oil-resistant)			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X7D1S-M1
				M12 Connector Models	---			---	---	E2E-X10D1S 2M *1
								2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X10D1S-M1
M18	7 mm			Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X7D1S 2M *1
				M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X7D1S-M1
								---	---	E2E-X10D1S 2M *1
				Pre-wired Models (2 m)	PVC (oil-resistant)			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X7D1S-M1
				M12 Connector Models	---			---	---	E2E-X10D1S 2M *1
								2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X10D1S-M1
M30	10 mm			Pre-wired Models (2 m)	PVC (oil-resistant)		NO	---	---	E2E-X10D1S 2M *1
				M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X10D1S-M1
								---	---	E2E-X10D1S 2M *1
				Pre-wired Models (2 m)	PVC (oil-resistant)			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X10D1S-M1
				M12 Connector Models	---			---	---	E2E-X10D1S 2M *1
								2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X10D1S-M1

*1. Models with different frequencies are also available. The model number is E2E-X □D15S (example: E2E-X3D15S 2M).

*2. Refer to page 24 for details.

2-Wire Models

Unshielded DC 2-Wire Models with Self-diagnosis Output [Refer to *Dimensions* on page 29.]

Appearance	Sensing distance		Connection method	Cable specifications	Polarity	Operation mode	Pin arrangement	Applicable connector code *2	Model
M12		8 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	Yes	NO	---	---	E2E-X8MD1S 2M *
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X8MD1S-M1
M18		14 mm	Pre-wired Models (2 m)	PVC (oil-resistant)			---	---	E2E-X14MD1S 2M *
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X14MD1S-M1
M30		20 mm	Pre-wired Models (2 m)	PVC (oil-resistant)			---	---	E2E-X20MD1S 2M *
			M12 Connector Models	---			2: +V and diagnostic output 3: 0 V 4: +V and control output	D	E2E-X20MD1S-M1


*1. Models with different frequencies are also available. The model number is E2E-X□MD1S (example: E2E-X8MD1S 2M).

*2. Refer to page 24 for details.

Connector Pin Assignments of DC 2-Wire Models

- The connector pin assignments of each New E2E DC 2-Wire Model conform to IEC 947-5-2 Table III. (Only DC 2-Wire Models have been changed in comparison to the previous models.)
- The following models with conventional connector pin assignments are available as well. (Only NO Models can be used.)
The cable at the right should also be used if the XW3A-P□45-G11 Connector Junction Box is already being used.

Cable length	Model
500 mm	XS2W-D421-BY1

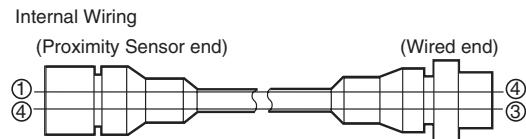

Models with conventional connector pin assignments are available as well.

Appearance	Model				
	NO	Applicable connector code *	NC	Applicable connector code *	
Shielded	M8	E2E-X2D1-M1	C	E2E-X2D2-M1	D
	M12	E2E-X3D1-M1	C	E2E-X3D2-M1	D
	M18	E2E-X7D1-M1	C	E2E-X7D2-M1	D
	M30	E2E-X10D1-M1	C	E2E-X10D2-M1	D
Unshielded	M8	E2E-X4MD1-M1	C	E2E-X4MD2-M1	D
	M12	E2E-X8MD1-M1	C	E2E-X8MD2-M1	D
	M18	E2E-X14MD1-M1	C	E2E-X14MD2-M1	D
	M30	E2E-X20MD1-M1	C	E2E-X20MD2-M1	D

Note: Refer to page 24 for details.

2-Wire Models

AC 2-Wire Models Shielded Models [Refer to *Dimensions* on page 29.]

Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *3	Model
	1.5 mm	2 mm						
M8	1.5 mm	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X1R5Y1 2M
					NC	---	---	E2E-X1R5Y2 2M
M12	2 mm	5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2Y1 2M *1*2
					NC	---	---	E2E-X2Y2 2M
M18	5 mm	10 mm	M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X2Y1-M1
					NC	(1, 2): (AC, AC)	F	E2E-X2Y2-M1
M30	10 mm	18 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10Y1 2M *1*2
					NC	---	---	E2E-X10Y2 2M
M12	2 mm	5 mm	M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X10Y1-M1
					NC	(1, 2): (AC, AC)	F	E2E-X10Y2-M1

*1. Models with different frequencies are also available. The model number is E2E-X □Y□5 (example: E2E-X5Y15 2M).

*2. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X2Y1 5M)

*3. Refer to page 24 for details.

Unshielded Models

Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *3	Model
	2 mm	5 mm						
M8	2 mm	5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2MY1 2M
					NC	---	---	E2E-X2MY2 2M
M12	5 mm	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5MY1 2M *1*2
					NC	---	---	E2E-X5MY2 2M
M18	10 mm	18 mm	M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X5MY1 2M
					NC	(1, 2): (AC, AC)	F	E2E-X5MY2-M1
M30	18 mm	18 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10MY1 2M *1
					NC	---	---	E2E-X10MY2 2M
M12	5 mm	10 mm	M12 Connector Models	---	NO	(3, 4): (AC, AC)	E	E2E-X10MY1-M1
					NC	(1, 2): (AC, AC)	F	E2E-X10MY2-M1

*1. Models with different frequencies are also available. The model number is E2E-X □MY□5 (example: E2E-X5MY15 2M).

*2. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X5MY1 5M)

*3. Refer to page 24 for details.

AC 2-Wire Models Shielded Models [Refer to *Dimensions* on page 29.]

(There are no unshielded models.)

Appearance	Sensing distance		Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code *3	Model
M12	3 mm	7 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X3T1 2M
M18	7 mm	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)		---	---	E2E-X7T1 2M *
M30	10 mm	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)		---	---	E2E-X10T1 2M

Note: Not compliant with CE.

* The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X7T1 5M)

3-Wire Models

Shielded DC 3-Wire Models [Refer to *Dimensions* on page 29.]

Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code ^{*5}	Model	
							NPN output	PNP output
3 dia.	0.6 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-CR6C1 2M	E2E-CR6B1 2M
				NC			E2E-CR6C2 2M	E2E-CR6B2 2M
4 dia.	0.8 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-CR8C1 2M *1*2	E2E-CR8B1 2M *2
				NC			E2E-CR8C2 2M	E2E-CR8B2 2M
M5	1 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X1C1 2M *1*2	E2E-X1B1 2M *2
				NC			E2E-X1C2 2M	E2E-X1B2 2M
5.4 dia.	1 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-C1C1 2M *1*2	E2E-C1B1 2M
				NC			E2E-C1C2 2M	E2E-C1B2 2M
M8	1.5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X1R5E1 2M *1*2	E2E-X1R5F1 2M *1*2
				NC			E2E-X1R5E2 2M	E2E-X1R5F2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X1R5E1-M1	E2E-X1R5F1-M1
				NC			E2E-X1R5E2-M1	E2E-X1R5F2-M1
		M8 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	I	E2E-X1R5E1-M3	E2E-X1R5F1-M3
				NC			E2E-X1R5E2-M3	E2E-X1R5F2-M3
M12	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2E1 2M *1*2*3*4	E2E-X2F1 2M *1*2*3
				NC			E2E-X2E2 2M	E2E-X2F2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X2E1-M1	E2E-X2F1-M1
				NC			E2E-X2E2-M1	E2E-X2F2-M1
M18	5 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5E1 2M *1*2*3*4	E2E-X5F1 2M *1*2*3
				NC			E2E-X5E2 2M	E2E-X5F2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X5E1-M1	E2E-X5F1-M1
				NC			E2E-X5E2-M1	E2E-X5F2-M1
M30	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10E1 2M *1*2*3*4	E2E-X10F1 2M *2
				NC			E2E-X10E2 2M	E2E-X10F2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X10E1-M1	E2E-X10F1-M1
				NC			E2E-X10E2-M1	E2E-X10F2-M1

*1. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X2E1 5M)

*2. Models with a flexible cable are also available. Add -R to the end of the model number. (Example: E2E-X5E1-R 2M).

*3. Models with different frequencies are also available. The model number is E2E-X□□□5 (example: E2E-X5E15 2M).

*4. Models with pre-wired e-CON connectors are also available (cable length: 0.3 m). Add "-ECON 0.3M" to the end of the model number. (Example: E2E-X2E1-ECON 0.3M)

*5. Refer to page 24 for details.

3-Wire Models

Unshielded DC 3-Wire Models [Refer to *Dimensions* on page 29.]


Appearance	Sensing distance	Connection method	Cable specifications	Operation mode	Pin arrangement	Applicable connector code ^{*5}	Model	
							NPN output	PNP output
M8	2 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X2ME1 2M *2	E2E-X2MF1 2M *2
				NC	---	---	E2E-X2ME2 2M	E2E-X2MF2 2M
		M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X2ME1-M1	E2E-X2MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X2ME2-M1	E2E-X2MF2-M1
	10 mm	M8 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	I	E2E-X2ME1-M3	E2E-X2MF1-M3
				NC	1: +V, 3: 0 V, 2: Control output		E2E-X2ME2-M3	E2E-X2MF2-M3
		Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X5ME1 2M *1*2*3*4	E2E-X5MF1 2M *2
				NC	---	---	E2E-X5ME2 2M	E2E-X5MF2 2M
M12	5 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X5ME1-M1	E2E-X5MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X5ME2-M1	E2E-X5MF2-M1
	10 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X10ME1 2M *1*2*3*4	E2E-X10MF1 2M *2
				NC	---	---	E2E-X10ME2 2M	E2E-X10MF2 2M
M18	10 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X10ME1-M1	E2E-X10MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X10ME2-M1	E2E-X10MF2-M1
	18 mm	Pre-wired Models (2 m)	PVC (oil-resistant)	NO	---	---	E2E-X18ME1 2M *1*2*3*4	E2E-X18MF1 2M *2
				NC	---	---	E2E-X18ME2 2M	E2E-X18MF2 2M
M30	18 mm	M12 Connector Models	---	NO	1: +V, 3: 0 V, 4: Control output	B	E2E-X18ME1-M1	E2E-X18MF1-M1
				NC	1: +V, 3: 0 V, 2: Control output	D	E2E-X18ME2-M1	E2E-X18MF2-M1

*1. The standard stock includes models with a cable length of 5 m. Specify the cable length at the end of the model number. (Example: E2E-X5ME1 5M)

*2. Models with a flexible cable are also available. Add -R to the end of the model number. (example: E2E-X5E1-R 2M).

*3. Models with different frequencies are also available. The model number is E2E-X□M□□5 (example: E2E-X5ME15 2M).

*4. Models with pre-wired e-CON connectors are also available (cable length: 0.3 m). Add "-ECON 0.3M" to the end of the model number. (Example: E2E-X2E1-ECON 0.3M)

*5. Refer to page 24 for details.

Ratings and Specifications

E2E-X□D□ DC 2-Wire Models

Item	Model	Size		M8		M12		M18		M30									
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded								
Sensing distance		2 mm \pm 10%		4 mm \pm 10%		3 mm \pm 10%		8 mm \pm 10%		7 mm \pm 10%									
Set distance *1		0 to 1.6 mm		0 to 3.2 mm		0 to 2.4 mm		0 to 6.4 mm		0 to 5.6 mm									
Differential travel		15% max. of sensing distance		10% max. of sensing distance															
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 18 and 19.)																	
Standard sensing object		Iron, 8 \times 8 \times 1 mm	Iron, 20 \times 20 \times 1 mm	Iron, 12 \times 12 \times 1 mm	Iron, 30 \times 30 \times 1 mm	Iron, 18 \times 18 \times 1 mm	Iron, 30 \times 30 \times 1 mm	Iron, 54 \times 54 \times 1 mm											
Response frequency *2		1.5 kHz	1 kHz		0.8 kHz		0.5 kHz	0.4 kHz		0.1 kHz									
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.																	
Leakage current		0.8 mA max.																	
Control output	Load current	3 to 100 mA, Diagnostic output: 50 mA for -D1(5)S Models																	
	Residual voltage *3	3 V max. (Load current: 100 mA, Cable length: 2 m, M1J-T Models only: 5 V max.)																	
Indicators		D1 Models: Operation indicator (red) and setting indicator (green) D2 Models: Operation indicator (red)																	
Operation mode (with sensing object approaching)		D1 Models: NO Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 21 for details. D2 Models: NC																	
Diagnostic output delay		0.3 to 1 s																	
Protection circuits		Surge suppressor, Load short-circuit protection (for control and diagnostic output)																	
Ambient temperature range		Operating: -25 to 70°C , Storage: -40 to 85°C (with no icing or condensation)																	
Ambient humidity range		Operating/storage: 35% to 95% (with no condensation)																	
Temperature influence		$\pm 15\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C	$\pm 10\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C																
Voltage influence		$\pm 1\%$ max. of sensing distance at rated voltage $\pm 15\%$ range																	
Insulation resistance		50 M Ω min. (at 500 VDC) between current-carrying parts and case																	
Dielectric strength		1000 VAC, 50/60 Hz for 1 minute between current carry parts and case																	
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																	
Shock resistance		Shock resistance: 500 m/s ² 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions																
Degree of protection		Pre-wired Models: IEC 60529 IP67, in-house standards: oil-resistant Connector Models: IEC 60529 IP67																	
Connection method		Pre-wired Models (Standard cable length: 2 m), Connector Models, or Pre-wired Connector Models (Standard cable length: 0.3 m)																	
Weight (packed state)	Pre-wired Models	Approx. 60 g		Approx. 70 g		Approx. 130 g		Approx. 175 g											
	Pre-wired Connector Models	---		Approx. 40 g		Approx. 70 g		Approx. 110 g											
	Connector Models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g											
Materials	Case	Stainless steel (SUS303)		Nickel-plated brass															
	Sensing surface	PBT																	
	Clamping nuts	Nickel-plated brass																	
	Toothed washer	Zinc-plated iron																	
Accessories	Instruction manual																		

*1. Use the E2E within the range in which the setting indicator (green LED) is ON (except D2 Models).

*2. The response frequency is an average value.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*3. The residual voltage of each M1J-T Model is 5 V. When connecting to a device, make sure that the device can withstand the residual voltage. (Refer to page 28 for details.)

E2E-X□Y□ AC 2-Wire Models

Item	Model	Size		M8		M12		M18		M30	
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded
Sensing distance	E2E-X1R5Y□	1.5 mm ±10%	2 mm ±10%			5 mm ±10%		10 mm ±10%		18 mm ±10%	
Set distance	E2E-X2MY□	E2E-X2Y□	E2E-X5MY□	E2E-X5Y□	E2E-X10MY□	E2E-X10Y□	E2E-X18MY□				
Differential travel	10% max. of sensing distance										
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 19.)										
Standard sensing object	Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm	Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm	Iron, 54 × 54 × 1 mm					
Response frequency	25 Hz										
Power supply voltage (operating voltage range) ^{*1}	24 to 240 VAC (20 to 264 VAC), 50/60 Hz										
Leakage current	1.7 mA max.										
Control output	Load current ^{*2}	5 to 100 mA	5 to 200 mA	5 to 300 mA							
	Residual voltage	Refer to <i>Engineering Data</i> on page 20.									
Indicators	Operation indicator (red)										
Operation mode (with sensing object approaching)	Y1 Models: NO Y2 Models: NC	Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 23 for details.									
Protection circuits	Surge suppressor										
Ambient temperature range ^{*1*2}	Operating/Storage: -25 to 70°C (with no icing or condensation)	Operating/Storage: -40 to 85°C (with no icing or condensation)									
Ambient humidity range	Operating/storage: 35% to 95% (with no condensation)										
Temperature influence	±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C	±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C, ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C									
Voltage influence	±1% max. of sensing distance at rated voltage in the rated voltage ±15% range										
Insulation resistance	50 MΩ min. (at 500 VDC) between current-carrying parts and case										
Dielectric strength	4,000 VAC (M8 Models: 2,000 VAC), 50/60 Hz for 1 min between current-carrying parts and case										
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions										
Shock resistance	Destruction: 500 m/s ² 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions									
Degree of protection	Pre-wired Models: IEC 60529 IP67, in-house standards: oil-resistant Connector Models: IEC 60529 IP67										
Connection method	Pre-wired Models (Standard cable length: 2 m) and Connector Models										
Weight	Pre-wired Models Model	Approx. 60 g	Approx. 70 g	Approx. 130 g	Approx. 175 g						
	Connector Models	Approx. 15 g	Approx. 25 g	Approx. 40 g	Approx. 90 g						
Materials	Case	Stainless steel (SUS303)	Nickel-plated brass								
	Sensing surface	PBT									
	Clamping nuts	Nickel-plated brass									
	Toothed washer	Zinc-plated iron									
Accessories	Instruction manual										

*1. When supplying 24 VAC to any of the above models, make sure that the operating ambient temperature range is at least -25°C.

*2. When using an M18 or M30 Connector Model at an ambient temperature between 70 and 85°C, make sure that the Sensor has a control output (load current) of 5 to 200 mA max.

E2E-X□T1 AC/DC 2-Wire Models

Item	Model	Size	M12	M18	M30
		Shielded	Shielded		
		E2E-X3T1	E2E-X7T1	E2E-X10T1	
Sensing distance		3 mm $\pm 10\%$	7 mm $\pm 10\%$	10 mm $\pm 10\%$	
Set distance		0 to 2.4 mm	0 to 5.6 mm	0 to 8 mm	
Differential travel		10% max. of sensing distance			
Detectable object		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 18.)			
Standard sensing object		Iron, 12 \times 12 \times 1 mm	Iron, 18 \times 18 \times 1 mm	Iron, 30 \times 30 \times 1 mm	
Response frequency *1	DC	1 kHz	0.5 kHz	0.4 kHz	
	AC	25 Hz			
Power supply voltage (operating voltage range) *2		24 to 240 VDC (20 to 264 VDC) 48 to 240 VAC (40 to 264 VAC)			
Leakage current		DC: 1 mA max. AC: 2 mA max.			
Control output	Load current	5 to 100 mA			
	Residual voltage	DC: 6 V max. (Load current: 100 mA, Cable length: 2 m) AC: 10 V max. (Load current: 5 mA, Cable length: 2 m)			
Indicators		Operation indicator (red), Setting indicator (green)			
Operation mode (with sensing object approaching)		NO (Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 21 for details.)			
Protection circuits		Load short-circuit protection (20 to 40 VDC only), Surge suppressor			
Ambient temperature range		Operating: -25 to 70°C, Storage: -40 to 85°C (with no icing or condensation)			
Ambient humidity range		Operating/Storage: 35% to 95% (with no condensation)			
Temperature influence		$\pm 10\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C			
Voltage influence		$\pm 1\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 15\%$ range			
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case			
Dielectric strength		4,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 1,000 m/s ² 10 times each in X, Y, and Z directions			
Degree of protection		IEC 60529 IP67, in-house standards: oil-resistant			
Connection method		Pre-wired Models (Standard cable length: 2 m)			
Weight (packed state)		Approx. 80 g	Approx. 140 g	Approx. 190 g	
Materials	Case	Nickel-plated brass			
	Sensing surface	PBT			
	Clamping nuts	Nickel-plated brass			
	Toothed washer	Zinc-plated iron			
Accessories		Instruction manual			

*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*2. Power Supply Voltage Waveform:
Use a sine wave for the power supply. Using a rectangular AC power supply may result in faulty reset.

E2E-X□E□/F□ DC 3-Wire Models

Item	Model	Size		M8		M12		M18		M30										
		Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded	Shielded	Unshielded									
		E2E-X1R5E□/F□	E2E-X2ME□/F□	E2E-X2E□/F□	E2E-X5ME□/F□	E2E-X5E□/F□	E2E-X10ME□/F□	E2E-X10E□/F□	E2E-X18ME□/F□											
Sensing distance	1.5 mm ±10%	2 mm ±10%			5 mm ±10%			10 mm ±10%		18 mm ±10%										
Set distance	0 to 1.2 mm	0 to 1.6 mm			0 to 4 mm			0 to 8 mm		0 to 14 mm										
Differential travel	10% max. of sensing distance																			
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 18 and 19.)																			
Standard sensing object	Iron, 8 × 8 × 1 mm	Iron, 12 × 12 × 1 mm			Iron, 15 × 15 × 1 mm	Iron, 18 × 18 × 1 mm	Iron, 30 × 30 × 1 mm			Iron, 54 × 54 × 1 mm										
Response frequency *1	2 kHz	0.8 kHz	1.5 kHz	0.4 kHz	0.6 kHz	0.2 kHz	0.4 kHz	0.1 kHz												
Power supply voltage (operating voltage range) *2	12 to 24 VDC (10 to 40 VDC), ripple (p-p): 10% max.																			
Current consumption	13 mA max.																			
Control output	Load current *2	200 mA max.																		
	Residual voltage	2 V max. (Load current: 200 mA, Cable length: 2 m)																		
Indicators	Operation indicator (red)																			
Operation mode (with sensing object approaching)	E1/F1 Models: NO E2/F2 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 21 for details.																			
Protection circuits	Load short-circuit protection, Surge suppressor, Reverse polarity protection																			
Ambient temperature range *2	Operating/Storage: -40 to 85°C (with no icing or condensation)																			
Ambient humidity range	Operating/Storage: 35% to 95% (with no condensation)																			
Temperature influence	±15% max. of sensing distance at 23°C in the temperature range of -40 to 85°C ±10% max. of sensing distance at 23°C in the temperature range of -25 to 70°C																			
Voltage influence	±1% max. of sensing distance at rated voltage in the rated voltage ±15% range																			
Insulation resistance	50 MΩ min. (at 500 VDC) between current-carrying parts and case																			
Dielectric strength	1,000 VAC, 50/60 Hz for 1 minute between current carry parts and case																			
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions																			
Shock resistance	10 times each in X, Y, and Z directions	500 m/s ²			1,000 m/s ²			10 times each in X, Y, and Z directions												
Degree of protection	Pre-wired Models : IEC 60529 IP67, in-house standards: oil-resistant Connector Models : IEC 60529 IP67																			
Connection method	Pre-wired Models (Standard cable length: 2 m) and Connector Models																			
Weight	Pre-wired Models	Approx. 65 g		Approx. 75 g		Approx. 150 g		Approx. 195 g												
	Connector Models	Approx. 15 g		Approx. 25 g		Approx. 40 g		Approx. 90 g												
Materials	Case	Stainless steel (SUS303)		Nickel-plated brass																
	Sensing surface	PBT																		
	Clamp-nuts	Nickel-plated brass																		
	Toothed washer	Zinc-plated iron																		
Accessories	Instruction manual																			

*1. The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

*2. When using an M8 Model at an ambient temperature between 70 and 85°C, supply 10 to 30 VDC to the Sensor and make sure that the Sensor has a control output of 100 mA maximum.

E2E-C□C/B□ and E2E-X1C/B□ DC 3-Wire Models

Item	Model	Size	3 dia.	4 dia.	M5	5.4 dia.									
		Shielded	Shielded												
		E2E-CR6C/B□	E2E-CR8C/B□	E2E-X1C/B□	E2E-C1C/B□										
Sensing distance	0.6 mm $\pm 15\%$	0.8 mm $\pm 15\%$	1 mm $\pm 15\%$												
Set distance	0 to 0.4 mm	0 to 0.5 mm	0 to 0.7 mm												
Differential travel	15% max. of sensing distance														
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on pages 18 and 19.)														
Standard sensing object	Iron, 3 \times 3 \times 1 mm	Iron, 5 \times 5 \times 1 mm													
Response frequency *	2 kHz	3 kHz													
Power supply voltage (operating voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.														
Current consumption	10 mA max.	17 mA max.													
Control output	Load current	Open-collector output, 80 mA max. (30 VDC max.)	Open-collector output, 100 mA max. (30 VDC max.)												
	Residual voltage	1 V max. (Load current: 80 mA, Cable length: 2 m)	2 V max. (Load current: 100 mA, Cable length: 2 m)												
Indicators	Operation indicator (red)														
Operation mode (with sensing object approaching)	C1/B1 Models: NO C2 Models: NC	Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 22 for details.													
Protection circuits	Reverse polarity protection, Surge suppressor														
Ambient temperature range	Operating/Storage: -25 to 70°C (with no icing or condensation)														
Ambient humidity range	Operating/Storage: 35% to 95% (with no condensation)														
Temperature influence	$\pm 15\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C														
Voltage influence	$\pm 5\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 10\%$ range	$\pm 2.5\%$ max. of sensing distance at rated voltage in the rated voltage $\pm 15\%$ range													
Insulation resistance	50 M Ω min. (at 500 VDC) between current-carrying parts and case														
Dielectric strength	500 VAC, 50/60 Hz for 1 min between current-carrying parts and case														
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions														
Shock resistance	Destruction: 500 m/s 2 10 times each in X, Y, and Z directions														
Degree of protection	IEC 60529 IP66	IEC 60529 IP67, in-house standards: oil-resistant													
Connection method	Pre-wired Models (Standard cable length: 2 m)														
Weight (packed state)	Approx. 60 g														
Materials	Case	Stainless steel (SUS303)			Nickel-plated brass										
	Sensing surface	Heat-resistant ABS													
	Clamping nuts	Nickel-plated brass (E2E-X1C/B□ only)													
	Toothed washer	Zinc-plated iron (E2E-X1C/B□ only)													
Accessories	Instruction manual														

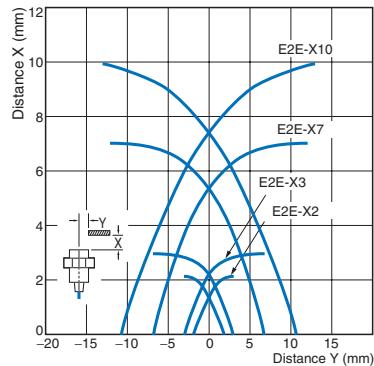
* The response frequency is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

Engineering Data (Typical)

Sensing Area


Shielded Models

E2E-X□D□/-X□T1




Unshielded Models

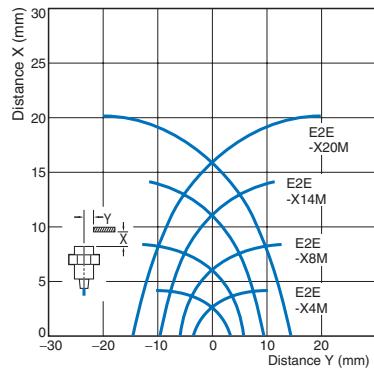E2E-X□MD□




E2E-X□E□/-X□Y□/-X□F□

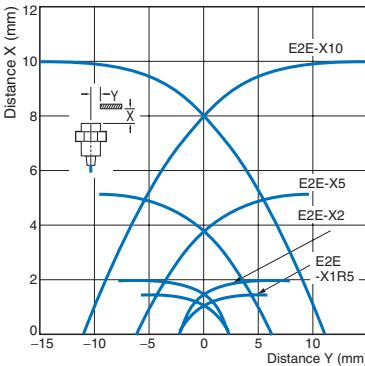


E2E-C□C□/-X□C□

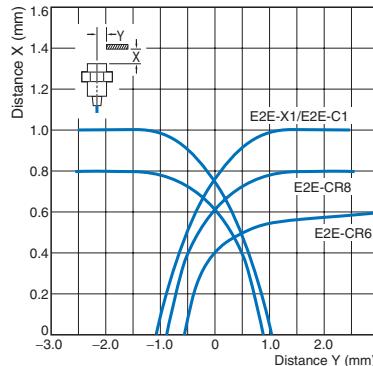E2E-C□B1/-X□B□




E2E-X□ME□/-X□MY□/-X□MF□

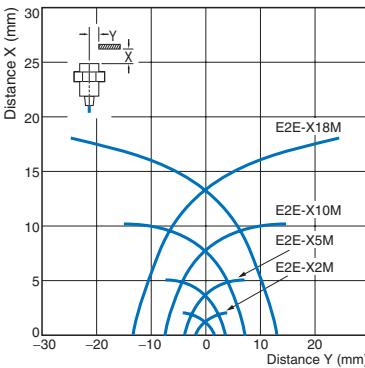


Influence of Sensing Object Size and Material

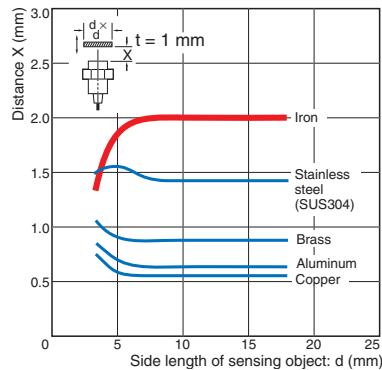
E2E-X2D□




E2E-X3D□/-X3T1

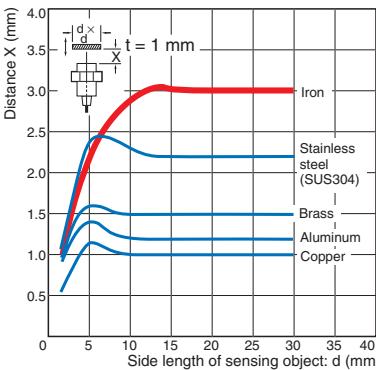


E2E-X7D□/-X7T1

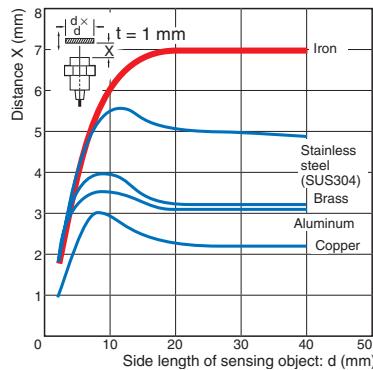


E2E-X10D□/-X10T1

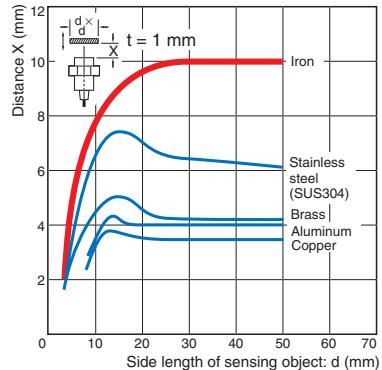


E2E-X4MD□

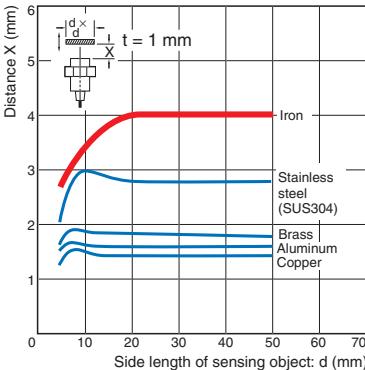


E2E-X8MD□

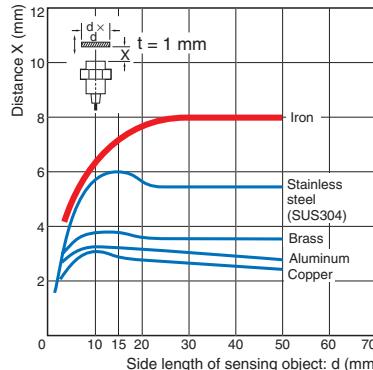


E2E-X14MD

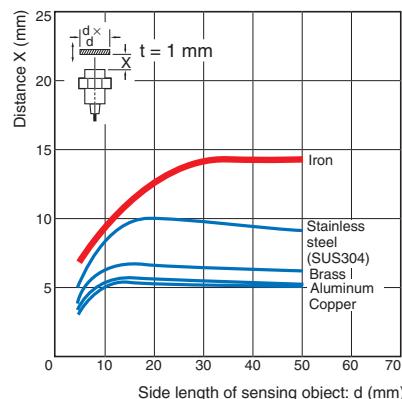


E2E-X20MD □

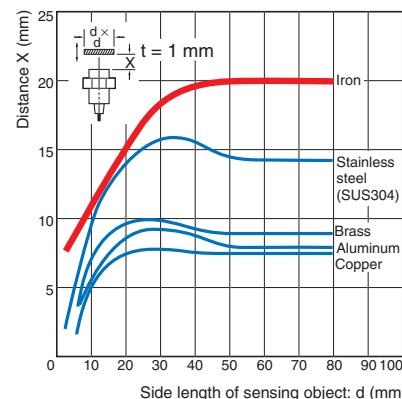


E2E-X1R5E□/-X1R5Y□/-X1R5F□

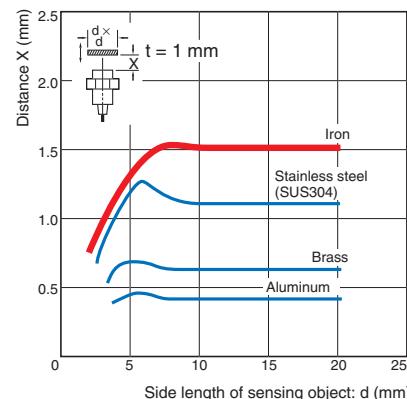


E2E-X2E□/-X2Y□/-X2F□

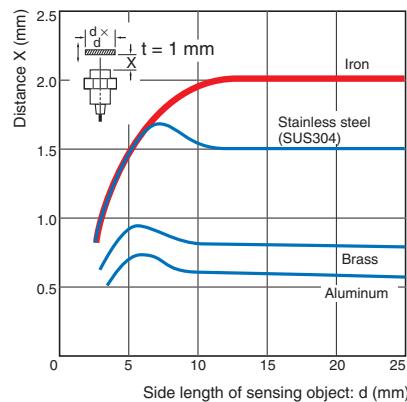


E2E-X5E□/-X5Y□/-X5F□

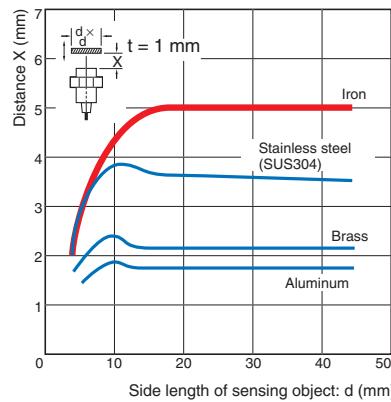


E2E-X10E□/-X10Y□/-X10F□

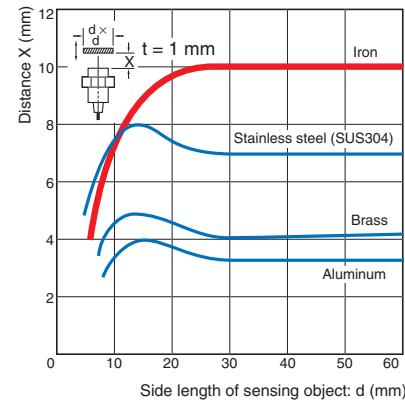


E2E-X2ME□/-X2MY□/-X2MF□

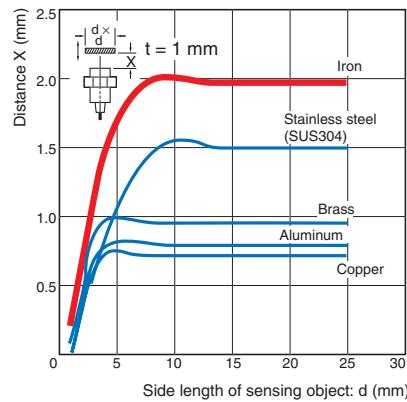


E2E-X5ME□/-X5MY□/-X5MF□

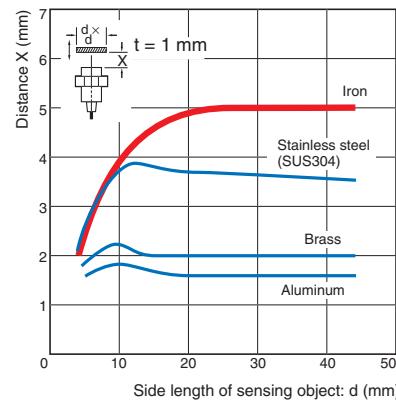


E2E-X10ME□/-X10MY□/-X10MF□

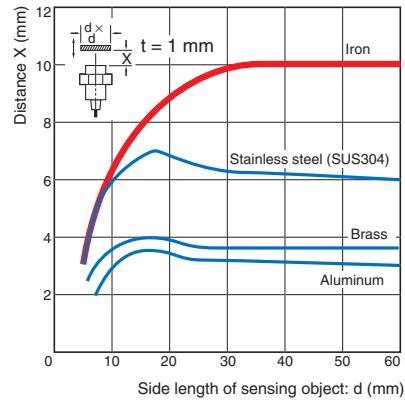


E2E-X18ME□/-X18MY□/-X18MF□









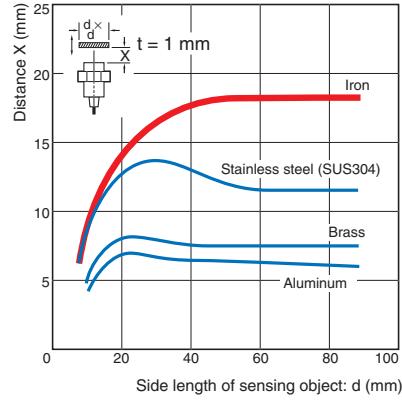


E2E-CR6

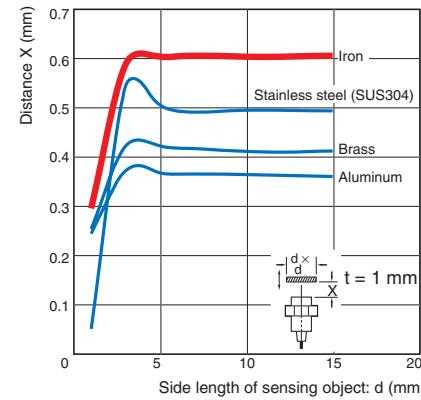








E2E-CR8

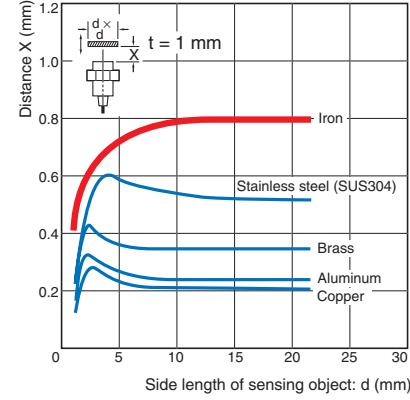

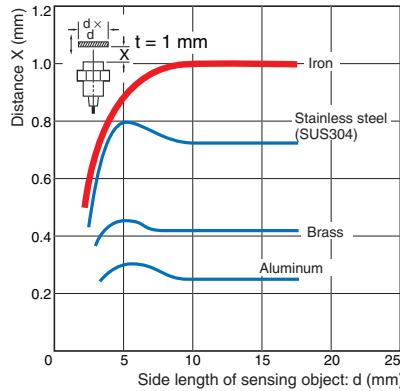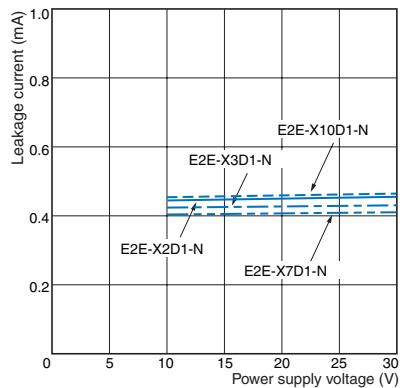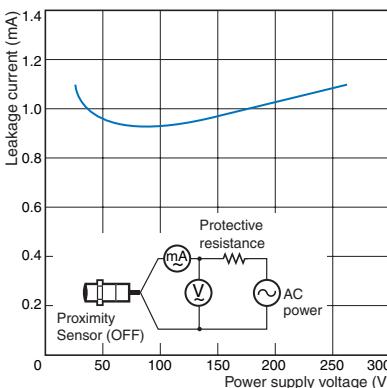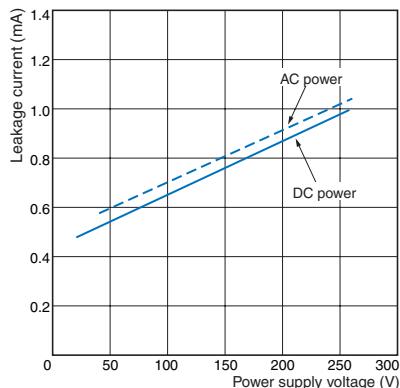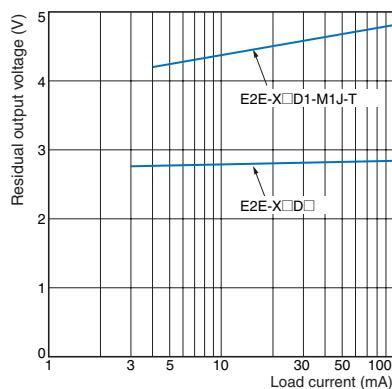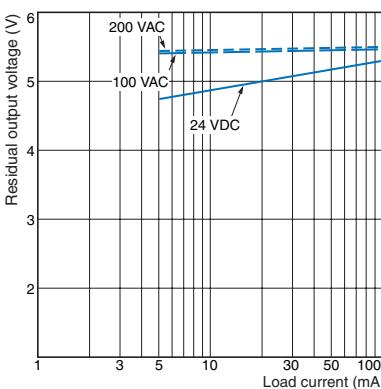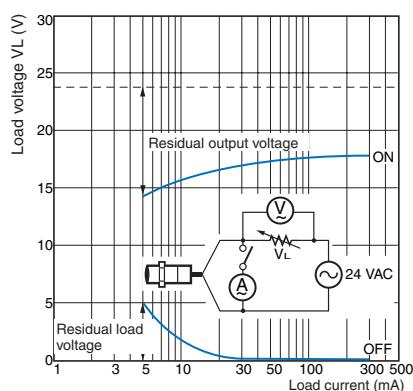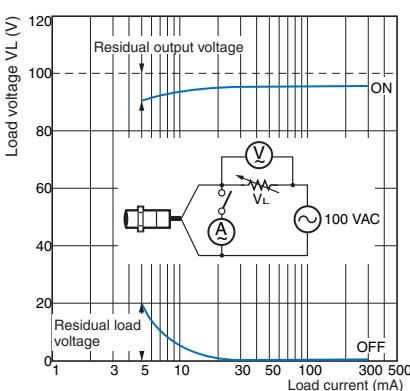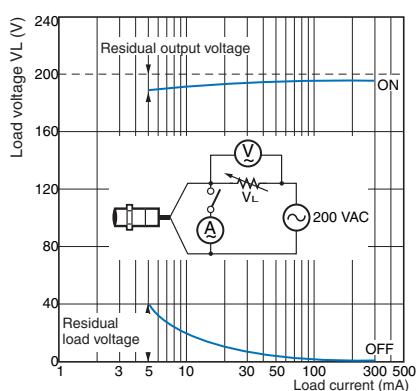E2E-X1□/-C1□**Leakage Current****E2E-X□D□****E2E-X□Y□****E2E-X□T1****Residual Output Voltage****E2E-X□D□****E2E-X□T1****E2E-X□Y□ at 24 VAC****E2E-X□Y□ at 100 VAC****E2E-X□Y□ at 200 VAC**

I/O Circuit Diagrams

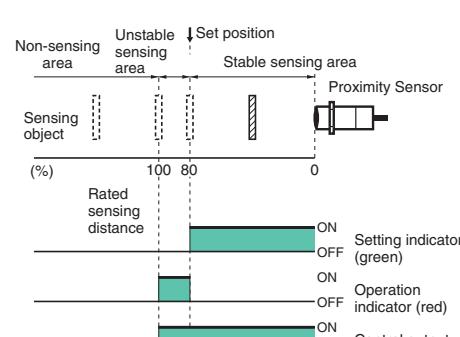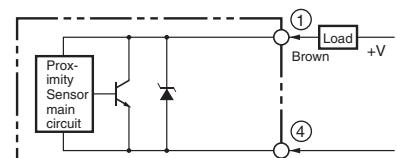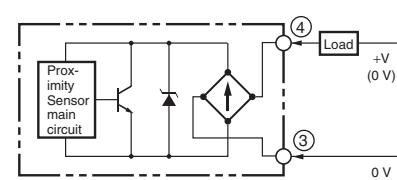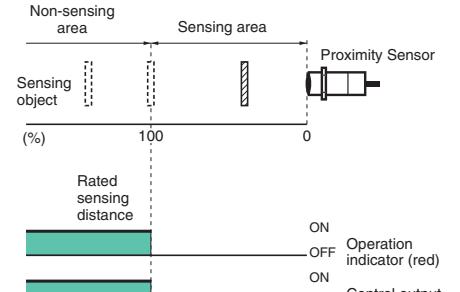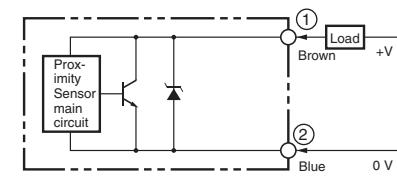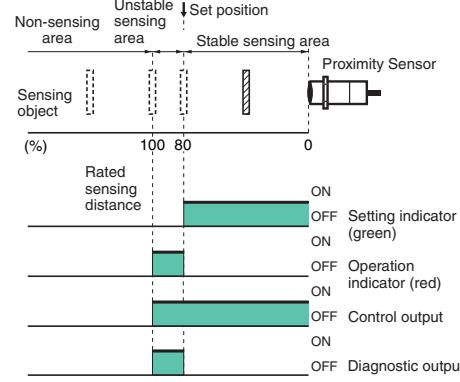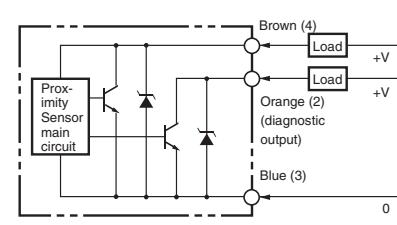E2E-X□D□ DC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit
Without self-diagnostic output: NO	E2E-X□D1-N E2E-X□D1-M1G(J) E2E-X□D1-(M1TGJ)-U E2E-X□D1-M3G		<p>Polarity: Yes</p>  <p>Note: The load can be connected to either the +V or 0 V side.</p>
	E2E-X□D1-M1J-T		<p>Polarity: None</p>  <p>Note 1. The load can be connected to either the +V or 0 V side. 2. The E2E-X□D1-M1J-T has no polarity. Therefore, terminals 3 and 4 have no polarity.</p>
Without self-diagnostic output: NC	E2E-X□D2-N E2E-X□D2-M1G E2E-X□D2-(M1TGJ)-U E2E-X□D2-M3G		 <p>Note: The load can be connected to either the +V or 0 V side.</p>
With self-diagnostic output: NO	E2E-X□D1S E2E-X□D1S-M1	 <p>* The diagnostic output is ON when there is a coil burnout or the sensing object is located in the unstable sensing area for 0.3 s or longer.</p>	 <p>Note: Connect both the loads to the +V side of the control output and diagnostic output.</p>

DC 3-Wire Models

Operation mode	Output specifications	Model	Timing Chart	Output circuit		
NO	NPN output	E2E-X□E□ E2E-X□E□-M1 E2E-X□E□-M3	Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output (between brown and black leads) ON OFF			
			Output voltage (between black and blue leads) High Low			
NC			Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output (between brown and black leads) ON OFF			
			Output voltage (between black and blue leads) High Low			
NO	PNP output	E2E-X□F□ E2E-X□F□-M1 E2E-X□F□-M3	Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output (Between blue and black leads) ON OFF			
			Output voltage (between brown and black leads) High Low			
NC			Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output (Between blue and black leads) ON OFF			
			Output voltage (between brown and black leads) High Low			
NO	NPN open-collector output	E2E-C/X□C□	Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output ON OFF			
			Sensing object Present Not present			
NC			Operation indicator (red) ON OFF			
			Control output ON OFF			
			Sensing object Present Not present			
			Operation indicator (red) ON OFF			
NO	PNP open-collector output	E2E-C/X□B□	Sensing object Present Not present			
			Operation indicator (red) ON OFF			
			Control output ON OFF			
			Sensing object Present Not present			
NC			Operation indicator (red) ON OFF			
			Control output ON OFF			
			Sensing object Present Not present			
			Operation indicator (red) ON OFF			

*Constant current output is 1.5 to 3 mA.

Note: For Connector Models, the connection between pins 1, 4 and 3 uses an NO contact, and the connection between pins 1, 2 and 3 uses an NC contact.




*When a transistor is connected

Note: For Connector Models, the connection between pins 1, 4 and 3 uses an NO contact, and the connection between pins 1, 2 and 3 uses an NC contact.



*The E2E-CR6□ does not have 100-Ω resistance.

*The E2E-CR6□ does not have 100-Ω resistance.

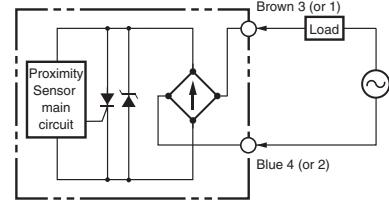AC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit
NO E2E-X□Y□ E2E-X□Y□-M1			
			<p>Note: For Connector Models, the connection between pins 3 and 4 uses an NO contact, and the connection between pins 1 and 2 uses an NC contact.</p>

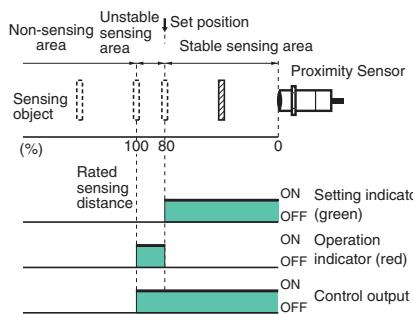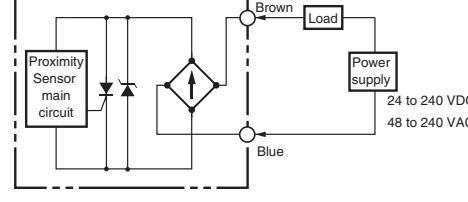AC/DC 2-Wire Models

Operation mode	Model	Timing Chart	Output circuit
NO E2E-X□T1			 <p>Note: The load can be connected to either the +V or 0 V side. There is no need to be concerned about the polarity (brown/blue) of the Proximity Sensor.</p>

e-CON Connectors

Requirement for e-CON Pre-wired Connector: A Connector is not provided with the Sensor. Be sure to order a Connector separately. [\[Dimensions: Inquire.\]](#)

Appearance	Cable length	Connector model number	Applicable Proximity Sensor model number
Single-end connector 	2 m	E39-ECON2M	E2E-X□E□-ECON
	5 m	E39-ECON5M	
Double-end connectors 	0.5 to 1 m	E39-ECONW□M	E2E-X□E□-ECON
	1.1 to 1.5 m	□ indicates cable length (in units of m). Specify with 0.1-increments.	
	1.6 to 2 m		


Sensor I/O Connectors

Model for Connectors and Pre-wired Connectors: A Connector is not provided with the Sensor. Be sure to order a Connector separately.
 [Refer to Dimensions for the XS2, XS3, and XS5.]

Applicable connector code	Connector				Applicable Proximity Sensor model number	Connection diagram No. *2
	Screw	Appearance *1	Cable length 2m	Cable length 5m		
			Connec tor model number	Connec tor model number		
A		Straight	XS2F-D421-DA0-A	XS2F-D421-GA0-A	E2E-X□D1-M1G(J)	1
		L-shape	XS2F-D422-DA0-A	XS2F-D422-GA0-A		
B		Straight	XS2F-D421-DC0-A	XS2F-D421-GC0-A	E2E-X□E1-M1 E2E-X□F1-M1	10
		L-shape	XS2F-D422-DC0-A	XS2F-D422-GC0-A		
C		Straight	XS2F-D421-DD0	XS2F-D421-GD0	E2E-X□D1-M1J-T	3
		L-shape	XS2F-D422-DD0	XS2F-D422-GD0	E2E-X□D1-M1	2
		Straight	XS2F-D421-D80-A	XS2F-D421-G80-A	E2E-X□D1-M1J-T	3
		L-shape			E2E-X□D1-M1	2
D	M12	Straight			E2E-X□D2-M1G(J)	6
		L-shape			E2E-X□D2-M1J-T	8
		Straight			E2E-X□D2-M1	7
		L-shape			E2E-X□D1S-M1	5
		Straight			E2E-X□E2-M1	11
		L-shape			E2E-X□F2-M1	11
		Straight	XS2F-A421-DB0-A	XS2F-A421-GB0-A	E2E-X□Y1-M1	14
		L-shape	XS2F-A422-DB0-A	XS2F-A422-GB0-A	E2E-X□Y2-M1	15
		Straight	XS2F-A421-D90-A	XS2F-A421-G90-A	E2E-X□D1-M1TGJ	16
E		Smartclick Connector, Straight	XS5F-D421-D80-A	XS5F-D421-G80-A	E2E-X□D1-M1TGJ-U	17
		Smartclick Connector, Straight Oil-resistant Reinforced Cables	XS5F-D421-D80-P	XS5F-D421-G80-P	E2E-X□D2-M1TGJ-U	18
					E2E-X□D2-M1TGJ-U	18
I	M8	Straight	XS3F-M421-402-A	XS3F-M421-405-A	E2E-X□D1-M3G	4
		L-shape	XS3F-M422-402-A		E2E-X□D2-M3G	9
		Straight	E2E-X□E1-M3		12	
		L-shape	E2E-X□F1-M3		13	
		Straight	E2E-X□E2-M3		4	
		L-shape	E2E-X□F2-M3		9	
		Straight	E2E-X□E1-M3		12	
		L-shape	E2E-X□F1-M3		13	

Note: Refer to *Introduction to Sensor I/O Connectors* for details and for information on Cable length and Robotics Cables.

*1. Images of straight and L-shaped connectors.



*2. Refer to *Connection Diagrams* on page 25 for information on Proximity Sensor and I/O Connector connections.

Connections for Sensor I/O Connectors

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections	
	Type	Operation mode	Model			
1	DC 2-wire (IEC pin wiring)	NO	E2E-X□D1-M1G(J)	XS2F-D42□-□A0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Brown (+) ② Blue (-)
2	DC 2-wire (previous pin wiring)		E2E-X□D1-M1	XS2F-D42□-□D0 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Blue (-) ② Brown (+)
3	DC 2-wire (no polarity)		E2E-X□D1-M1J-T	XS2F-D42□-□D0 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F Main circuit ① Blue (+) (-) ② Brown (-) (+)
4	DC 2-wire (M8 connector)		E2E-X□D1-M3G	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F * Main circuit ① Brown (+) ② White (not connected) ③ Blue (not connected) ④ Black (-)
5	DC 2-wire (diagnostic type)		E2E-X□D1S-M1	XS2F-D42□-□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F * Main circuit ① Brown (not connected) ② White (diagnostic output) (+) ③ Blue (0 V) ④ Black (control output) (+)
6	DC 2-wire (IEC pin wiring)	NC	E2E-X□D2-M1G(J)	XS2F-D42□-□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F * Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)
7	DC 2-wire (previous pin wiring)		E2E-X□D2-M1	XS2F-D42□-□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F * Main circuit ① Brown (not connected) ② White (+) ③ Blue (-) ④ Black (not connected)
8	DC 2-wire (no polarity)		E2E-X□D2-M1J-T	XS2F-D42□-□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F * Main circuit ① Brown (+) (-) ② White (-) (+) ③ Blue (not connected) ④ Black (not connected)
9	DC 2-wire (M8 connector)		E2E-X□D2-M3G	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F * Main circuit ① Brown (+) ② White (-) ③ Blue (not connected) ④ Black (not connected)

* Different from Proximity Sensor wire colors.

Connection diagram No.	Proximity Sensor			Sensor I/O Connector model number	Connections	
	Type	Operation mode	Model			
10	DC 3-wire	NO	E2E-X□E/F1-M1	XS2F-D42□□C0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F ○ Brown (+V) ○ Blue (0 V) ○ Black (output)
11		NC	E2E-X□E2/F2-M1	XS2F-D42□□80-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS3F ○ Brown (+V) ○ White (not connected) ○ Blue (0 V) ○ Black (output)
12	DC 3-wire (M8 connector)	NO	E2E-X□E1/F1-M3	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F ○ Brown (+V) ○ White (not connected) ○ Blue (0 V) ○ Black (output)
13		NC	E2E-X□E2/F2-M3	XS3F-M42□-40□-A 1: Straight 2: L-shape 2: 2-m cable 5: 5-m cable	E2E	XS3F ○ Brown (+V) ○ White (output) ○ Blue (0 V) ○ Black (not connected)
14	AC 2-wire	NO	E2E-X□Y1-M1	XS2F-A42□□B0-A 1: Straight 2: L-shape D: 2-m cable G: 5-m cable	E2E	XS2F ○ Brown ○ Blue
15		NC	E2E-X□Y2-M1	XS2F-A421-□90-A D: 2-m cable G: 5-m cable	E2E	XS2F* ○ Brown ○ White ○ Blue (not connected) ○ Black (not connected)
16	DC 2-wire (Smartclick connector)	NO	E2E-X□D1-M1TGJ	XS5F-D421-□80-A D: 2-m cable G: 5-m cable	E2E	XS5F ○ Brown (+) ○ White (not connected) ○ Blue (not connected) ○ Black (-)
17			E2E-X□D1-M1TGJ-U	XS5F-D421-□80-P D: 2-m cable G: 5-m cable	E2E	XS5F ○ Brown (+) ○ White (not connected) ○ Blue (not connected) ○ Black (-)
18		NC	E2E-X□D2-M1TGJ-U	XS5F-D421-□80-P D: 2-m cable G: 5-m cable	E2E	XS5F ○ Brown (+) ○ White (-) ○ Blue (not connected) ○ Black (not connected)

* Different from Proximity Sensor wire colors.

Refer to *Introduction to Sensor I/O Connectors* for details.

Safety Precautions

Refer to **Warranty and Limitations of Liability**.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



⚠ CAUTION

- Do not short the load. Explosion or burning may result.
- Do not supply power to the Sensor with no load, otherwise Sensor may be damaged.



Applicable Models

E2E-CR6□
E2E-CR8□
E2E-X1□
E2E-C1□

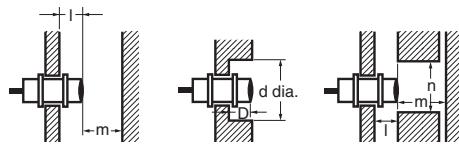
Precautions for Correct Use

Do not use this product under ambient conditions that exceed the ratings.

● Design

Influence of Surrounding Metal

When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.



Influence of Surrounding Metal

(Unit: mm)



Model		Item	M8	M12	M18	M30
DC 2-Wire Models E2E-X□D□	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	12	15	22	30
		d	24	40	70	90
		D	12	15	22	30
		m	8	20	40	70
		n	24	40	70	90
AC/DC 2-Wire Models E2E-X□T1	Shielded	I		0		
		d	8	12	18	30
		D		0		
		m	4.5	8	20	40
		n	12	18	27	45
	Unshielded	I	12	15	22	30
		d	24	40	70	90
		D	12	15	22	30
		m	8	20	40	70
		n	24	40	70	90
Model		Item	3 dia.	4 dia.	M5	5.4 dia.
DC 3-Wire Models E2E-X□E□ E2E-X□F□	Shielded	I		0		
		d	3	4	5	5.4
		D		0		
		m	2	2.4	3	
		n	6		8	

Relationship between Sizes and Models

Model	Model
3 dia.	E2E-CR6C/B
M5	E2E-CR8C□
	E2E-CR8B□
	E2E-X1C□
	E2E-X1B□
	E2E-C1C□
	E2E-C1B□
	E2E-X2D□
	E2E-X1R5E□
	E2E-X1R5F□
	E2E-X1R5Y□
M8	E2E-X4MD□
	E2E-X2ME□
	E2E-X2MF□
	E2E-X2MY□
	E2E-X3D□
	E2E-X2E□
	E2E-X2F□
	E2E-X2Y□
	E2E-X3T1
	E2E-X8MD□
M12	E2E-X5ME□
	E2E-X5MF□
	E2E-X5MY□
	E2E-X7D□
	E2E-X5E□
	E2E-X5F□
	E2E-X5Y□
	E2E-X7T1
	E2E-X14MD□
	E2E-X10ME□
M18	E2E-X10MF□
	E2E-X10MY□
	E2E-X10D□
	E2E-X10E□
	E2E-X10F□
	E2E-X10Y□
	E2E-X10T1
	E2E-X20MD□
	E2E-X18ME□
	E2E-X18MF□
M30	E2E-X18MY□

Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.



Mutual Interference

(Unit: mm)

Model		Item	M8	M12	M18	M30
DC 2-Wire Models E2E-X□D□	Shielded	A	20	30 (20)	50 (30)	100 (50)
		B	15	20 (12)	35 (18)	70 (35)
AC/DC 2-Wire Models E2E-X□T1	Unshielded	A	80	120 (60)	200 (100)	300 (100)
		B	60	100 (50)	110 (60)	200 (100)
DC 3-Wire Models E2E-X□E□/X□F□	Shielded	A	20	30 (20)	50 (30)	100 (50)
		B	15	20 (12)	35 (18)	70 (35)
AC 2-Wire Models E2E-X□Y□	Unshielded	A	80	120 (60)	200 (100)	300 (100)
		B	60	100 (50)	110 (60)	200 (100)
Model		Item	3 dia.	4 dia.	M5	5.4 dia.
DC 3-Wire Models E2E-X□C/B□ E2E-C□C/B□	Shielded	A			20	
		B			15	

Note: Values in parentheses apply to Sensors operating at different frequencies.

Loads with Large Surge Currents (E2E-X□T□)

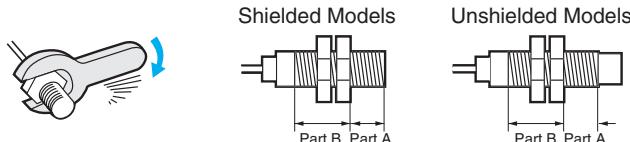
If a load with a large surge current is connected, such as a relay, lamp, or motor, the surge current may cause the load short-circuit protection circuit to operate, resulting in operating errors.

● Mounting

Tightening Force

Do not tighten the nut with excessive force.

A washer must be used with the nut.




Note: 1. The allowable tightening strength depends on the distance from the edge of the head, as shown in the following table. (A is the distance from the edge of the head. B includes the nut on the head side. If the edge of the nut is in part A, the tightening torque for part A applies instead.)

2. The following strengths assume washers are being used.

Model	Part A		Part B	
	Dimension	Torque	Torque	
M5	1 N·m			
M8	Shielded	9	9 N·m	
	Unshielded	3		
M12	30 N·m			
M18	70 N·m			
M30	180 N·m			

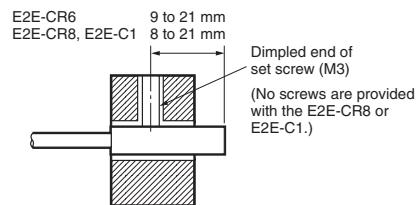Refer to the following to mount the E2E-CR6, E2E-CR8 and E2E-C1 Unthreaded Cylindrical Models.



When using a set screw, tighten it to a torque of 0.2 N·m max.
(E2E-C1: 0.4 N·m max.)

Connecting a DC 2-Wire Proximity Sensor to a PLC (Programmable Controller)

Required Conditions

Connection to a PLC is possible if the specifications of the PLC and the Proximity Sensor satisfy the following conditions. (The meanings of the symbols are given at the right.)

1. The ON voltage of the PLC and the residual voltage of the Proximity Sensor must satisfy the following.

$$V_{ON} \leq V_{CC} - V_R$$

2. The OFF current of the PLC and the leakage current of the Proximity Sensor must satisfy the following.

$$I_{OFF} \geq I_{leak}$$

(If the OFF current is not listed in the PLC's input specifications, take it to be 1.3 mA.)

3. The ON current of the PLC and the control output of the Proximity Sensor must satisfy the following.

$$I_{OUT} (\text{min.}) \leq I_{ON} \leq I_{OUT} (\text{max.})$$

The ON current of the PLC will vary, however, with the power supply voltage and the input impedance, as shown in the following equation.

$$I_{ON} = (V_{CC} - V_R - V_{PLC})/R_{IN}$$

Connection is thus possible.

V _{ON} : ON voltage of PLC (14.4 V)
I _{ON} : ON current of PLC (typically 7 mA)
I _{OFF} : OFF current of PLC (1.3 mA)
R _{IN} : Input impedance of PLC (3 kΩ)
V _{PLC} : Internal residual voltage of PLC (4 V)
V _R : Output residual voltage of Proximity Sensor (3 V)
I _{leak} : Leakage current of Proximity Sensor (0.8 mA)
I _{OUT} : Control output of Proximity Sensor (3 to 100 mA)
V _{CC} : Power supply voltage (PLC: 20.4 to 26.4 V)
Values in parentheses apply to the following PLC model and Proximity Sensor model.
PLC: C200H-ID212
Sensor: E2E-X7D1-N

Dimensions

(Unit: mm)

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Main Units

Model Number-Dimensions Drawing Number Lookup Table

Model	Model	DC 2-Wire Models		DC 3-Wire Models		AC 2-Wire Models		AC/DC 2-Wire Models	
		Model	No.	Model	No.	Model	No.	Model	No.
Pre-wired Models	Shielded	3 dia.		E2E-CR6□	1				
		4 dia.		E2E-CR8□	2				
		M5		E2E-X1□	4				
		5.4 dia.		E2E-C1□	3				
		M8	E2E-X2D□	5	E2E-X1R5E□/F□	5	E2E-X1R5Y□	7	
	Unshielded	M12	E2E-X3D□	9	E2E-X2E□/F□	9	E2E-X2Y□	11	E2E-X3T1
		M18	E2E-X7D□	14	E2E-X5E□/F□	14	E2E-X5Y□	14	E2E-X7T1
		M30	E2E-X10D□	16	E2E-X10E□/F□	16	E2E-X10Y□	16	E2E-X10T1
		M8	E2E-X4MD□	6	E2E-X2ME□/F□	6	E2E-X2MY□	8	
		M12	E2E-X8MD□	10	E2E-X5ME□/F□	10	E2E-X5MY□	12	
Connector Models (M12)	Shielded	M18	E2E-X14MD□	15	E2E-X10ME□/F□	15	E2E-X10MY□	15	
		M30	E2E-X20MD□	17	E2E-X18ME□/F□	17	E2E-X18MY□	17	
		M8	E2E-X2D□-M1(G)	18	E2E-X1R5E/F□-M1	18	---		
		M12	E2E-X3D□-M1(G)	20	E2E-X2E/F□-M1	20	E2E-X2Y□-M1	22	
	Unshielded	M18	E2E-X7D□-M1(G)	24	E2E-X5E/F□-M1	24	E2E-X5Y□-M1	24	
		M30	E2E-X10D□-M1(G)	26	E2E-X10E/F□-M1	26	E2E-X10Y□-M1	26	
		M8	E2E-X4MD□-M1(G)	19	E2E-X2ME/F□-M1	19	---		
		M12	E2E-X8MD□-M1(G)	21	E2E-X5ME/F□-M1	21	E2E-X5MY□-M1	23	
Connector Models (M8)	Unshielded	M18	E2E-X14MD□-M1(G)	25	E2E-X10ME/F□-M1	25	E2E-X10MY□-M1	25	
		M30	E2E-X20MD□-M1(G)	27	E2E-X18ME/F□-M1	27	E2E-X18MY□-M1	27	
Connector Models (M8)	Shielded	M8	E2E-X2D□-M3G	28	E2E-X1R5E/F□-M3	28	---		
	Unshielded	M8	E2E-X4MD□-M3G	29	E2E-X2ME/F□-M3	29	---		
Pre-wired Connector Models	Shielded	M8	E2E-X2D□-M1(T)GJ(-U)	30	---	---	---		
		M12	E2E-X3D□-M1(T)GJ(-U)	31	---	---	---		
		M18	E2E-X7D□-M1(T)GJ(-U)	33	---	---	---		
		M30	E2E-X10D□-M1(T)GJ(-U)	35	---	---	---		
	Unshielded	M12	E2E-X8MD1-M1(T)GJ	32	---	---	---		
		M18	E2E-X14MD1-M1(T)GJ	34	---	---	---		
	M30	E2E-X20MD1-M1(T)GJ	36	---	---	---	---		
Pre-wired Connector Models (no polarity)	Shielded	M12	E2E-X3D1-M1J-T	31	---	---	---		
		M18	E2E-X7D□-M1J-T	33	---	---	---		
		M30	E2E-X10D□-M1J-T	35	---	---	---		


Note 1. Two clamping nuts and one toothed washer are provided with M8 to M30 Models.

2. The model numbers of M8 to M30 Pre-wired Models are laser-marked on the milled section and cable section. This does not apply, however, to models that end in -U.

Pre-wired Models (Shielded)




Diagram 1 E2E-CR6B□/CR6C□




*2.4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.08 mm², Insulator diameter: 0.7 mm)

Diagram 3 E2E-C1B□/C1C□



*2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.14 mm², Insulator diameter: 0.9 mm), Standard length: 2 m
Robotics Cable Models:
2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.15 mm², Insulator diameter: 1.05 mm), Standard length: 2 m
The cable can be extended up to 100 m (separate metal conduit).

Diagram 2 E2E-CR8B□/CR8C□




*2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.14 mm², Insulator diameter: 0.9 mm), Standard length: 2 m



Robotics Cable Models:
2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.15 mm², Insulator diameter: 1.05 mm), Standard length: 2 m

The cable can be extended up to 100 m (separate metal conduit).


Mounting Hole Dimensions




Dimension	3 dia.	4 dia.	5.4 dia.
F (mm)	3.3 ^{+0.3} ₀ dia.	4.2 ^{+0.5} ₀ dia.	5.7 ^{+0.5} ₀ dia.

**Pre-wired Models
(Shielded)**

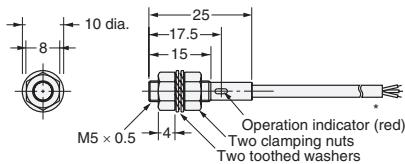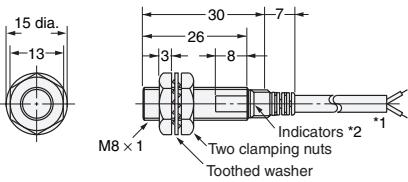Mounting Hole Dimensions


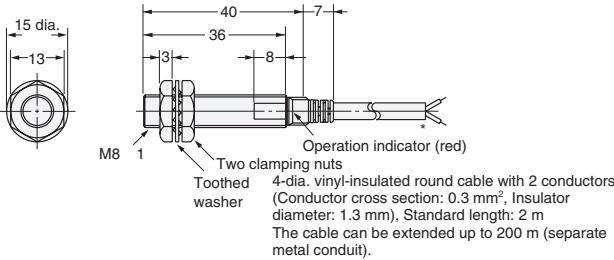
Dimension	M5	M8	M12
F (mm)	5.5 ^{+0.5} ₀ dia.	8.5 ^{+0.5} ₀ dia.	12.5 ^{+0.5} ₀ dia.

Diagram 4 E2E-X1B□/X1C□


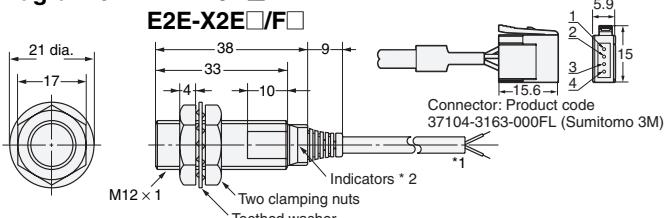
*2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.14 mm², Insulator diameter: 0.9 mm), Standard length: 2 m
Robotics Cable Models:
2.9-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.15 mm², Insulator diameter: 1.05 mm), Standard length: 2 m
The cable can be extended up to 100 m (separate metal conduit).

**Diagram 5 E2E-X2D□
E2E-X1R5E□/F□**



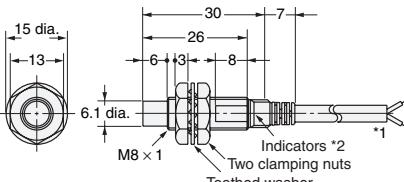
*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
Models with Highly Oil-resistant Cables:
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).
*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

Diagram 7 E2E-X1R5Y□



4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).

**Diagram 9 E2E-X3D□
E2E-X2E□/F□**


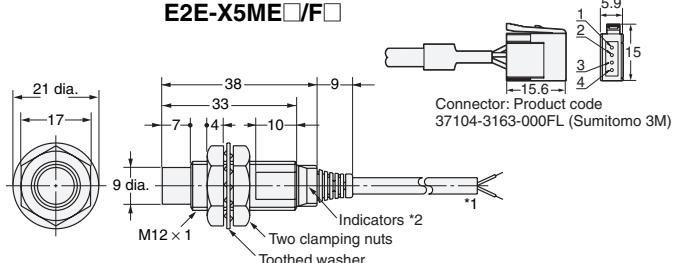
*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
Models with Highly Oil-resistant Cables:
4-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

Pre-wired Models (Unshielded)

**Diagram 6 E2E-X4MD□
E2E-X2ME□/F□**


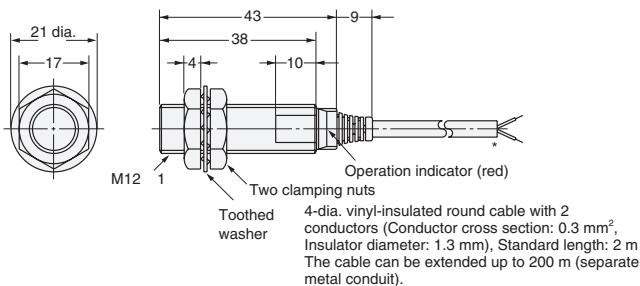
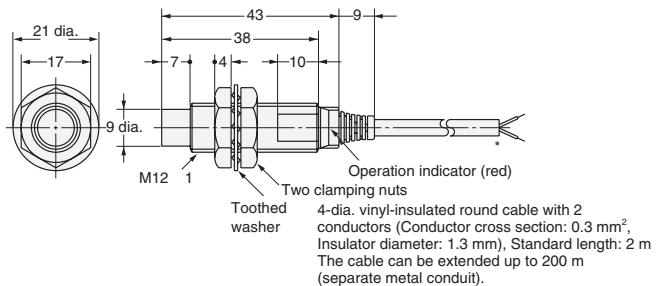
*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).
*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

Diagram 8 E2E-X2MY□


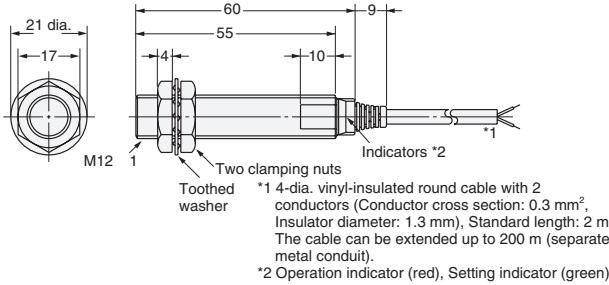

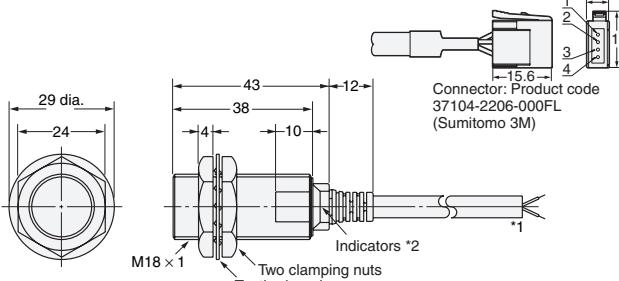
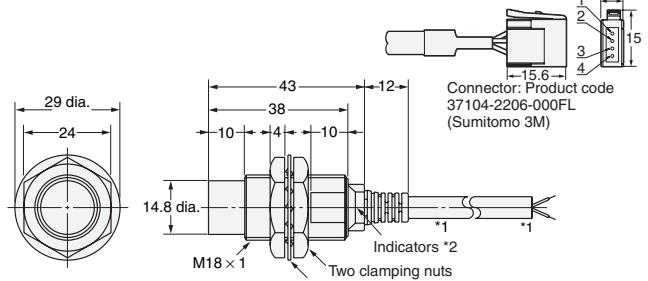
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
The cable can be extended up to 200 m (separate metal conduit).

**Diagram 10 E2E-X8MD□
E2E-X5ME□/F□**


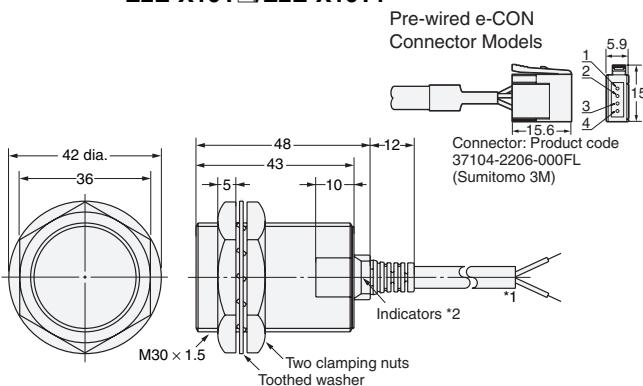
*1. 4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.3 mm), Standard length: 2 m
Robotics Cable Models:
4-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.3 mm², Insulator diameter: 1.27 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D1 Models: Operation indicator (red) and setting indicator (green), D2/E/F Models: Operation indicator (red)

Diagram 11 E2E-X2Y□**Diagram 12 E2E-X5MY□****Pre-wired Models (Shielded)****Mounting Hole Dimensions**

Dimension	M8	M12	M18	M30
F (mm)	8.5 ^{+0.5} ₀ dia.	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.


Diagram 13 E2E-X3T1**Pre-wired Models (Unshielded)****Diagram 14 E2E-X7D□/E2E-X5E□/F□
E2E-X5Y□/E2E-X7T1**Pre-wired e-CON
Connector Models**Diagram 15 E2E-X14MD□/E2E-X10ME□/F□
E2E-X10MY□**Pre-wired e-CON
Connector Models

**Diagram 16 E2E-X10D□/E2E-X10E□/F□
E2E-X10Y□/E2E-X10T1**



*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
Robotics Cable Models:
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
Models with Highly Oil-resistant:
6-dia. polyurethane-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D1/T Models: Operation indicator (red), Setting indicator (green)
D2/E/F/Y Models: Operation indicator (red)

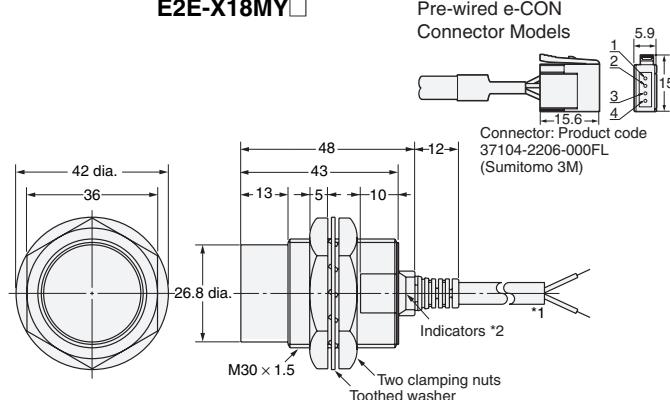**Diagram 17 E2E-X20MD□/E2E-X18ME□/F□
E2E-X18MY□**



*1. 6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.9 mm), Standard length: 2 m
Robotics Cable Models:
6-dia. vinyl-insulated round cable with 2 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.5 mm², Insulator diameter: 1.74 mm), Standard length: 2 m
The cable can be extended (separate metal conduit) up to 200 m for the control output and up to 100 m for the diagnostic output.
*2. D1/T Models: Operation indicator (red), Setting indicator (green)
D2/E/F/Y Models: Operation indicator (red)

**M8 Connector Models
(Shielded)**



**M8 Connector Models
(Unshielded)**



Diagram 28 E2E-X2D□-M3G/E2E-X1R5E□-M3/X1RF□-M3



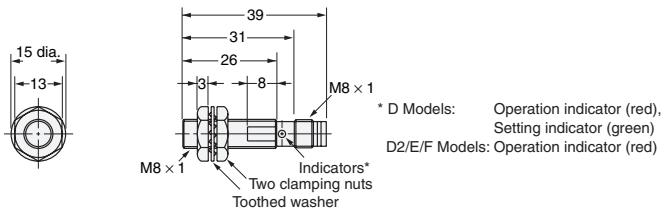



Diagram 29 E2E-X4MD□-M3G/E2E-X2ME□-M3/X2MF□-M3

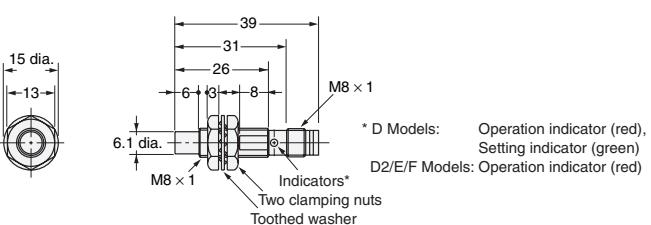


**M12 Connector Models
(Shielded)**




**M12 Connector Models
(Unshielded)**




**Diagram 18 E2E-X2D□-M1(G)
E2E-X1R5E□-M1/E2E-X1R5F□-M1**

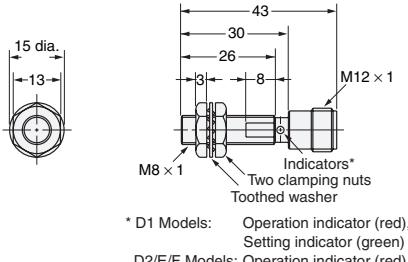

**Diagram 19 E2E-X4MD□-M1(G)
E2E-X2ME□-M1/E2E-X2MF□-M1**

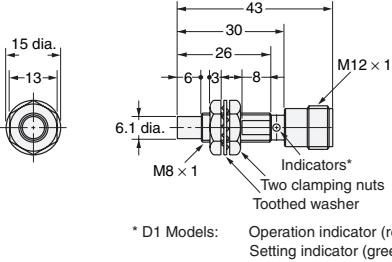


**Diagram 20 E2E-X3D□-M1(G)
E2E-X2E□-M1/E2E-X2F□-M1**

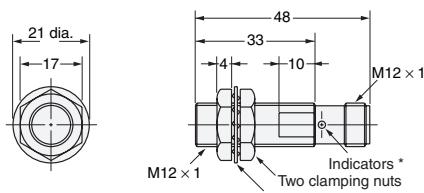


* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/F Models: Operation indicator (red)

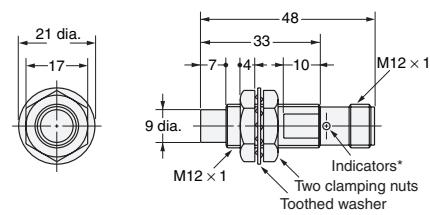**Diagram 21 E2E-X8MD□-M1(G)
E2E-X5ME□-M1/E2E-X5MF□-M1**




* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/F Models: Operation indicator (red)

Diagram 22 E2E-X2Y□-M1

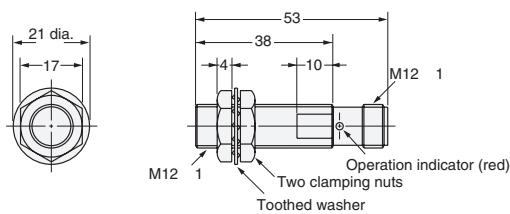


**Diagram 24 E2E-X7D□-M1(G)/E2E-X5E□-M1/X5F□-M1
E2E-X5Y□-M1**

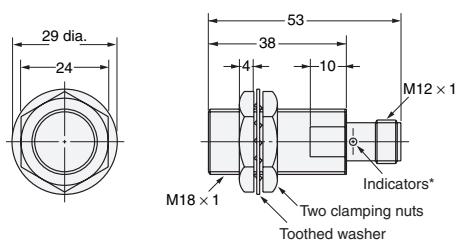


* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/Y Models: Operation indicator (red)

Diagram 23 E2E-X5MY□-M1

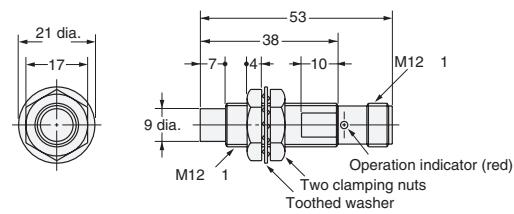


**Diagram 25 E2E-X14MD□-M1(G)/E2E-X10ME□-M1
X10MF□-M1
E2E-X10MY□-M1**

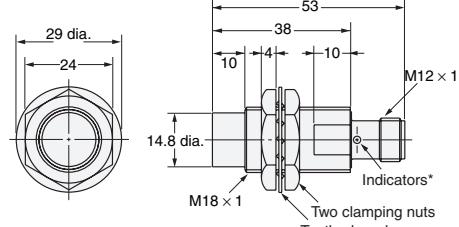


* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/Y Models: Operation indicator (red)

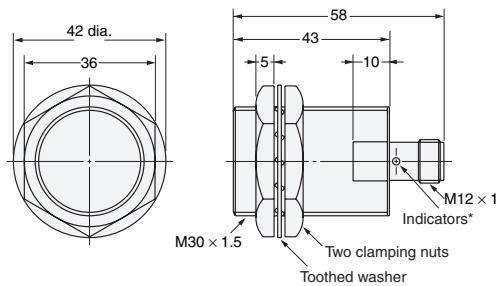**Diagram 26 E2E-X10D□-M1(G)/E2E-X10E□-M1/X10F□-M1
E2E-X10Y□-M1**




* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/Y Models: Operation indicator (red)

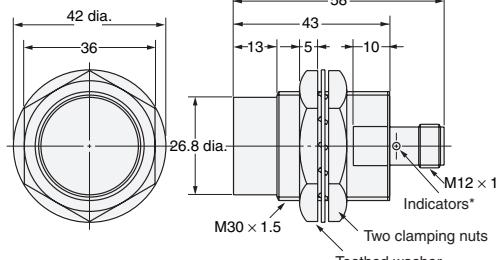**Diagram 27 E2E-X20MD□-M1(G)/E2E-X18ME□-M1/
X18MF□-M1
E2E-X18MY□-M1**




* D1 Models: Operation indicator (red), Setting indicator (green)
D2/E/Y Models: Operation indicator (red)

Mounting Hole Dimensions



Dimensions	M8	M12	M18	M30
F (mm)	$8.5^{+0.5}_0$ dia.	$12.5^{+0.5}_0$ dia.	$18.5^{+0.5}_0$ dia.	$30.5^{+0.5}_0$ dia.

Pre-wired Connector Models (Shielded)





Mounting Hole Dimensions



Dimension	M12	M18	M30
F (mm)	12.5 ^{+0.5} ₀ dia.	18.5 ^{+0.5} ₀ dia.	30.5 ^{+0.5} ₀ dia.

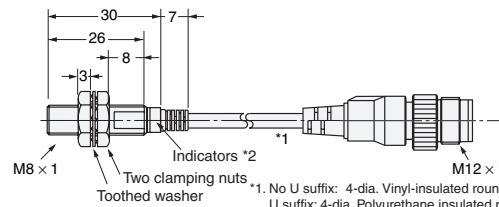

Diagram 30 E2E-X2D□-M1TGJ-U *3
E2E-X2D1-M1TGJ



*1. No U suffix: 4-dia. Vinyl-insulated round cable
U suffix: 4-dia. Polyurethane insulated round cable,
Standard length: 300 mm
*2. D1 Models: Operation indicator (red), Setting indicator (green)
D2 Models: Operation indicator (red)

*3. The connectors for M1TGJ models are XS5 Smartclick connectors.

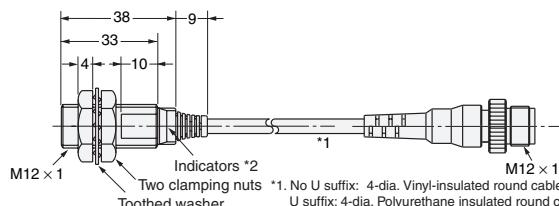

Diagram 31 E2E-X3D□-M1GJ
E2E-X3D1-M1J-T
E2E-X3D□-M1TGJ-U *3
E2E-X3D1-M1TGJ



*1. No U suffix: 4-dia. Vinyl-insulated round cable
U suffix: 4-dia. Polyurethane insulated round cable,
Standard length: 300 mm
*2. D1 Models: Operation indicator (red), Setting indicator (green)
D2 Models: Operation indicator (red)

*3. The connectors for M1TGJ models are XS5 Smartclick connectors.

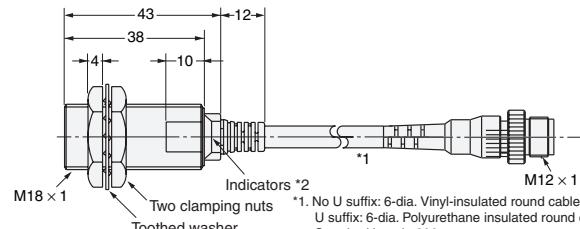

Diagram 33 E2E-X7D□-M1GJ
E2E-X7D□-M1J-T
E2E-X7D□-M1TGJ-U *3
E2E-X7D1-M1TGJ



*1. No U suffix: 6-dia. Vinyl-insulated round cable
U suffix: 6-dia. Polyurethane insulated round cable,
Standard length: 300 mm
*2. D1 Models: Operation indicator (red), Setting indicator (green)
D2 Models: Operation indicator (red)

*3. The connectors for M1TGJ models are XS5 Smartclick connectors.

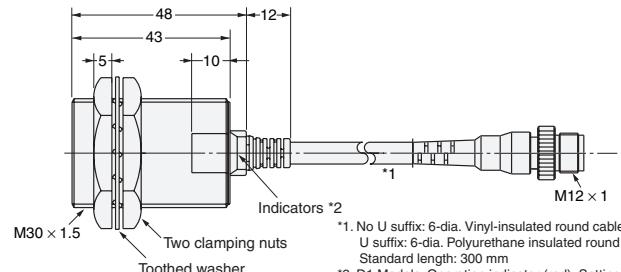Diagram 35 E2E-X10D□-M1GJ
E2E-X10D□-M1J-T
E2E-X10D□-M1TGJ-U *3
E2E-X10D1-M1TGJ




*1. No U suffix: 6-dia. Vinyl-insulated round cable
U suffix: 6-dia. Polyurethane insulated round cable,
Standard length: 300 mm
*2. D1 Models: Operation indicator (red), Setting indicator (green)
D2 Models: Operation indicator (red)

*3. The connectors for M1TGJ models are XS5 Smartclick connectors.


Pre-wired Connector Models (Unshielded)

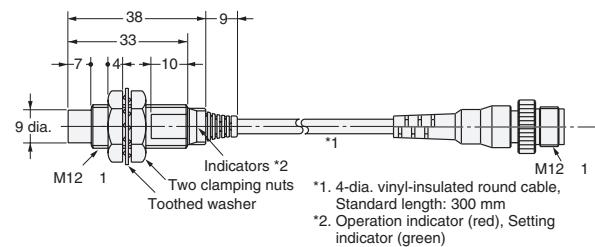Diagram 32 E2E-X8MD1-M1GJ
E2E-X8MD1-M1TGJ




*1. 4-dia. vinyl-insulated round cable,
Standard length: 300 mm
*2. Operation indicator (red), Setting indicator (green)

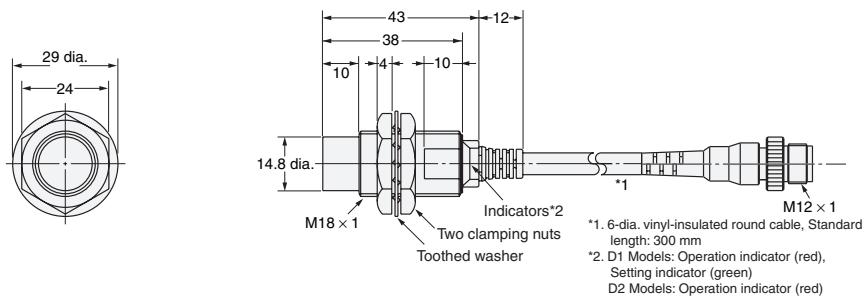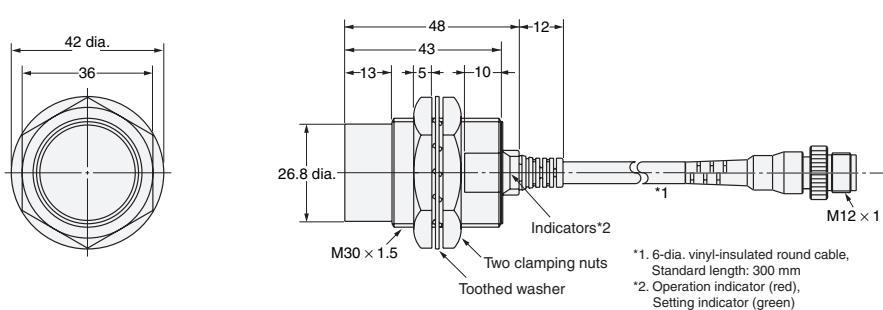**Diagram 34 E2E-X14MD□-M1GJ
E2E-X14MD1-M1TGJ**

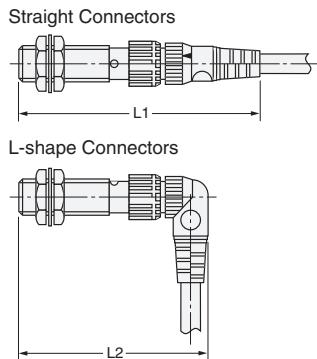


**Diagram 36 E2E-X20MD1-M1GJ
E2E-X20MD1-M1TGJ**

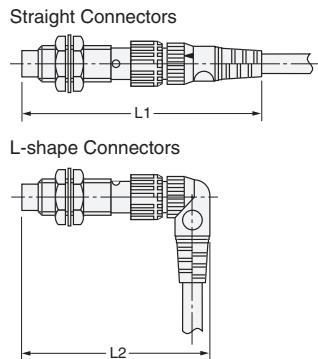


Dimensions for Proximity Sensors with Sensor I/O Connectors

Shielded Models



Unshielded Models



Dimensions with the XS2F Connected (Unit: mm)

Dimension Sensor diameter	L1	L2
M8	Approx. 75	Approx. 62
M12*	Approx. 80	Approx. 67
	Approx. 85	Approx. 72
M18	Approx. 85	Approx. 72
M30	Approx. 90	Approx. 77

* The overall length of the Sensor is different between AC and DC Models for Sensors with diameters of M12. This will change the dimension when the I/O Connector is connected.

Dimensions with the XS3F Connected (Unit: mm)

Dimension Sensor diameter	L1	L2
M8	Approx. 65	Approx. 54

Accessories (Order Separately)

Sensor I/O Connectors

Refer to *Introduction to Sensor I/O Connectors* for details.

Mounting Brackets

Protective Covers

Sputter Protective Covers

Refer to Y92□ for details.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2010.8

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2010 All Right Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru