
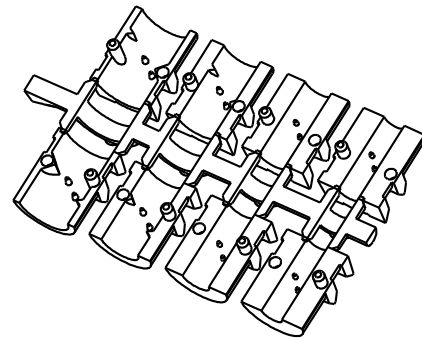
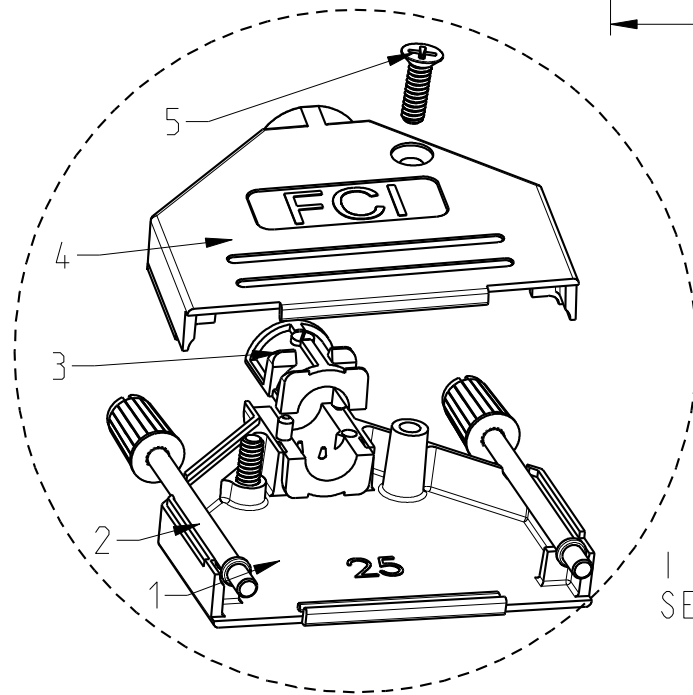


SIZE	Part Num.	Threading	Headscrew	Packaging
25	8655MH2501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH2502BLF	M3	Grey	BULK
	8655MH2502BKLF	M3	Grey	KIT

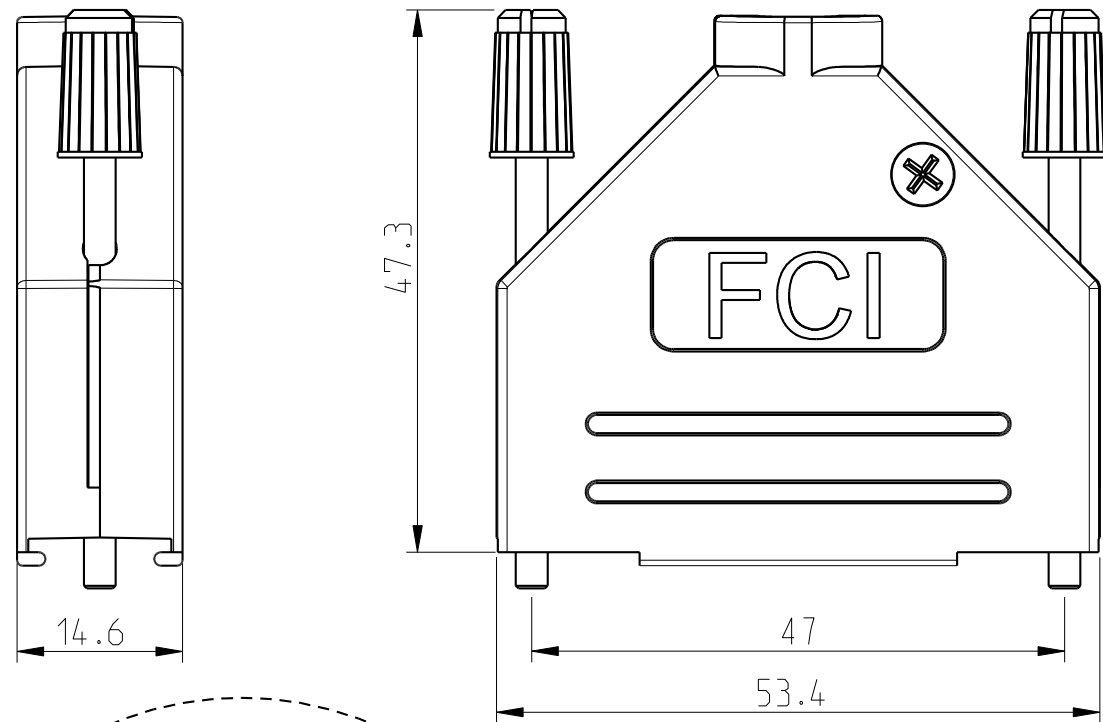

NOTES:

Material and finish: Zinc die-cast
Nickel plated

Cable strain relief: Polycarbonate (UL94V-0)

Jackscrews:

- Headscrew : plastic, color according threading
- Body : metal, threading according tables

Temperature range: -40°C to 120°C

Cable diameter: 4,0 to 13,0mm

Attenuation factor: >40 dB between 30MHz and 1 GHz

Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm

Jackscrew screwing force (max): 50 Ncm

Packaging notes (see tables):

- 1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag.5 plastic bags per carton box. 1 plastic bag per part.
- 2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag. 100 plastic bags per carton box.

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREW	2			2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREW POZIDRIVE	5			2	

spec ref		dr		A Parrenin	2009/05/20	projection				mm		size		A3	scale		3:2		
tolerance std		GENERAL TOLERANCES: ISO 2768-m				eng		D Detouillon	2017/01/16			ecn no		ELX-F-25931-1					
ISO 406						chr		J Dalibard	2017/01/16										
ISO 1101						appr		Aymeric Soudy	2017/01/17			product family		rel level		Released			
surface			linear		0.X	± /	Amphenol FCI		title		D-SUB METAL HOODS		dwg no		10085962		rev		F
					0.XX	± /													
					0.XXX	± /													
ISO 1302		angular		0°	± / °	www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3							



A

B



C

D



SIZE	Part Num.	Threading	Headscrew	Packaging
09	8655MH0901BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH0902BLF	M3	Grey	BULK
	8655MH0902BKLF	M3	Grey	KIT

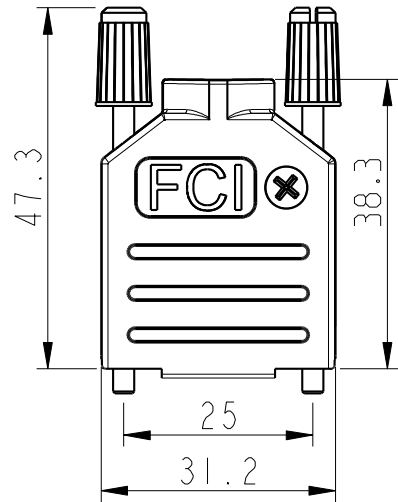


SIZE	Part Num.	Threading	Headscrew	Packaging
37	8655MH3701BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH3702BLF	M3	Grey	BULK
	8655MH3702BKLF	M3	Grey	KIT

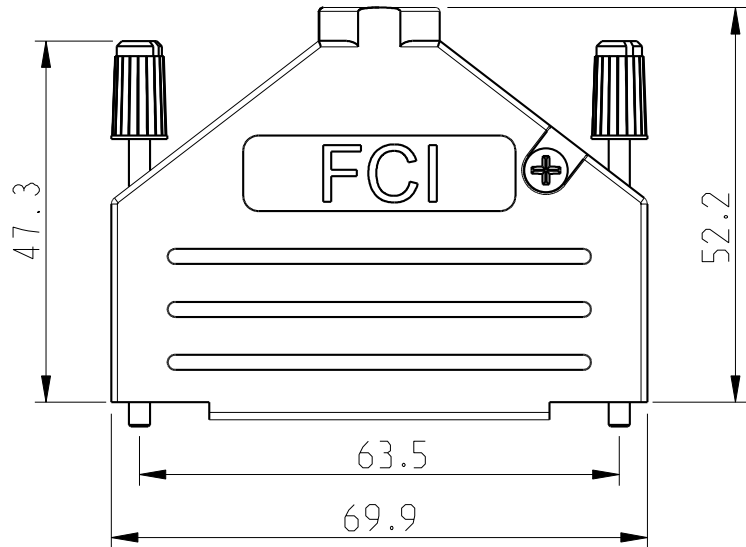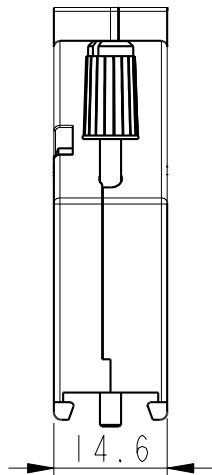


SIZE	Part Num.	Threading	Headscrew	Packaging
15	8655MH1501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH1502BLF	M3	Grey	BULK
	8655MH1502BKLF	M3	Grey	KIT

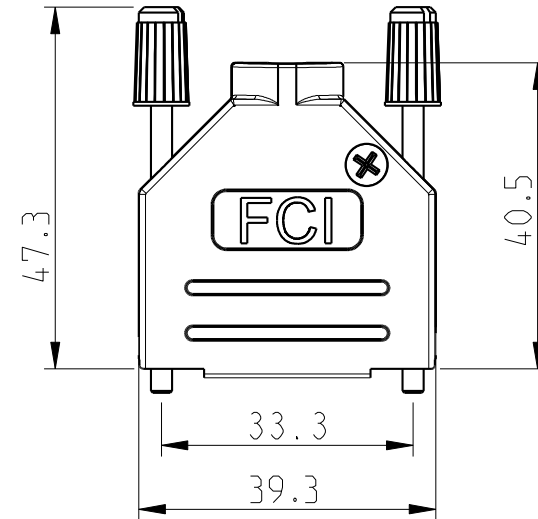


spec ref				dr	A Parrenin	2009/05/20	projection 	mm 	size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon	2017/01/16			ecn no	ELX-F-25931-1		
				chr	J Dalibard	2017/01/16			rel level Released			
				appr	Aymeric Soudy	2017/01/17						product family
surface  ISO 1302	linear	0.X	±/	Amphenol FCi	title D-SUB METAL HOODS STRAIGHT				dwg no 10085962	rev F		
		0.XX	±/									
		0.XXX	±/									
	angular	0°	±/°	www.fci.com	cat. no.		Product - Customer Drw			sheet 2 of 3		

CABLING INSTRUCTIONS FOR CABLE Ø 4, 5, 7 or 9 mm


1- Use two halves of strain relief, different sizes can be mixed (Ø4,5,7 or 9)

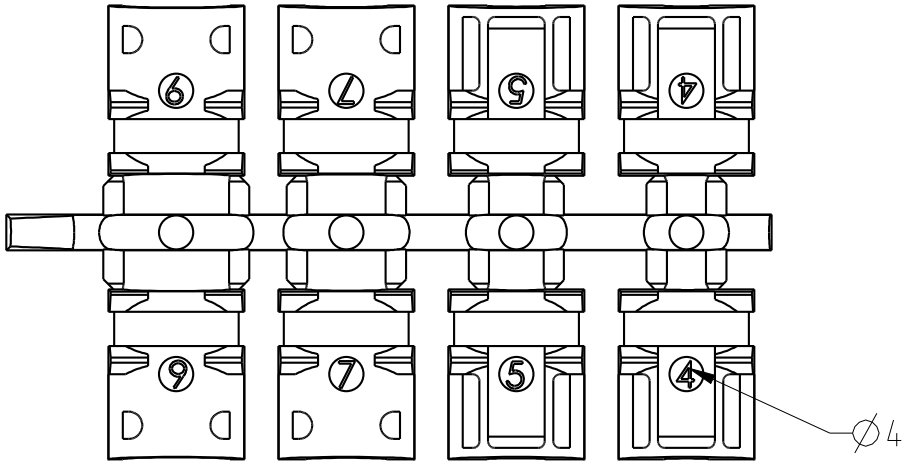

2- Strip cable 18mm and shape to two pigtails

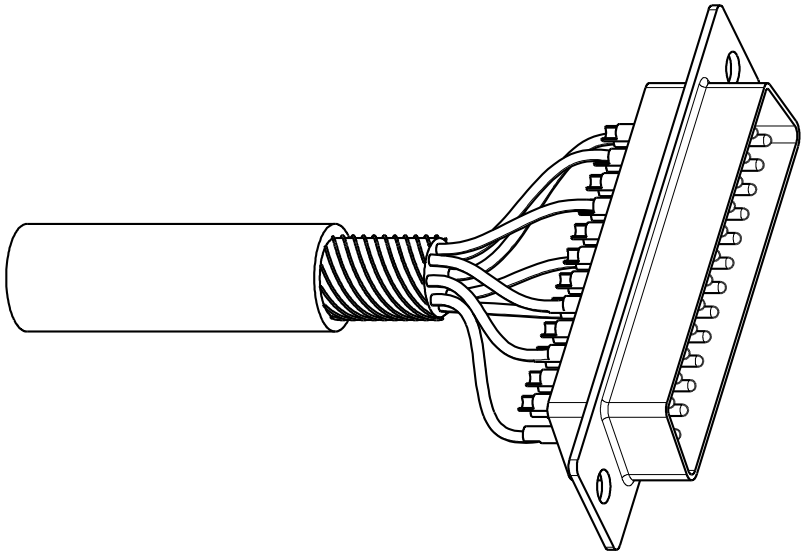


3- Attach the strain relief around the cable

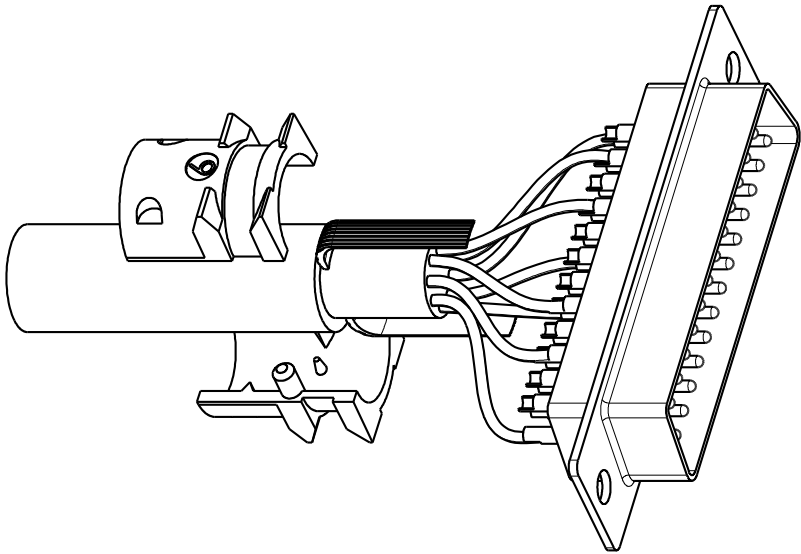


CABLING INSTRUCTIONS FOR CABLE Ø > 9 to 11 mm

1- Use one half of strain relief, (Ø9).


4- Bend cable shielding back on outside of strain relief

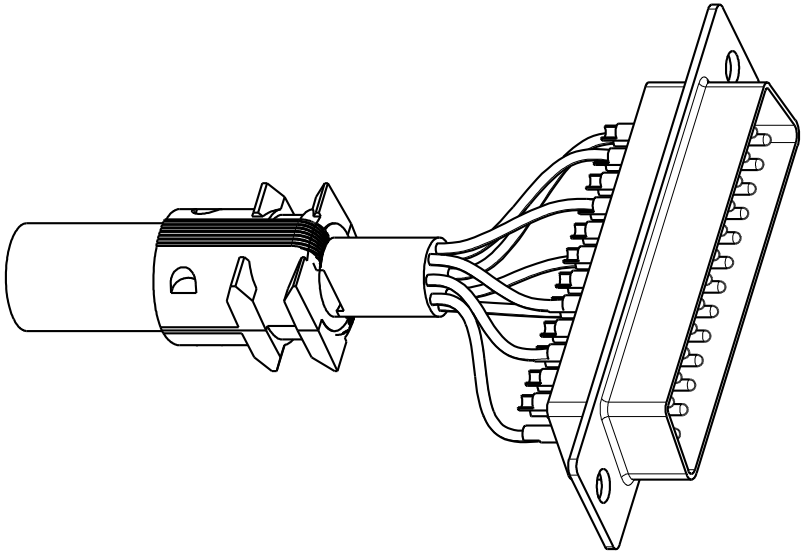


5- Mount connector and cable into the backshell

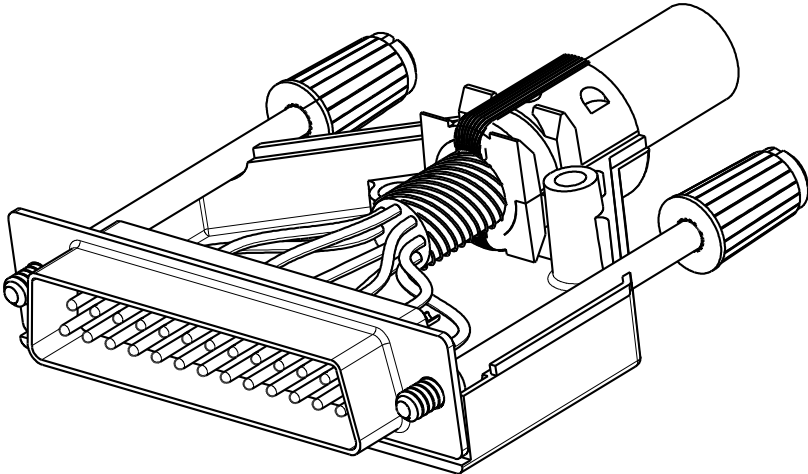

6- Assemble the other half screwing force: 100 Ncm

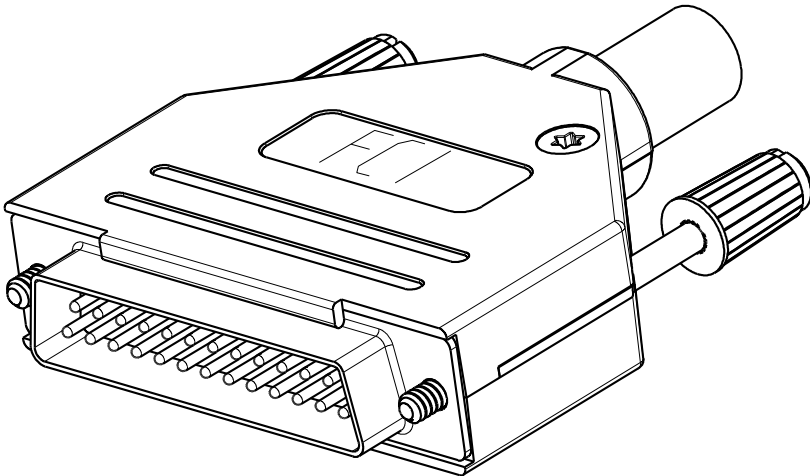

spec ref				dr	A Parrenin	2009/05/20	projection 	mm 	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon	2017/01/16			ecn no ELX-F-25931-1			
				chr	J Dalibard	2017/01/16			rel level Released			
				appr	Aymeric Soudy	2017/01/17						
surface  ISO 1302	linear	0.X	±/	Amphenol FCi	D-SUB METAL HOODS				dwg no 10085962	rev F		
		0.XX	±/									
		0.XXX	±/		STRAIGHT							
	angular	0°	±/°	www.fci.com	cat. no.		Product - Customer Drw				sheet 3 of 3	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru