

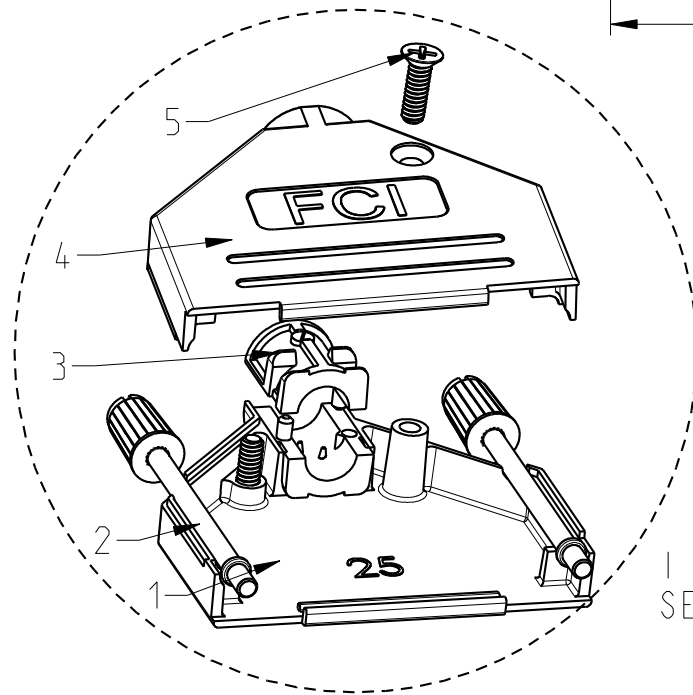


SIZE	Part Num.	Threading	Headscrew	Packaging
25	8655MH2501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH2502BLF	M3	Grey	BULK
	8655MH2502BKLF	M3	Grey	KIT

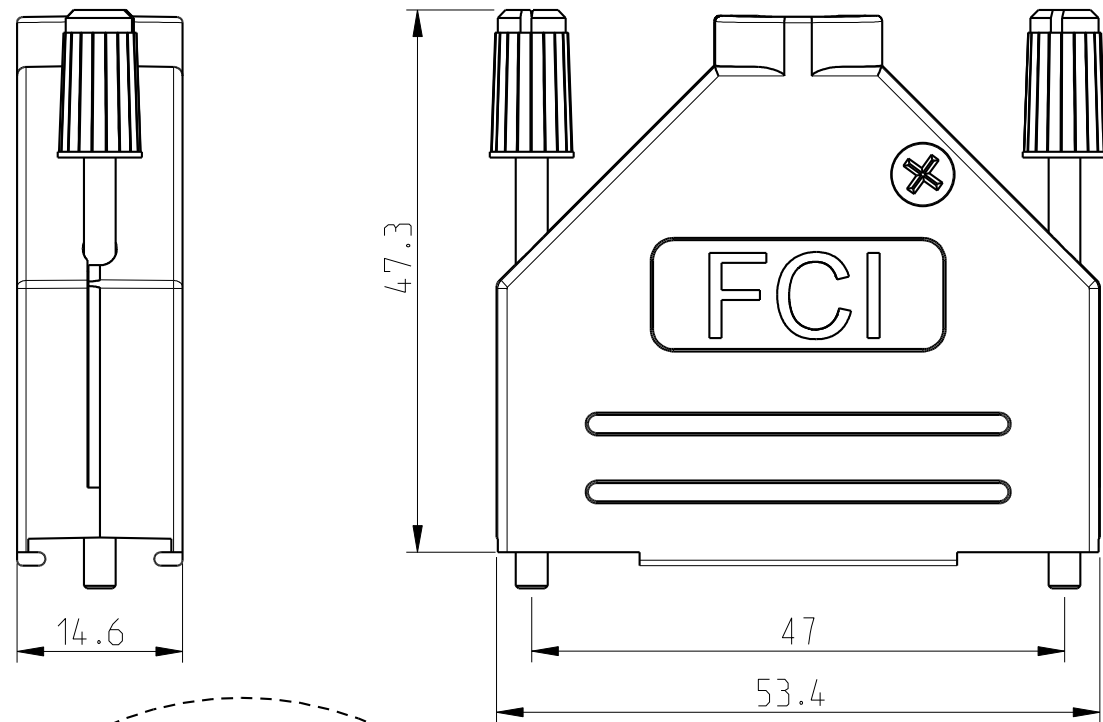

1 KIT
SEE NOTE 2

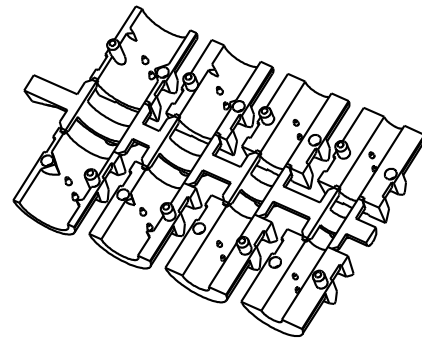

NOTES:

Material and finish: Zinc die-cast
Nickel plated

Cable strain relief: Polycarbonate (UL94V-0)

Jackscrews:

- Headscrew : plastic, color according threading
- Body : metal, threading according tables

Temperature range: -40°C to 120°C

Cable diameter: 4,0 to 13,0mm

Attenuation factor: >40 dB between 30MHz and 1 GHz

Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm

Jackscrew screwing force (max): 50 Ncm


Packaging notes (see tables):

- 1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag.5 plastic bags per carton box. 1 plastic bag per part.
- 2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag. 100 plastic bags per carton box.

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1		1		
JACKSCREW	2		2		
STRAIN RELIEF	3		2		
COVER TOP	4		1		
SCREW POZIDRIVE	5		2		

spec ref				dr	A Parrenin	2009/05/20	projection 	mm 	size	A3	scale	3:2	
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon	2017/01/16			ecn no				ELX-F-25931-1
				chr	J Dalibard	2017/01/16			rel level				Released
				appr	Aymeric Soudy	2017/01/17			product family				
surface  ISO 1302	linear	0.X	±/	Amphenol FCi	title D-SUB METAL HOODS STRAIGHT	dwg no	10085962		rev	F			
		0.XX	±/										
		0.XXX	±/										
		angular	0°	±/°	www.fci.com	cat. no.	Product - Customer Drw			sheet 1 of 3			



A

B



C

D



SIZE	Part Num.	Threading	Headscrew	Packaging
09	8655MH0901BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH0902BLF	M3	Grey	BULK
	8655MH0902BKLF	M3	Grey	KIT

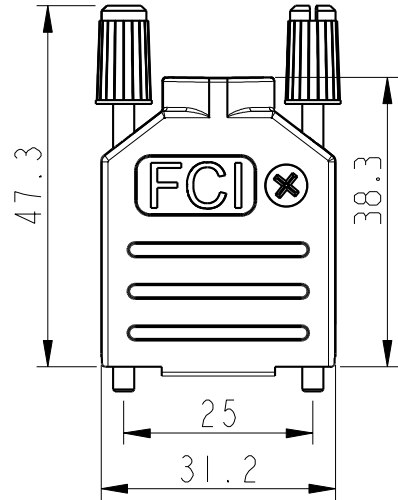

SIZE	Part Num.	Threading	Headscrew	Packaging
37	8655MH3701BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH3702BLF	M3	Grey	BULK
	8655MH3702BKLF	M3	Grey	KIT

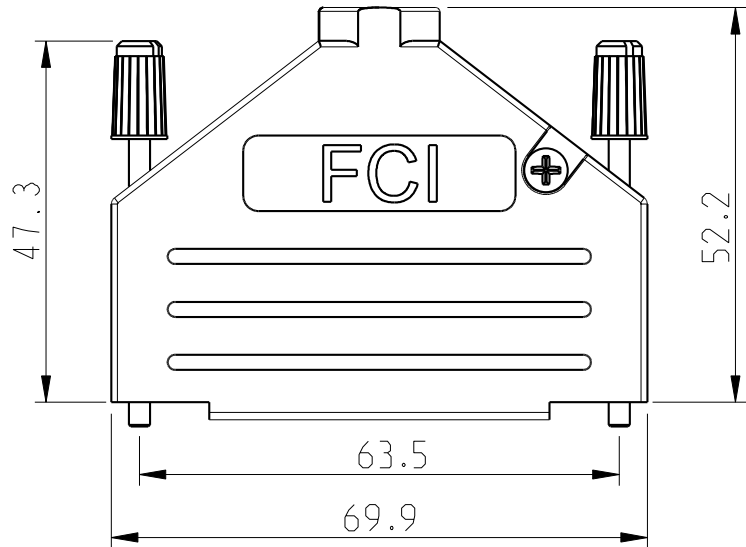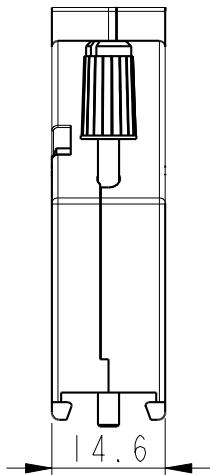

SIZE	Part Num.	Threading	Headscrew	Packaging
15	8655MH1501BLF	UNC 4.40	Black	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	Black	KIT (see note 2)
	8655MH1502BLF	M3	Grey	BULK
	8655MH1502BKLF	M3	Grey	KIT

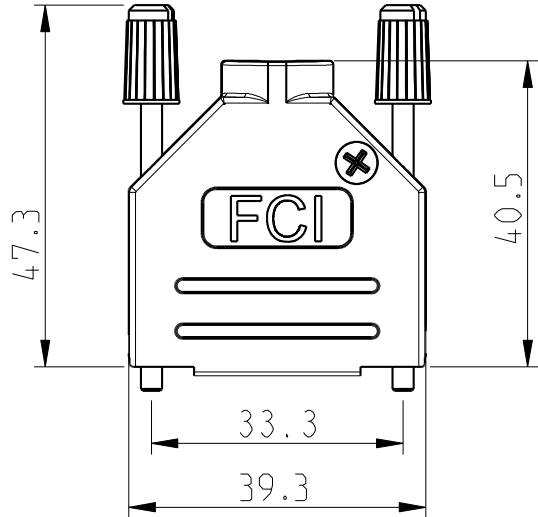

A

B


C

D


spec ref		dr		A Parrenin	2009/05/20	projection 	mm 	size	A3	scale	1:1		
tolerance std ISO 406 ISO 1101	GENERAL TOLERANCES: ISO 2768-m			eng	D Detouillon			2017/01/16	ecn no				ELX-F-25931-1
				chr	J Dalibard			2017/01/16	rel level				Released
				appr	Aymeric Soudy			2017/01/17	product family				
surface  ISO 1302	linear	0.X	± /	Amphenol FCi	title D-SUB METAL HOODS STRAIGHT	dwg no	10085962		rev	F			
		0.XX	± /										
		0.XXX	± /										
	angular	0°	± / °	www.fci.com	cat. no.	Product - Customer Drw			sheet 2 of 3				

CABLING INSTRUCTIONS FOR CABLE Ø 4, 5, 7 or 9 mm


1- Use two halves of strain relief, different sizes can be mixed (Ø4,5,7 or 9)

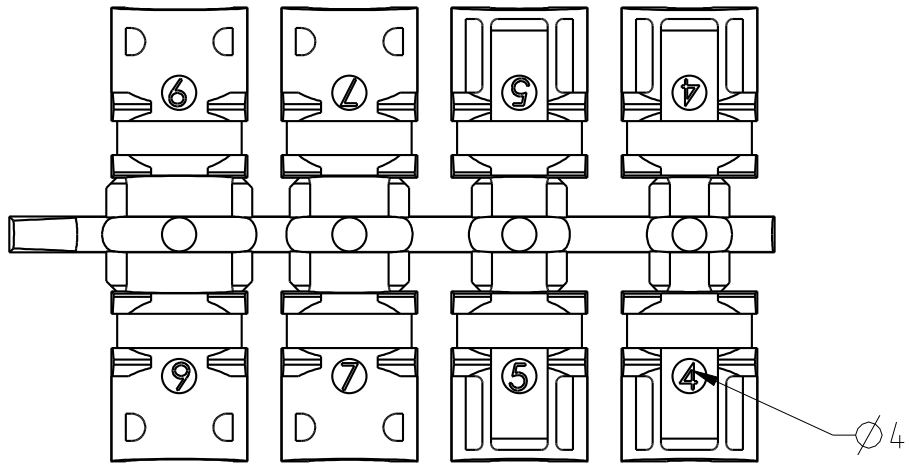

2- Strip cable 18mm and shape to two pigtails

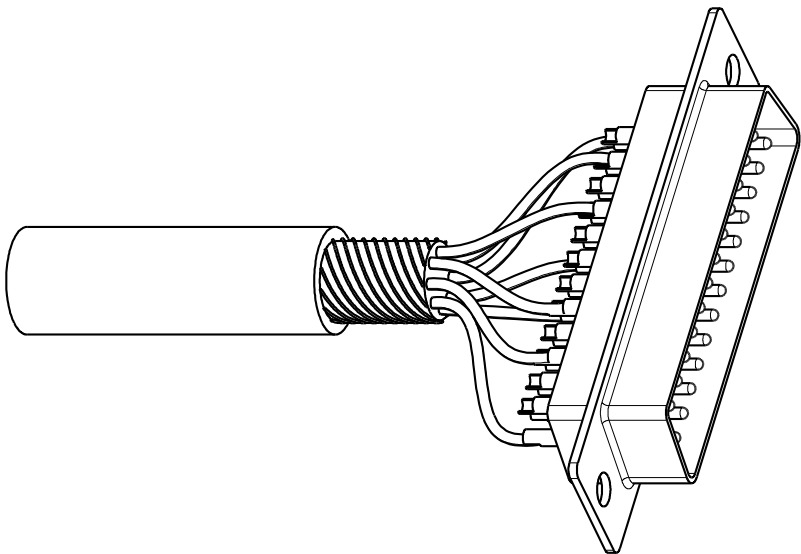


3- Attach the strain relief around the cable

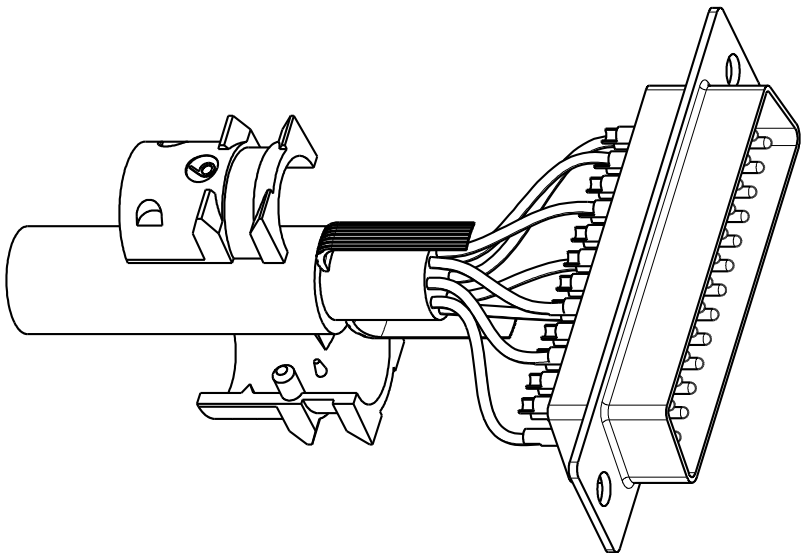


CABLING INSTRUCTIONS FOR CABLE Ø > 9 to 11 mm

1- Use one half of strain relief, (Ø9).


4- Bend cable shielding back on outside of strain relief

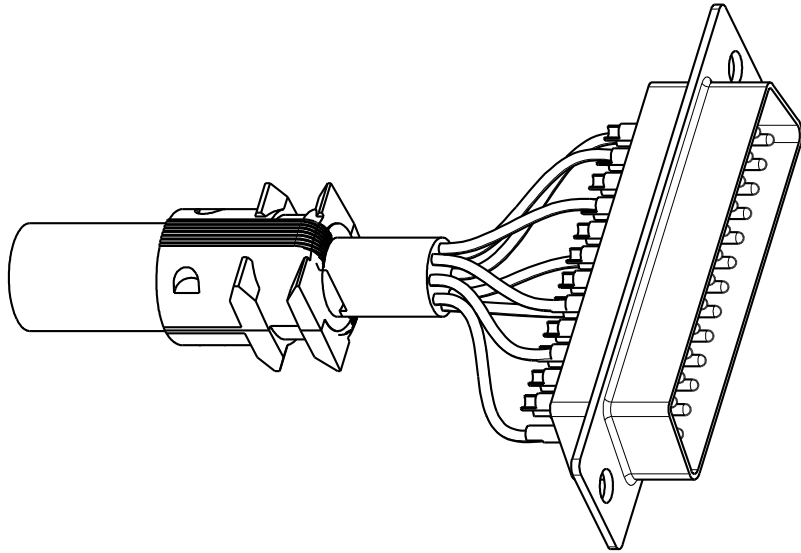


5- Mount connector and cable into the backshell

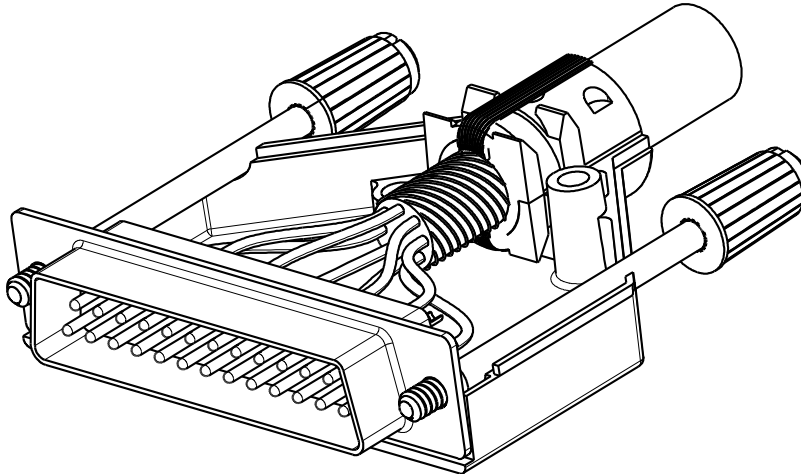

6- Assemble the other half screwing force: 100 Ncm

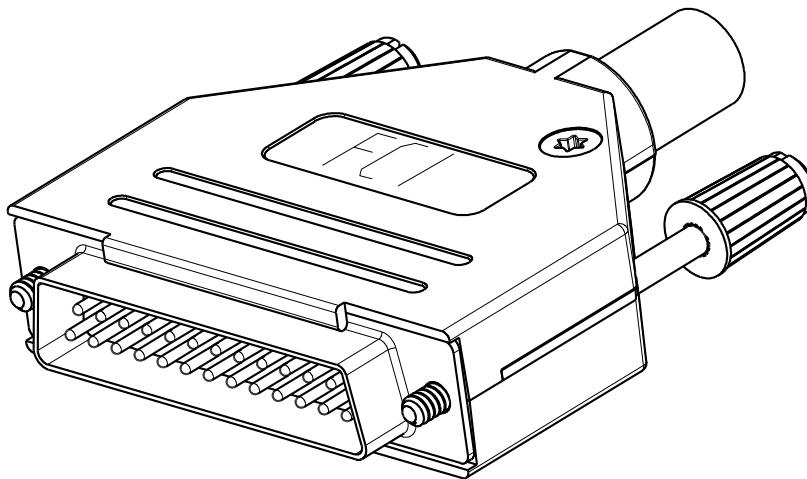

spec ref				dr		A Parrenin		2009/05/20		projection		mm		size		A3		scale		3:2					
tolerance std		GENERAL TOLERANCES: ISO 2768-m				eng		D Detouillon		2017/01/16						ecn no		ELX-F-25931-1							
ISO 406						chr		J Dalibard		2017/01/16															
ISO 1101						appr		Aymeric Soudy		2017/01/17												product family		rel level	
surface 		linear		0.X		±/		Amphenol FCI		title		D-SUB METAL HOODS		dwg no		10085962		rev		F					
																						0.XX		±/	
																						0.XXX		±/	
		ISO 1302		angular		0°																±/°		www.fci.com	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru