


## Isolated, Constant Current HV9971 LED Driver Demoboard

### Board Layout and Connection Diagram

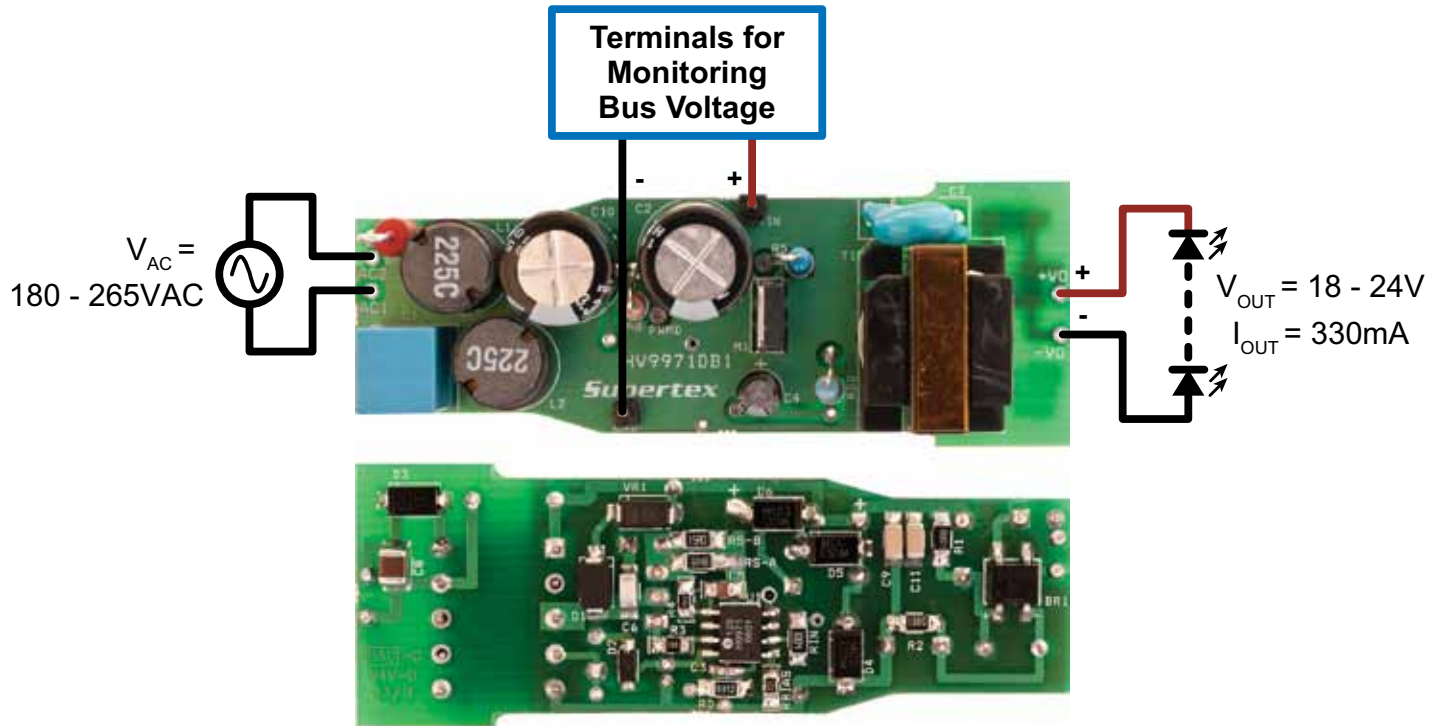


### Connections

- 1. Input Voltage:** Connect the AC input voltage between input terminals as shown.
- 2. LED String:** Connect the LED strings between  $+V_o$  and  $-V_o$  as shown (anode of the string to  $+V_o$  and cathode to  $-V_o$ ).
- 3. DC Voltage:** Use terminals either for measurement of the bus voltage or the DC voltage input

### Specifications


| Specification                   | Value                          |
|---------------------------------|--------------------------------|
| Input line voltage              | 180 – 265VAC                   |
| Output voltage                  | 18 – 24V                       |
| Output current                  | 330mA                          |
| Switching frequency             | 75 – 120kHz                    |
| Typical efficiency              | 82%@Low Line,<br>81%@High Line |
| Open LED protection             | 30V                            |
| Output short circuit protection | Hiccup                         |
| Power factor                    | ≥82%                           |

HV9971DB1 Schematic Diagram

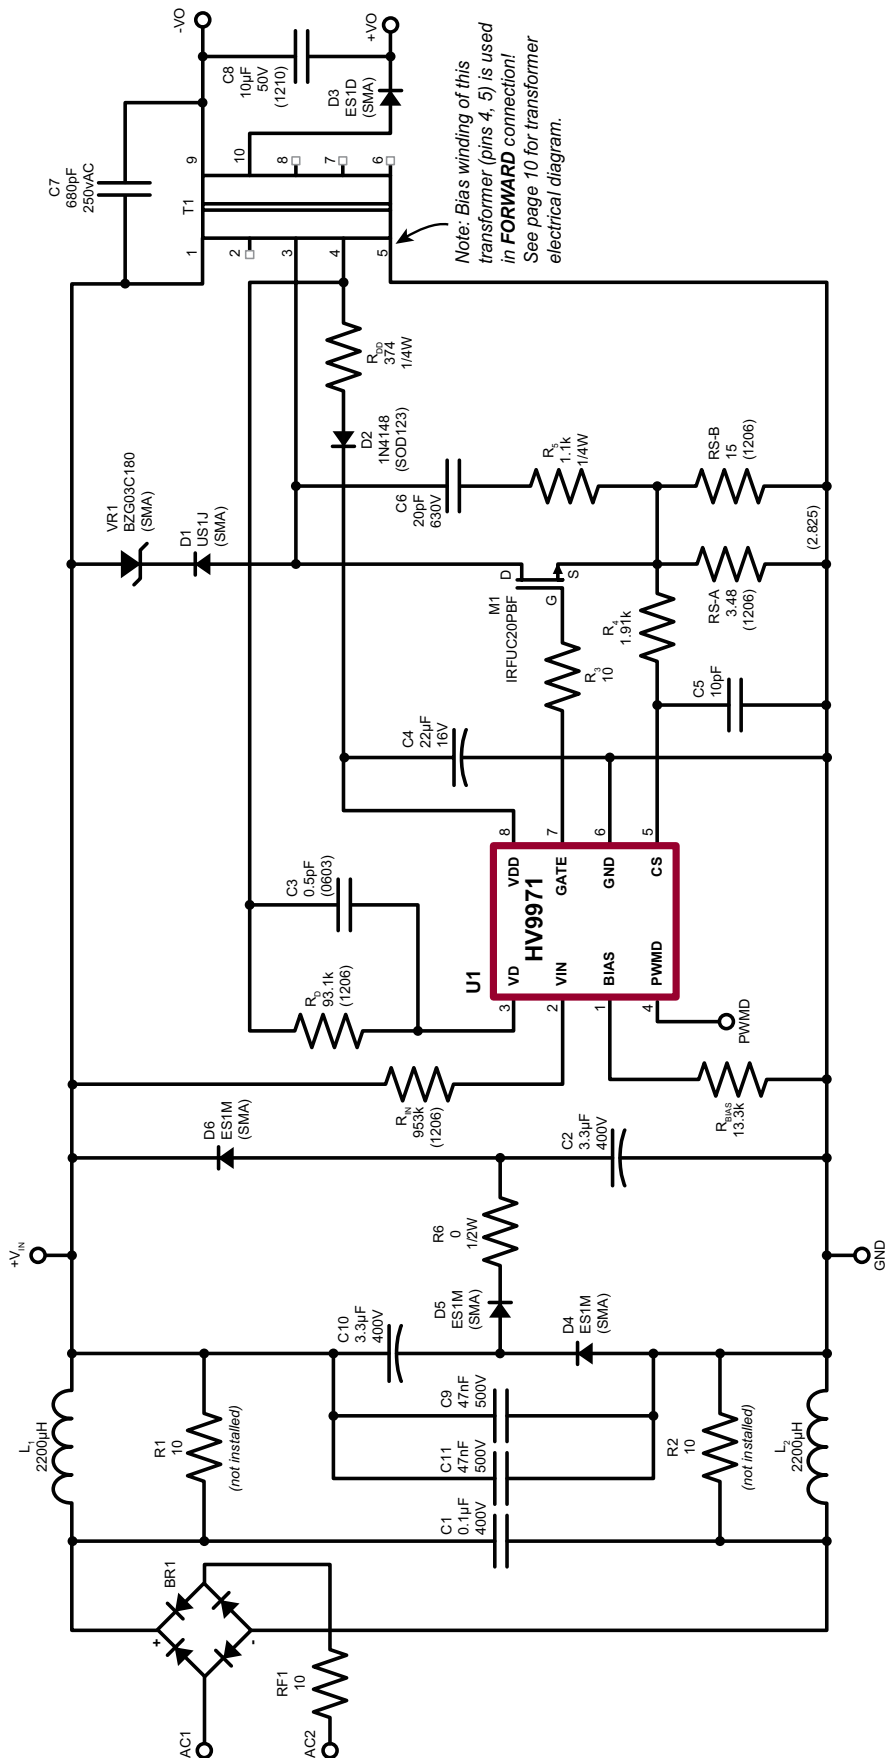


Note: Bias winding of this transformer (pins 4, 5) is used in FORWARD connection! See page 10 for transformer electrical diagram.

PCB Layout

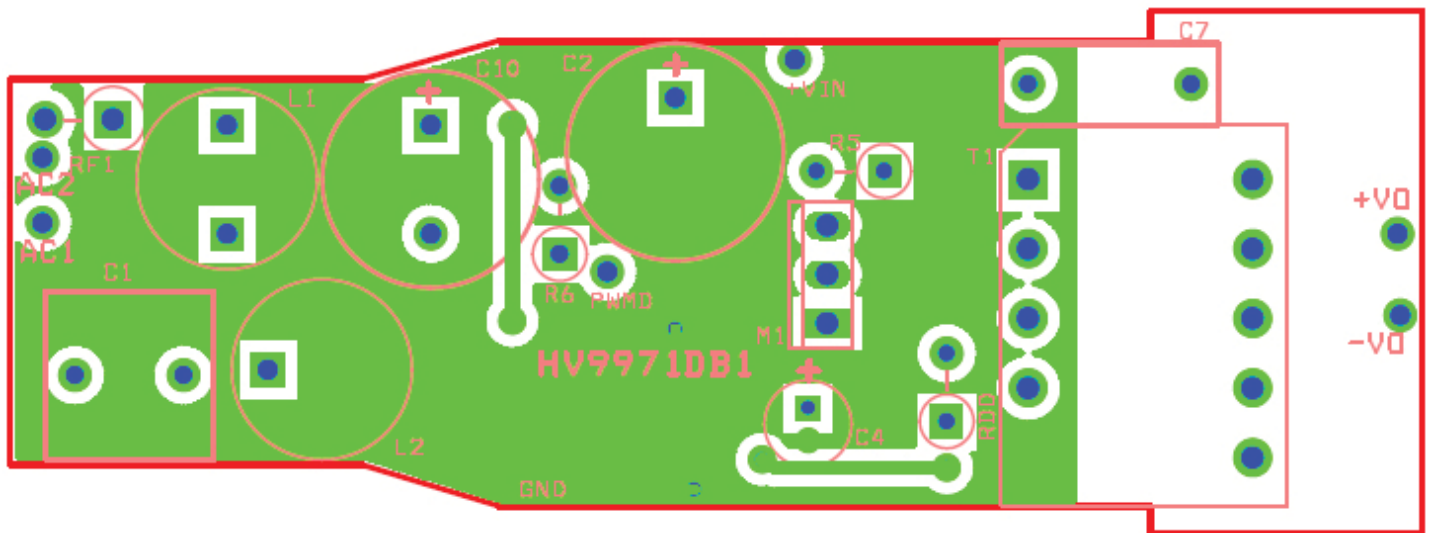


Through-Hole Component Side

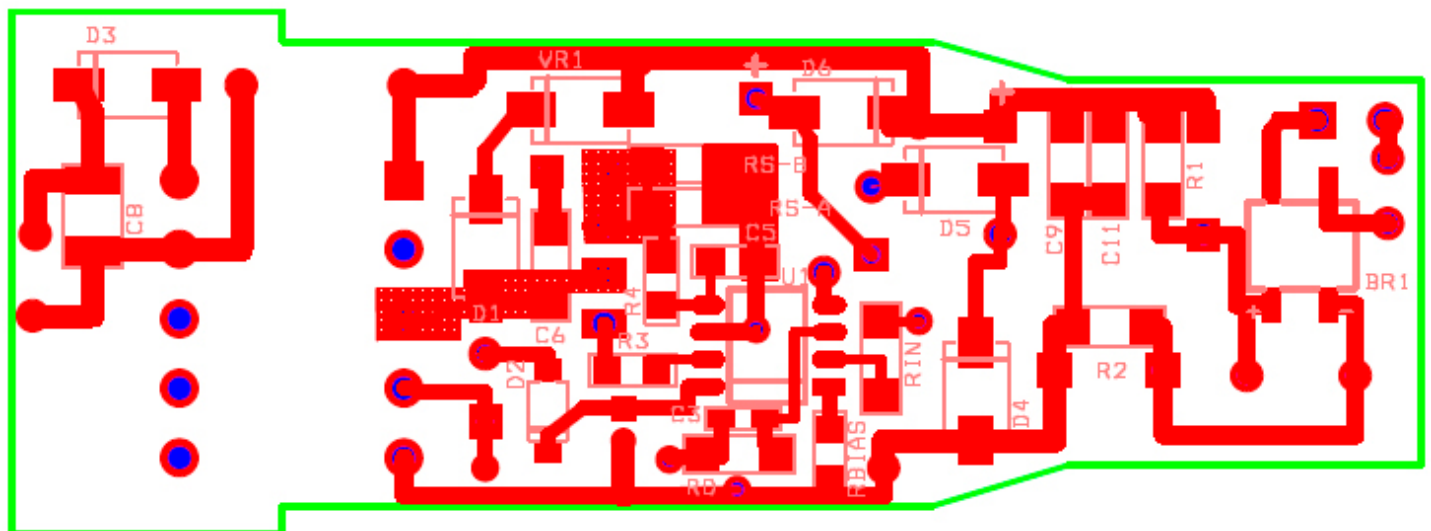


Solder Side

PCB Assembly Drawings

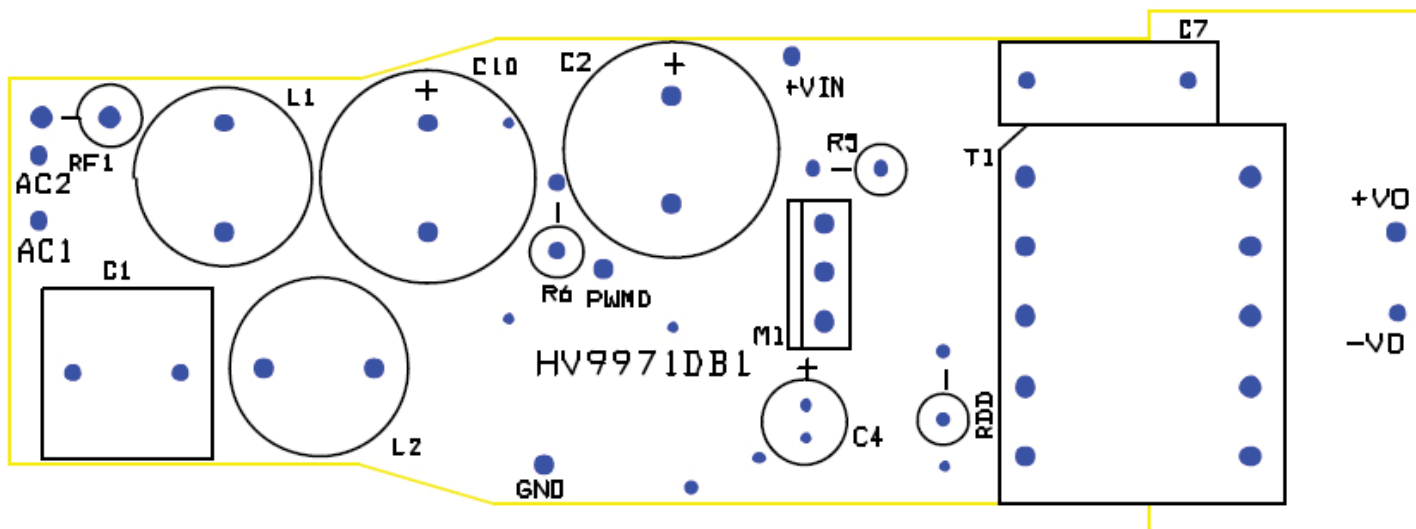

Through-Hole Component Side

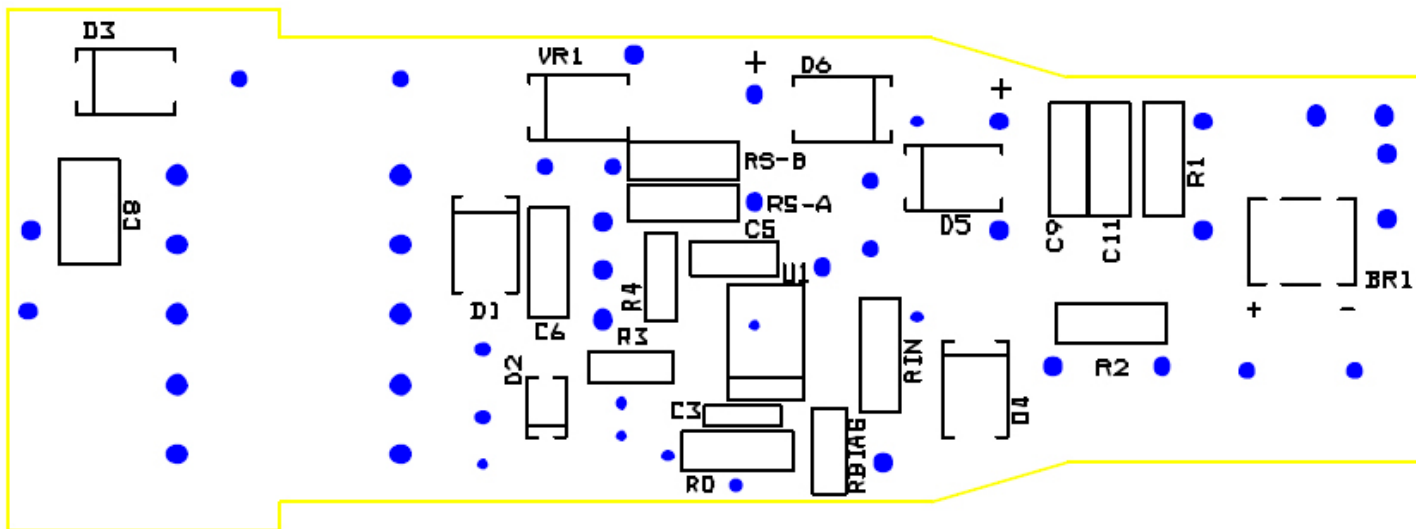

Solder Side

# Typical Characteristics

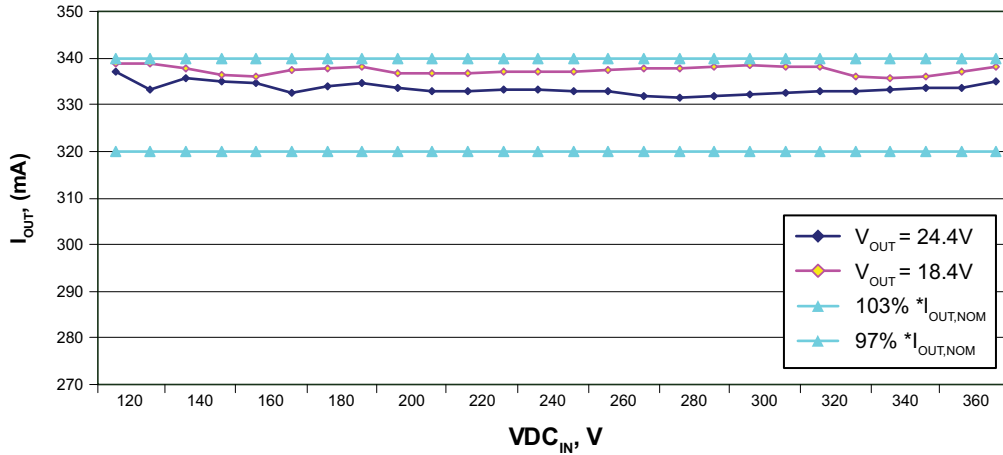


Figure 1. DC Line Regulation

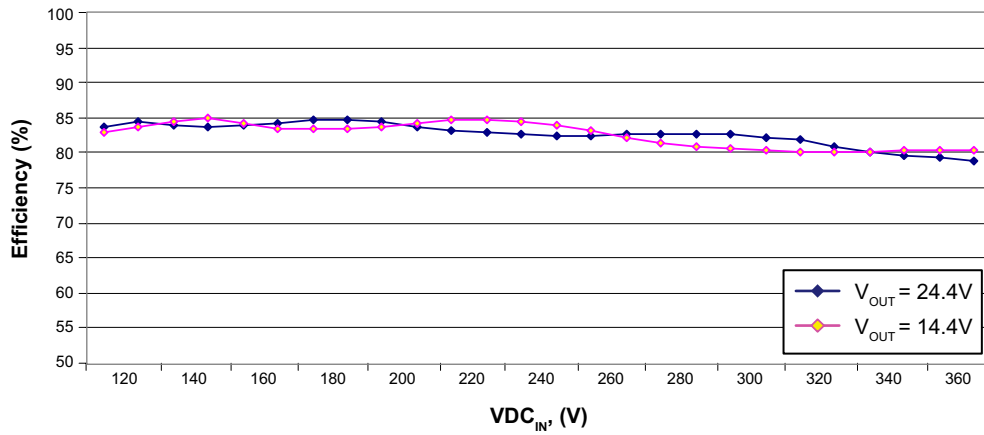


Figure 2. DC Efficiency @25°C

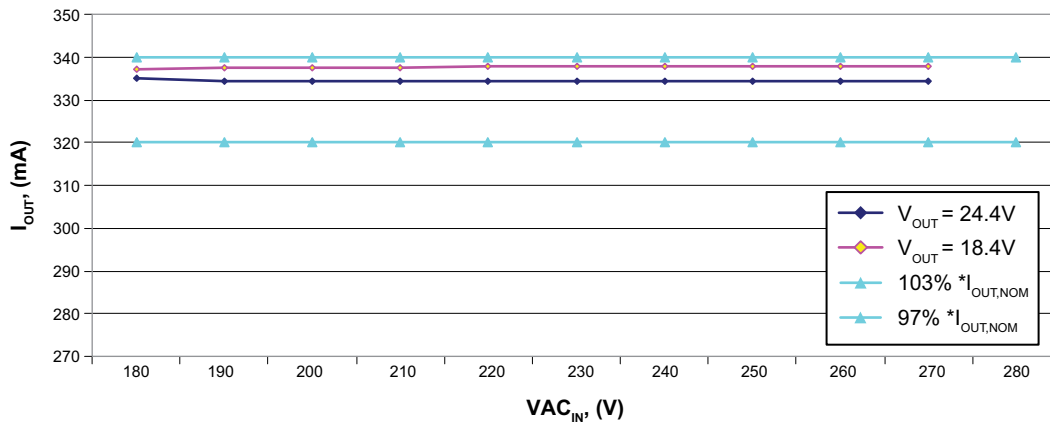


Figure 3. AC Line Regulation

Typical Characteristics (cont.)

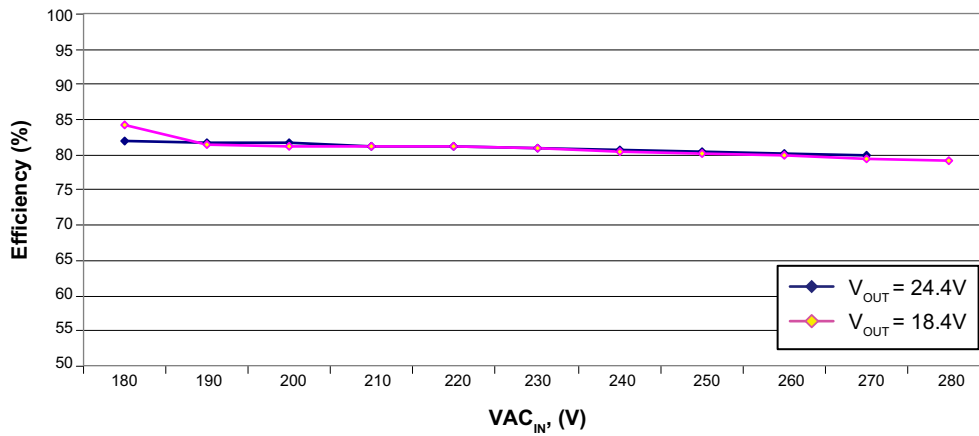


Figure 4. AC Efficiency @25°C

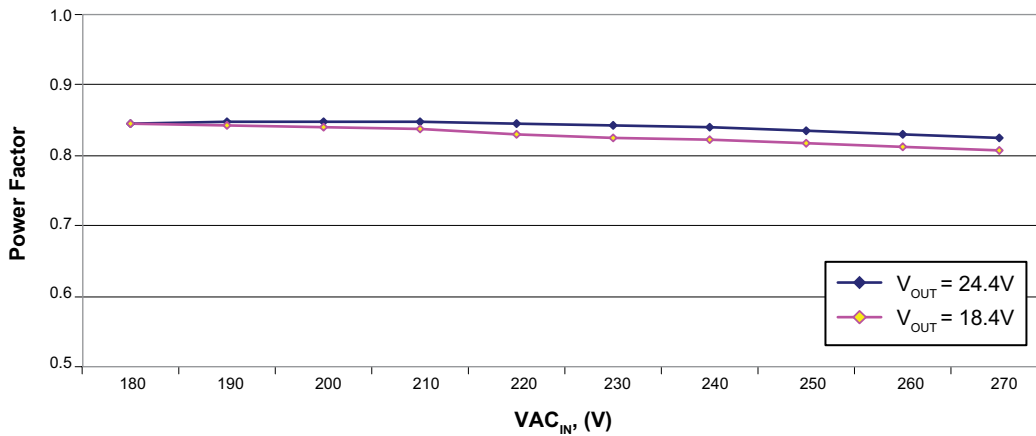


Figure 5. Power Factor



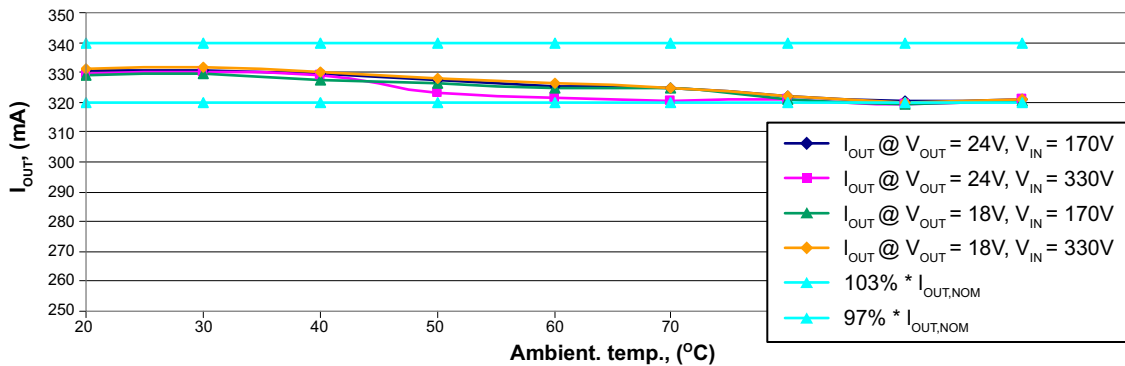


Figure 6. I<sub>OUT</sub> Temperature Regulation


Typical Waveforms

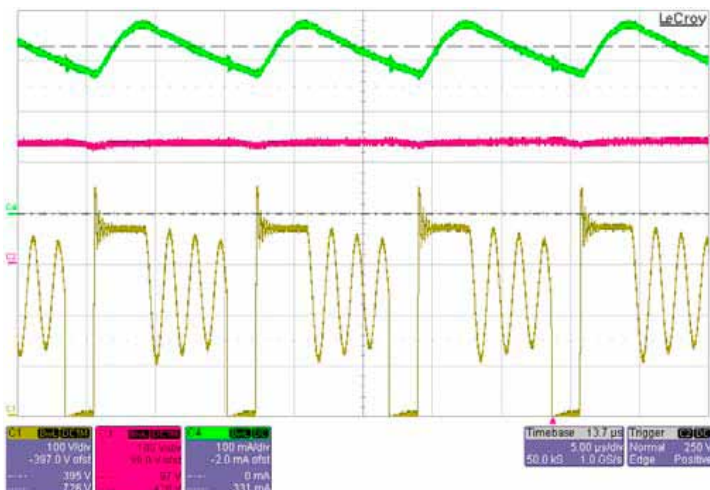


**Figure 7.** Output current (green trace, 100mA/div), drain voltage (yellow trace, 100V/div) and bus voltage (purple trace, 100V/div) @ $V_{LINE} = 230VAC$

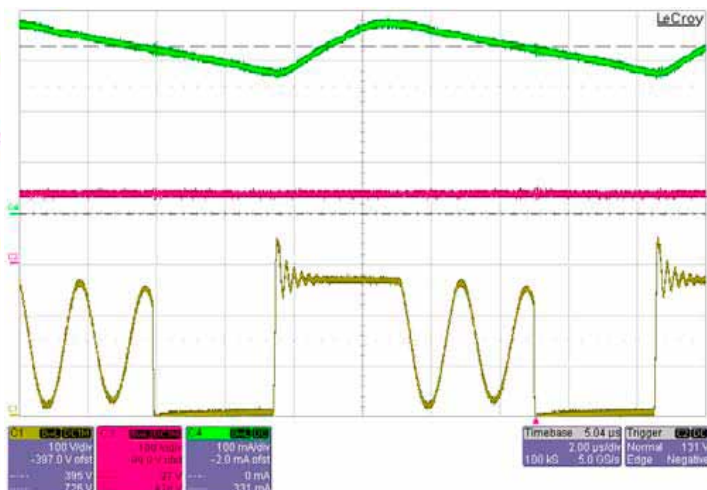

**Figure 8.** Output current (green trace, 100mA/div), drain voltage (yellow trace, 100V/div) and bus voltage (purple trace, 100V/div) @ $V_{LINE} = 230VAC$

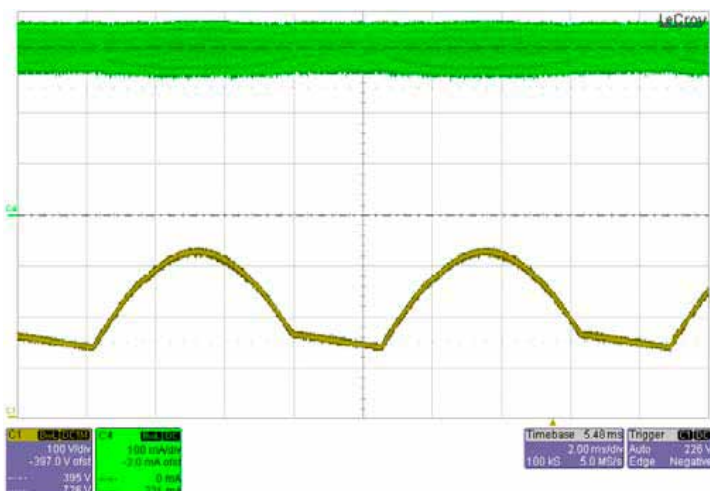


**Figure 9.** Output current (green trace, 100mA/div), and bus voltage (yellow trace, 100V/div) @ $V_{LINE} = 230VAC$

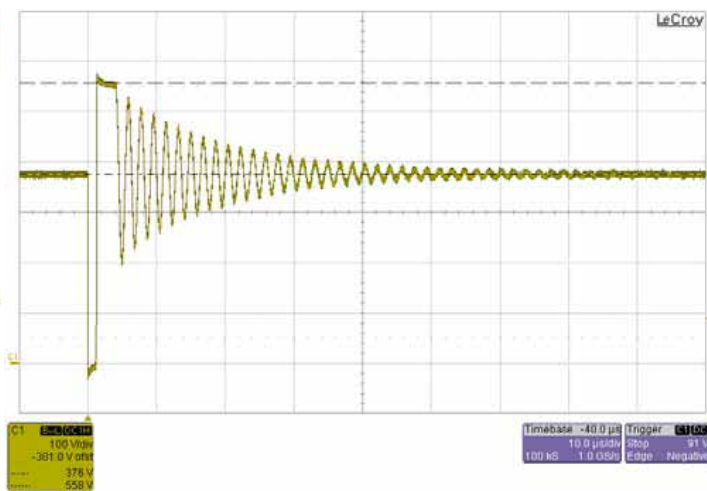


**Figure 10.** Drain voltage (yellow trace, 100V/div) @ $V_{IN} = 375VDC$  and LED open


## Typical Waveforms (cont.)

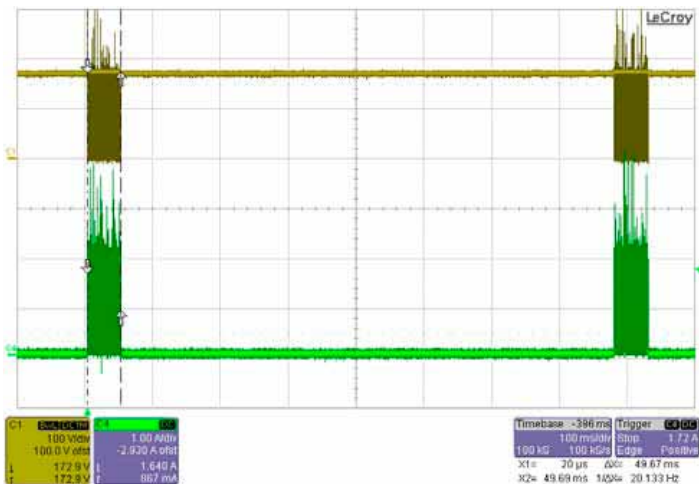


**Figure 11.** Output diode current (green trace, 1A/div), @ $V_{IN} = 170V_{DC}$  and short across LED

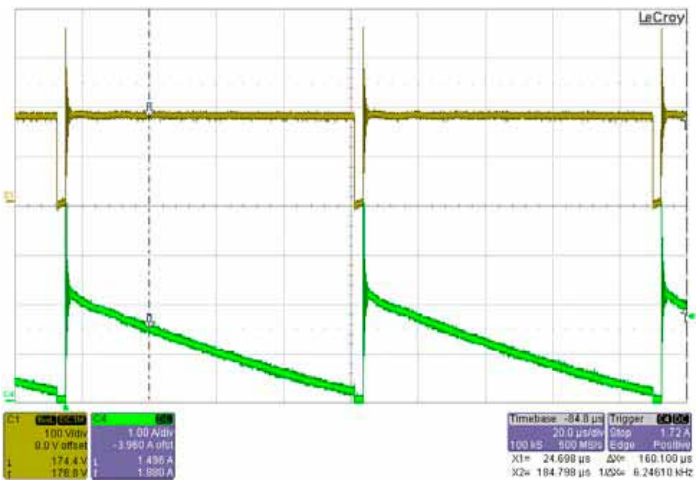

**Figure 12.** Output diode current (green trace, 1A/div), @ $V_{IN} = 170V_{DC}$  and short across LED

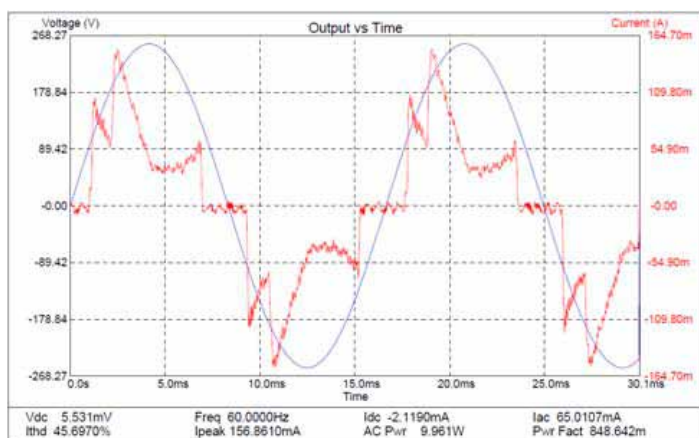

**Figure 13.** Line voltage and line current @ $V_{AC} = 180V$

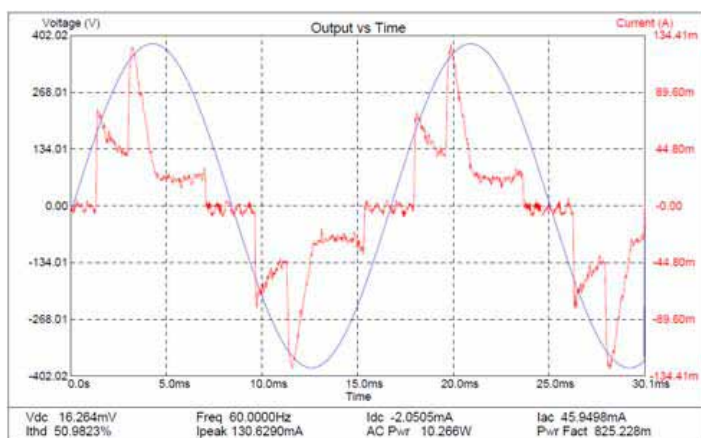

**Figure 14.** Line voltage and line current @ $V_{AC} = 270V$




## Bill of Materials


| #  | Quan | Ref. Des.         | Description                                | Package           | Manufacturer  | Manufacturer Part # |
|----|------|-------------------|--|-------------------|---------------|---------------------|
| 1  | 1    | BR1               | Rect bridge GP 600V 0.8A                   | Mini-Dip          | Diodes inc.   | HD06-T              |
| 2  | 1    | C1                | 0.1 $\mu$ F 400V radial capacitor          | Thru-hole         | Epcos         | B32529E6104J000     |
| 3  | 2    | C2, C10           | 3.3 $\mu$ F 400V elect vy radial capacitor | Thru-hole         | Nichicon      | UVZ2G3R3MPD         |
| 4  | 1    | C3                | 0.5pF 50V ceramic chip capacitor           | SMT0603           | Yageo         | CC0603CRNP09BNR50   |
| 5  | 1    | C4                | 22 $\mu$ F 16V alum elect capacitor        | Thru-hole         | Panasonic ECG | ECE-A1CKA220        |
| 6  | 1    | C5                | 10pF 50V ceramic chip capacitor            | SMT0805           | Yageo         | CC0805JRNP09BRN100  |
| 7  | 1    | C6                | 20pF 630V ceramic chip capacitor           | SMT1206           | Kemet         | C1206C200JBRACU     |
| 8  | 1    | C7                | 680 pF 250VAC capacitor                    | Thru-hole         | Murata        | DE2B3KH681KA3B      |
| 9  | 1    | C8                | 10 $\mu$ F 50V ceramic chip capacitor      | SMT1210           | Taiyo Yuden   | UMK325C7106MM-T     |
| 10 | 2    | C9, C10           | 47nF 500 ceramic chip capacitor            | SMT1206           | Vishay        | VJ1206Y473KXEAT5Z   |
| 11 | 1    | D1                | Diode ultra fast switch 600V 1A            | SMA               | Diodes inc.   | US1J-13-F           |
| 12 | 1    | D2                | Diode switch 75V 400mW                     | SOD123            | Diodes inc.   | 1N4148W-7-F         |
| 13 | 1    | D3                | Diode fast rec 200V 1A                     | SMA               | Diodes inc.   | ES1D-13-F           |
| 14 | 3    | D4, D5, D6        | Diode fast rec 1000V 1A                    | SMA               | Micro Comm    | ES1M-TP             |
| 15 | 2    | L1, L2            | 2.2mH 0.20A inductor                       | SMT               | Murata        | 13R225C             |
| 16 | 1    | M1                | 600V 2A N-channel MOSFET                   | I-PAK             | Vishay        | IRFUC20PBF          |
| 17 | 1    | R <sub>DD</sub>   | 374 $\Omega$ 1% resistor                   | 1/4W<br>Thru-hole | Any           | ---                 |
| 18 | 1    | R <sub>IN</sub>   | 953k $\Omega$ 1% resistor                  | SMT1206           | Any           | ---                 |
| 19 | 1    | R <sub>D</sub>    | 95.3k $\Omega$ 1% resistor                 | SMT1206           | Any           | ---                 |
| 20 | 1    | R <sub>BIAS</sub> | 13.3k $\Omega$ 1% resistor                 | SMT0805           | Any           | ---                 |
| 21 | 1    | R <sub>S-A</sub>  | 3.48 $\Omega$ 1% resistor                  | SMT1206           | Any           | (3.48//15) = 2.825  |
| 22 | 1    | R <sub>S-B</sub>  | 15.0 $\Omega$ 1% resistor                  | SMT1206           | Any           | (3.48//15) = 2.825  |
| 23 | 1    | R <sub>F1</sub>   | 10 $\Omega$ 5% 2W MF fusible resistor      | 1/4W<br>Thru-hole | Vishay        | ---                 |
| 24 | 2    | R1, R2            | Not Installed                              | SMT1206           | Any           | ---                 |
| 25 | 1    | R3                | 10 $\Omega$ 1% resistor                    | SMT0805           | Any           | ---                 |
| 26 | 1    | R4                | 1.91k $\Omega$ 1% resistor                 | SMT0805           | Any           | ---                 |
| 27 | 1    | R5                | 1.1k $\Omega$ 1% resistor                  | 1/4W<br>Thru-hole | Any           | ---                 |
| 28 | 1    | R6                | 0 $\Omega$                                 | Jumper<br>Wire    | -             | ---                 |
| 29 | 1    | T1                | Custom transformer                         | Thru-hole         | Any           | ---                 |
| 30 | 1    | U1                | LED Driver IC                              | SOIC-8            | Supertex      | HV9971LG-G          |
| 31 | 1    | VR1               | Diode Zener 180V 600W 5%                   | SMA               | Vishay        | BZG03C180TR         |

## Flyback Transformer Specifications

### Transformer Electrical Diagram

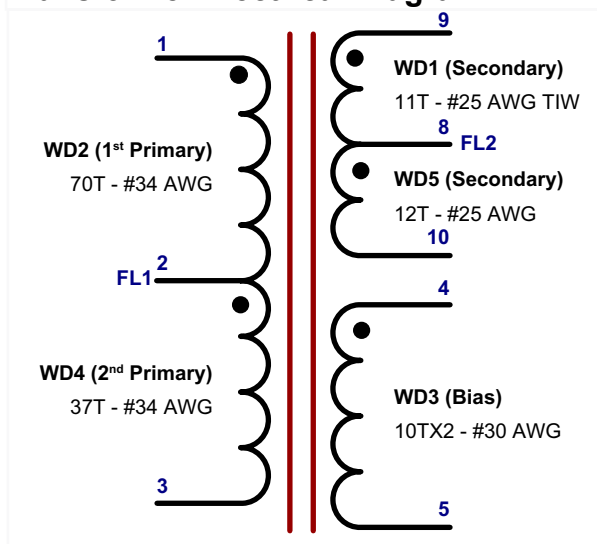

### Transformer Build Diagram

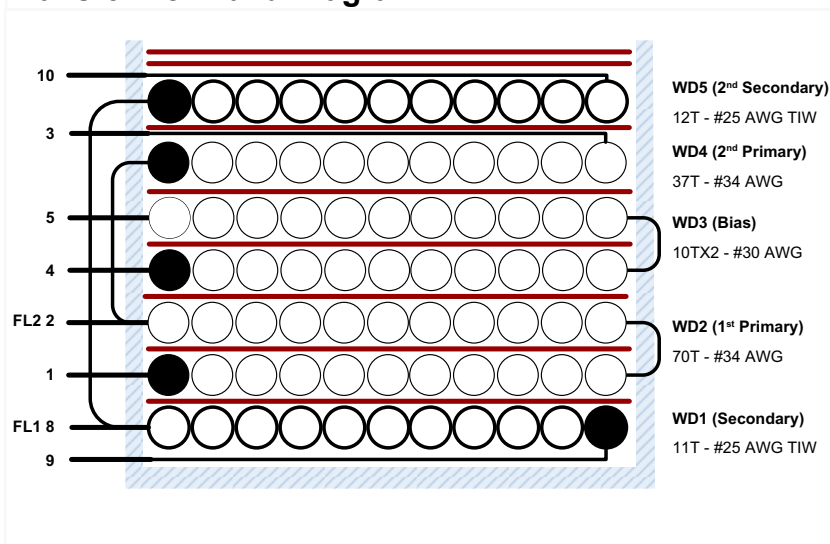

### Transformer Electrical Specifications

|                            |  |               |
|----------------------------|--|---------------|
| Electrical strength        | From pins 1-3 to pins 8-10 1second, AC 60Hz  | 3000VAC       |
| Primary inductance         | Pins 1, 3 all other windings open, at 100kHz | 916μH, ±10%   |
| Resonant frequency         | Pins 1, 3 all other windings open            | 750KHz (min.) |
| Primary leakage inductance | Pins 1, 3, leads 9, 10 shorted               | 18μH (max.)   |

### Transformer Bill of Materials

| Item | Description   |
|------|---|
| 1    | Core: RENCO E16/8/5 (or equivalent), Al = 80nH/T <sup>2</sup>         |
| 2    | Bobbin: E/16/8/5 vertical, 10pin or equivalent                        |
| 3    | Triple insulated wire: #25 AWG  |
| 4    | Magnet wire: #34 AWG  |
| 5    | Magnet wire: #30 AWG  |
| 6    | Tape: 3M 1298 Polyester Film, 8mm wide, 2.0mils thick or equivalent   |
| 7    | Tape: 3M 1298 Polyester Film, 4.7mm wide, 2.0mils thick or equivalent |
| 8    | Varnish: Dolph BC-359 or equivalent                                   |

**Supertex inc.** does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: <http://www.supertex.com>)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)