

LTM8050 58V_{IN}, 2A Step-Down µModule Regulator

DESCRIPTION

Demo circuit DC1723A features the LTM[®]8050, a µModule[®] (micromodule) step-down converter that can deliver up to 2A of output current. DC1723A is designed for a 5V, 2A output from a 7.5V to 58V input at 400kHz. The wide input range of the LTM8050 allows a variety of input sources such as automotive batteries and industrial supplies. At light loads, the LTM8050 enters Burst Mode[®] operation to maintain high efficiency and low output ripple over a broad current range. The user adjustable features of the LTM8050 such as output voltage, switching frequency, soft-start, and power good can be changed on DC1723A

simply by modifying or installing the appropriate resistors and/or capacitors.

The LTM8050 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this Quick Start Guide for the demo circuit 1723A.


Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LTC, LTM, Linear Technology, the Linear logo, µModule and Burst Mode are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Minimum Input Voltage, V _{IN}	V _{OUT} = 5V			7.5	V
Maximum Input Voltage, V _{IN}	V _{OUT} = 5V	58			V
Output Voltage, V _{OUT}	R4 = 93.1k	4.87	5.02	5.17	V
Maximum Output Current		2			A
Switching Frequency	R6 = 97.6k		400		kHz
Efficiency	V _{IN} = 12V, I _{OUT} = 2A		85		%

BOARD PHOTO

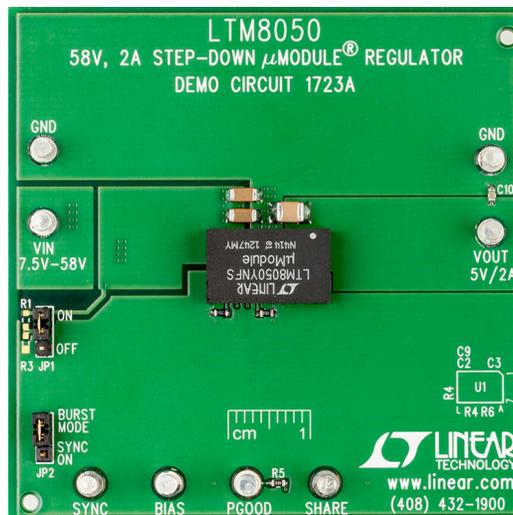

dc1723af

QUICK START PROCEDURE

Demonstration circuit 1723A is easy to set up to evaluate the performance of the LTM8050. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

Note: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the terminals of the input or output capacitors. See Figure 2 for proper scope probe technique.

1. Place JP1 in the ON position.
2. With power off, connect the input power supply to VIN and GND.
3. Turn on the power at the input.

Note: Make sure that the input voltage does not exceed 58V.

4. Check for the proper output voltage.

Note: If there is no output, temporarily disconnect the load to make sure that the load is not set too high or is shorted.

5. Once the proper output voltage is established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

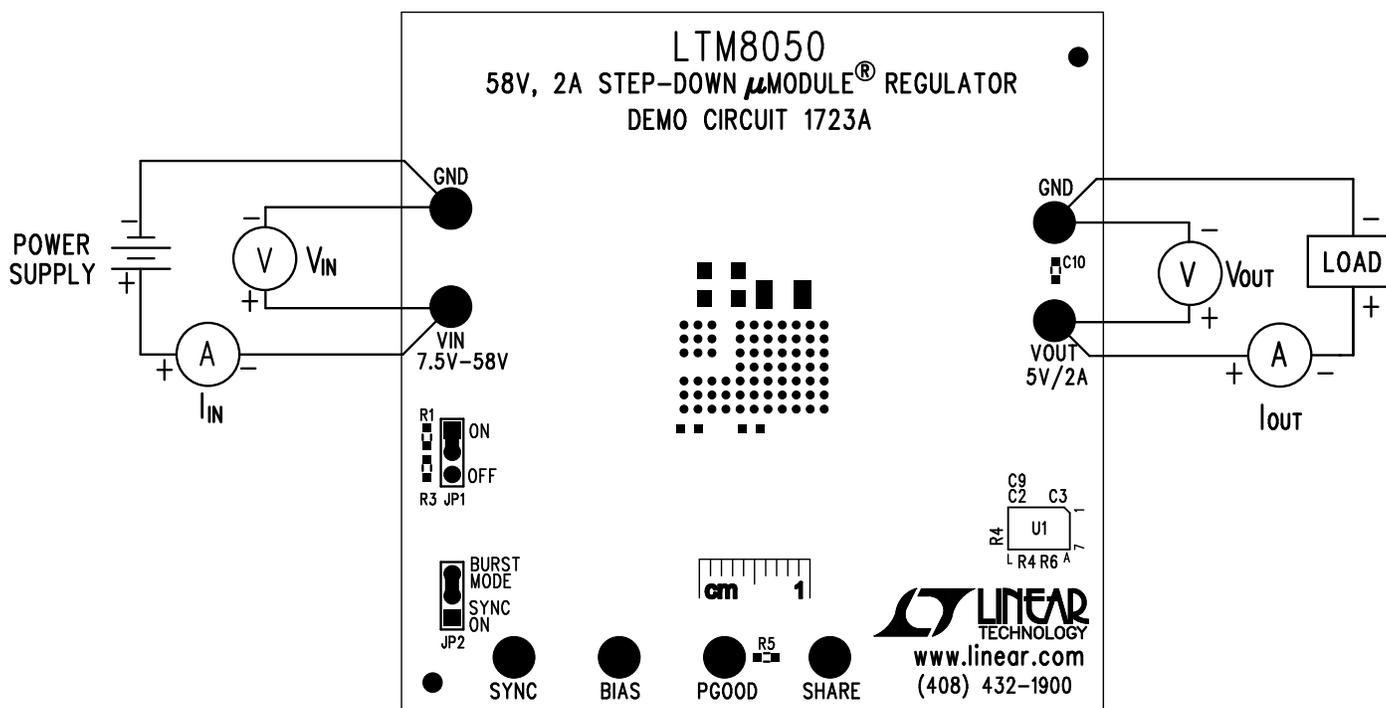


Figure 1. Measurement Equipment Setup

QUICK START PROCEDURE

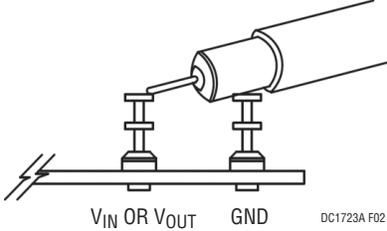


Figure 2. Measuring Input or Output Ripple

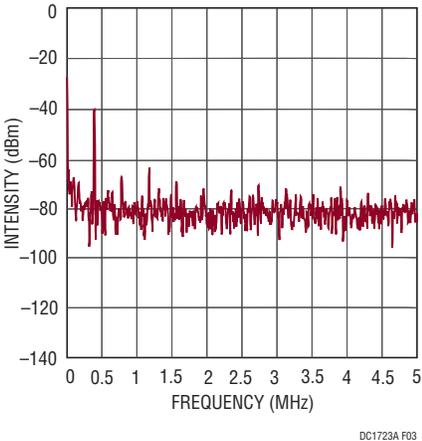



Figure 3. DC1723A Output Noise Spectrum ($V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 2A$)

DEMO MANUAL DC1723A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	C2, C9	CAP., X7R, 2.2 μ F, 100V, 10%, 1206	MURATA, GRM31CR72A225KA73
2	1	C3	CAP., X5R, 100 μ F, 6.3V, 20%, 1210	MURATA, GRM32ER60J107ME20L
3	1	C10	CAP., X7R, 0.1 μ F, 10V, 10%, 0603	AVX, 0603ZC104KAT2A
4	1	R2	RES., CHIP, 0 Ω , 1/10W, 0603	NIC, NRC06Z0TRF
5	1	R4	RES., CHIP, 93.1k, 1/10W, 1% 0603	VISHAY, CRCW060393K1FKEA
6	1	R5	RES., CHIP, 100k, 1/10W, 1% 0603	NIC, NRC06F1003TRF
7	1	R6	RES., CHIP, 97.6k, 1/10W, 1% 0603	VISHAY, CRCW060397K6FKEA
8	1	R7	RES., CHIP, 0 Ω , 1/4W, 1% 1206	NIC, NRC12Z0TRF
9	1	U1	IC., MODULE REGULATOR, LTM8050EY BGA-70 LEAD	LINEAR TECH., LTM8050EY
Additional Demo Board Circuit Components				
1	1	C1	CAP., ELECTROLYTIC, 10 μ F, 100V	SUN ELECT., 100CE10BS
2	0	C4, C5, C8 (OPT)	CAP., 0603	
3	0	C6 (OPT.)	CAP., 1210	
4	0	C7 (OPT.)	CAP., ALUM CAP.,	
5	0	R1, R3 (OPT.)	RES., CHIP, 0603	
6	0	FB1 (OPT.)	FERRITE BEAD, M TYPE	TAIYO YUDEN, FBMJ3216HS800T
7	0	L1 (OPT.)	IND., 10 μ H	VISHAY, IHLP-2525CZ-01
Hardware-For Demo Board Only				
1	8	E1-E8	TESTPOINT, TURRET, 0.094" PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
2	2	JP1-JP2	3 PIN 0.079" SINGLE ROW HEADER	SULLINS, NRPN031PAEN-RC
3	1	XJP1-XJP2	SHUNT, 0.079" CENTER	SAMTEC, 2SN-BK-G
4	1	Stencil		

SCHEMATIC DIAGRAM

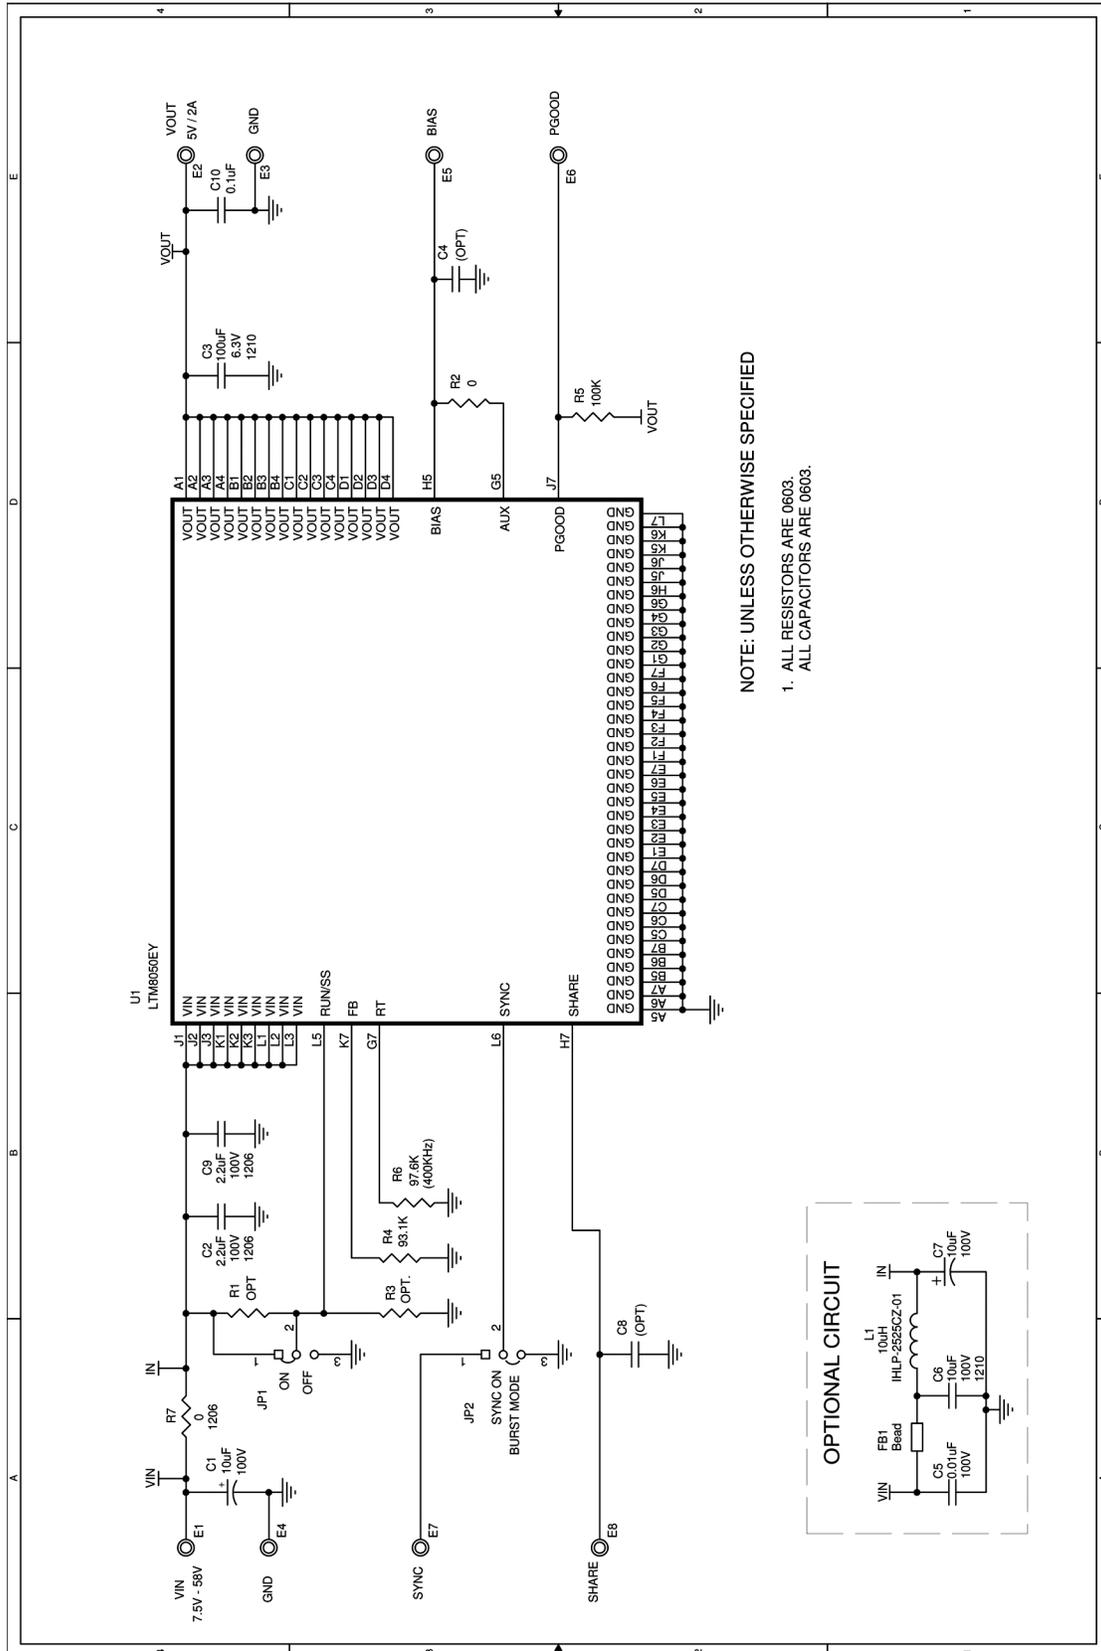

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. ALL RESISTORS ARE 0603.
- ALL CAPACITORS ARE 0603.

DEMO MANUAL DC1723A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru