

## LTC3553EPD: Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator

### DESCRIPTION

Demonstration Circuit DC1550A is a Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator featuring the LTC<sup>®</sup>3553.

### PERFORMANCE SUMMARY Specifications are at T<sub>a</sub> = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V <sub>BUS</sub>	Bus Input Voltage Range		4.35		6	V
V(BAT)	Battery Float Voltage	Constant Voltage Mode	4.15		4.23	V
I(BAT)	Battery Charge Current	Constant Current Mode, R <sub>PROG</sub> = 1.87k	420		500	mA
VLDO	LDO Output Voltage	I(VLDO) ≤ 200mA	3.25		3.35	V
VBUCK	Buck Regulator Output Voltage	I(VBUCK) ≤ 200mA	1.15		1.25	V

### QUICK START PROCEDURE

Refer to Figure 1 for the proper measurement equipment setup and jumper settings and follow the procedure below.


**NOTE.** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V<sub>BUS</sub> or V<sub>OUT</sub>(x) and GND terminals. See Figure 2 for proper scope probe technique.

- Set PS1 = 0V, PS2 = 3.6V. Press “ON” button for > 0.5s. Observe I(BAT) (AM2), VBUCK (VM5) and VLDO (VM6).  
The LTC3553 is in STBY which reduces the battery current to less than 15μA, even with both regulators running. In STBY the maximum current from regulators is reduced to as low as 10mA
- Set STBY (JP6) to “OFF”, PS1 to 5V. Observe I(VBUS) (AM1), I(BAT) (AM2) and VPROG (VM2).

The LTC3553 is now operating in normal mode drawing more current from the battery. However the regulators are now capable of delivering over 200mA each. Also, since V<sub>BUS</sub> is now available, the battery charger is operating, but charge current is limited by the input current limit to 100mA.


- Set HPWR (JP2) to “500mA”. Observe I(VBUS) (AM1), I(BAT) (AM2) and VPROG (VM2).  
The input current limit is now 500mA, so the battery charger is delivering ~420mA to the battery.
- Set LD2 to 200mA, LD3 to 200mA. Observe VBUCK (VM5), VLDO (VM6) and I(BAT) (AM2).  
Each regulator is supplying 200mA, and since the efficiency is ~90%, drawing ~225mA. So, the battery charger is only delivering approximately 50mA. This is because the input current limit is 500mA – 225mA – 225mA = 50mA.

5. Set LD2 to 0A, LD3 to 0A. Press “OFF” button. Observe VBUCK (VM5) and VLDO (VM6). The regulators are now off and therefore supplying 0 current. The battery charger is once again supplying ~ 420mA to the battery.
6. Reset the Jumpers to their default position.

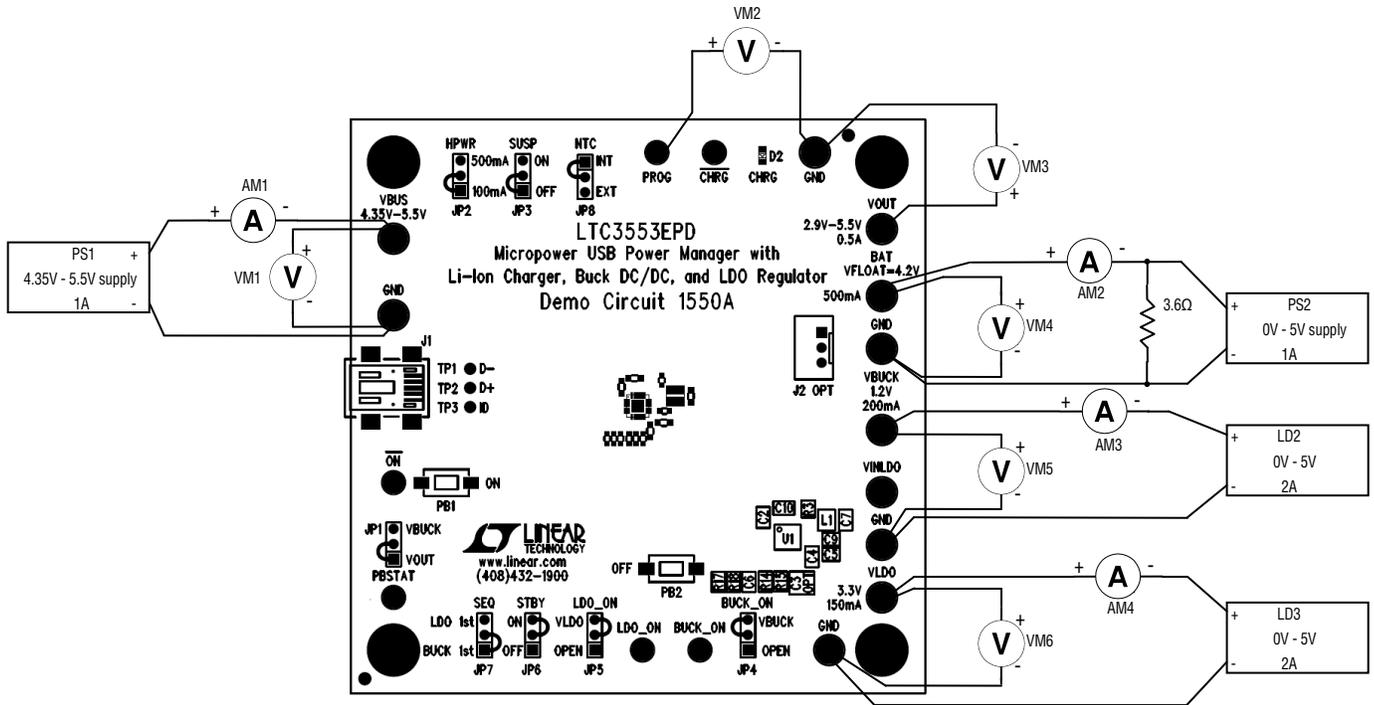


Note: All connections from equipment should be Kelvin connected directly to the board pins which they are connected on this diagram and any input or output leads should be twisted pair.

**Figure 1. Proper Measurement Equipment Setup for DC1550A**

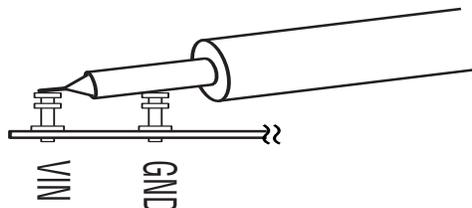

**Figure 2. Measuring Input or Output Ripple**

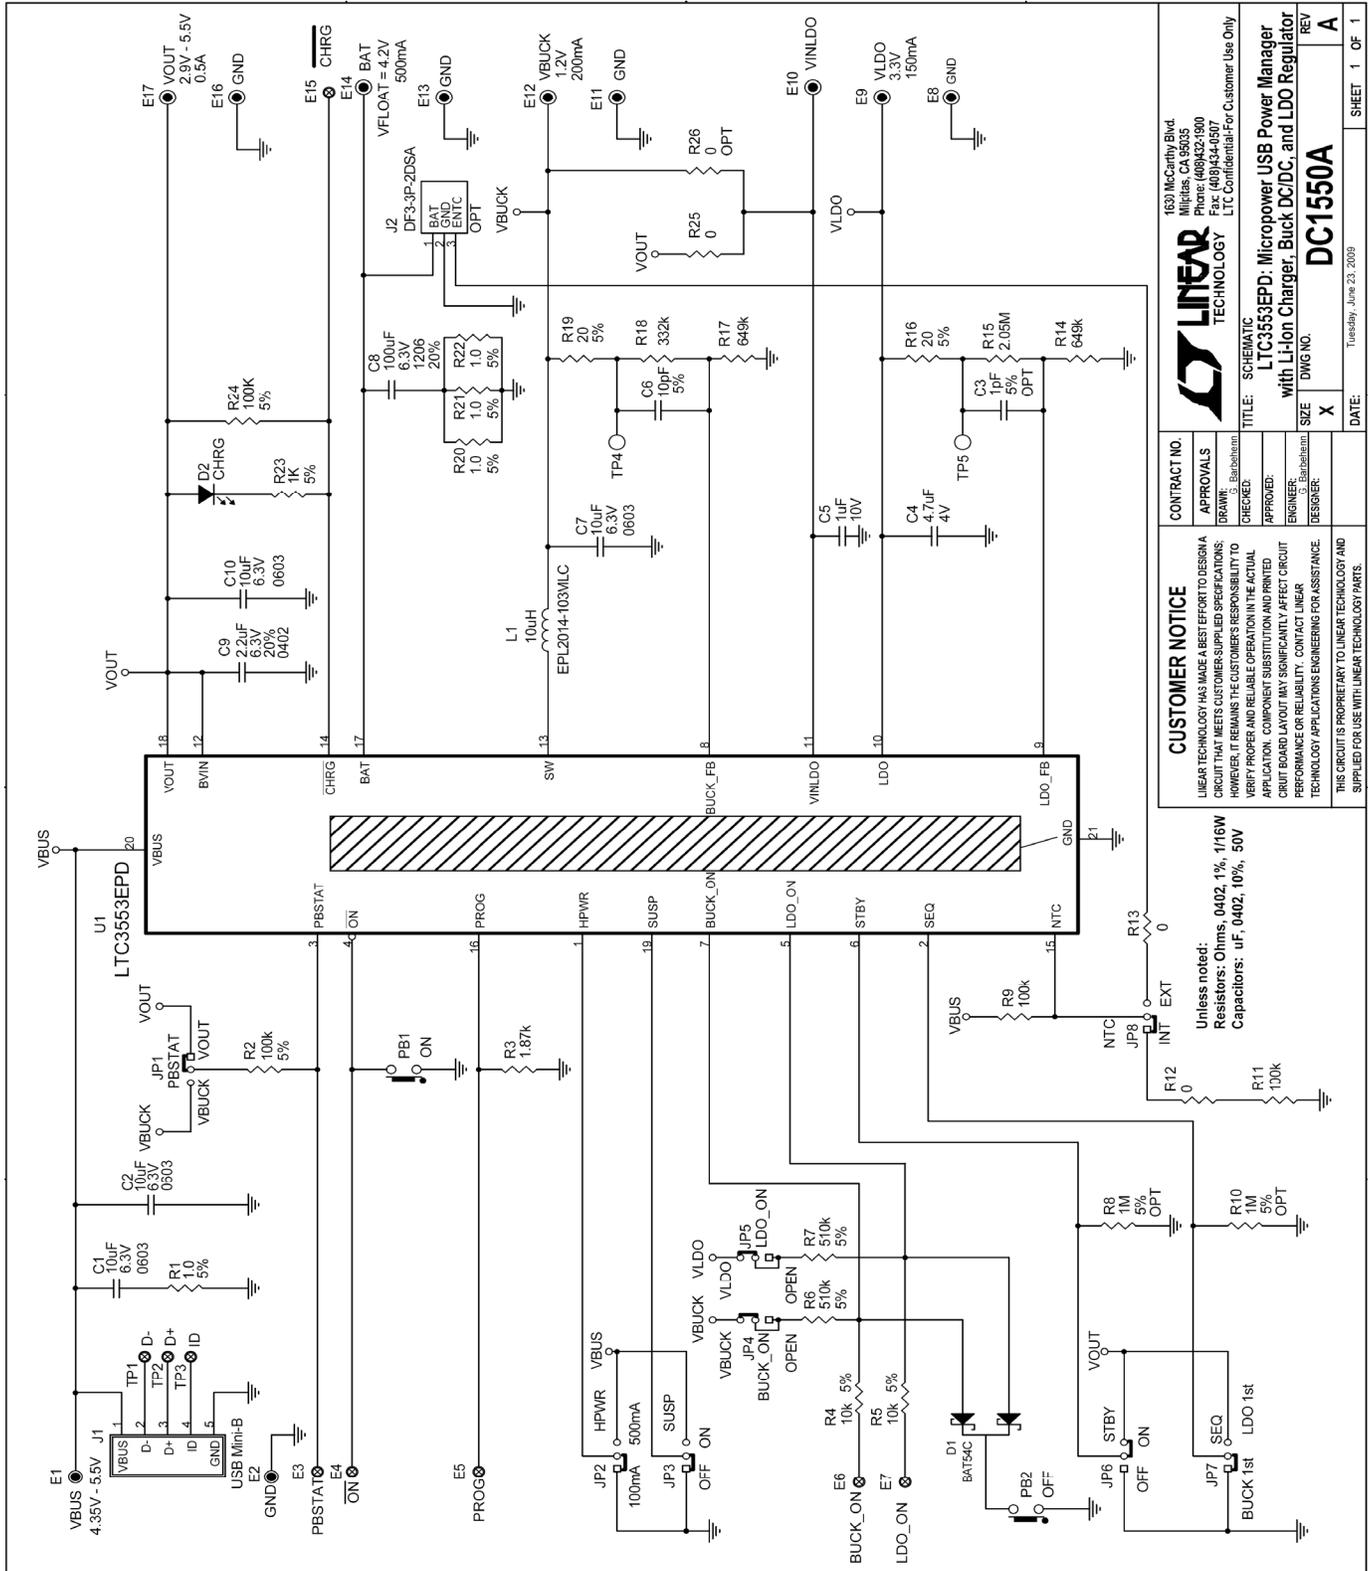

<b>CUSTOMER NOTICE</b>		<b>CONTRACT NO.</b>	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.		APPROVALS	
THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.		DRAWN: G. Baderbaum	
		CHECKED:	
		APPROVED:	
		ENGINEER: G. Baderbaum	
		DESIGNER:	
		TITLE: SCHEMATIC	
		LTC3553EPD: Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator	
SIZE	X	DWG NO.	DC1550A
REV	A	DATE:	Tuesday, June 23, 2009
			SHEET 1 OF 1

Unless noted:  
Resistors: Ohms, 0402, 1%, 1/16W  
Capacitors: uF, 0402, 10%, 50V

Figure 3. Circuit Schematic

Qty	Reference	Part Description	Manufacture / Part #	
<b>REQUIRED CIRCUIT COMPONENTS:</b>				
1	3	C2, C7, C10	CAP, CHIP, X5R, 10 $\mu$ F, $\pm$ 10%, 6.3V, 0603	TDK, C1608X5R0J106K
2	1	C4	CAP, CHIP, X5R, 4.7 $\mu$ F, $\pm$ 20%, 4V, 0402	MURATA, GRM155R60G475M
3	1	C5	CAP, CHIP, X5R, 1 $\mu$ F, $\pm$ 10%, 10V, 0402	MURATA, GRM155R61A105KE15D
4	1	C6	CAP, CHIP, C0G, 10pF, $\pm$ 5%, 50V, 0402	MURATA, GRM1555C1H100JZ01D
5	1	C9	CAP, CHIP, X5R, 2.2 $\mu$ F, $\pm$ 20%, 6.3V, 0402	MURATA, GRM155R60J225ME15D
6	1	L1	IND, SMT, 10 $\mu$ H, 459m $\Omega$ , $\pm$ 20%, 0.631A, 2mmX2mm	COILCRAFT, EPL2014-103MLC
7	1	R3	RES, CHIP, 1.87k $\Omega$ , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW04021K87FKED
8	2	R9, R11	RES, CHIP, 100k $\Omega$ , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402100KFKED
9	3	R12, R13, R25, R26-OPT	RES, CHIP, 0 $\Omega$ jumper, 1/16W, 0402	VISHAY, CRCW04020000Z0ED
10	2	R14, R17	RES, CHIP, 649k $\Omega$ , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402649KFKED
11	1	R15	RES, CHIP, 2.05MEG $\Omega$ , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW04022M05FKED
12	1	R18	RES, CHIP, 332k $\Omega$ , $\pm$ 1%, 1/16W, 0402	VISHAY, CRCW0402332KFKED
13	1	U1	Micropower USB Power Manager with Li-Ion Charger, Buck DC/DC, and LDO Regulator	LINEAR TECH., LTC3553EPD
<b>ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:</b>				
1	1	C1	CAP, CHIP, X5R, 10 $\mu$ F, $\pm$ 10%, 6.3V, 0603	TDK, C1608X5R0J106K
2	0	C3-OPT	CAP, CHIP, C0G, 1pF, $\pm$ 5%, 50V, 0402	VISHAY, VJ0402A1R0JXAA
3	1	C8	CAP, CHIP, X5R, 100 $\mu$ F, $\pm$ 20%, 6.3V, 1206	MURATA, GRM31CR60J107ME39L
4	1	D1	DIODE, Dual Schottky, 30V, 200mA, SOT23	DIODES INC., BAT54C
5	1	D2	LED, GREEN, 0603	LITE-ON, LTST-C190KGKT
6	4	R1, R20, R21, R22	RES, CHIP, 1 $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW04021R00JNED
7	2	R2, R24	RES, CHIP, 100k $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW0402100KJNED
8	2	R4, R5	RES, CHIP, 10k $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW040210K0JNED
9	2	R6, R7	RES, CHIP, 510k $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW0402510KJNED
10	0	R8-OPT, R10-OPT	RES, CHIP, 1MEG $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW04021M00JNED
11	2	R16, R19	RES, CHIP, 20 $\Omega$ , $\pm$ 5%, 1/16W, 0402	VISHAY, CRCW040220R0JNED
12	1	R23	RES, CHIP, 1k $\Omega$ , $\pm$ 5%, 1/10W, 0603	VISHAY, CRCW06031K00JNED
<b>HARDWARE FOR DEMO BOARD ONLY:</b>				
1	11	E1, E2, E8, E9, E10, E11, E12, E13, E14, E16, E17	TURRET, 0.09"	MILLMAX, 2501-2
2	6	E3, E4, E5, E6, E7, E15	TURRET, 0.061"	MILLMAX, 2308-2
3	1	J1	CONN, USB Mini-B	TYCO, 1734035-2
4	0	J2-OPT	CONN, 3 Pin Polarized	HIROSE, DF3-3P-2DSA
5	8	JP1, JP2, JP3, JP4, JP5, JP6, JP7, JP8	HEADER, 3 Pin, 2mm	SAMTEC, TMM-103-02-L-S
6	8	JP1, JP2, JP3, JP4, JP5, JP6, JP7, JP8	SHUNT, 2mm	SAMTEC, 2SN-BK-G
7	2	PB1, PB2	SWITCH, N.O. Momentary, 3.5mmx6mm SMT	PANASONIC, EVQPPFA25
8	4		STAND-OFF, NYLON, 0.375"	KEYSTONE, 8832
9	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1550A
10	1		STENCIL-TOP	STENCIL #1550-1-TOP
11	1		STENCIL-BOTTOM	STENCIL #1550-1-BOTTOM

Figure 4. Bill of Materials

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)