

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1904 UNIVERSAL DUAL-BATTERY CHARGER/SELECTOR

LTC1960

DESCRIPTION

Demonstration circuit 1904 is a dual battery PowerPath™ and charger controller featuring the LTC1960. The input voltage is 15V to 20V. The charger output voltage is programmed via SPI serial interface. The maximum charge current is 4A. The demo board has been optimized to work with 3- and 4-cell Li-ion batteries. A jumper is provided to select the LowBatt voltage trip point. The board will not charge any battery without a device to program it. By default the board powers up in 3-Diode mode, which simply means all three power paths to the output (load) are on.

PowerPath selection is programmed over the SPI interface.

This is not a stand-alone demonstration circuit—an SPI interface and associated software is required for proper evaluation. Linear Technology offers demonstration circuit 1223A-B, which includes an SPI-to-USB-port adapter and software to control demonstration circuit 1904.

Design files for this circuit board are available. Call the LTC factory.

LTC is a registered trademark of Linear Technology Corporation.

Table 1. Performance Summary

| PARAMETER | CONDITION | VALUE |
|--|---|--|
| Maximum Input Voltage | Limited by input Capacitor Volt Ratings | 20V ± 10 % |
| Recommended Minimum Input Voltage | | 15V ± 10 % |
| Low Battery Voltage trip point at full discharge | 0% capacity voltage. Set by DCLOW TRIP Jumper | >7.9 for 3 cell Li-ion >11V for 4 cell Li-ion |
| Input Trip Voltage | Set by DCDIV divider network. | 13V ± 3% |
| Maximum Charge Current | V _{in} > V _{BATmax} > 6V | 4A ± 5% Settable to 1, 2 and 3 amps. |
| Short Circuit Shutdown Trip Current | Static Load T > 15ms | 8.33A ± 5% |
| Input Current Limit | IBAT + ILOAD | 3.57A ± 5% |

QUICK START PROCEDURE

Demonstration circuit 1904 is easy to set up to evaluate the performance of the LTC1960. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect the input power source to DCIN terminals J1 or TP1 and TP3 using a power supply capable of handling 4A of current within a 15V to 20V range.
2. Connect the load to DCOUT terminals TP2 and TP4.
3. Turn on the input power supply.
4. Attach one or two batteries to the BATTERY 1 or BATTERY 2 terminals or both. Industry standard 5-pin AMP Smart Battery connectors are provided as well as test points for hardwire.

NOTE: The input supply *must* be greater than the full voltage value of the battery to allow a full charge to take place.

5. Program the LTC1960.

NOTE: OPTIONALLY use the DC1223A-B demonstration software to control and configure DC1904.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1904

UNIVERSAL DUAL-BATTERY CHARGER/SELECTOR


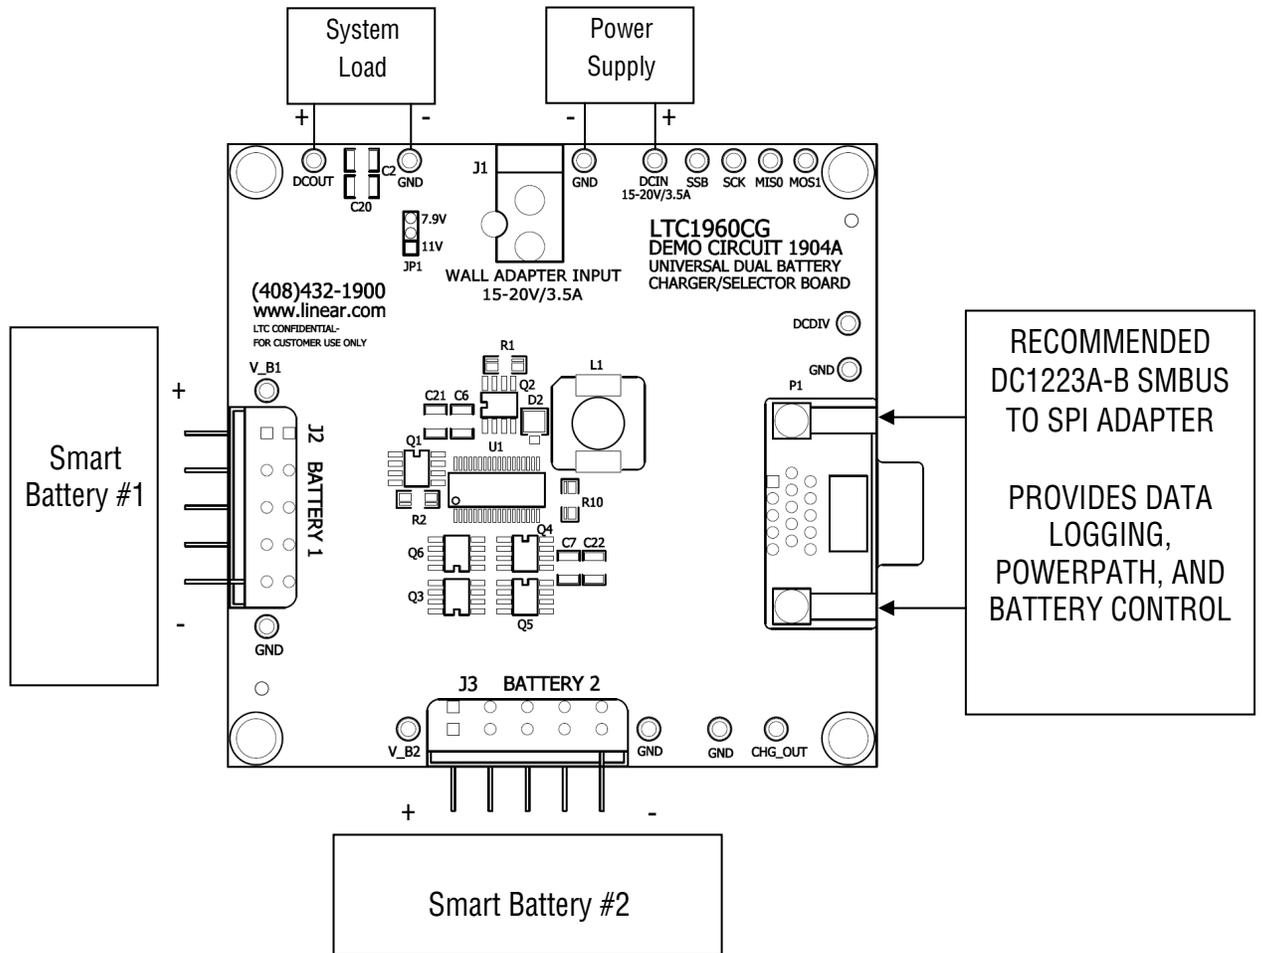


Figure 1: Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1904 UNIVERSAL DUAL-BATTERY CHARGER/SELECTOR

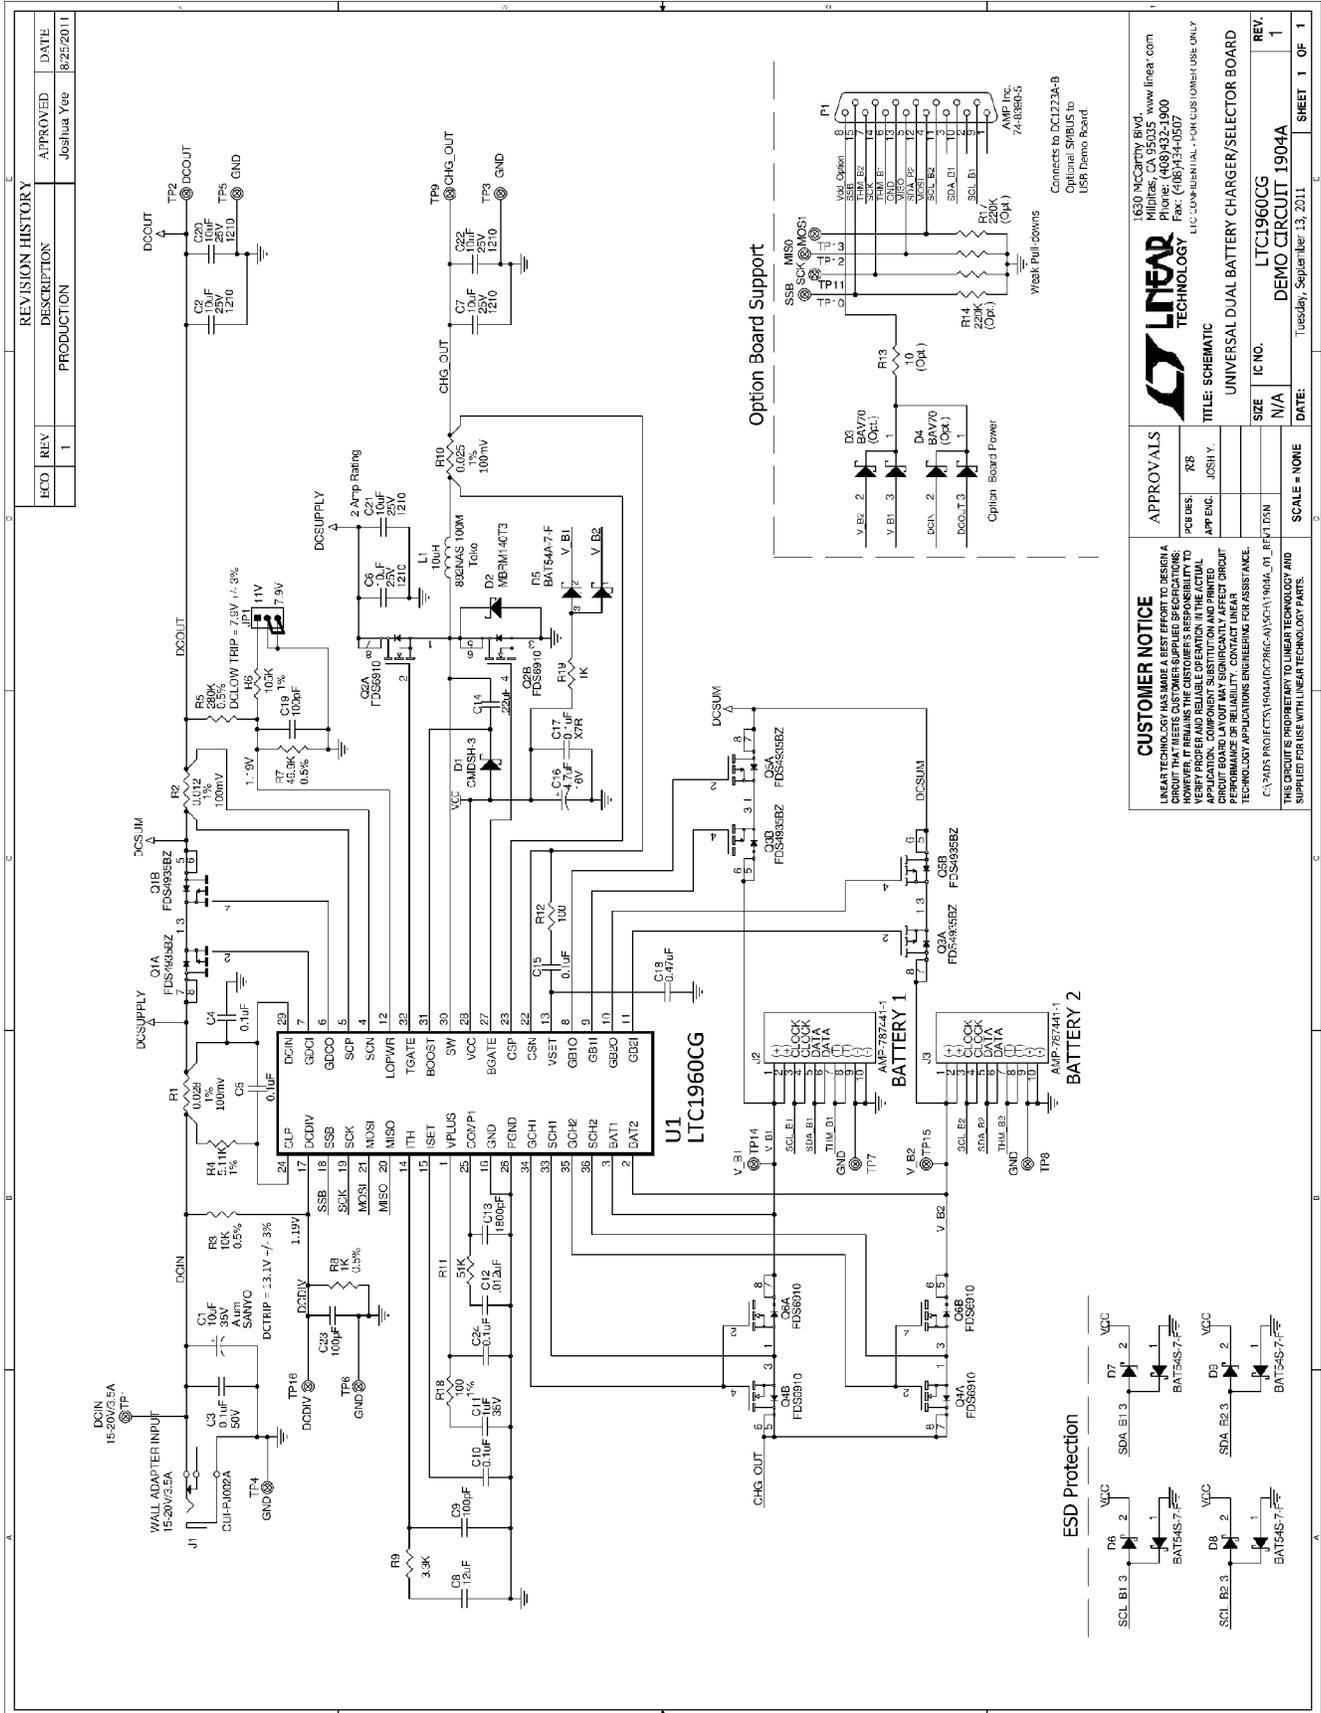

| REVISION HISTORY | | APPROVED | DATE |
|------------------|-------|------------|-----------|
| ECO | REV 1 | Joshua Yee | 8/25/2011 |
| DESCRIPTION | | | |
| PRODUCTION | | | |

CUSTOMER NOTICE
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SPECIFIED SPECIFICATIONS; HOWEVER, THE USER MUST VERIFY THE BOARD LAYOUT TO VERIFY PROPER AND RELIABLE OPERATION. IN THE ACTUAL APPLICATION, COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE. LINEAR TECHNOLOGY ASSUMES NO LIABILITY FOR TECHNOLOGY APPLICATIONS ENGINEERING ASSISTANCE.

CU-3405-PROJECTS-1904A(DC232A-B) (REV. 01) (REV. 01) (REV. 01)

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.



APPROVALS

| | |
|----------|---------|
| FCB DES. | JZB |
| APP ENG. | JDSH Y. |

TITLE: SCHEMATIC
UNIVERSAL DUAL BATTERY CHARGER/SELECTOR BOARD

SIZE: N/A
IC NO.: LTC1960CG
REV: 1

DATE: Tuesday, September 13, 2011
SHEET 1 OF 1

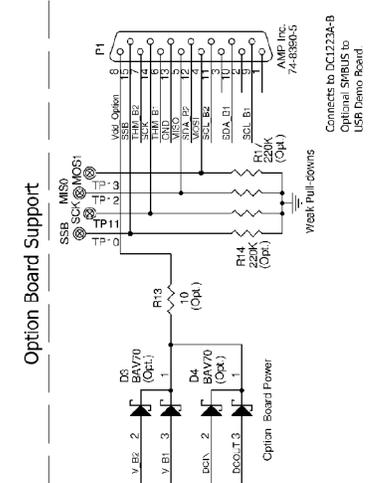

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru