

DESCRIPTION

Demonstration circuit 1294A shows adjustable linear regulators in parallel using LT3080. Architected as a precision current source and voltage follower, it allows this new regulator to be used in many applications requiring high current, adjustability to zero output, and no heat sink. Also the device brings out the collector of the pass transistor to allow low dropout operation when used with multiple supplies.

A key feature of the LT3080 is the capability to supply a wide output voltage range. By using a reference current through a single resistor, the output voltage can be programmed to any level between zero and 36V. The DC1294A has a reduced input voltage 25V due to input capacitor voltage rating, and is capable of delivering up to 4.4A output current by paralleling 4 LT3080s with only 20mΩ PCB ballast resistors. The DC1294A can be used as a high current linear regulator, post regulator for switching supply, vari-

able voltage supply or low output voltage power supply.

Internal protection circuitry includes current limiting and thermal limiting.

LT3080 regulator is offered in 8-lead MSOP (with an Exposed Pad for better thermal characteristics), a 3mm × 3mm DFN, 5-lead TO-220 and a simple-to-use 3-lead SOT-223 version.

The LT3080 datasheet gives a complete description of the part, operation and application information. The datasheet should be read in conjunction with this quick start guide for working on or modifying the demo circuit 1294A.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Vin Voltage	Vout=3.3V	3.8V
Maximum Vin Voltage		25V
Minimum Vcontrol Voltage	Vout=3.3V	4.9V
Maximum Vcontrol Voltage		25V
Output Voltage		3.3V ±3%
Minimum Output Current		4mA
Maximum Output Current	Vin-Vout<2.5V	4.4A

QUICK START PROCEDURE

The DC1294A is easy to set up to evaluate the performance of the LT3080. Refer to Figure 1. for proper measurement equipment setup and following the procedures below:

1. Apply 3.8V across V_{in} (to Gnd), and 4.9V across $V_{control}$. Draw 4.4A of load current. The measured V_{out} should be $3.3V \pm 3\%$ (3.2V to 3.4V).

2. Vary V_{in} from 3.8V to 25V, $V_{control}$ from 4.9V to 25V and the load current from 4mA to 4.4A. V_{out} should measure $3.3V \pm 3\%$ (3.2V to 3.4V).

Note: Make sure the power dissipation is limited below the thermal limit.

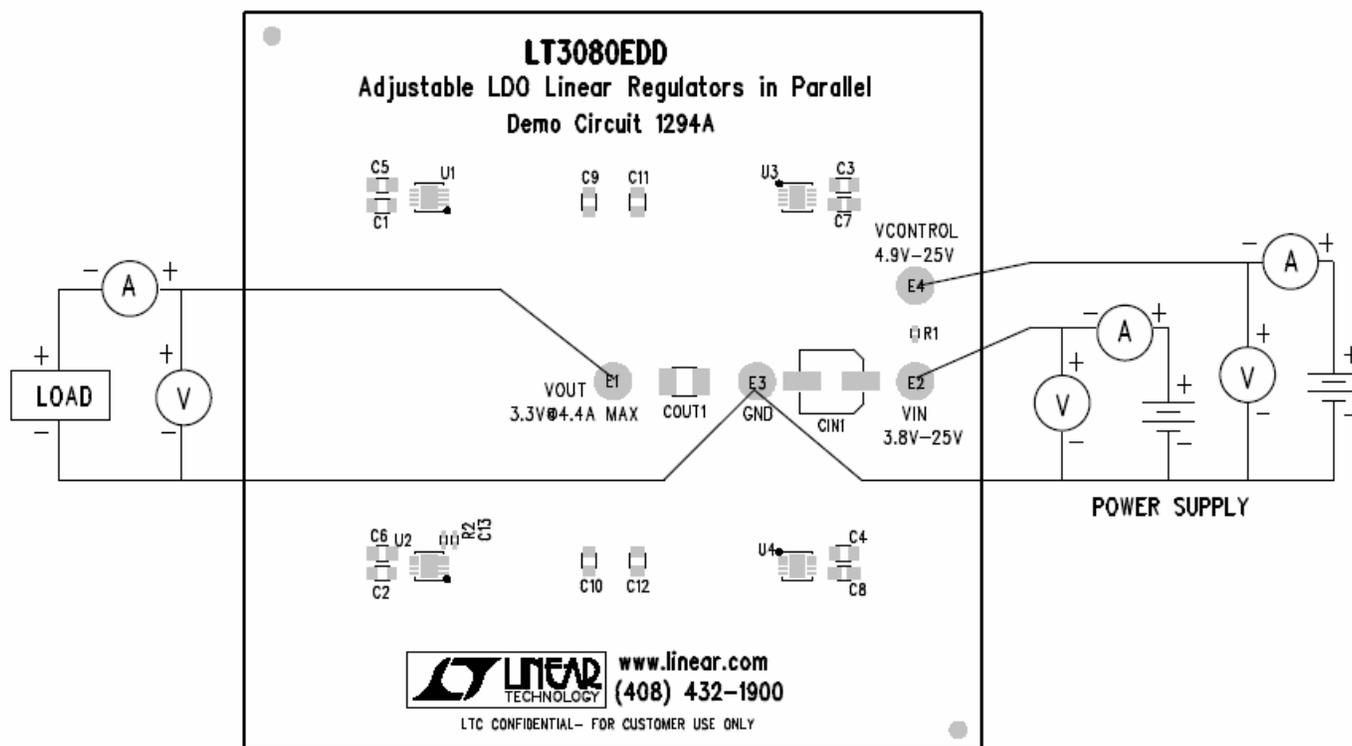


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

INPUT VOLTAGE RANGE

The guaranteed V_{in} dropout voltage is 0.5V at 4.4A, the guaranteed $V_{control}$ dropout voltage is 1.6V at 4.4A. The maximum V_{in} and maximum $V_{control}$ is

reduced to 25V due to the input capacitor voltage rating.

DUAL SUPPLY OR SINGLE SUPPLY

Use two separate supplies for V_{in} and $V_{control}$, a low dropout voltage can be achieved on the V_{in} pin and the power dissipation is minimized. Alternatively, Tying the $V_{control}$ to V_{in} through a zero ohm jump resistor R1

on board, a single supply is sufficient to drive the demo circuit 1294A. **AVOID USING A LONG WIRE TO TIE VCONTROL AND VIN.**


OUTPUT CURRENT

The output current will decrease at high input-to-output differential. The actual current output is further

limited by the thermal shutdown function, which is related to the board thermal dissipation.

THERMAL IMAGE

An example thermal image shows the temperature distribution on board. The test is done in still air at room temperature with average 1.7W power dissipation in each LT3080.

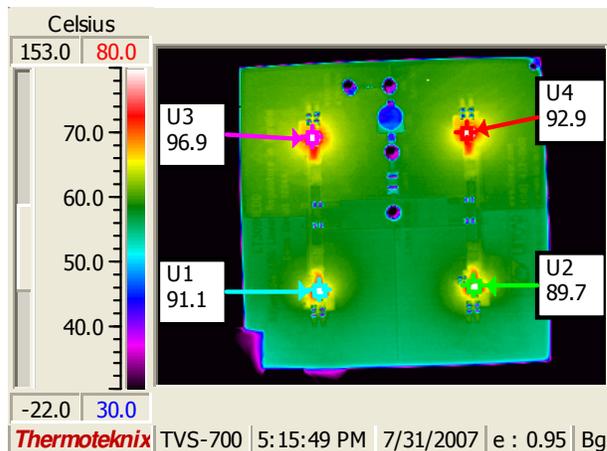

BYPASS CAPACITOR

Since the SET pin is a high impedance node, unwanted signals may couple into the SET pin and cause erratic behavior. This will be most noticeable when operating with minimum output capacitors at full load current. The easiest way to remedy this is to bypass the SET

pin with a small amount of capacitance from SET to ground, 10pF to 20pF is sufficient. A 0.01uF bypass capacitor is used on the demo board to provide a low-noise output. Please refer to datasheet for details.


PARALLEL OPERATION

A small ballast resistor is required for parallel operation, such as 20mΩ. A short PCB trace can easily serve that purpose. Refer to the datasheet for trace length calculation. **THE BOTTOM PAD OF IC IS THE OUTPUT.** The bottom pad can be tied to the output pin

respectively, however, each bottom pad should isolated from the others, thus force the output current go through the ballast resistors.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1294A

ADJUSTABLE LDO LINEAR REGULATORS IN PARALLEL

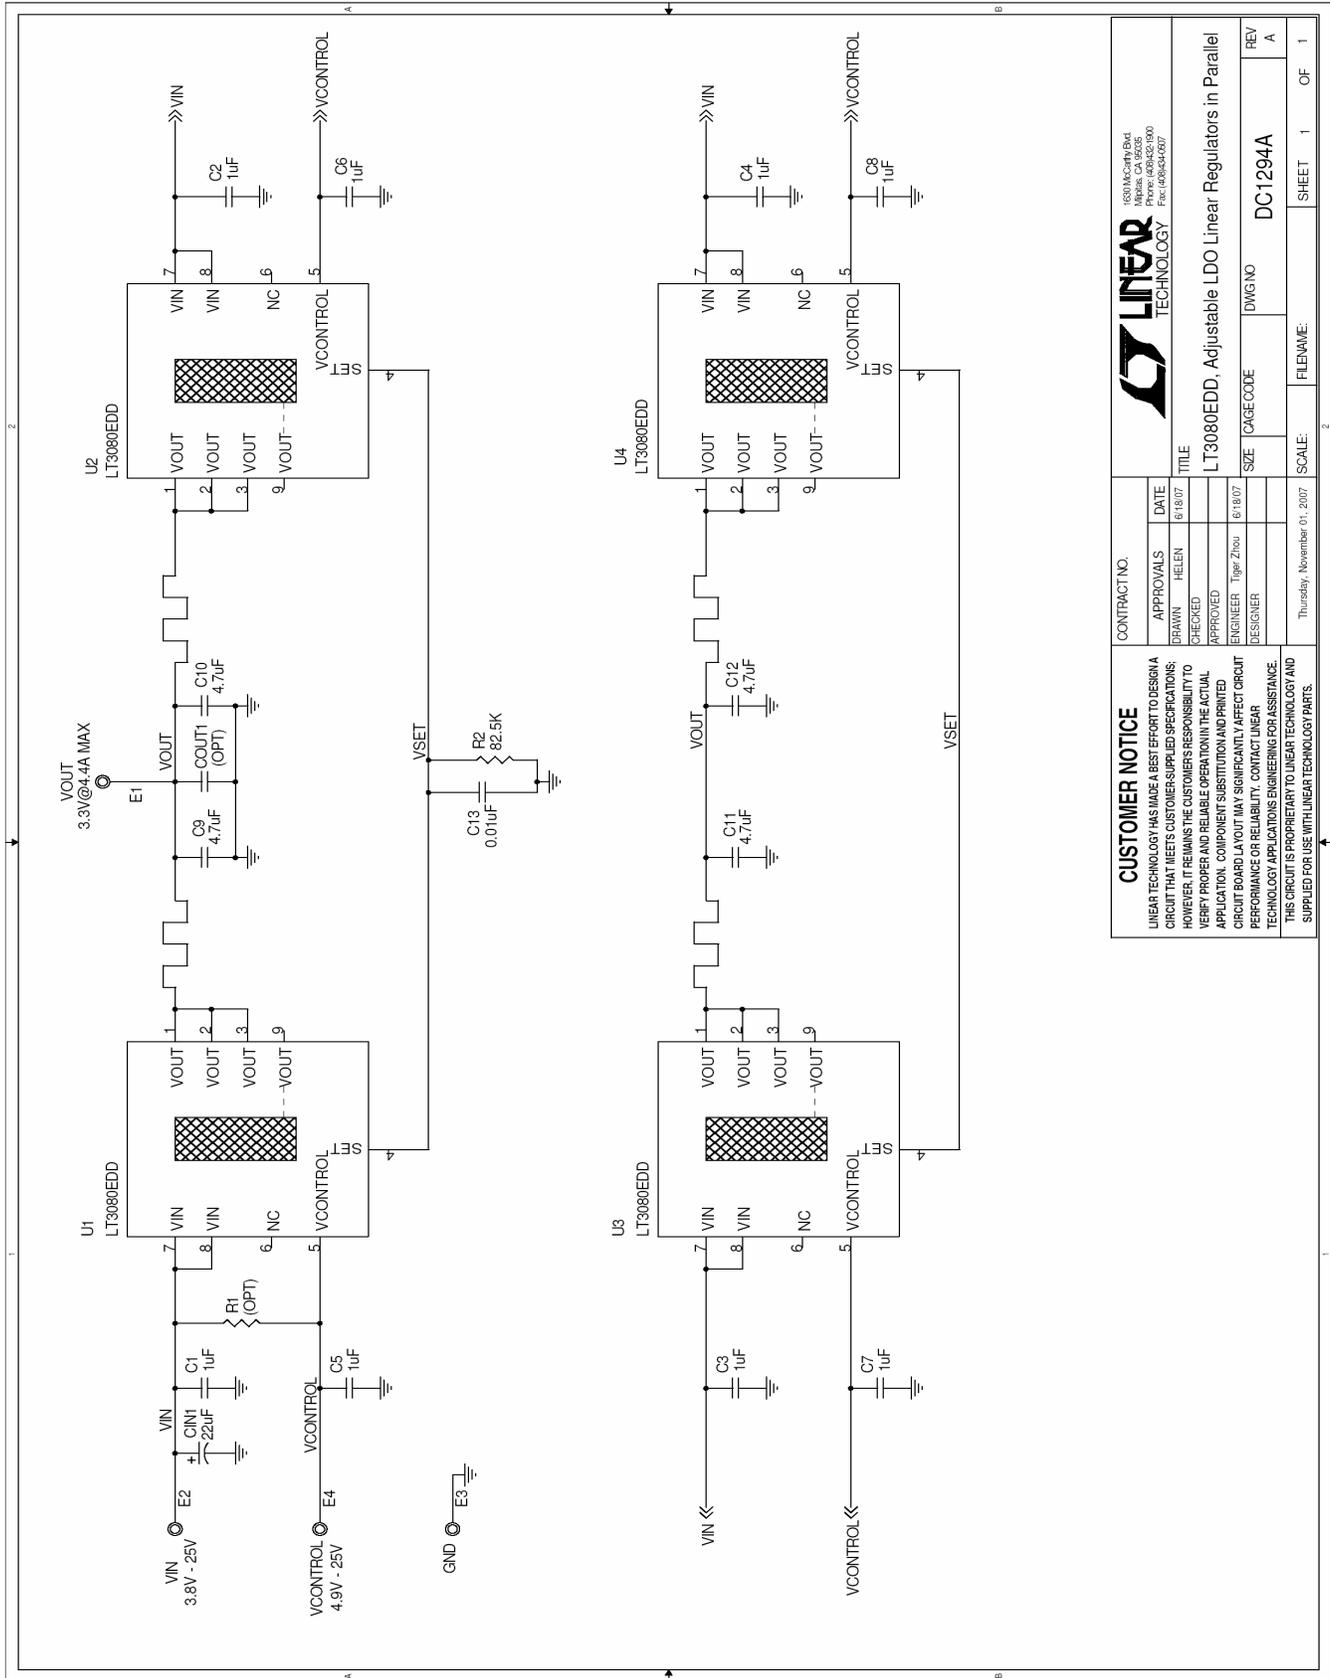

CUSTOMER NOTICE		CONTRACT NO.	APPROVALS	DATE	TITLE
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.		DRAWN	HELEN	6/18/07	LT3080EDD, Adjustable LDO Linear Regulators in Parallel
		CHECKED			
		ENGINEER	Tiger Zhou	6/18/07	
		DESIGNER			
		SIZE	CAGE CODE	DWG NO	REV
				DC1294A	A
		SCALE	FILENAME	SHEET	OF
				1	1



1830 McCarty Rd
Milpitas, CA 95035
Phone: (408)432-1000
Fax: (408)432-0077

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru