

# LTC3265EDHC

## Low Noise Dual Supply with Boost and Inverting Charge Pumps

### DESCRIPTION

Demonstration Circuit 2235A has boost and inverting charge pumps each with a low noise LDO post regulator featuring the **LTC®3265EDHC**. The LTC3265 operates with an input voltage from 4.5V to 16V for the boost charge pump and from 4.5V to 32V for the inverting charge pump. The demo board provides selectable LDO<sup>±</sup> output set magnitudes of 5V, 15V, and 24V for each polarity. The demo board also provides the means to select between low power Burst Mode<sup>®</sup> operation or low noise constant-frequency

mode operation, plus select an operating frequency of 500kHz, 200kHz, or 50kHz.

The LTC3265 data sheet gives a complete description of the device, operation and application information. The data sheet must be read in conjunction with this demo manual.

**Design files for this circuit board are available at <http://www.linear.com/demo/DC2235A>**


LT, LT, LTC, LTM, Linear Technology, the Linear logo and Burst Mode are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY

Specifications are at T<sub>A</sub> = 25°C


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V <sub>IN_P</sub>	V <sub>IN_P</sub> Input Voltage Range		4.5		16	V
V <sub>IN_N</sub>	V <sub>IN_N</sub> Input Voltage Range		4.5		32	V
V <sub>LDO+</sub>	LDO <sup>+</sup> Output Voltage	V <sub>IN_P</sub> • 2 ≥ LDO <sup>+</sup> Set Point + 0.8V	1.2		32	V
V <sub>LDO-</sub>	LDO <sup>-</sup> Output Voltage	V <sub>IN_N</sub> ≤ LDO <sup>-</sup> Set Point - 0.5V	-32		-1.2	V
V <sub>OUT+</sub>	V <sub>OUT+</sub> Output Voltage Range	MODE = 0V (Const. Freq.) MODE ≥ 2V (Burst)		V <sub>IN_P</sub> • 2 0.94 • V <sub>IN_P</sub> • 2		V V
V <sub>OUT-</sub>	V <sub>OUT-</sub> Output Voltage Range	MODE = 0V (Const. Freq.) MODE ≥ 2V (Burst)		-V <sub>IN_N</sub> -0.94 • V <sub>IN_N</sub>		V V

### BOARD PHOTO

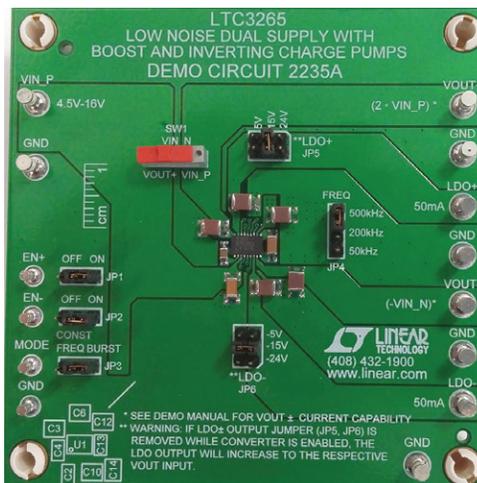


## TYPICAL APPLICATIONS

Low Noise  $\pm 15V$  Outputs from a Single 12V Input

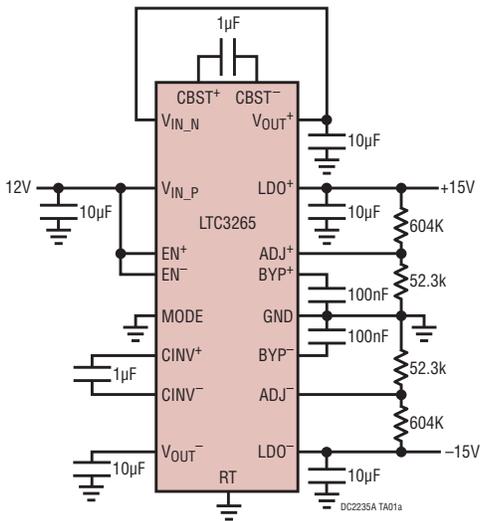

LDO Rejection of  $V_{OUT}^{\pm}$  Ripple

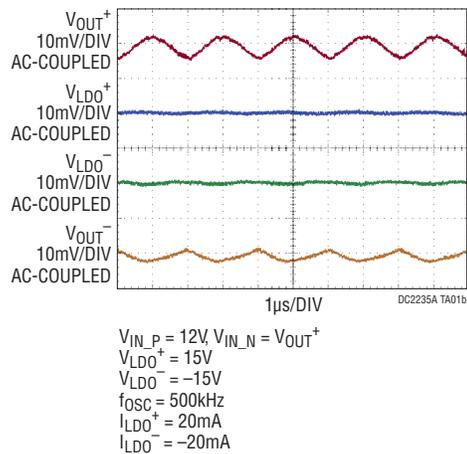

## QUICK START PROCEDURE

Refer to Figure 1 for the proper measurement equipment setup and jumper settings and follow the procedure below.

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the  $V_{IN}$  or  $V_{OUT}$  and GND terminals. See Figure 2 for proper scope probe technique.

1. Make sure the jumper settings are as follows:

- JP1:** EN<sup>+</sup> is on the ON position
- JP2:** EN<sup>-</sup> is on the ON position
- JP3:** MODE is in the Burst position
- JP4:** FREQ is on the 500kHz position
- JP5:** LDO<sup>+</sup> is set to 15V setting
- JP6:** LDO<sup>-</sup> is set to -15V setting

2. Set SW1 to the  $V_{OUT}^+$  position.
3. Set PS1 to 12V.
4. Slowly increase load on LDO<sup>-</sup> to -50mA and observe how output ripple on  $V_{OUT}^-$  changes and how burst frequency increases. When the load is large enough, the charge pump will run constant-frequency.

5. Slowly increase the load on LDO<sup>+</sup> to 50mA and observe the output ripple and the output voltage on LDO<sup>+</sup>.
6. Set the LDO<sup>+</sup> load and the LDO<sup>-</sup> load to 0mA and turn off PS1.
7. Set SW1 to the  $V_{IN\_P}$  position.
8. Set JP5 LDO<sup>+</sup> jumper to 5V position and JP6 LDO<sup>-</sup> to the -5V position.

**Note:** It is recommended to remove power or disable the respective regulators prior to changing the positions of the LDO $^{\pm}$  output jumpers (JP5, JP6).

9. Repeat steps 3 through 6.
10. Set JP5 LDO<sup>+</sup> jumper to 24V position and JP6 LDO<sup>-</sup> to the -24V position.
11. Set SW1 to the  $V_{OUT}^+$  position
12. Turn on and set PS1 to 15V.
13. Repeat steps 4 through 6.
14. Return JP5 LDO<sup>+</sup> jumper to 15V position and JP5 LDO<sup>-</sup> to the -15V position.
15. Turn on and set PS1 to 12V.

## QUICK START PROCEDURE

16. Slowly increase the load on  $V_{OUT}^+$  to 100mA and observe the output ripple and output voltage on  $V_{OUT}^+$ .
17. Set the load on  $V_{OUT}^+$  to 0mA.
18. Slowly increase the load on  $V_{OUT}^-$  to -100mA and observe the output ripple and output voltage on  $V_{OUT}^-$ .
19. Set the load on  $V_{OUT}^-$  to 0mA.
20. Change JP3 MODE jumper from Burst Mode operation to the constant-frequency mode and repeat steps 16 to 19.
21. Change JP4 FREQ jumper from 500kHz to 200kHz then slowly increase the load on  $V_{OUT}^+$  from 0mA to 50mA and observe the output ripple and output voltage on  $V_{OUT}^+$ .
22. Set the load on  $V_{OUT}^+$  to 0mA.
23. Slowly increase the load on  $V_{OUT}^-$  to -50mA and observe the output ripple and output voltage on  $V_{OUT}^-$ .
24. Set the load on  $V_{OUT}^-$  to 0mA.
25. Change JP4 FREQ jumper from 200kHz to 50kHz. Slowly increase the load on  $V_{OUT}^+$  from 0mA to 10mA and observe the output ripple and output voltage on  $V_{OUT}^+$ .
26. Set the load on  $V_{OUT}^+$  to 0mA.
27. Slowly increase the load on  $V_{OUT}^-$  to -10mA and observe the output ripple and output voltage on  $V_{OUT}^-$ .
28. Set the load on  $V_{OUT}^-$  to 0mA.
29. Turn off the loads and supply when done.

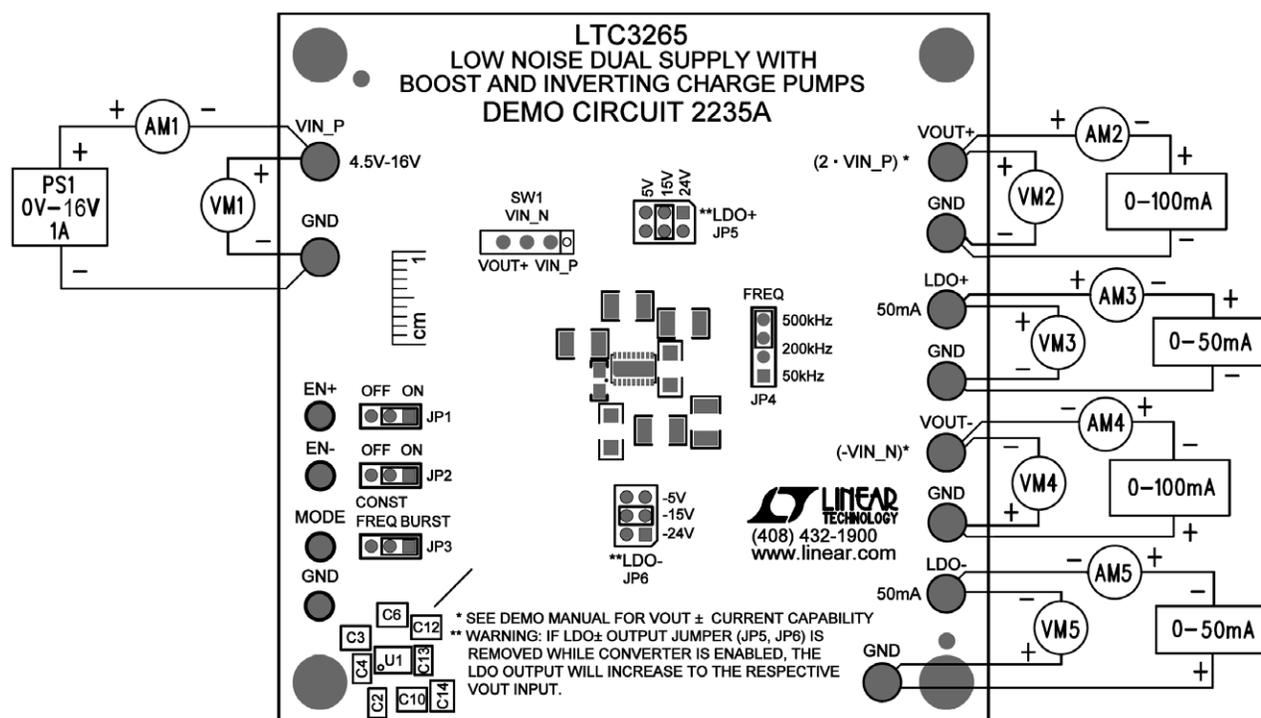


Figure 1. Proper Measurement Equipment Setup for DC2235A

## QUICK START PROCEDURE

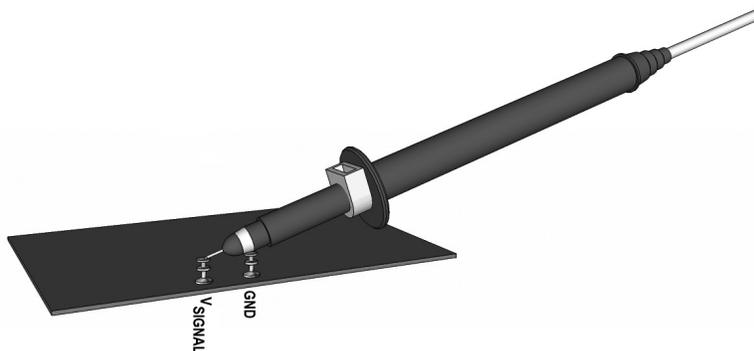


Figure 2. Measuring Input or Output Ripple

## APPLICATIONS INFORMATION

Figure 3 illustrates the voltage loss from the ideal boost charge pump output voltage of  $2 \cdot V_{IN\_P}$  to the measured  $V_{OUT^+}$  voltage. Figure 4 illustrates the voltage loss from

the ideal inverting charge pump output voltage of  $-V_{IN\_N}$  to the measured  $V_{OUT^-}$  voltage.

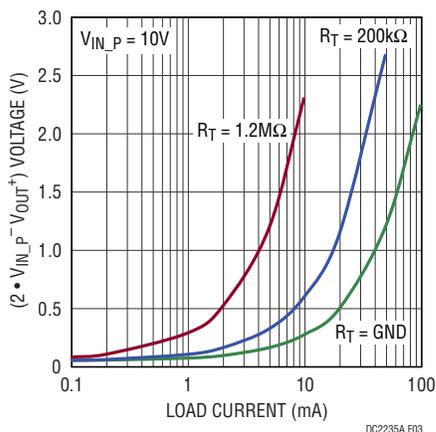


Figure 3.  $V_{OUT^+}$  Voltage Loss vs Output Current (Constant-Frequency Mode)

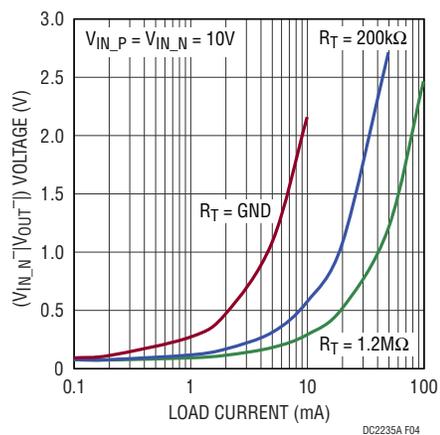


Figure 4.  $V_{OUT^-}$  Voltage Loss vs Output Current (Constant-Frequency Mode)

## APPLICATIONS INFORMATION

Figures 5 and 6 are CISPR radiated and conducted emissions respectively. The data were collected in a GTEM chamber and using a CISPR25 LISN for conducted emissions. The EMI tests were conducted using a 12V input on  $V_{IN\_P}$ ,  $V_{OUT}^+$  connected to  $V_{IN\_N}$  via SW1 of the demo board, and a 600Ω resistor load between LDO<sup>+</sup> and

LDO<sup>-</sup> in constant-frequency mode with a 500kHz oscillator frequency. Linear Technology has made every effort to provide useful and accurate EMI data, but it remains the responsibility of the customer to ensure product compliance with applicable rules and regulations.

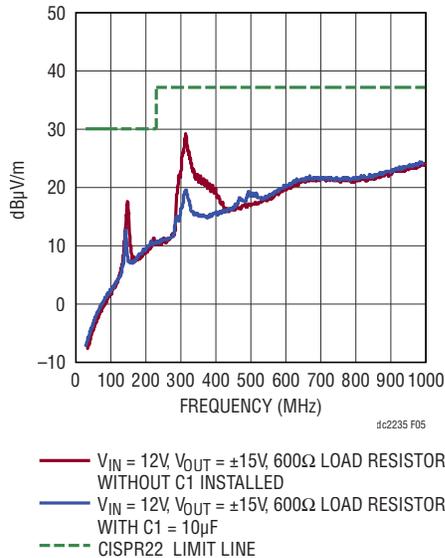


Figure 5. CISPR22 Radiated Emissions

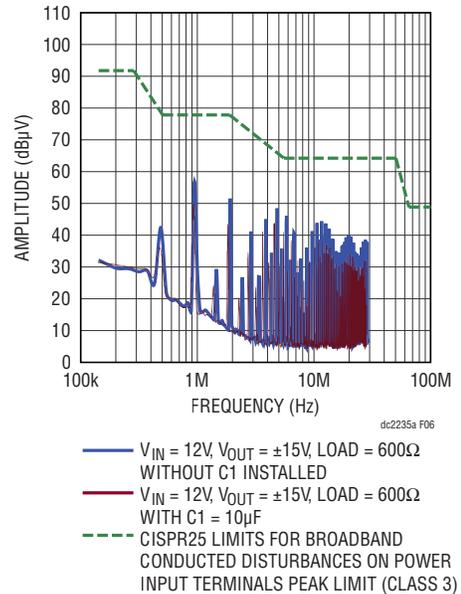



Figure 6. CISPR25 Conducted Emissions

# DEMO MANUAL DC2235A

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	1	C2	CAP, CHIP, X7R, 10 $\mu$ F, $\pm$ 10%, 25V, 1206	WURTH ELEKTRONIK, 885012208069
2	5	C3, C6, C10, C12, C14	CAP, CHIP, X7S, 10 $\mu$ F, $\pm$ 10%, 50V, 1210	TDK, C3225X7S1H106K250AB
3	1	C4	CAP, CHIP, X7R, 1 $\mu$ F, $\pm$ 10%, 25V, 0805	TDK, C2012X7R1E105K125AB
4	1	C13	CAP, CHIP, X7R, 1 $\mu$ F, $\pm$ 10%, 50V, 1206	TDK, C3216X7R1H105K160AB
5	2	R3, R9	RES 604k $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW0402604KFKED
6	2	R11, R12	RES 52.3k $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW0402523K3FKED
7	1	U1	LOW NOISE DUAL SUPPLY WITH BOOST AND INVERTING CHARGE PUMPS	LINEAR TECH., LTC3265EDHC#PBF
<b>Additional Demo Board Circuit Components</b>				
8	1	C1	CAP, CHIP, X7R, 10 $\mu$ F, $\pm$ 10%, 25V, 1206	WURTH, 885012208069
9	0	C5, C7, C9 (OPT)	CAP, CHIP, 25V, 0603	
10	2	C8, C11	CAP, CHIP, X7R, .1 $\mu$ F, $\pm$ 10%, 16V, 0402	MURATA, GRM155R71C104KA88D
11	2	C15, C16	CAP, CHIP, NPO, 10pF, $\pm$ 5%, 50V, 0402	AVX, 04025A100JAT2A
12	3	R1, R6, R13	RES 1.0M $\Omega$ 1/16W 5% 0402 SMD	VISHAY, CRCW04021M00JNED
13	2	R2, R8	RES 1.0M $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW04021M00FKED
14	2	R4, R10	RES 165k $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW0402165KFKED
15	3	R5, R7, R14	RES 4.7k $\Omega$ 1/16W 5% 0402 SMD	VISHAY, CRCW04024K70JNED
16	1	R15	RES 909k $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW0402909KFKED
17	1	R16	RES 200k $\Omega$ 1/16W 1% 0402 SMD	VISHAY, CRCW0402200KFKED
<b>Hardware</b>				
18	3	JP1, JP2, JP3	HEADER, 3-PIN 1 ROW 0.079CC	SULLIN, NRPNO31PAEN-RC
19	1	JP4	HEADER, 4-PIN 1 ROW 0.079CC	SULLIN, NRPNO41PAEN-RC
20	2	JP5, JP6	HEADER, 2 $\times$ 3 PINS, 2mm	SULLIN, NRPNO32PAEN-RC
21	6	JP1-JP6	SHUNT, 2mm	SAMTEC, 2SN-BK-G
22	10	E1, E2, E7-E14	TP, TURRET, 0.094", PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
23	4	E3-E6	TURRET, 0.061" DIA	MILL-MAX, 2308-2-00-80-00-00-07-0
24	4	MH1-MH4	STAND-OFF, NYLON 0.375" TALL	KEYSTONE, 8832 (SNAP ON)
25	1	SW1	10mm $\times$ 2.5mm, SLIDE SWITCH, THT	WURTH ELEKTRONIK, 450301014042

SCHEMATIC DIAGRAM

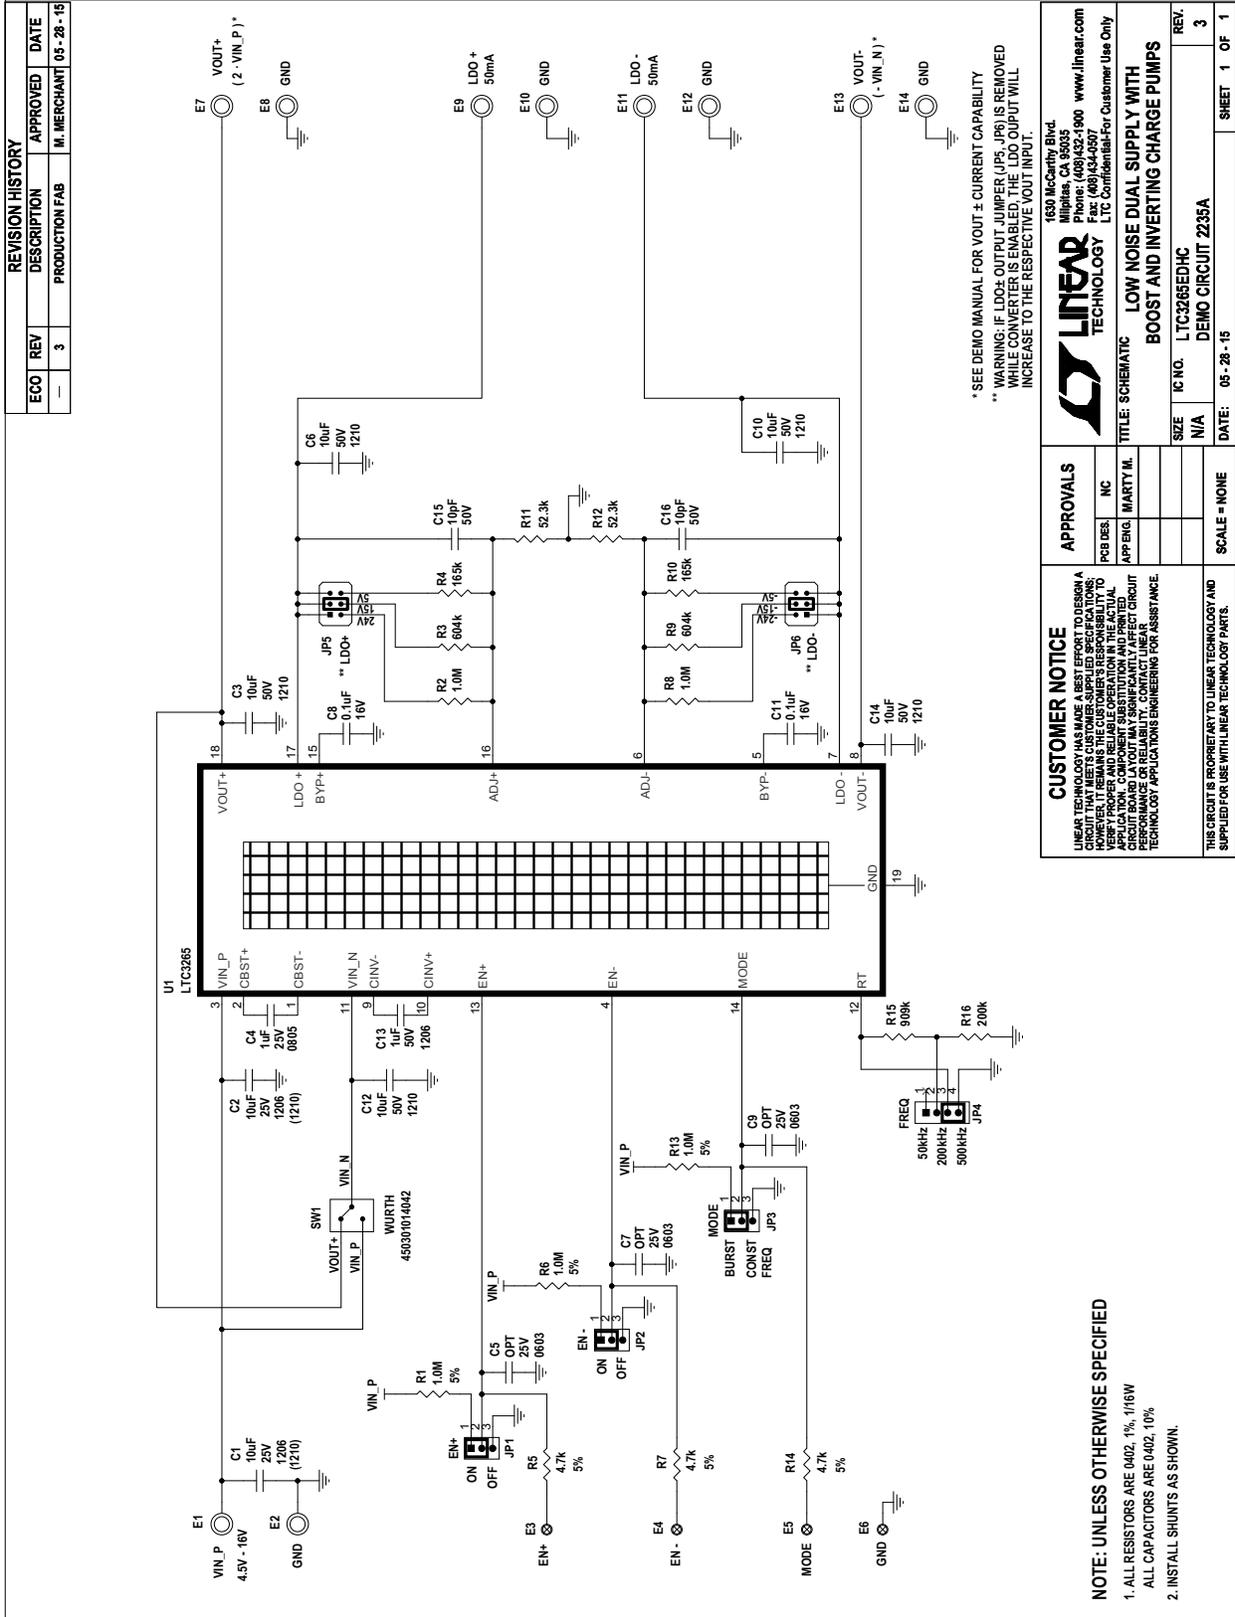

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

# DEMO MANUAL DC2235A

---

## DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

**Please read the DEMO BOARD manual prior to handling the product.** Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology  
1630 McCarthy Blvd.  
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)