


**I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter
User Manual**

GRAVITECH.US

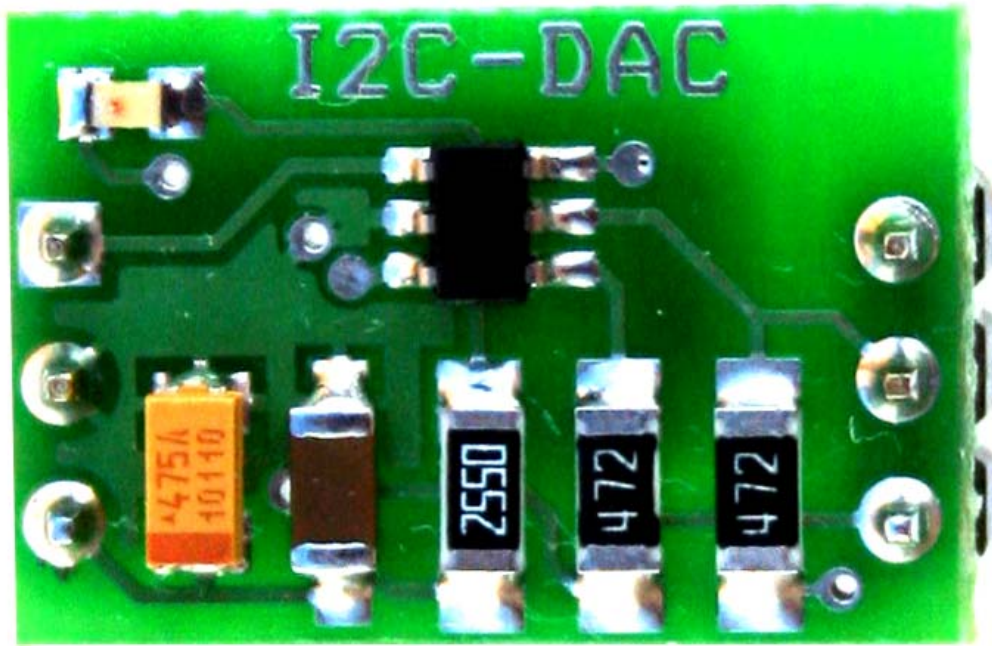

MicroResearch

GRAVITECH GROUP

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter

User Manual

Description

The I2C-DAC board is a 6-pin CMOS 8-bit digital-to-analog converter device using I²C bus. There are no external components required. Only two signal lines SDA and SCL plus supply voltage and ground are required to be connected. This makes it perfect for embedded systems that require digital-to-analog converter.

This board features innovations that set it apart from other digital-to-analog converter module. Innovations feature like on-board I²C address jumpers, pull-up resistors, and power LED. The module can be quickly connected directly on to the breadboard. The board is small and compact in size 0.70 x 0.47 inches.

The I2C-DAC is designed base on DAC5571 IC. It is a low-power, single-channel, 8-bit buffered voltage output DAC. Its on-chip precision output amplifier allows rail-to-rail output swing to be achieved.

The output voltage range of the DAC is 0V to VCC. The I2C-DAC incorporates a power-on-reset circuit that ensures that the DAC output powers up at zero volts and remains there until a valid write to the device takes place.

A jumper pins vary the fixed I²C address and allow up to two devices to share the same I²C bus.

Features

- Up to 2 devices on the same bus
- Resolution: 8-bit
Fast Update Rate: 188 KSPS
- I²C Interface up to 3.4 Mbps
- On-Chip Output Buffer Amplifier, Rail-to-Rail Operation
- Stand alone module, no external components required
- On-board I²C address jumpers, pull-up resistors and power LED
- Decoupling supply voltage
- Design easy for breadboard
- High quality double sided PCB
- All SMT components
- Small and compact in size 0.70 x 0.47 inches
- Dual row 0.6" width, 0.1" pitch header pins
- Flexible operating power supply voltage range of +2.7V to +5.5V
- Suitable for 3.3V or 5.0V microcontroller


Applications

- Process Control
- Data Acquisition Systems
- Closed-Loop Servo Control
- Thermostat controls
- Audio and Video
- Peripherals
- And much more...

* I²C is a trademark of Philips Semiconductors Corporation.

I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter User Manual

Pin Configuration

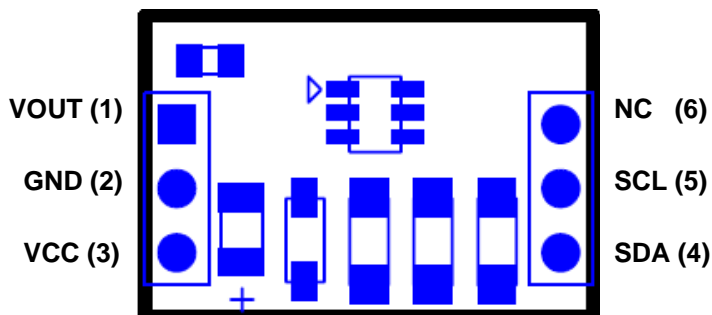

Pin No.	Name	Type	Description
1	VOUT	Output	Analog output voltage from DAC
2	GND	PWR	Supply ground
3	VCC	PWR	Supply voltage
4	SDA	I/O	Serial data line
5	SCL	Input	Serial clock line
6	NC	NC	No connect

Interfaces

Power:

The I2C-DAC board needs an external +2.7VDC – +5.5VDC supply.

- **VCC:** is an input power +2.7VDC – +5.5VDC to I2C-DAC board.
- **GND:** is a common ground for every pin. This pin **MUST** be connected to ground of the external power supply.

I²C pins:

The I2C-DAC operates as a slave on the I²C bus. Only two signal lines SDA and SCL are required for I²C bus. Please refer to I²C specification for more information.

VOUT pin:

This is an analog output voltage from the I2C-DAC. The output contains the buffer amplifier. The output buffer amplifier is a gain-of-2 amplifier, capable of generating rail-to-rail voltages on its

I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter User Manual

output, which gives an output range of 0 V to VCC. It is capable of driving a load of 2 kΩ in parallel with 1000 pF to GND. The source and sink capabilities of the output amplifier can be seen in the typical characteristics curves. The slew rate is 1 V/μs with a half-scale settling time of 7 μs with the output unloaded.

Module Configuration


I²C address:

Default address shipped from the manufacture is 0x98 for write and 0x99 for read.

A0 = GND

MSB								LSB
1	0	0	1	1	0	A0		0

The address can be easily change by solder the bridge between the A0 pin to VCC or GND at the bottom of the module. This is allows up to two devices to share the same I²C bus.

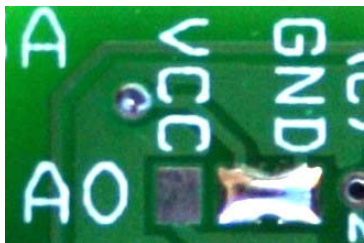

Power-on LED:

The green LED on the module is illuminating when the power applied. The power-on LED is enabled from the manufacture. It can be disabling for light sensitive or low current requirement application by remove the solder bridge on "PW" at the bottom of the module.




I²C pull-up resistors:

I²C bus specification required to have pull-up resistors on SDA and SCL pin. I2C-DAC come with these two pull-up resistors enabled from the manufacture. It can be disabling when connect to I²C bus that already have pull-up resistors by remove the solder bridge on the "PU" at the bottom of the module.



I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter User Manual

Below are the default settings from the manufacture.

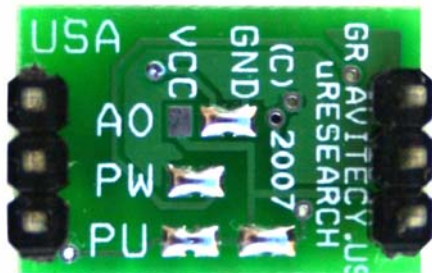

uResearch

© 2007 Copyright, All Rights Reserved



uResearch

© 2007 Copyright, All Rights Reserved



uResearch

© 2007 Copyright, All Rights Reserved

I2C-DAC™ I²C 8-Bit Digital-to-Analog Converter User Manual

Notes

Contact Us

We maintain a website where you can get information on our products, obtain literature and download support files. Visit us online at:

WWW.GRAVITECH.US

Use our online Forum or e-mail your technical support questions to support@gravitech.us. We try to respond to your questions the same day.

For sales questions or to place and order, direct your e-mails to sales@gravitech.us. Refer to our website for product pricing, shipping rates, payment instructions, and for other info we need to complete your order.

Disclaimer: MicroResearch reserves the right to modify its products or literature, or to discontinue any product at any time without prior notice. The customer is responsible for determining the suitability of any device for any application developed using MicroResearch components.

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru