

General purpose transistor (isolated transistor and diode)

QSZ4

A 2SB1706 and a 2SD2671 are housed independently in a TSMT5 package.

●Applications

DC / DC converter
Motor driver


●Features

- 1) Low $V_{CE(sat)}$
- 2) Small package


●Structure

Silicon epitaxial planar transistor

●Dimensions (Unit : mm)

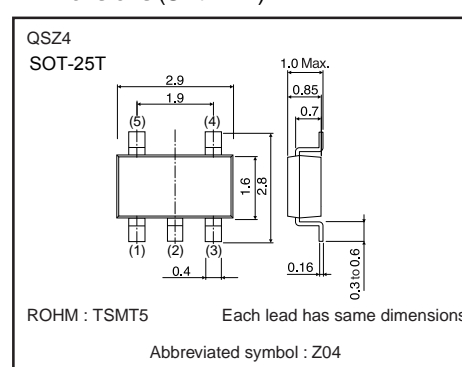

●Equivalent circuit

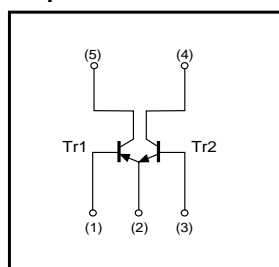

●Packaging specifications

Type	QSZ4
Package	TSMT5
Marking	Z04
Code	TR
Basic ordering unit(pieces)	3000

Transistors

●Absolute maximum ratings (Ta=25°C)

Tr1

Parameter	Symbol	Limits	Unit
Collector-base voltage	V _{CBO}	-30	V
Collector-emitter voltage	V _{CEO}	-30	V
Emitter-base voltage	V _{EBO}	-6	V
Collector current	I _C	-2	A
	I _{CP}	-4	A *1
Power dissipation	P _C	500	mW/Total *2
		1.25	W/Total *3
		0.9	W/Element *3
Junction temperature	T _J	150	°C
Range of storage temperature	T _{stg}	-55 to +150	°C

*1 Single pulse, Pw=1ms.

*2 Each terminal mounted on a recommended land.

*3 Mounted on a 25×25×¹0.8mm ceramic substrate.

Tr 2

Parameter	Symbol	Limits	Unit
Collector-base voltage	V _{CBO}	30	V
Collector-emitter voltage	V _{CEO}	30	V
Emitter-base voltage	V _{EBO}	6	V
Collector current	I _C	2	A
	I _{CP}	4	A *1
Power dissipation	P _C	500	mW/Total *2
		1.25	W/Total *3
		0.9	W/Element *3
Junction temperature	T _J	150	°C
Range of storage temperature	T _{stg}	-55 to +150	°C

*1 Single pulse, Pw=1ms.

*2 Each terminal mounted on a recommended land.

*3 Mounted on a 25×25×¹0.8mm ceramic substrate.

●Electrical characteristics (Ta=25°C)

Tr1

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CBO}	-30	-	-	V	I _C =-10μA
Collector-emitter breakdown voltage	BV _{CEO}	-30	-	-	V	I _C =-1mA
Emitter-base breakdown voltage	BV _{EBO}	-6	-	-	V	I _E =-10μA
Collector cutoff current	I _{CBO}	-	-	-100	nA	V _{CB} =-30V
Emitter cutoff current	I _{EBO}	-	-	-100	nA	V _{EB} =-6V
Collector-emitter saturation voltage	V _{CE(sat)}	-	-180	-370	mV	I _C =-1.5A, I _B =-75mA
DC current gain	h _{FE}	270	-	680	-	V _{CE} =-2V, I _C =-200mA*
Transition frequency	f _T	-	280	-	MHz	V _{CE} =-2V, I _E =200mA, f=100MHz*
Collector output capacitance	C _{ob}	-	20	-	pF	V _{CB} =-10V, I _E =0A, f=1MHz

* Pulsed

Tr 2

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CBO}	30	-	-	V	I _C =10μA
Collector-emitter breakdown voltage	BV _{CEO}	30	-	-	V	I _C =1mA
Emitter-base breakdown voltage	BV _{EBO}	6	-	-	V	I _E =10μA
Collector cutoff current	I _{CBO}	-	-	100	nA	V _{CB} =30V
Emitter cutoff current	I _{EBO}	-	-	100	nA	V _{EB} =6V
Collector-emitter saturation voltage	V _{CE(sat)}	-	180	370	mV	I _C =1.5A, I _B =75mA
DC current gain	h _{FE}	270	-	680	-	V _{CE} =2V, I _C =200mA*
Transition frequency	f _T	-	280	-	MHz	V _{CE} =2V, I _E =-200mA, f=100MHz*
Collector output capacitance	C _{ob}	-	20	-	pF	V _{CB} =10V, I _E =0A, f=1MHz

* Pulsed

Transistors

●Electrical characteristic curves

Tr1(PNP)

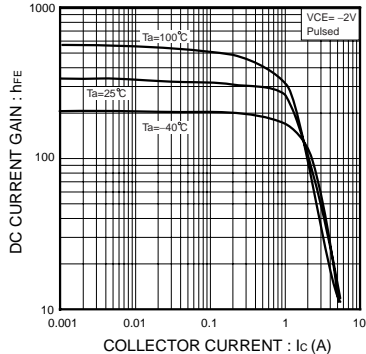


Fig.1 DV current gain vs. collector current

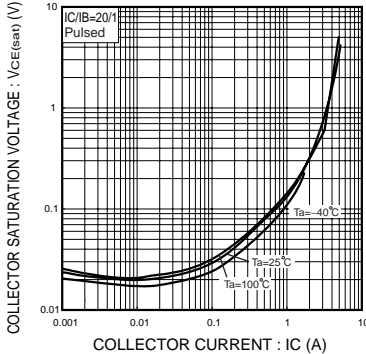


Fig.2 Collector-emitter saturation voltage vs. collector current

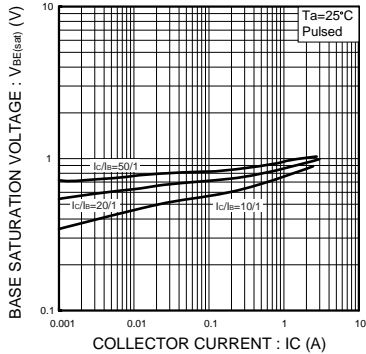


Fig.3 Base-emitter saturation voltage vs. collector current

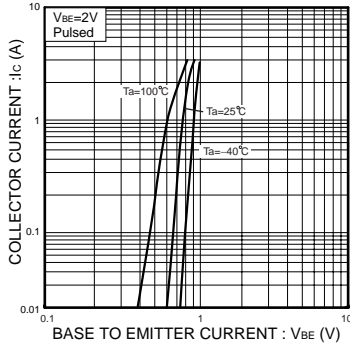


Fig.4 Grounded emitter propagation characteristics

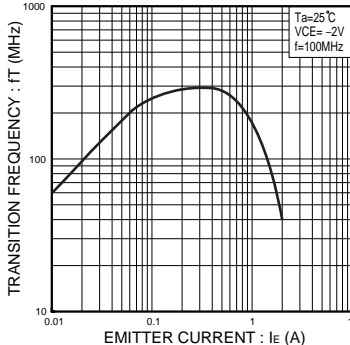


Fig.5 Gain bandwidth product vs. emitter current

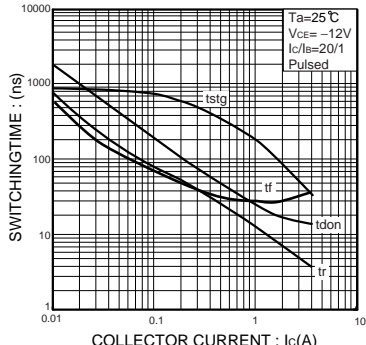


Fig.6 Switching time

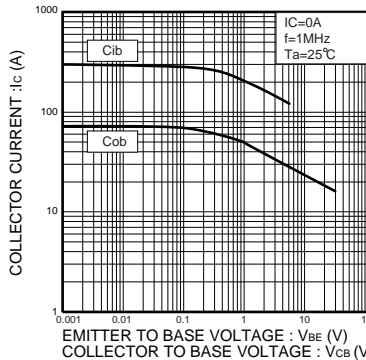


Fig.7 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

Transistors

Tr2(NPN)

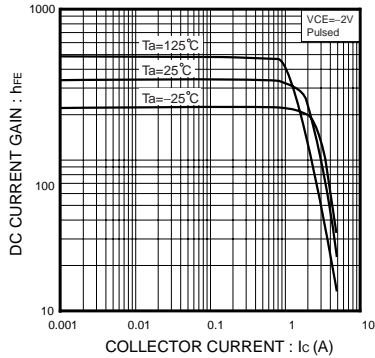


Fig.8 DC current gain vs. collector current

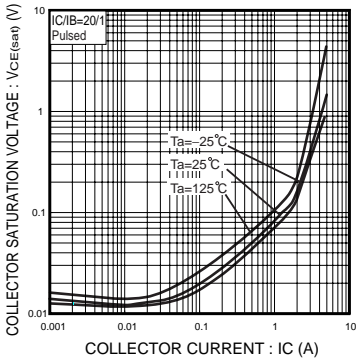


Fig.9 Collector-emitter saturation voltage base-emitter saturation voltage vs. collector current

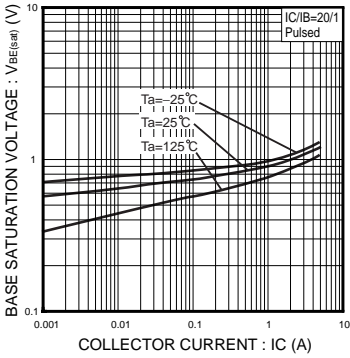


Fig.10 Base-emitter saturation voltage vs. collector current

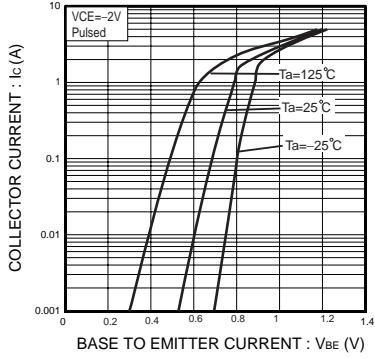


Fig.11 Grounded emitter propagation characteristics

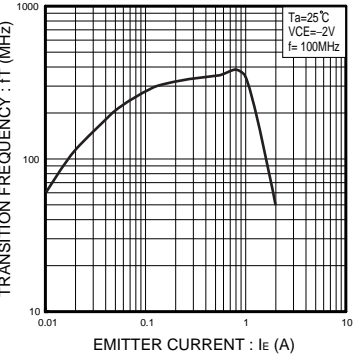


Fig.12 Gain bandwidth product vs. emitter current

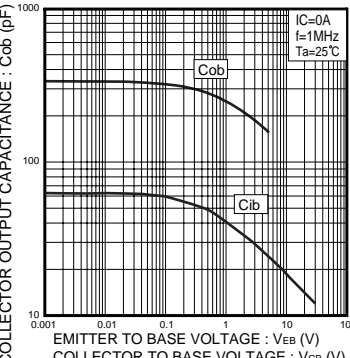


Fig.13 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[QSZ4TR](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru