

RPI-1133

Photointerrupter, Small type



Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Input (LED)	Forward current	I_F	50	mA
	Reverse voltage	V_R	5	V
	Power dissipation	P_D	80	mW
Output (photo IC)	Power supply voltage	V_{CC}	7	V
	Output current	I_O	10	mA
	Power dissipation	P_D	80	mW
Operating temperature		T_{opr}	-20 to +60	°C
Storage temperature		T_{stg}	-40 to +100	°C

Applications

Optical control equipment

Features

- 1) Small slit width (0.3mm) for high precision.
- 2) Fast response.
- 3) Built-in visible light filter.

Electrical and optical characteristics (Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input characteristics	Forward voltage	V_F	—	1.1	1.3	V	$I_F=10\text{mA}$
	Reverse current	I_R	—	—	10	μA	$V_R=5\text{V}$
Output characteristics	Power supply voltage	V_{CC}	2.0	—	7.0	V	—
	Output low level voltage	V_{OL}	—	0.08	0.35	V	$V_{CC}=3\text{V}$, $I_{OL}=2\text{mA}$
	Output high level voltage	V_{OH}	2.8	—	3.0	V	$V_{CC}=3\text{V}$, $I_F=0\text{mA}$
	Low level power supply current	I_{CCL}	—	0.35	1.5	mA	$V_{CC}=3\text{V}$, $I_F=5\text{mA}$
	High level power supply current	I_{CCH}	—	0.35	1.5	mA	$V_{CC}=3\text{V}$, $I_F=0\text{mA}$
Transfer characteristics	High $\rightarrow$ Low Threshold input current	I_{FHL}	0.25	—	2.5	mA	$V_{CC}=3\text{V}$
	Hysteresis	I_{FLH} / I_{FHL}	0.4	0.7	0.9	—	$V_{CC}=3\text{V}$
	Response time	Low $\rightarrow$ High Propagation delay time	t_{PLH}	—	22	μs	$V_{CC}=3\text{V}$, $I_F=5\text{mA}$, $R_L=100\Omega$
		High $\rightarrow$ Low Propagation delay time	t_{PHL}	—	5.5	μs	
		Rise time	t_r	—	5	μs	
		Fall time	t_f	—	0.05	μs	
Infrared light emitter diode	Cut-off frequency	f_c	—	1	—	MHz	$I_F=50\text{mA}$ * Non-coherent Infrared light emitting diode used.
	Peak light emitting wavelength	λ_P	—	950	—	nm	
Photo IC	Response time	t_r	—	5	15	μs	$V_{CC}=3\text{V}$, $I_F=5\text{mA}$, $R_L=100\Omega$ * This product is not designed to be protected against electromagnetic wave.
		t_f	—	0.05	0.15	μs	

Electrical and optical characteristics curves

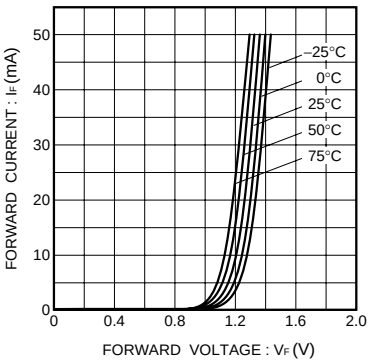


Fig.1 Forward current vs. forward voltage

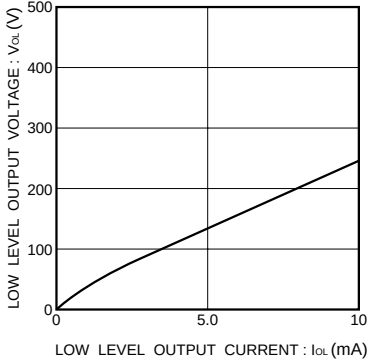


Fig.2 Low level output voltage vs. low level output current

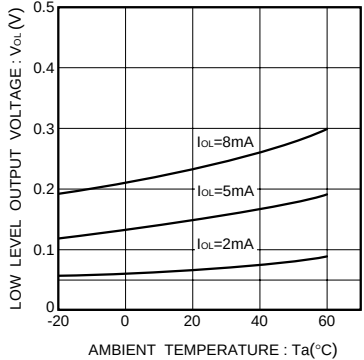


Fig.3 Low level output voltage vs. ambient temperature

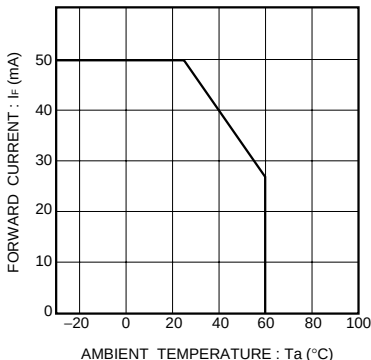


Fig.7 Forward current falloff

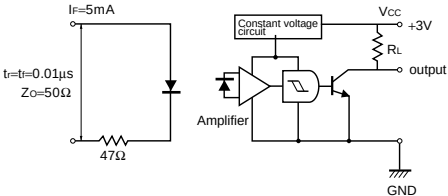


Fig.8 Response time measurement circuit




Fig.6 Relative output voltage vs. distance characteristics

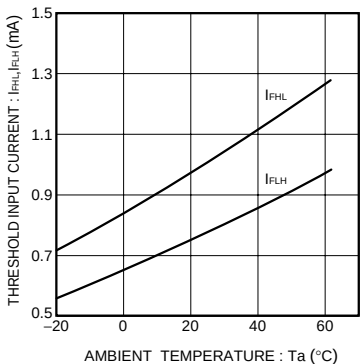


Fig.4 Threshold input current vs. ambient temperature



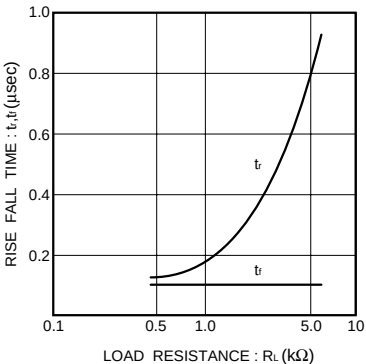


Fig.5 Response time vs. load resistance

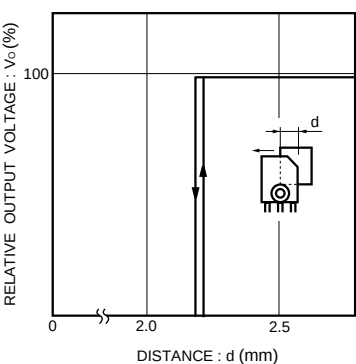

External dimensions (Unit : mm)

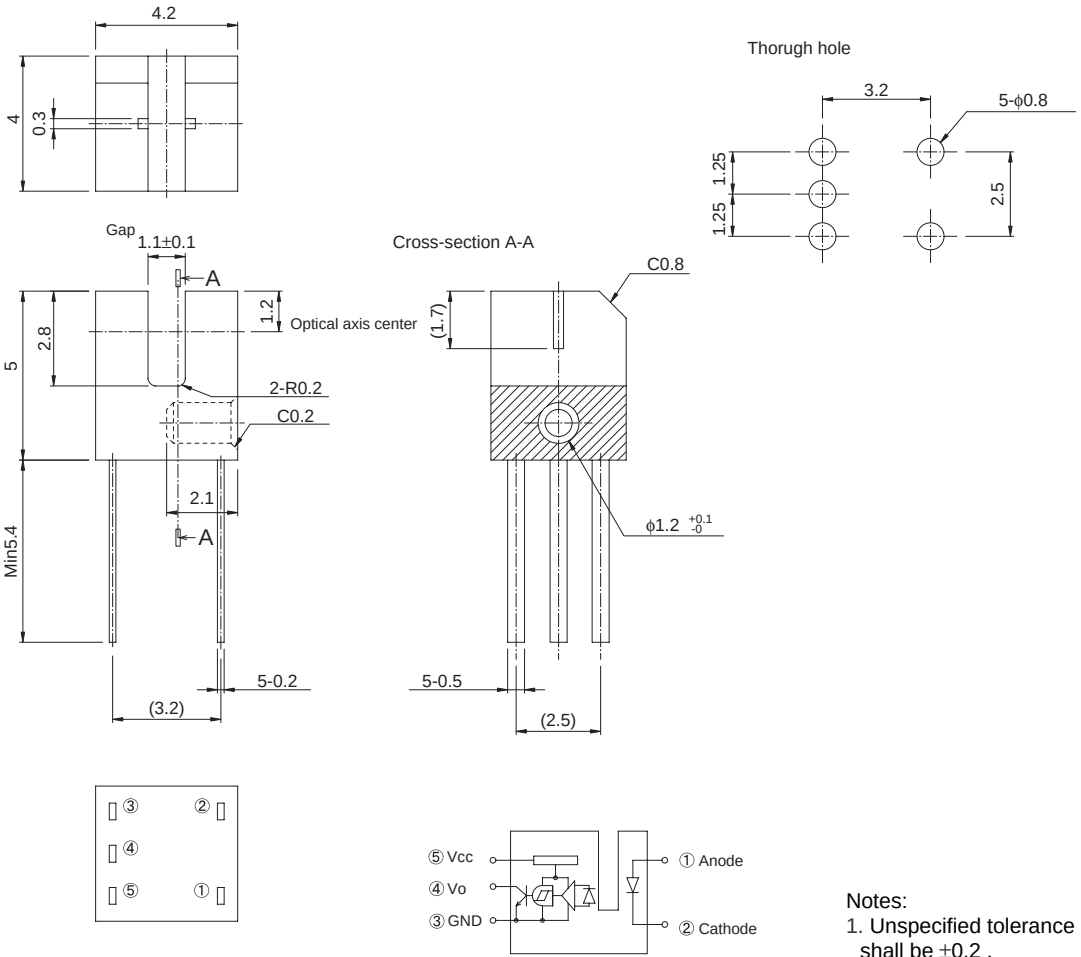

- Notes:
- 1. Unspecified tolerance shall be ± 0.2 .
 - 2. Dimension in parenthesis are show for reference.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru