


TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT process) (Bias Resistor Built-in Transistor)

## RN1901FE, RN1902FE, RN1903FE RN1904FE, RN1905FE, RN1906FE

Switching, Inverter Circuit, Interface Circuit and Driver Circuit Applications


- Two devices are incorporated into an Extreme-Super-Mini (6-pin) package.
- Incorporating a bias resistor into a transistor reduces parts count. Reducing the parts count enables the manufacture of ever more compact equipment and lowers assembly cost.
- Complementary to RN2901FE to RN2906FE

### Equivalent Circuit and Bias Resistor Values

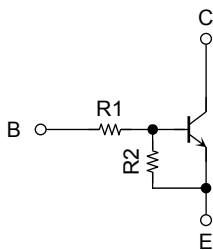

Type No.	R1 (kΩ)	R2 (kΩ)
RN1901FE	4.7	4.7
RN1902FE	10	10
RN1903FE	22	22
RN1904FE	47	47
RN1905FE	2.2	47
RN1906FE	4.7	47

Unit: mm

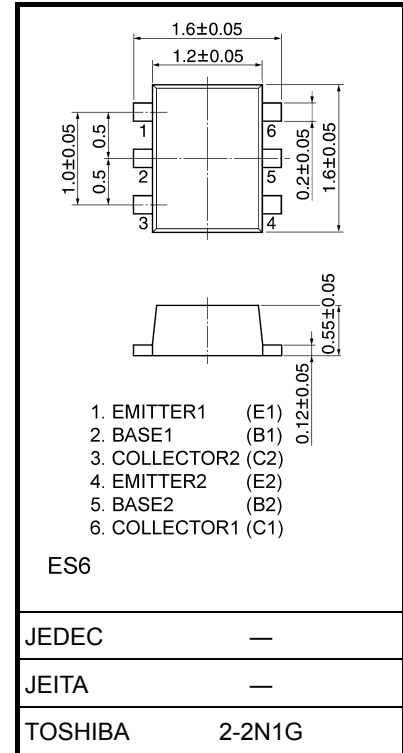

Weight: 3 mg (typ.)

### Absolute Maximum Ratings (Ta = 25°C) (Q1, Q2 common)


Characteristics	Symbol	Rating	Unit	
Collector-base voltage	RN1901FE to RN1906FE	$V_{CBO}$	50	V
Collector-emitter voltage		$V_{CEO}$	50	V
Emitter-base voltage	RN1901FE to RN1904FE	$V_{EBO}$	10	V
	RN1905FE RN1906FE		5	
Collector current	RN1901FE to RN1906FE	$I_C$	100	mA
Collector power dissipation		$P_C$ (Note1)	100	mW
Junction temperature		$T_j$	150	°C
Storage temperature range		$T_{stg}$	-55 to 150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note1: Total rating

### Equivalent Circuit (top view)









Start of commercial production  
2000-05







## Electrical Characteristics (Ta = 25°C) (Q1, Q2 common)







Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	RN1901FE to RN1906FE	$I_{CBO}$	$V_{CB} = 50\text{ V}, I_E = 0$	—	—	100	nA
		$I_{CEO}$	$V_{CE} = 50\text{ V}, I_B = 0$	—	—	500	
Emitter cut-off current	RN1901FE	$I_{EBO}$	$V_{EB} = 10\text{ V}, I_C = 0$	0.82	—	1.52	mA
	RN1902FE			0.38	—	0.71	
	RN1903FE			0.17	—	0.33	
	RN1904FE			0.082	—	0.15	
	RN1905FE	$V_{EB} = 5\text{ V}, I_C = 0$	0.078	—	0.145		
	RN1906FE		0.074	—	0.138		
DC current gain	RN1901FE	$h_{FE}$	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}$	30	—	—	
	RN1902FE			50	—	—	
	RN1903FE			70	—	—	
	RN1904FE			80	—	—	
	RN1905FE			80	—	—	
	RN1906FE			80	—	—	
Collector-emitter saturation voltage	RN1901FE to RN1906FE	$V_{CE(sat)}$	$I_C = 5\text{ mA}, I_B = 0.25\text{ mA}$	—	0.1	0.3	V
Input voltage (ON)	RN1901FE	$V_{I(ON)}$	$V_{CE} = 0.2\text{ V}, I_C = 5\text{ mA}$	1.1	—	2.0	V
	RN1902FE			1.2	—	2.4	
	RN1903FE			1.3	—	3.0	
	RN1904FE			1.5	—	5.0	
	RN1905FE			0.6	—	1.1	
	RN1906FE			0.7	—	1.3	
Input voltage (OFF)	RN1901FE to RN1904FE	$V_{I(OFF)}$	$V_{CE} = 5\text{ V}, I_C = 0.1\text{ mA}$	1.0	—	1.5	V
	RN1905FE, RN1906FE			0.5	—	0.8	
Transition frequency	RN1901FE to RN1906FE	$f_T$	$V_{CE} = 10\text{ V}, I_C = 5\text{ mA}$	—	250	—	MHz
Collector output capacitance	RN1901FE to RN1906FE	$C_{ob}$	$V_{CB} = 10\text{ V}, I_E = 0, f = 1\text{ MHz}$	—	3	6	pF
Input resistor	RN1901FE	$R_1$	—	3.29	4.7	6.11	kΩ
	RN1902FE			7	10	13	
	RN1903FE			15.4	22	28.6	
	RN1904FE			32.9	47	61.1	
	RN1905FE			1.54	2.2	2.86	
	RN1906FE			3.29	4.7	6.11	
Resistor ratio	RN1901FE to RN1904FE	$R_1/R_2$	—	0.9	1.0	1.1	
	RN1905FE			0.0421	0.0468	0.0515	
	RN1906FE			0.09	0.1	0.11	







## Q1, Q2 Common

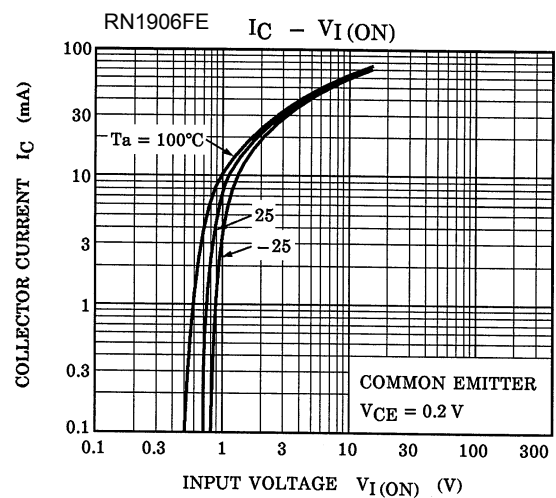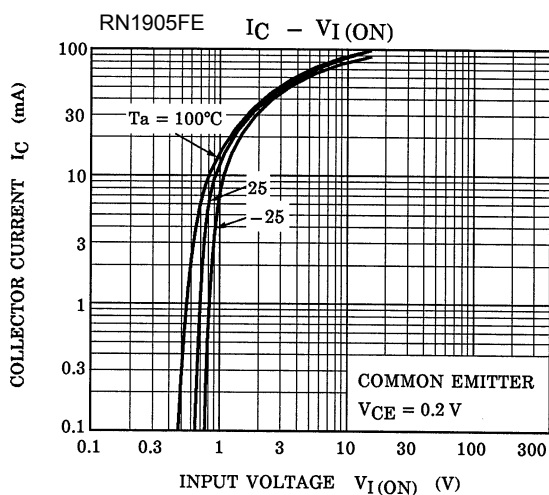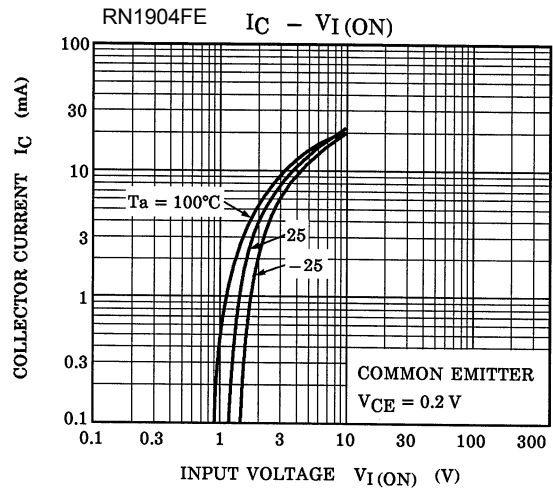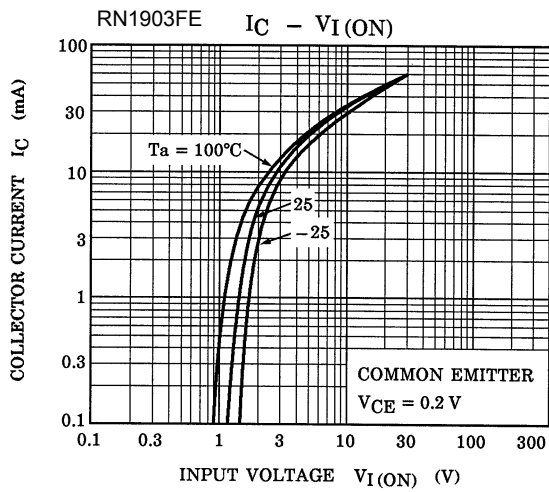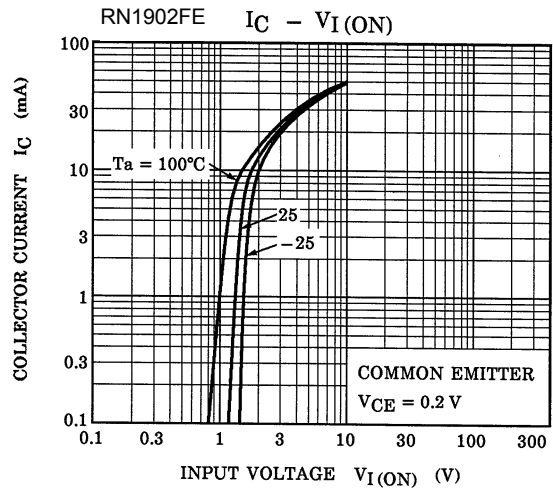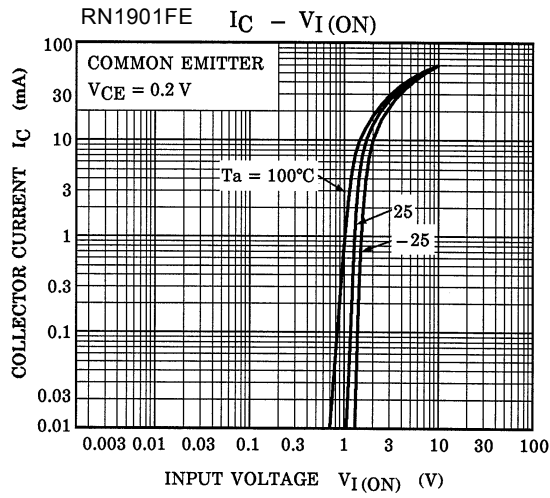







## Q1, Q2 Common

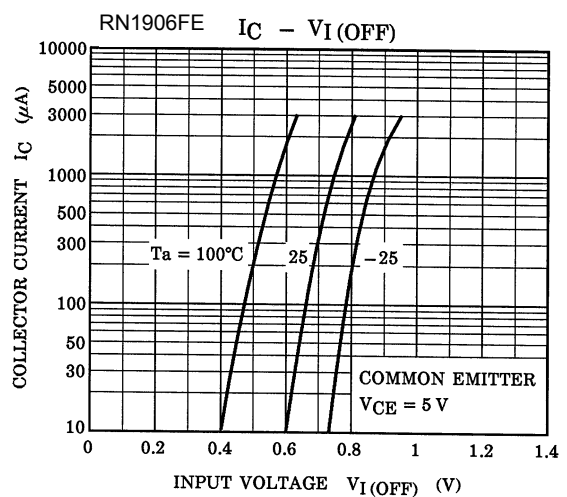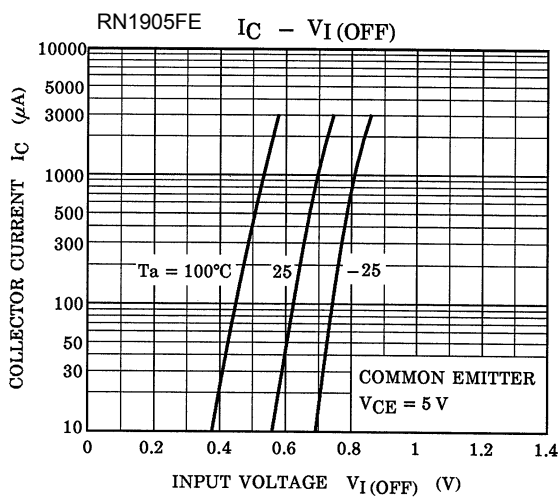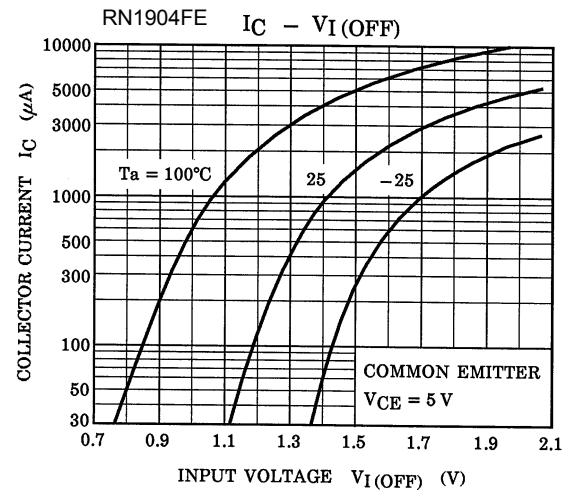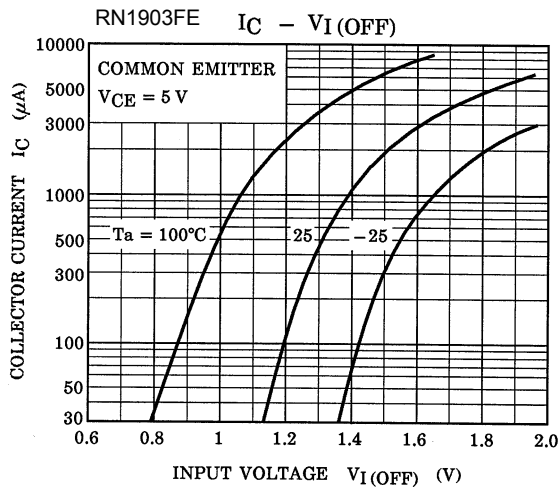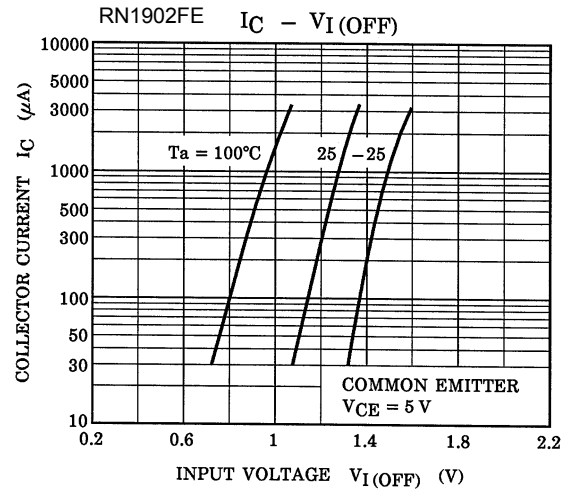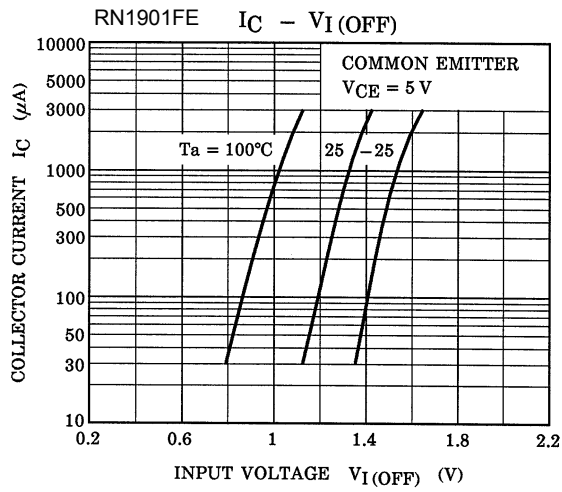

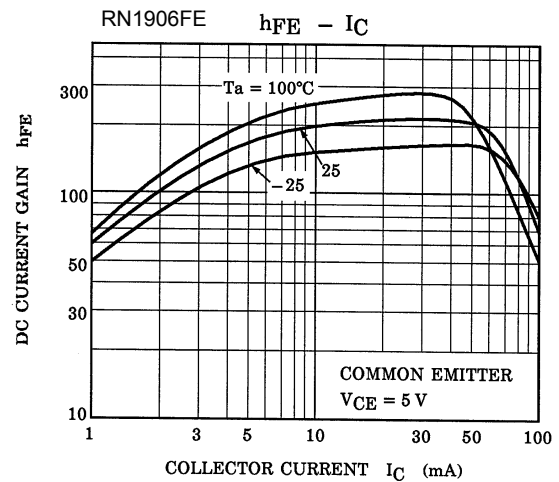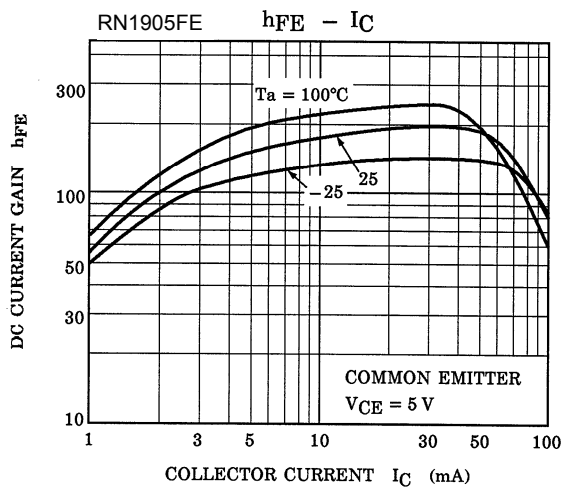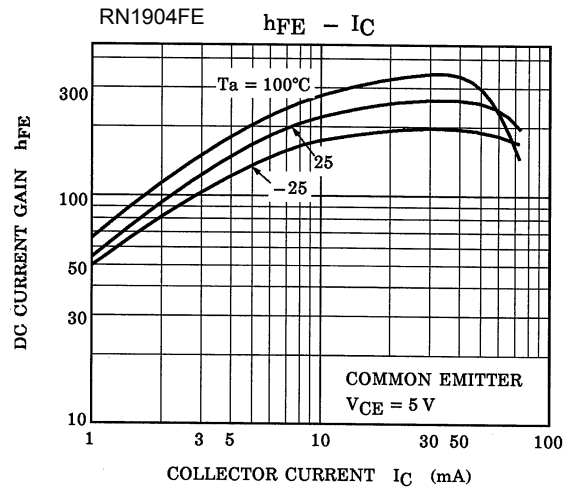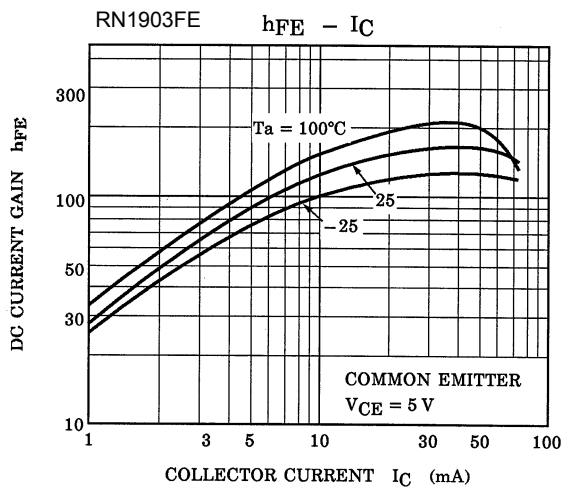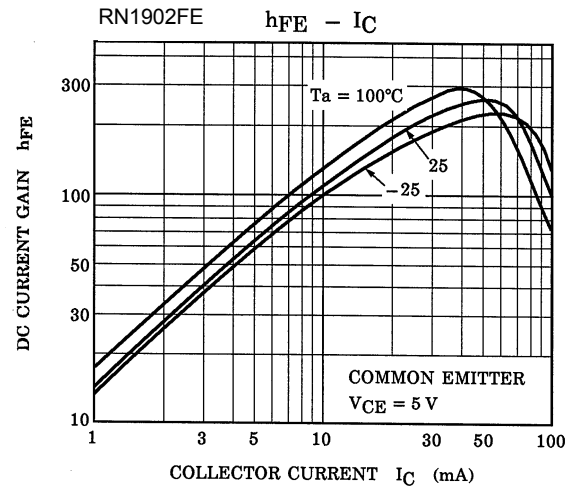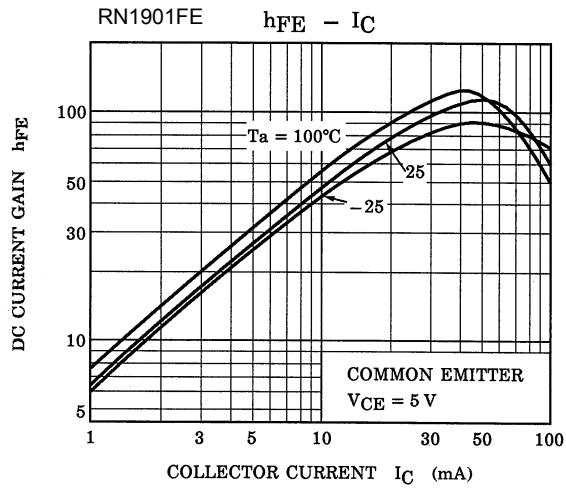

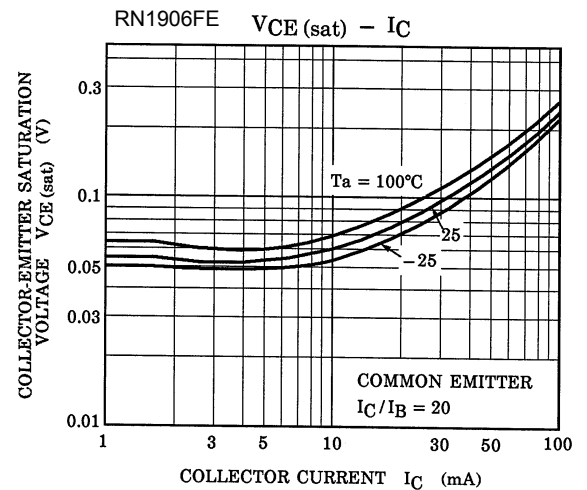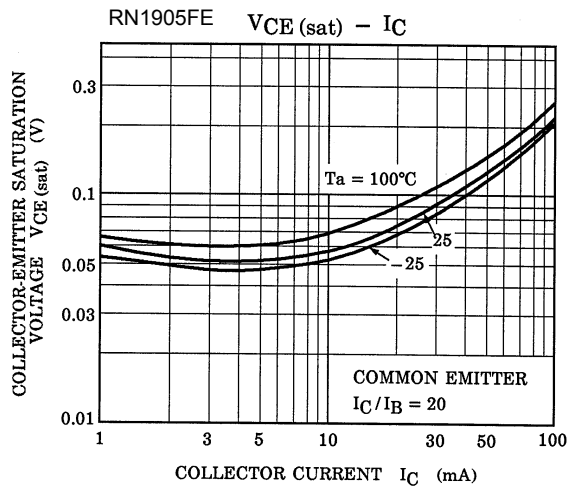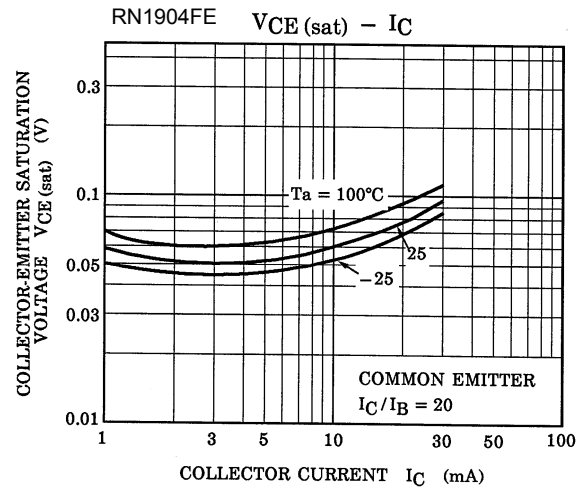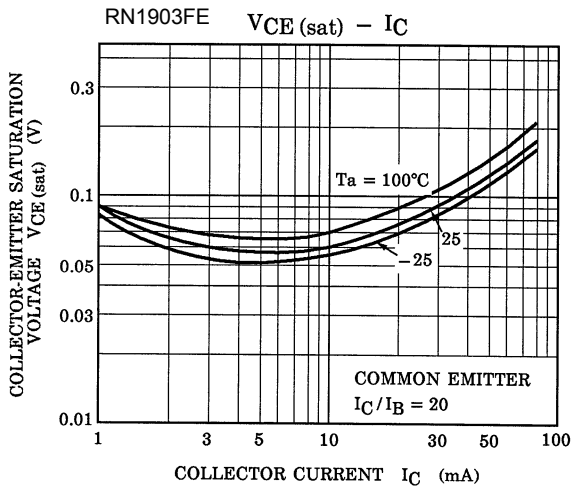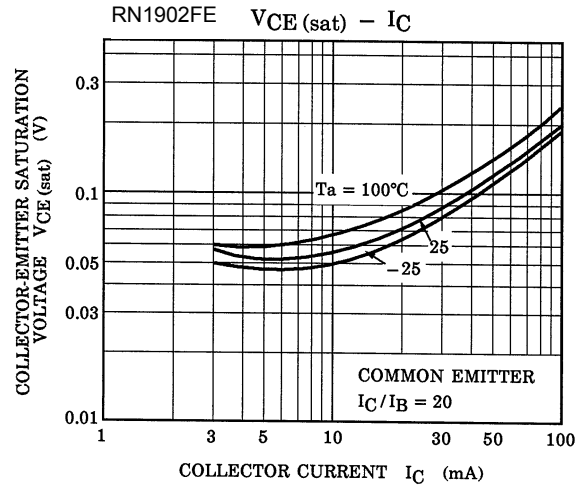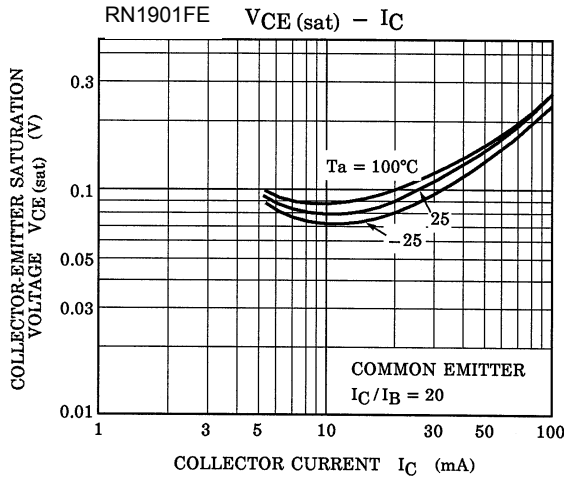

## Marking

Type Name	Marking
RN1901FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XA' is printed in the center. An arrow points from the text 'Type name' to the 'XA' marking.</p>
RN1902FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XB' is printed in the center. An arrow points from the text 'Type name' to the 'XB' marking.</p>
RN1903FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XC' is printed in the center. An arrow points from the text 'Type name' to the 'XC' marking.</p>
RN1904FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XD' is printed in the center. An arrow points from the text 'Type name' to the 'XD' marking.</p>
RN1905FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XE' is printed in the center. An arrow points from the text 'Type name' to the 'XE' marking.</p>
RN1906FE	 <p>The diagram shows a rectangular component with six pins (three on top, three on bottom). A small black dot is located in the bottom-left corner. The marking 'XF' is printed in the center. An arrow points from the text 'Type name' to the 'XF' marking.</p>

**RESTRICTIONS ON PRODUCT USE**

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)