

Monolithic 700mA Step-Down Regulator with Power-On Reset and Watchdog Timer

DESCRIPTION

Demonstration circuit 1312 is a Monolithic 700mA Step-Down Regulator with Power-On Reset and Watchdog Timer featuring the LT3689. The board operates from inputs up to 36V and withstands transients up to 60V. Output is 3.3V, 700mA. When output current is low, the circuit operates in Burst Mode. Users can program R7 on the EN/UVLO pin to provide a programmable under voltage lockout. Fault protections are provided through power switch current limit, switching frequency fold back and thermal shutdown, etc.

The power-on reset and watchdog timer periods are independently adjustable using external capacitors. Tight accuracy specifications and glitch immunity ensure reliable operation of the circuit. Window mode or time out mode is selectable through JP1. Watchdog can be enabled or dis-

abled by JP2. Circuit can be synchronized to an external clock connected to SYNC turret. If SYNC function is used, the R_t resistor should be chosen to set the LT3689 internal switching frequency at least 20% below the lowest synchronization input frequency.

The LT3689 datasheet gives complete descriptions of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for working on or modifying the demo circuit 1327.

Design files for this circuit board are available. Call the LTC factory.

L, LTC, LTM, LT, Burst Mode are registered trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

PERFORMANCE SUMMARY **Specifications are at TA = 25°C**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Supply Range	$V_{OUT}=3.3V$	4.5		36	V
V_{OUT}	Output Voltage Range		3.2	3.3	3.4	V
I_{OUT}	Output Current		0		700	mA
I_Q	No Load Quiescent Current	No load		77		μA
EFF	Efficiency	$V_{IN} = 12V, I_{OUT} = 700mA$		82		%
T_{WDU}	Watchdog Upper Boundary Period	$C3=10nF$		182		ms
T_{WDL}	Watchdog Lower Boundary Period	$C3=10nF$		5.88		ms
T_{RST}	Programmed Reset Period	$C4=10nF$		23		ms

QUICK START PROCEDURE

Demonstration circuit 1312 is easy to set up to evaluate the performance of the LT3689. Refer to 0 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the terminals of the input or output capacitors. See Figure 2 for proper scope probe technique.

1. Place jumpers in the following positions:

JP1 T or W (bar)

JP2 ON or OFF (When OFF, watchdog disabled)

2. With power off, connect the input power supply to VIN and GND.
3. With power off, connect the load to VOUT and GND.

4. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed 36V.

5. Check for the proper output voltages. VOUT=3.3V

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high or is shorted.

6. Once the proper output voltage is established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.
7. To test watchdog timer, connect a clock input to the WDI terminal. Observe output at the WDO terminal while the clock parameters are adjusted.
8. To test Power-On reset, observe output at the RESET terminals.

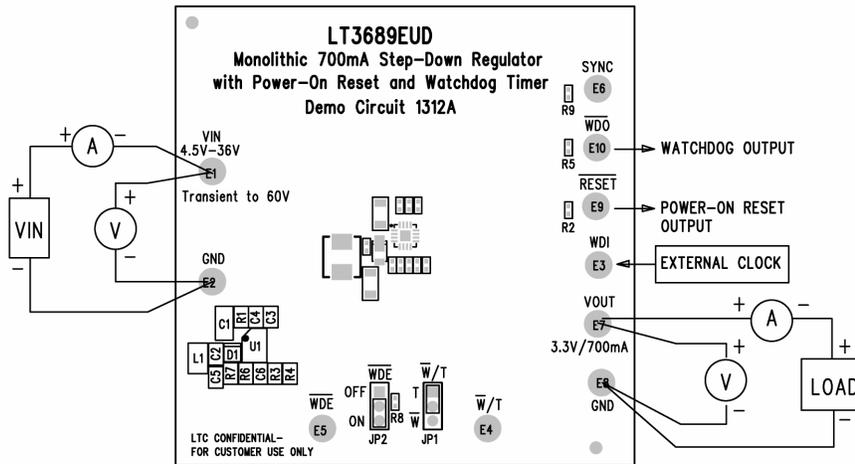


Figure 1. Measurement Equipment Setup





Figure 2. Measuring Input or Output Ripple



CONTRACT NO.		APPROVALS		DATE
		DRAWN	HELEN	6/7/09
		CHECKED		
		APPROVED		
		ENGINEER	Walker Bai	6/7/09
		DESIGNER		
CUSTOMER NOTICE				
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.				
THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.				
TITLE		SIZE	FILENAME:	SCALE:
LT3689EUD Monolithic 700mA Step - Down Regulator with Power - On Reset and Watchdog Timer		DC1312A		
REV		DWGNO	SHEET	OF
A			1	1

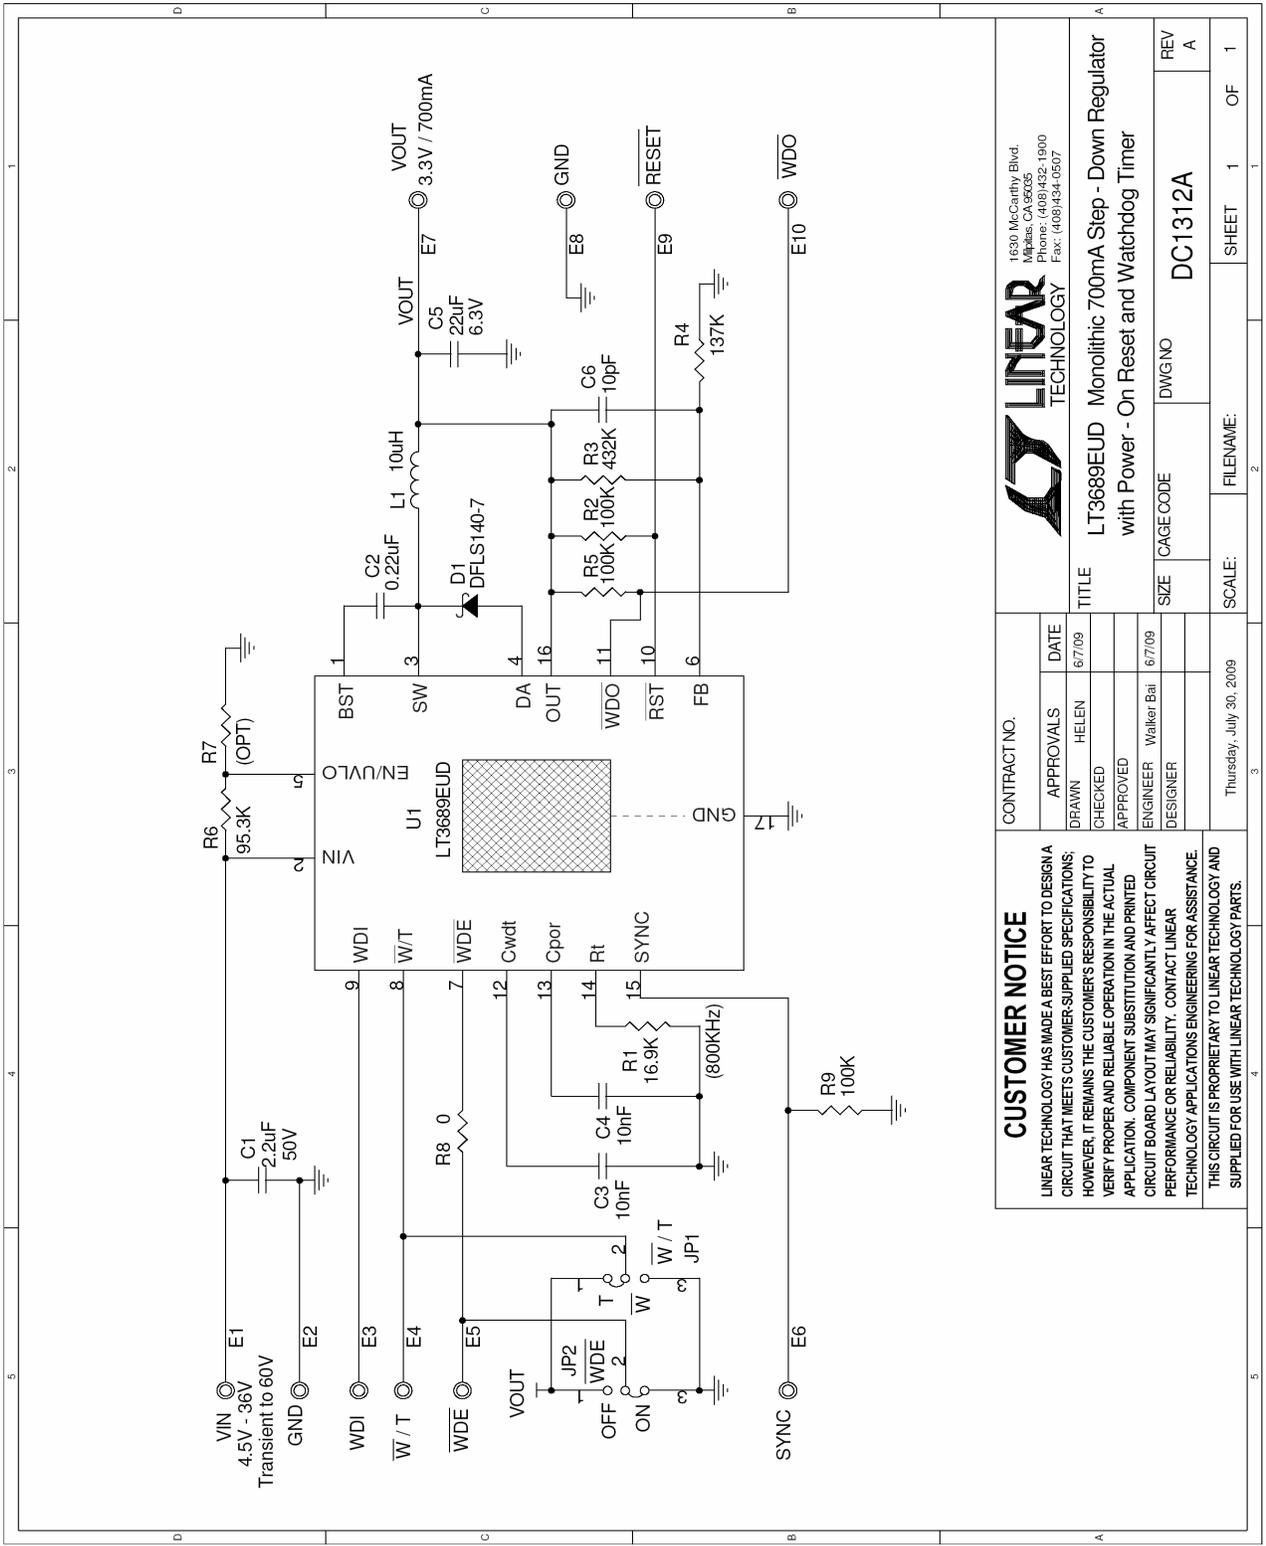

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru