

LT3758AEMSE
High Efficiency SEPIC Converter**DESCRIPTION**

Demonstration circuit 1342B features the **LT[®]3758AEMSE** in a 300kHz SEPIC converter circuit, designed for a 24V output from a 18V to 72V input.

The LT3758A operates over an input range of 5.5V to 100V, suitable for automotive, telecom and industrial applications. It also exhibits a low shutdown current of 1 μ A, making it ideal for battery-operated systems. Thanks to a novel FBX pin architecture, the LT3758A can be connected directly to a resistor divider from either a positive output voltage or a negative output voltage to ground. It also packs many popular features such as soft-start, input undervoltage

lockout, adjustable frequency and clock synchronization in a small 10-lead MSOP package or a 3mm \times 3mm QFN package.

The LT3758A data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this quick start guide for demo circuit 1342B.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY 300kHz SEPIC Regulator. Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Supply Range		18		72	V
Output Voltage		23.28	24	24.72	V
Maximum Output Current				1	A
Switching Frequency			300		kHz

QUICK START PROCEDURE

Demonstration circuit 1342B is easy to set up to evaluate the performance of the LT3758AEMSE. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 2 for proper scope probe technique.

1. Place JP1 on the ON position.
2. With power off, connect the input power supply to V_{IN} and GND.

3. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed the maximum input voltage.

4. Check for the proper output voltages.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

QUICK START PROCEDURE

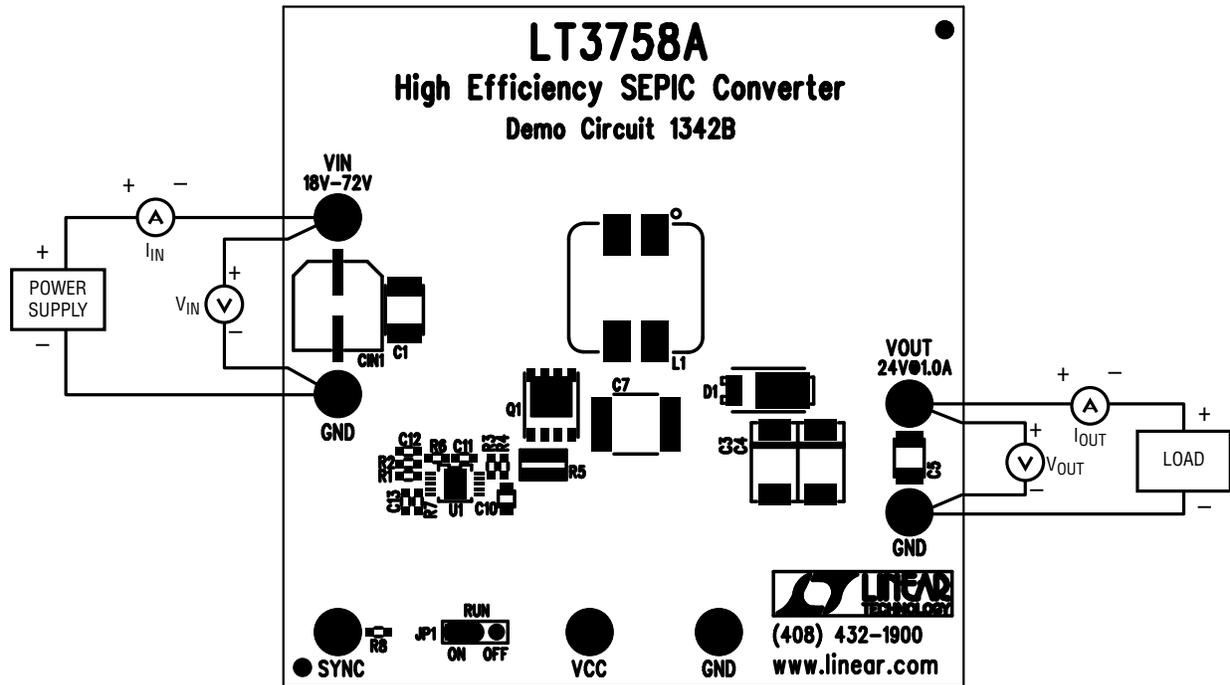


Figure 1. Proper Measurement Equipment Setup




Figure 2. Measuring Input or Output Ripple

DEMO MANUAL DC1342B

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C1	CAP., X7R, 2.2 μ F, 100V, 10% 1812	TDK, C4532X7R2A225K
2	2	C3, C4	CAP., TANT, 22 μ F, 35V, 20% 7343	AVX, TPSD226M035R0125
3	1	C5	CAP., X7R, 3.3 μ F, 25V, 20% 1210	Taiyo Yuden, TMK325BJ335MN
4	1	C7	CAP., X7R, 4.7 μ F, 100V, 20% 2220	TDK, C5750X7R2A475M
5	1	C10	CAP., X5R, 4.7 μ F, 10V, 20% 0805	Taiyo Yuden, LMK212BJ475MG-T
6	1	C11	CAP., X7R, 4.7nF, 50V, 10% 0603	TDK, C1608X7R1H472K
7	1	C12	CAP., COG, 100pF, 50V, 5% 0603	TDK, C1608COG1H101J
8	1	C13	CAP., X7R, 0.1 μ F, 25V, 10% 0603	TDK, C1608X7R1E104K
9	1	D1	Diodes Inc., PDS3100-13	Diodes Inc., PDS3100-13
10	1	L1	IND., Dual, 47 μ H	Würth Elektronik, 744870470
11	1	Q1	N-MOSFET, FDMS2572, Power 56	FAIRCHILD, FDMS2572
12	1	R1	RES., CHIP, 280k, 1/10W, 1% 0603	VISHAY, CRCW0603280KFKEA
13	2	R2, R4	RES., CHIP, 20.0k, 1/10W, 1% 0603	VISHAY, CRCW060320K0FKEA
14	1	R3	RES., CHIP, 232k, 1/10W, 1% 0603	VISHAY, CRCW0603232KFKEA
15	1	R5	RES., CHIP, 0.02, 1W, 1%, 0815	THIN FILM, RL3720WTR02F-C
16	1	R6	RES., CHIP, 30.9k, 1/10W, 1% 0603	VISHAY, CRCW060330K9FKEA
17	1	R7	RES., CHIP, 42.2k, 1/10W, 1% 0603	VISHAY, CRCW060342K2FKEA
18	1	R8	RES., CHIP, 10k, 1/10W, 5% 0603	VISHAY, CRCW060310K0JNEA
19	1	U1	I.C. LT3758AEMSE, MSOP10/Exposed Pad	LINEAR TECH., LT3758AEMSE#TRPBF
Additional Demo Board Circuit Components				
1	1	CIN1	CAP., Alum., 10 μ F, 100V, E Size Code	
Hardware: For Demo Board Only				
1	7	E1, E2, E3, E4, E5, E6, E7	TESTPOINT, TURRET, .094" PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
2	1	JP1	3 PIN, 0.079 SINGLE ROW HEADER	SAMTEC, TMM103-02-L-S
3	1	XJP1	SHUNT, .079" CENTER	SAMTEC, 2SN-BK-G

DEMO MANUAL DC1342B

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru