

LT3513EUHF

2MHz, High Current 5 Output Switching Regulator for TFT-LCD Panels

DESCRIPTION

Demonstration circuit 1028 is a highly integrated, 5 output regulator for TFT LCD panels featuring LT[®]3513, which comes in the 38-pin QFN package. The DC1028A has an input voltage range from 8 to 30V, and produce a 5V logic voltage. A lower voltage logic supply can be generated from this 5V by adding an external NPN driven by a linear regulator. The other three regulators provide the three voltages required by LCDs: a higher power boost regulator to generate AVDD, a lower power boost to generate VON and an inverting converter to provide VOFF. An internal high side PNP provides delayed turn on of the VON signal. The LT3513's wide input voltage range allows it to accept a variety of power sources, including automo-

tive batteries, distributed supplies and wall transformers.

All four switchers are synchronized to the internal 2MHz clock, allowing the use of low profile inductors and ceramic capacitors. They all have soft start to limit inrush current.

The LT3513 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1028A.

Design files for this circuit board are available. Call the LTC factory.

LT, LTC and LT are registered trademarks of Linear Technology Corporation. ThinSOT and PowerPath are trademarks of Linear Technology Corporation.

Performance Summary ($T_A = 25^{\circ}\text{C}$)

PARAMETER FOR BUCK REGULATOR	CONDITION	VALUE
Minimum Input Voltage		8V
Maximum Input Voltage		30V
Output Voltage V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}, I_{\text{OUT}}=0 \text{ to } 500\text{mA}$	5V +/- 4%
Maximum Output Current at V_{LOGIC}	$V_{\text{IN}}=8\text{V to }30\text{V}$	500mA
Typical Switching frequency		2MHz

QUICK START PROCEDURE

Demonstration circuit 1028 is easy to set up to evaluate the performance of the LT3513. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. With Power off, connect the input power supply to Vin and GND. Insert jumper JP1 into the ON position.
2. Set the input between 8V to 30V. Turn on the power at the input.
3. Check for the proper output voltage. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.
4. Once the proper output voltages are established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

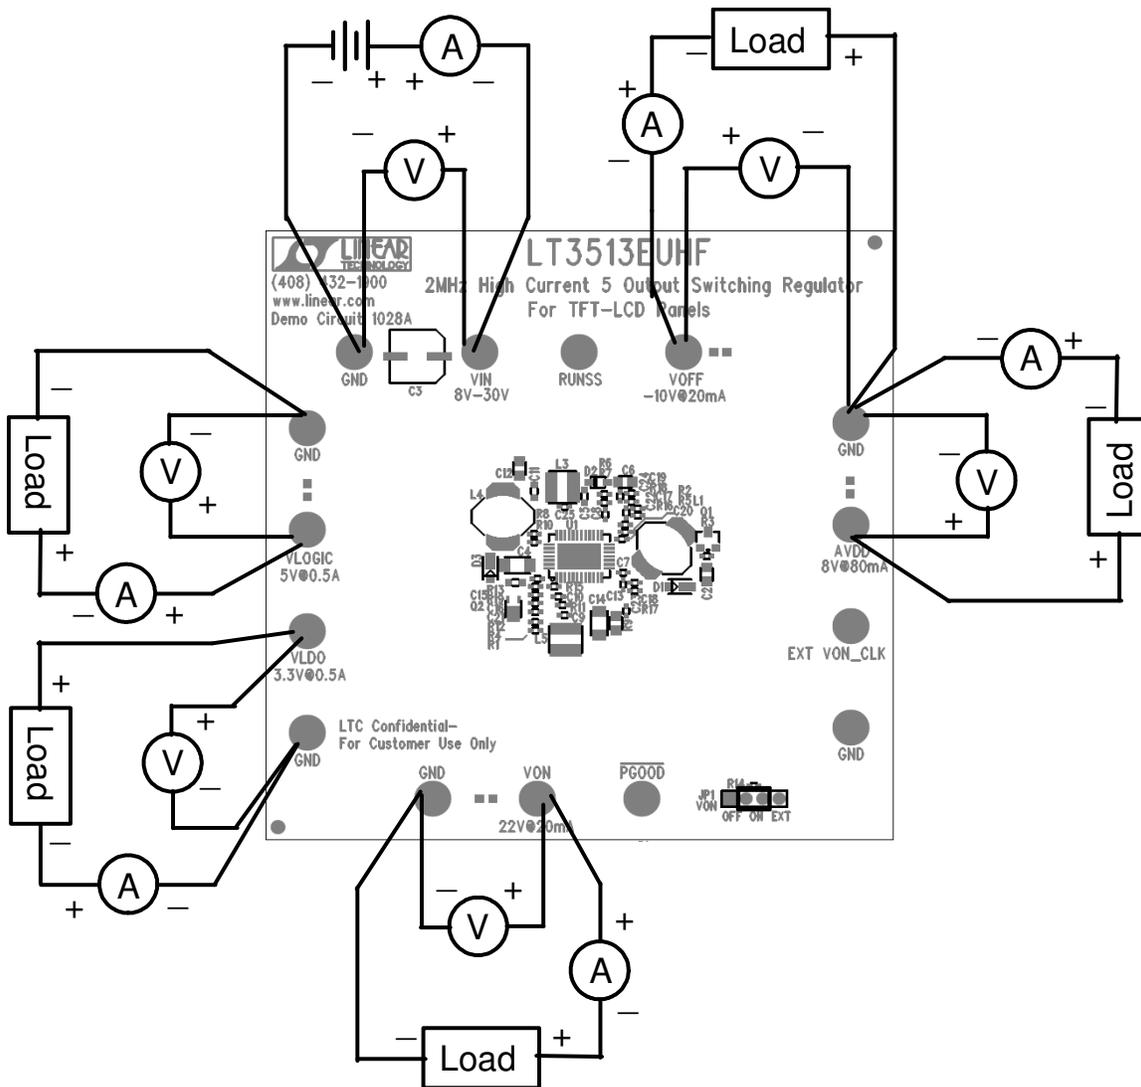


Figure 1. Proper Measurement Equipment Setup



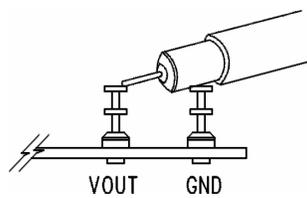


Figure 2. Measuring Input or Output Ripple

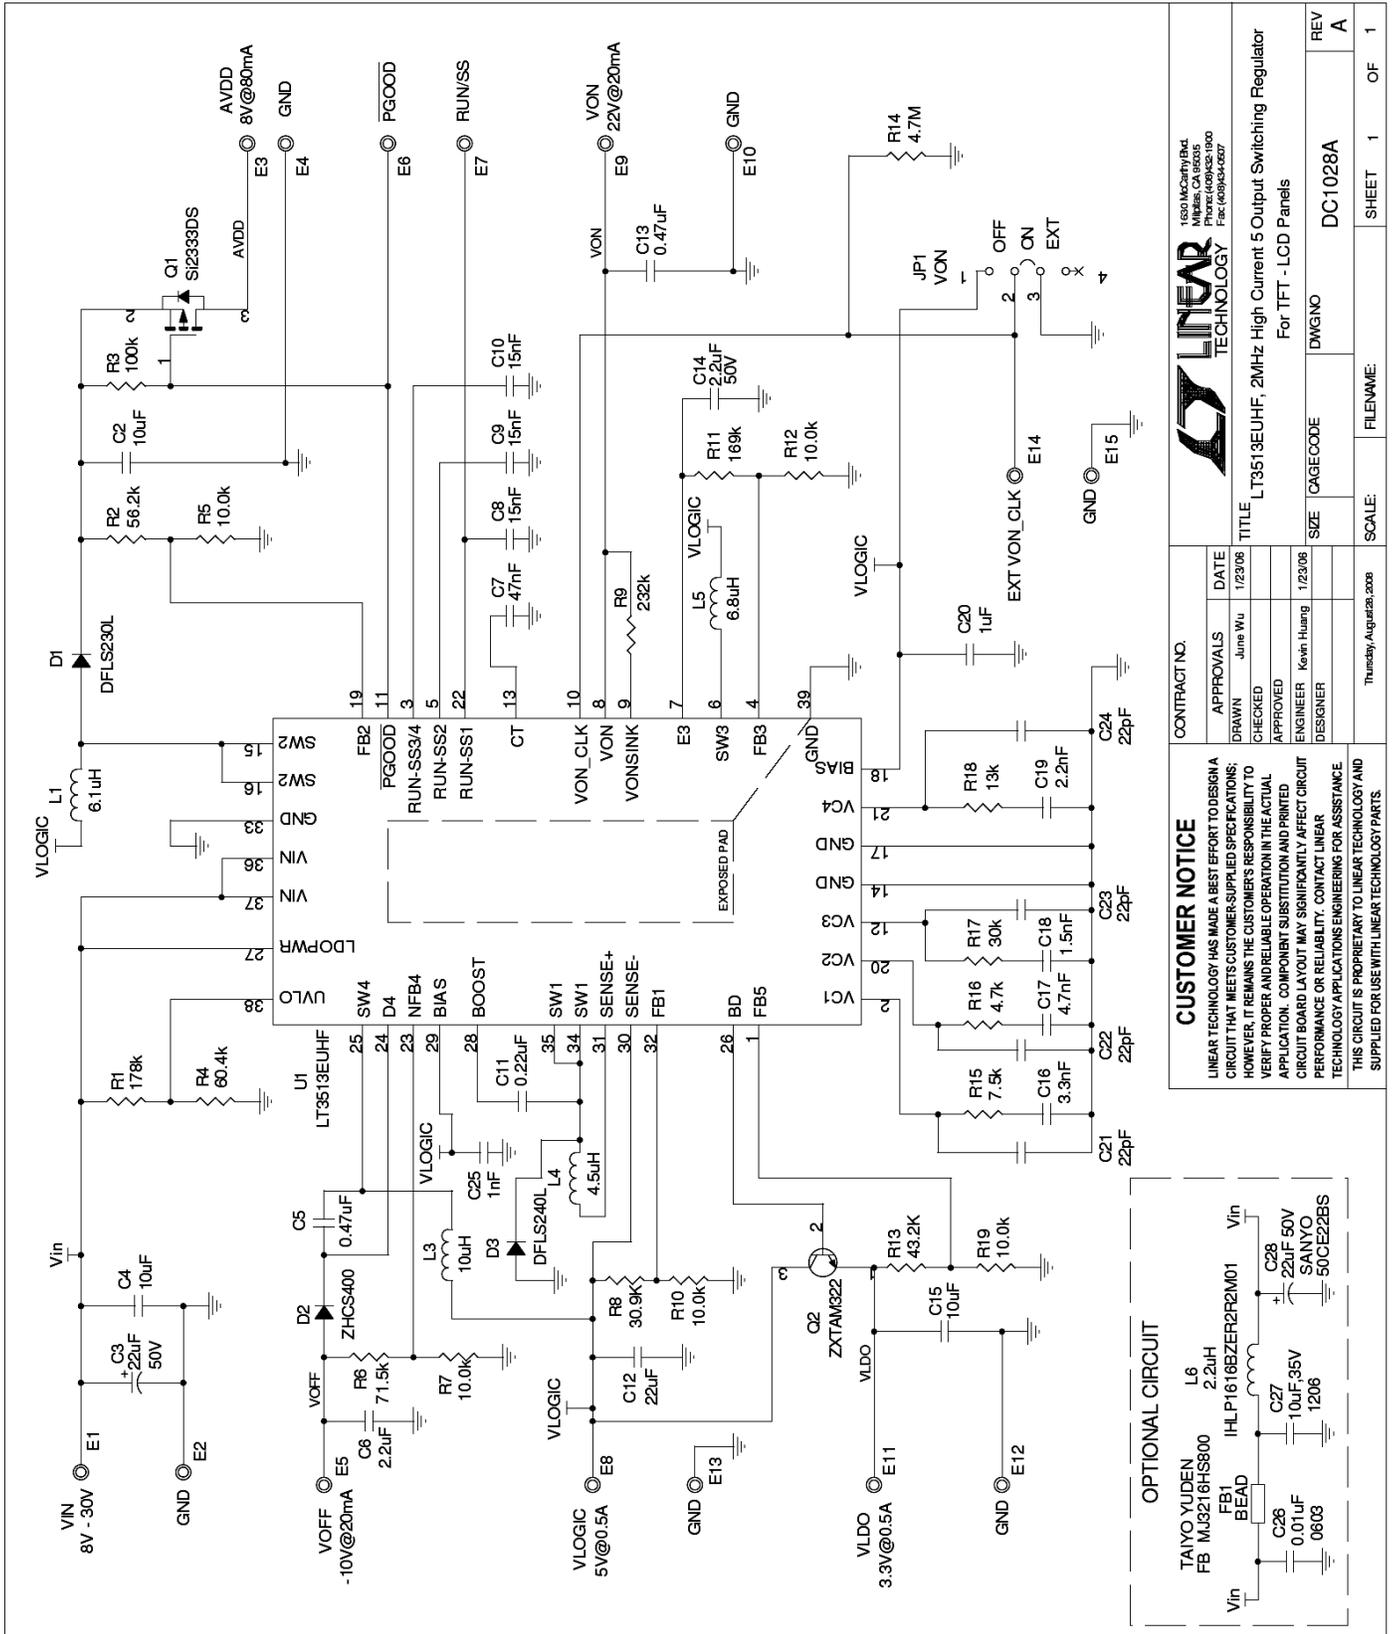

<p>CONTRACT NO.</p> <p>APPROVALS DATE</p> <p>DRAWN June Wu 1/23/06</p> <p>CHECKED</p> <p>APPROVED</p> <p>ENGINEER Kevin Huang 1/23/06</p> <p>DESIGNER</p>		<p>FILENAME:</p> <p>Thursday, August 28, 2008</p>	
<p>CUSTOMER NOTICE</p> <p>LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.</p>		<p>SCALE:</p> <p>Thursday, August 28, 2008</p>	
<p>TITLE LT3513EUHF, 2MHz High Current 5 Output Switching Regulator</p> <p>For TFT - LCD Panels</p>		<p>SIZE CAGECODE</p> <p>DWGNO DC1028A</p> <p>REV A</p>	
<p>LINEAR TECHNOLOGY</p> <p>1650 McCarthy Blvd Folsom, CA 95630 Phone: (408) 745-1000 Fax: (408) 745-6007</p>		<p>SHEET 1</p> <p>OF 1</p>	

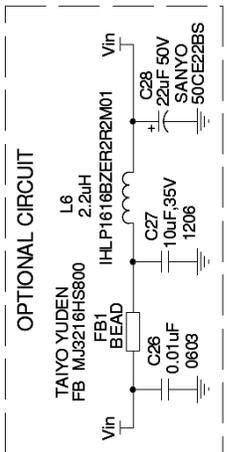

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru