



Grove - Encoder

Release date : 9/22/2015

Version : 1.0

Wiki: http://www.seeedstudio.com/wiki/Grove_-_Encoder

Bazaar: <http://www.seeedstudio.com/depot/Grove-Encoder-p-1352.html>

Document Revision History

Revision	Date	Author	Description
1.0	Sep 21, 2015	Victor.He	Create file

Contents

Document Revision History.....	2
1. Introduction	2
2. Features.....	3
3. Specifications	4
4. Usage.....	5
5. Resources	8
6. Support.....	9

Disclaimer

For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.

Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.

Copyright

The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.

1. Introduction

This module is an incremental rotary encoder. It encodes the rotation signal from the axis and output the signal by electronic pulse. The Grove – Encoder is one of the Grove series and has a standard Grove interface.

When you need to add a rotary knob to your project, for example a volume knob for a speaker, a selection panel or a digital input, this will be your first choice.



2. Features

- Incremental encoder
- Grove Interface.
- 360 degree rotary


3. Specifications

Item	Min	Typical	Max	Unit
Voltage	4.5	5	5.5	VDC
Current	10	20	30	mA
Dimension	20x 20			mm
Net Weight	12			Gram

4. Usage

This Grove-Encoder is very easy to use with the [Encoder Lib](#) designed by seeedstudio. Simply connect this module to the D2 connector of Base Shield and you can start using. The following is a introduction of how to make a [Circular LED bar](#) (the idea came from [seeedstudio wish](#)) .

- This Circular LED bar consists of an Encoder and a [Grove-CircularLED](#) module. Connect the two modules to Base shield as the following picture:

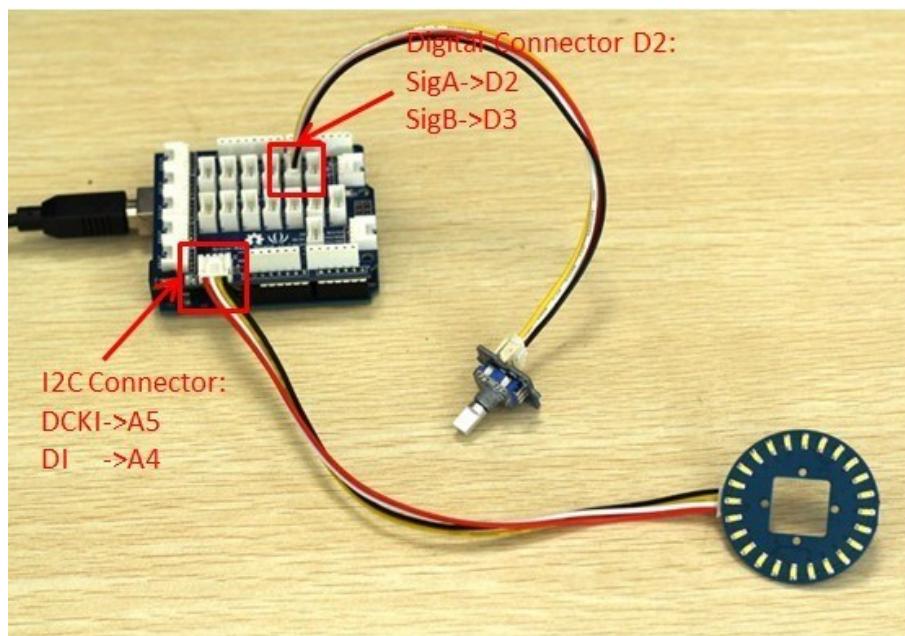

- In the project, the [TimeOne Lib](#) and [Encoder Lib](#) and [CircularLED Library](#) are needed. Download all the librarys and install them to your Arduino IDE.
- Restart the Arduino IDE and open the example by the path :File->Examples->Encoder->EncodeCircuiBar.

```
#include <CircularLED.h>
#include <Encoder.h>
#include <TimerOne.h>
CircularLED circularLED;
unsigned int LED[24];
int index_LED;
void setup()
{
    encoder.Timer_init();
}
```

```
void loop()
{
    if (encoder.rotate_flag ==1)
    {
        if (encoder.direct==1)
        {
            index_LED++;
            if (index_LED>23)
                index_LED=24;
            SennocircularBar(index_LED);
        }
        else
        {
            index_LED--;
            if(index_LED<0)
                index_LED=0;
            SennocircularBar(index_LED);
        }
        encoder.rotate_flag =0;
    }
}

void SennocircularBar(int index)
{
    for (int i=0;i<24;i++)
    {
        if (i<index)
        {
            LED[i]=0xff;
        }
        else
            LED[i]=0;
    }
    circularLED.CircularLEDWrite(LED);
}
```

Upload it to your Arduino/Seeeduino, please refer to [here](#) to learn how to upload sketches. You can see:



Note: It is able to generate another signal when it's being pressed down. However due to the limitation of the number of Grove signal cable, the module is made without output of this signal.

5. Resources

[Encoder Spec](#)

[Demo in Arduino forum](#)

[TimeOne Lib](#)

[Encoder Lib](#)

[Grove-Encoder Eagle files](#)

6. Support

If you have questions or other better design ideas, you can go to our [forum](#) or [wish](#) to discuss.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru