



MAX16818 Evaluation Kit

General Description

The MAX16818 evaluation kit (EV kit) is a fully assembled and tested surface-mount printed-circuit board (PCB) designed to evaluate the MAX16818 pulse-width modulation (PWM) LED driver controller in a buck-boost configuration.

The MAX16818 EV kit operates from a DC supply voltage of 6V to 28V. The EV kit's output is configured to deliver at least 1A of current into an 18V series LED string. The LED brightness can be dimmed using a digital PWM signal.

The EV kit provides an option to configure the MAX16818 IC's overvoltage protection, switching frequency, and frequency compensation. The MAX16818 EV kit also features a 180° out-of-phase clock output PCB pad.

Features

- ◆ 6V to 28V Input-Voltage Range
- ◆ 1A Output Current into an 18V LED String
- ◆ Pulse-Width Modulated LED Current Dimming
- ◆ Resistor-Adjustable Overvoltage Protection and Switching Frequency
- ◆ 180° Out-of-Phase Clock Output
- ◆ Fully Assembled and Tested

Ordering Information

| PART | TEMP RANGE | IC PACKAGE |
|----------------|---------------|--------------|
| MAX16818EVKIT+ | 0°C to +70°C* | 28 TQFN-EP** |

+Denotes a lead-free and RoHS-compliant EV kit.

*This limited temperature range applies to the EV kit PCB only. The MAX16818 IC temperature range is -40°C to +125°C.

**EP = Exposed paddle.

Component List

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| C1 | 1 | 2.2μF ±10%, 50V X7R ceramic capacitor (1206) Murata GRM31CR71H225K |
| C2 | 1 | 1μF ±20%, 50V X7R ceramic capacitor (0805) Murata GRM21BR71H105M |
| C3 | 1 | 4.7μF ±10%, 6.3V X7R ceramic capacitor (0603) Murata GRM188R70J475K |
| C4 | 1 | 0.47μF ±10%, 6.3V X7R ceramic capacitor (0603) Murata GRM188R70J474K |
| C5 | 1 | 1000pF ±10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H102K |
| C6, C7 | 2 | 10μF ±10%, 50V X7R ceramic capacitors (2220) Murata GRM55DR71H106K |
| C8, C10 | 0 | Not installed, capacitors (0603) |
| C9 | 1 | 0.22μF ±10%, 16V X7R ceramic capacitor (0603) Murata GRM188R71C224K |
| C11 | 1 | 2200pF ±10%, 50V X7R ceramic capacitor (0603) Murata GRM188R71H222K |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| C12 | 1 | 0.1μF ±10%, 16V X7R ceramic capacitor (0603) Murata GRM188R71C104K |
| C13 | 1 | 100pF ±5%, 50V C0G ceramic capacitor (0603) Murata GRM1885C1H101J |
| C14 | 1 | 100μF, 50V electrolytic capacitor (8mm x 10.2mm) Panasonic EEEFK1H101P |
| D1 | 1 | 60V, 2A Schottky diode (SMB) Diodes Inc. B260-13-F |
| JU1 | 1 | 3-pin header |
| JU2 | 1 | 2-pin header |
| L1 | 1 | 8.8μH, 4A _{DC} inductor Sumida CDEP105-8R8 |
| N1 | 1 | 40V, 4.9A n-channel MOSFET (SO8) Vishay Si4446DY |
| N2-N5 | 4 | 60V, 115mA n-channel MOSFETs (SOT23) Central Semiconductor 2N7002 LEAD-FREE |
| P1 | 1 | -20V, -3.8A p-channel MOSFET (TSOP-6) Vishay Si3467DV-T1-E3 |

Evaluates: MAX16818

MAX16818 Evaluation Kit

Component List (continued)

| DESIGNATION | QTY | DESCRIPTION |
|---------------------|-----|---|
| Q1 | 1 | NPN bipolar transistor (SOT223) Fairchild Semiconductor PZT3904 |
| Q2 | 1 | PNP bipolar transistor (SOT23) Fairchild Semiconductor MMBT3906 |
| R1 | 1 | 1k Ω \pm 1% resistor (1206) |
| R2 | 1 | 12.1k Ω \pm 1% resistor (0603) |
| R3, R7, R15, R16 | 4 | 10k Ω \pm 1% resistors (0603) |
| R4, R5 | 2 | 1 Ω \pm 1% resistors (0603) |
| R6 | 1 | 4.99k Ω \pm 1% resistor (0402) |
| R8 | 1 | 221k Ω \pm 1% resistor (0402) |
| R9 | 1 | 100k Ω \pm 1% resistor (0402) |
| R10 | 1 | 12.4k Ω \pm 1% resistor (0402) |
| R11 | 1 | 105k Ω \pm 1% resistor (0603) |
| R12, R13 | 2 | 1k Ω \pm 5% resistors (0805) |
| R14 | 1 | 0.007 Ω \pm 2%, 0.5W sense resistor (2010) IRC LRC-LRF2010LF-01-R007-G |
| R17 | 1 | 1k Ω \pm 1% resistor (0603) |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| R18 | 1 | 2k Ω \pm 1% resistor (0603) |
| R19 | 1 | 499 Ω \pm 1% resistor (0603) |
| R20 | 1 | 0.11 Ω \pm 1%, 0.5W sense resistor (1206) IRC LRC-LRC1206LF-01-R11-F |
| R21 | 1 | 30.1k Ω \pm 1% resistor (0603) |
| R22 | 1 | 40.2k Ω \pm 1% resistor (0603) |
| R23 | 1 | 100k Ω SMT cermet trimmer, 11 turns |
| U1 | 1 | MAX16818ATI+ (28-pin TQFN-EP, 5mm x 5mm) |
| U2 | 1 | Voltage-output, high-side current- sense amplifier MAX4073TAXK+ (5-pin SC70-5) |
| U3, U4 | 2 | Low-voltage, adjustable precision shunt regulators (SOT23) Texas Instruments TL431AQDBZRQ1 |
| — | 2 | Shunts |
| — | 1 | PCB: MAX16818 Evaluation Kit+ |

Component Suppliers

| SUPPLIER | PHONE | WEBSITE |
|-------------------------|--------------|-----------------------|
| Central Semiconductor | 631-435-1110 | www.centalsemi.com |
| Diodes Inc. | 805-446-4800 | www.diodes.com |
| Fairchild Semiconductor | 888-522-5372 | www.fairchildsemi.com |
| IRC, Inc. | 361-992-7900 | www.irctt.com |
| Murata Mfg. Co., Ltd. | 770-436-1300 | www.murata.com |
| Panasonic Corp. | 800-344-2112 | www.panasonic.com |
| Sumida Corp. | 847-545-6700 | www.sumida.com |
| Vishay/Vitramon | 203-268-6261 | www.vishay.com |

Note: Indicate that you are using the MAX16818 when contacting these component suppliers.

MAX16818 Evaluation Kit

Evaluates: MAX16818

Quick Start

Recommended Equipment

Before beginning, the following equipment is needed:

- 6V to 28V, 5A DC power supply
- A series-connected LED string rated at 1A (maximum voltage on the string should not exceed 18V)
- A current probe to measure LED current
- One voltmeter

Procedure

The MAX16818 EV kit is fully assembled and tested. Follow the steps below to verify board operation.

Caution: Do not turn on the power supply until all connections are completed.

- 1) Verify that a shunt is installed across pins 2-3 of jumper JU1.
- 2) Verify that no shunt is installed across jumper JU2 (EV kit on).
- 3) Connect the anode end of the LED string to the LED+ pad.
- 4) Connect the cathode end of the LED string to the LED- pad.
- 5) Clip on the current probe across the string wires to measure the LED current.
- 6) Connect the positive terminal of the power supply to the VIN pad on the EV kit. Connect the negative terminal of the power supply to the PGND pad next to the VIN pad.
- 7) Turn on the power supply and increase the voltage to 6V or above.
- 8) Verify that the LED string current is approximately 1A. Adjust potentiometer R23 to obtain 1A.
- 9) Measure the voltage between the LED+ to LED- PCB pads.

Detailed Description

The MAX16818 EV kit is designed to evaluate the MAX16818 PWM LED driver controller in a buck-boost configuration. The EV kit PCB is designed with two layers and has 1oz copper traces. All components on the EV kit are installed on the top layer. The EV kit includes an on-board VCC regulating circuit for operation with input voltage between 6V to 8V. The EV kit also includes on-board output overvoltage protection circuitry to limit the output voltage.

Input-Voltage Range

The MAX16818 EV kit can operate from a DC supply voltage of 6V to 28V and requires at least 5A. The input-voltage range is jumper selectable (see the *Jumper Selection* section). Transistor Q1, shunt regulator U3, and resistors R1, R2, and R3 are used to regulate VCC to 5V when the input voltage to the EV kit is between 6V to 8V. If the minimum input voltage is 8V, jumper JU1 can be replaced by a shorting wire between pins 1-2. Transistor Q1, shunt regulator U3, and resistors R1, R2, and R3 can be omitted from the EV kit, saving components and reducing the required PCB space.

Output Current Range

The MAX16818 EV kit can deliver up to 1A into an 18V series LED string. The maximum output current is configurable by sense resistor R14. The LED current can be adjusted from 400mA to 1A using potentiometer R23.

LED Brightness Dimming

The LED brightness can be dimmed using a TTL PWM signal with a frequency range of 80Hz to 5kHz. Connect the TTL dimming signal to the PWMDIM and GND pads to control the brightness of the LEDs.

Output Overvoltage Protection

The MAX16818 EV kit features overvoltage protection circuitry to limit the voltage from LED+ to GND to 46V when the LED string is opened. The overvoltage protection circuitry consists of resistors R6–R10, transistor Q2, and shunt regulator U4. The overvoltage protection circuitry is nonlatching.

Switching Frequency

The MAX16818 EV kit switching frequency (f_{sw}) is configured to 600kHz by resistor R11. To reconfigure the MAX16818 switching frequency from 125kHz to 1.5MHz, replace resistor R11 using the equation below:

For $120k\Omega \leq R11 \leq 500k\Omega$

$$R11 = \frac{(6.25 \times 10^{10})}{f_{sw}}$$

For $40k\Omega \leq R11 \leq 120k\Omega$

$$R11 = \frac{(6.40 \times 10^{10})}{f_{sw}}$$

where f_{sw} is the desired switching frequency in Hz.

Note: Other component values may need to be changed for proper operation. Refer to the MAX16818 IC data sheet for additional information.

MAX16818 Evaluation Kit

Clock Output

The MAX16818 EV kit also features a digital clock output that is 180° out-of-phase with respect to the high-side driver, N1. The clock output is available at the CLKOUT PCB pad.

Jumper Selection

Input-Voltage Range (VIN)

Jumper JU1 selects the input-voltage range for the MAX16818 EV kit (see Table 1 for shunt positions).

Table 1. JU1 Jumper Selection (IN)

| SHUNT POSITION | IN PIN CONNECTED TO | VIN VOLTAGE RANGE |
|-----------------------|---------------------|-------------------|
| 1-2 | VIN | 8V to 28V* |
| 2-3** | VCC | 6V to 28V |
| None (Not allowed) | No connect | 0V |

*When operating in the 8V to 28V input-voltage range, jumper JU1 can be replaced by a shorting wire between pins 1-2.

**Default position.

Output Enable (EN)

Jumper JU2 controls the output enable pin on the MAX16818 IC. The MAX16818 output enable pin (EN) is also connected to the overvoltage protection circuitry on the EV kit (see Table 2 for shunt positions).

Table 2. JU2 Jumper Selection (EN)

| SHUNT POSITION | EN PIN CONNECTED TO | EV KIT FUNCTION |
|----------------|--|-----------------|
| Installed | GND | Disabled |
| Not installed* | Overvoltage protection circuitry (R6-R10, Q2, U4) | Enabled |

*Default position.

MAX16818 Evaluation Kit

Evaluates: MAX16818

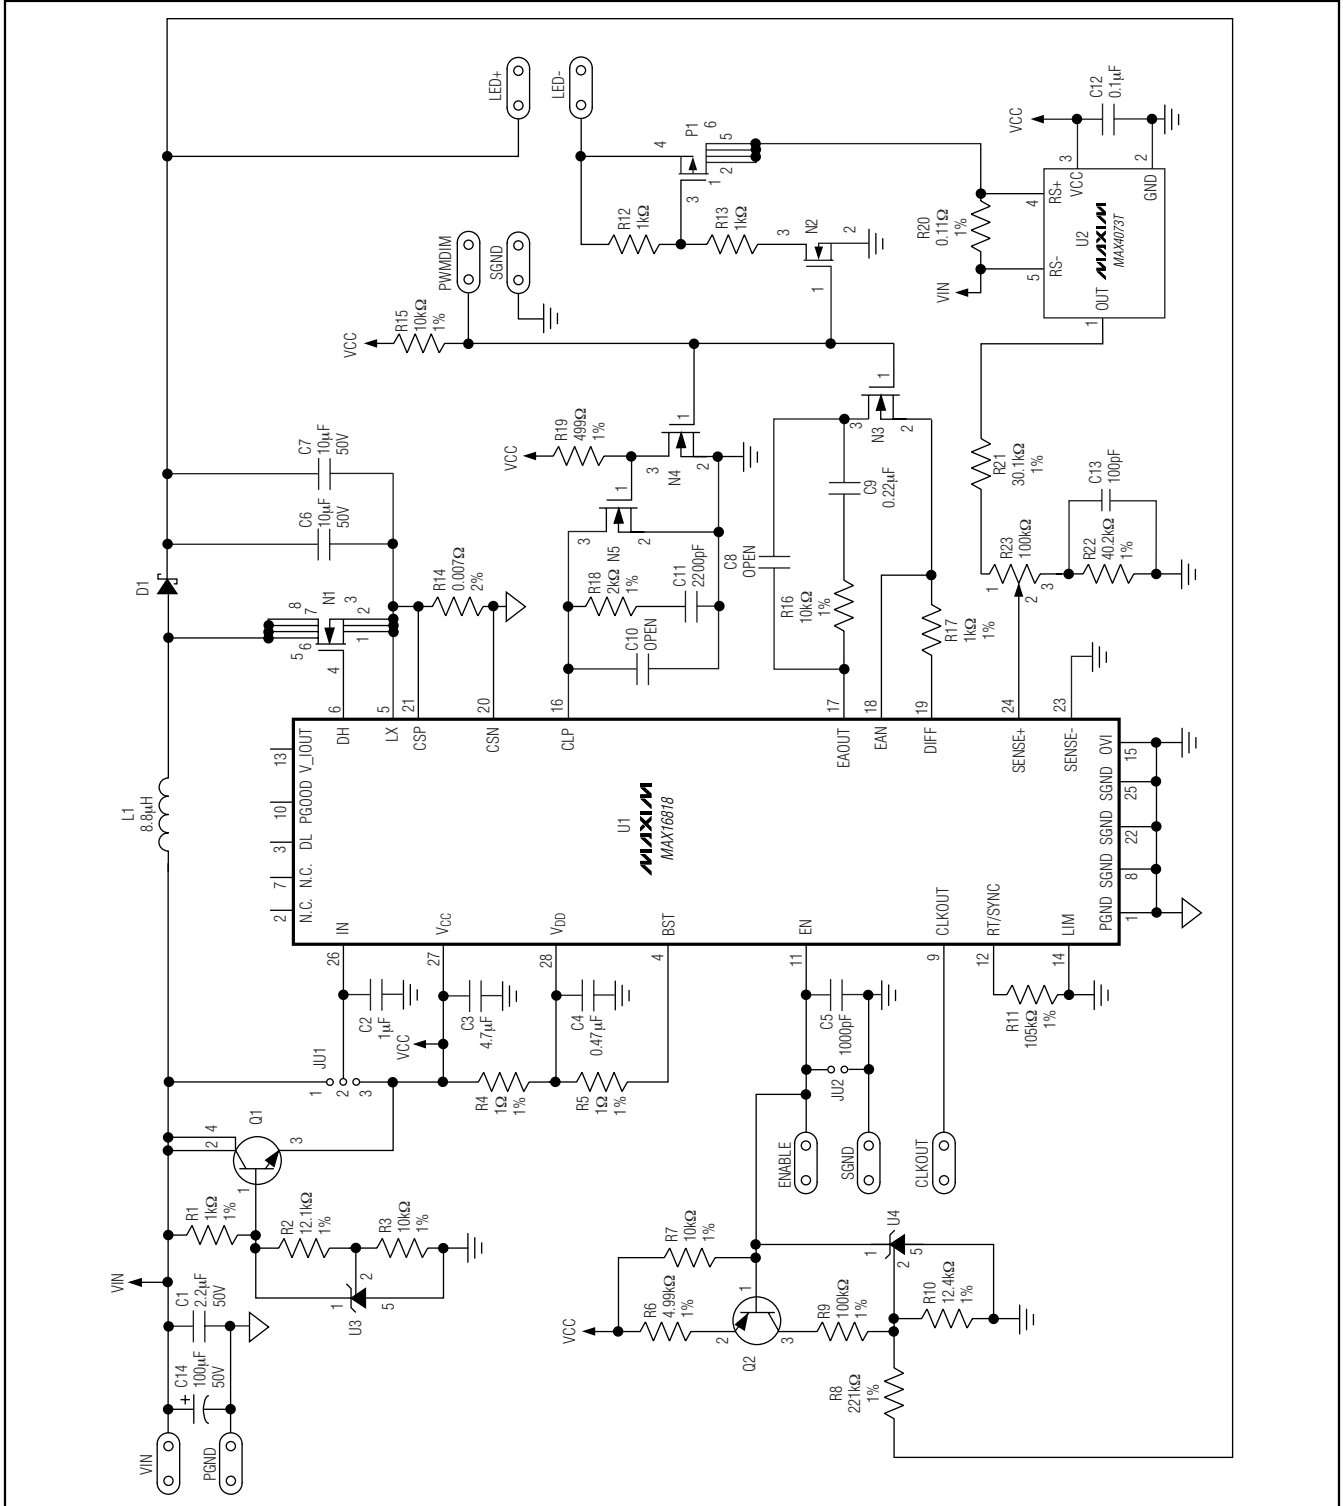


Figure 1. MAX16818 EV Kit Schematic

MAX16818 Evaluation Kit

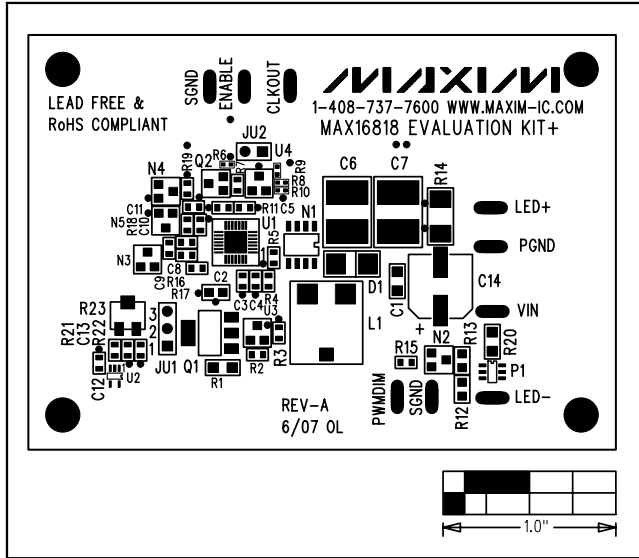


Figure 2. MAX16818 EV Kit Component Placement Guide—Component Side

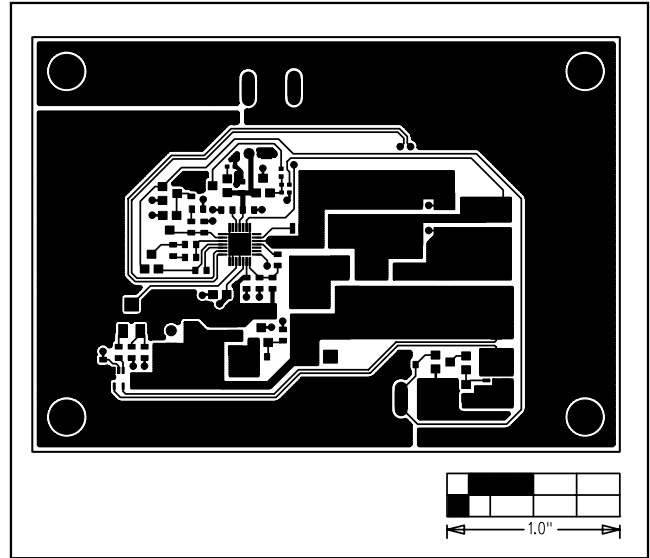


Figure 3. MAX16818 EV Kit PCB Layout—Component Side

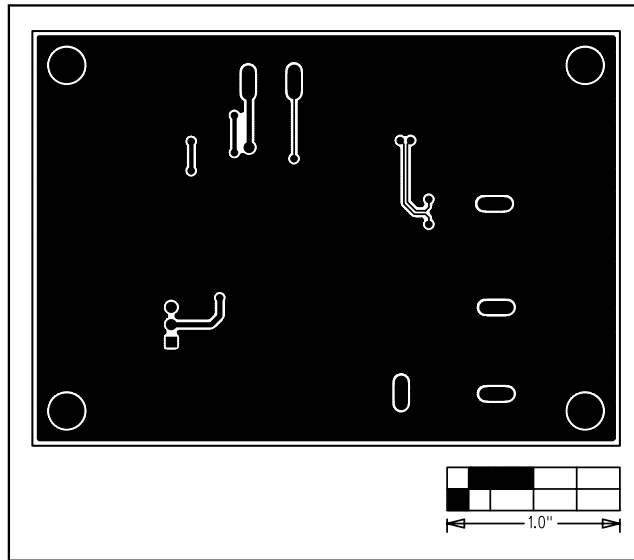


Figure 4. MAX16818 EV Kit PCB Layout—Solder Side

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

6 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru