


**Both NO and NC contacts  
incorporated in a  
DIP8-pin package**

**PhotoMOS®  
GU Form A & B  
(AQW614)**

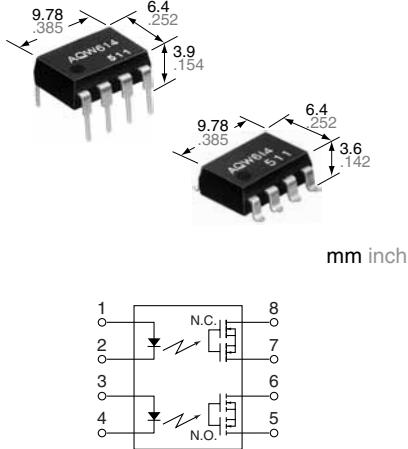

## FEATURES

1. Approx. 1/2 the space compared with the mounting of a set of 1 Form A and 1 Form B PhotoMOS
2. Applicable for 1 Form A 1 Form B use as well as two independent 1 Form A and 1 Form B use
3. Controls load currents up to 0.13 A with 5 mA input current
4. Extremely low closed-circuit offset voltages to enable control of small analog signals without distortion
5. Stable on-resistance

## TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Computers
- Sensing equipment

**RoHS compliant**

## TYPES

|                | Output rating* |              | Package  | Part No.              |                                |                                | Packing quantity |  |  |  |  |
|----------------|----------------|--------------|----------|-----------------------|--------------------------------|--------------------------------|------------------|--|--|--|--|
|                | Load voltage   | Load current |          | Through hole terminal | Surface-mount terminal         |                                |                  |  |  |  |  |
|                |                |              |          | Tube packing style    |                                | Tape and reel packing style    |                  |  |  |  |  |
|                |                |              |          |                       | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side |                  |  |  |  |  |
| AC/DC dual use | 400 V          | 100 mA       | DIP8-pin | AQW614                | AQW614A                        | AQW614AX                       | AQW614AZ         | 1 tube contains:<br>50 pcs.<br>1 batch contains:<br>500 pcs.<br>1,000 pcs. |  |  |  |

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


| Item                    |                         | Symbol            | AQW614(A)                       | Remarks  |
|-------------------------|-------------------------|-------------------|---------------------------------|--|
| Input                   | LED forward current     | I <sub>F</sub>    | 50 mA                           |  |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5 V                             |  |
|                         | Peak forward current    | I <sub>FP</sub>   | 1 A                             | f = 100 Hz, Duty factor = 0.1%                                   |
|                         | Power dissipation       | P <sub>in</sub>   | 75 mW                           |  |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 400 V                           |  |
|                         | Continuous load current | I <sub>L</sub>    | 0.1 A (0.13 A)                  | Peak AC, DC<br>( ): in case of using only 1a or 1b,<br>1 channel |
|                         | Peak load current       | I <sub>peak</sub> | 0.3 A                           | 100 ms (1 shot), V <sub>L</sub> = DC                             |
|                         | Power dissipation       | P <sub>out</sub>  | 800 mW                          |  |
| Total power dissipation |                         | P <sub>T</sub>    | 850 mW                          |  |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 1,500 V AC                      | Between input and output/between contact sets                    |
| Temperature limits      | Operating               | T <sub>opr</sub>  | -40°C to +85°C -40°F to +185°F  | Non-condensing at low temperatures                               |
|                         | Storage                 | T <sub>stg</sub>  | -40°C to +100°C -40°F to +212°F |  |

# GU Form A & B (AQW614)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol             | AQW614(A)                             | Condition  |
|--------------------------|----------------------------------|--------------------|---------------------------------------|--|
| Input                    | LED operate current              | Typical<br>Maximum | $I_{Fon}$ (N.O.)<br>$I_{Foff}$ (N.C.) | 0.9 mA<br>3 mA<br>$I_L = 100$ mA   |
|                          | LED reverse current              | Minimum<br>Typical | $I_{Foff}$ (N.O.)<br>$I_{Fon}$ (N.C.) | 0.4 mA<br>0.8 mA<br>$I_L = 100$ mA   |
|                          | LED dropout voltage              | Typical            | $V_F$                                 | 1.25 V (1.14 V at $I_F = 5$ mA)  |
|                          |                                  | Maximum            |                                       | 1.5 V<br>$I_F = 50$ mA   |
| Output                   | On resistance                    | Typical            | $R_{on}$                              | 27 Ω<br>$I_F = 5$ mA (N.O.)<br>$I_F = 0$ mA (N.C.)                             |
|                          |                                  | Maximum            |                                       | 50 Ω<br>$I_L = 100$ mA<br>within 1 s on time                                   |
|                          | Off state leakage current        | Maximum            | $I_{Leak}$                            | 1 μA<br>$I_F = 0$ mA (N.O.)<br>$I_F = 5$ mA (N.C.)<br>$V_L = 400$ V            |
| Transfer characteristics | Operate time*                    | Typical<br>Maximum | $T_{on}$ (N.O.)<br>$T_{off}$ (N.C.)   | 0.28 ms (N.O.) 0.43 ms (N.C.)<br>1 ms<br>$I_F = 0$ mA → 5 mA<br>$I_L = 100$ mA |
|                          | Reverse time*                    | Typical<br>Maximum | $T_{off}$ (N.O.)<br>$T_{on}$ (N.C.)   | 0.04 ms (N.O.) 0.3 ms (N.C.)<br>1 ms<br>$I_F = 5$ mA → 0 mA<br>$I_L = 100$ mA  |
|                          | I/O capacitance                  | Typical<br>Maximum | $C_{iso}$                             | 0.8 pF<br>1.5 pF<br>$f = 1$ MHz<br>$V_B = 0$ V                                 |
|                          | Initial I/O isolation resistance | Minimum            |                                       | 1,000 MΩ<br>500 V DC   |

\*Operate/Reverse time

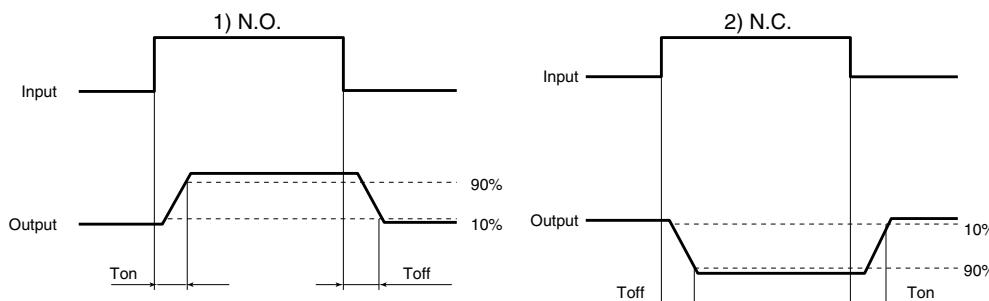

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

| Item              | Symbol | Recommended value | Unit |
|-------------------|--------|-------------------|------|
| Input LED current | $I_F$  | 5                 | mA   |

### ■ For Dimensions.

### ■ For Schematic and Wiring Diagrams.

### ■ For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.

## REFERENCE DATA


### 1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

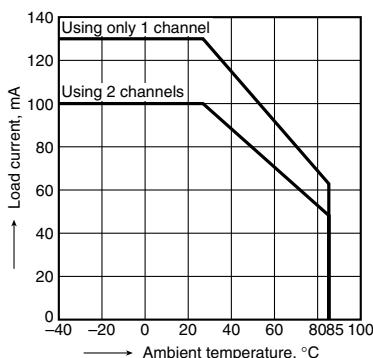


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

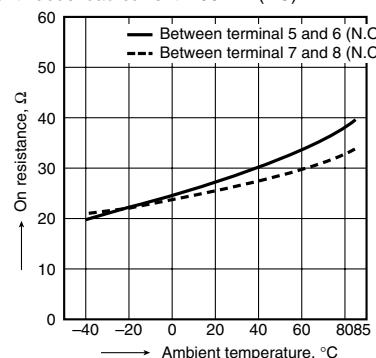

### 3. Operate time vs. ambient temperature characteristics


LED current: 5 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 100 mA (DC)

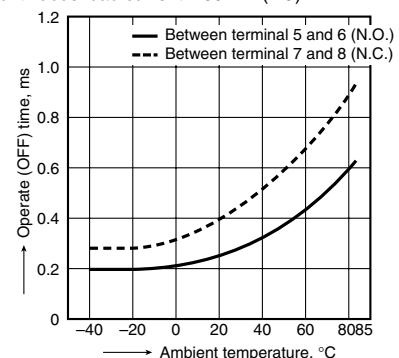

# GU Form A & B (AQW614)


## 4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 100 mA (DC)

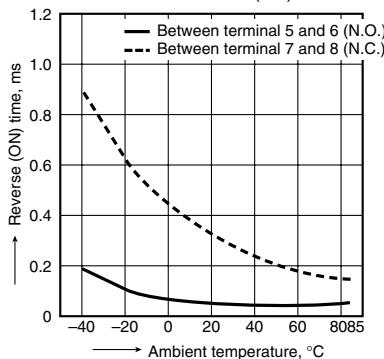


## 5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 100 mA (DC)

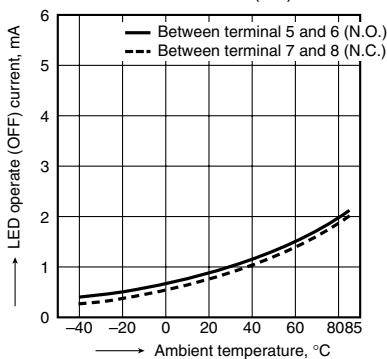


## 6. LED reverse current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 100 mA (DC)

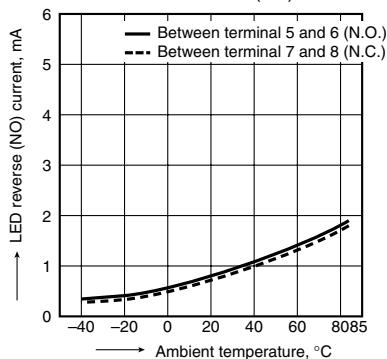


## 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

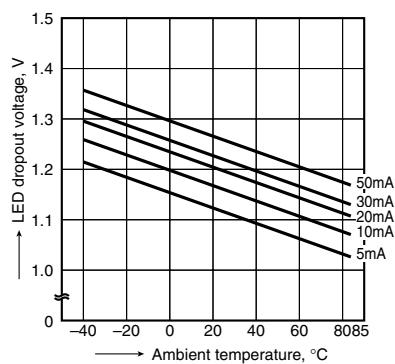


## 8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

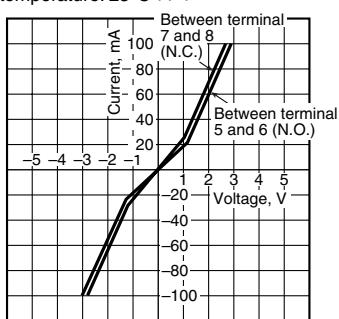


## 9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

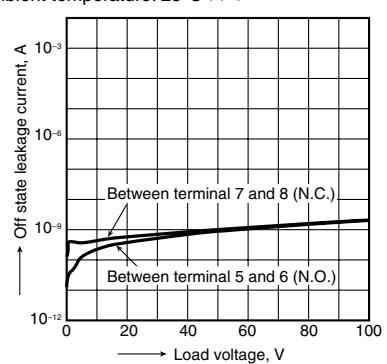


## 10. Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

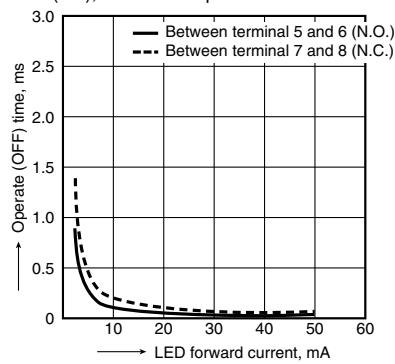


## 11. Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

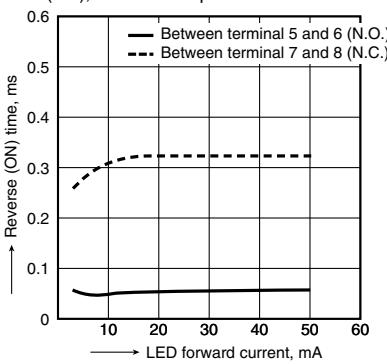

## 12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

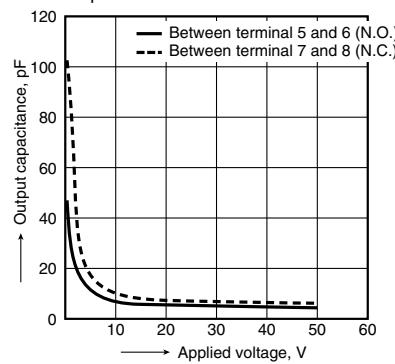

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru