


STAMPED AND FORMED CONTACTS, PG 1 of 2

Click on [blue underlined](#) part numbers to be taken to their spec sheets.

OPTIONS


PART NUMBER: [AT62-14-01XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

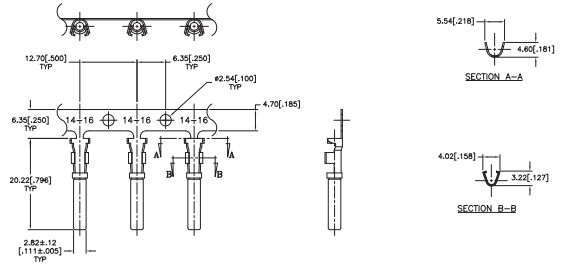


PART NUMBER: [AT62-16-01XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

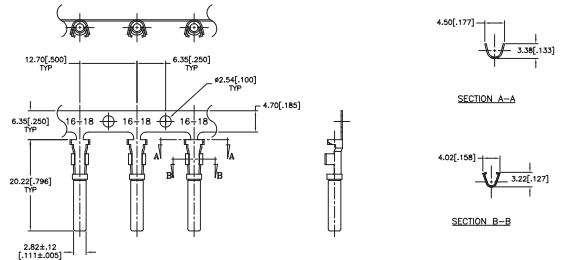


PART NUMBER: [AT62-16-06XX](#)
DESCRIPTION: CONTACT, SOCKET, STAMPED, SIZE 16

MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-01, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

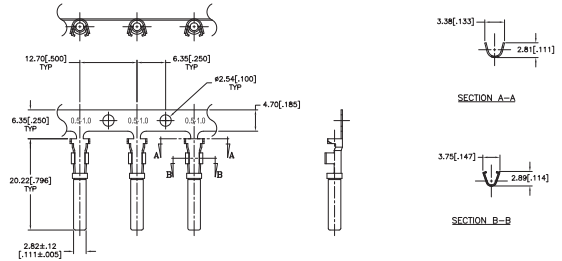

PART NUMBER: [AT60-14-01XX](#)
DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16

MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=22 NICKEL PLATING
 XX=44 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: ATT-16-00, MFX-3950 & MFX-3953
CRIMPER SPECIFICATIONS: S2-15223 & S2-15224
CRIMP INFORMATION DRAWING: S2-15221 & S2-15222
CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

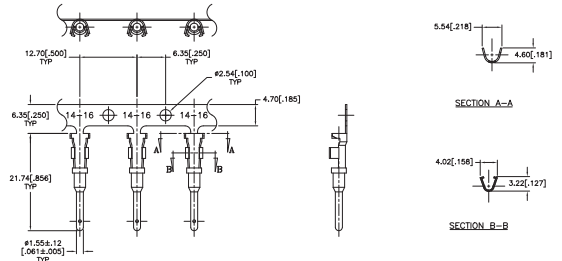

STAMPED AND FORMED CONTACTS, PG 2 of 2

Click on [blue underlined](#) part numbers to be taken to their spec sheets.

OPTIONS

PART NUMBER: AT60-16-01XX

DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16

MATERIAL: COPPER ALLOY

PLATING SUFFIX CODE:

XX=22 NICKEL PLATING

XX=44 GOLD PLATING


CONTACT GENERAL DATA SPECIFICATION: S2-15217

AVAILABLE CRIMPERS: ATT-16-00, ATT-16-01, MFX-3950 & MFX-3953

CRIMPER SPECIFICATIONS: S2-15223 & S2-15224

CRIMP INFORMATION DRAWING: S2-15221 & S2-15222

CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

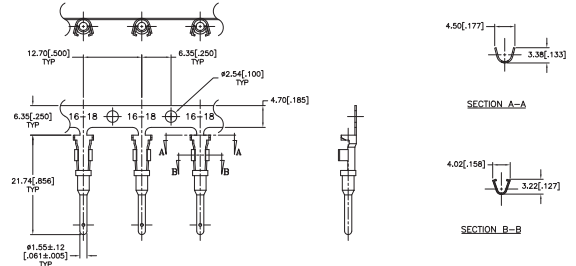

PART NUMBER: AT60-16-06XX

DESCRIPTION: CONTACT, PIN, STAMPED, SIZE 16

MATERIAL: COPPER ALLOY

PLATING SUFFIX CODE:

XX=22 NICKEL PLATING

XX=44 GOLD PLATING


CONTACT GENERAL DATA SPECIFICATION: S2-15217

AVAILABLE CRIMPERS: ATT-16-01, MFX-3950 & MFX-3953

CRIMPER SPECIFICATIONS: S2-15223 & S2-15224

CRIMP INFORMATION DRAWING: S2-15221 & S2-15222

CONTACTS PER REEL: APPROX. 4000 (PARTIAL REELS AVAILABLE)

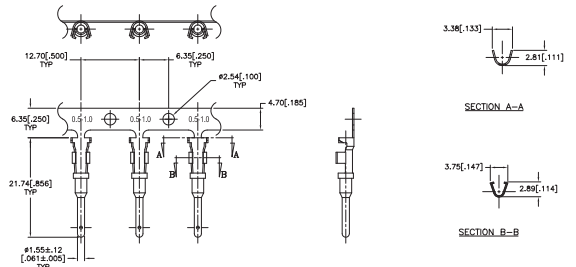


SOLID/MACHINED CONTACTS

Click on blue underlined part numbers to be taken to their spec sheets.


OPTIONS

MILITARY-STYLE

PART NUMBER: AT60-202-16XX
DESCRIPTION: CONTACT, PIN, SOLID MACHINED, SIZE 16
MATERIAL: COPPER ALLOY
PLATING SUFFIX CODE:
 XX=141 NICKEL PLATING
 XX=31 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

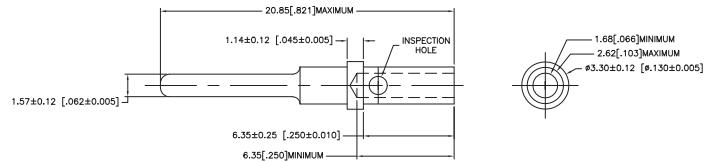


PART NUMBER: AT62-201-16XX
DESCRIPTION: CONTACT, SOCKET, SOLID MACHINED, SIZE 16
MATERIAL:
 CONTACT BODY: COPPER ALLOY
 HOOD: STAINLESS STEEL
PLATING SUFFIX CODE:
 XX=141 NICKEL PLATING
 XX=31 GOLD PLATING
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

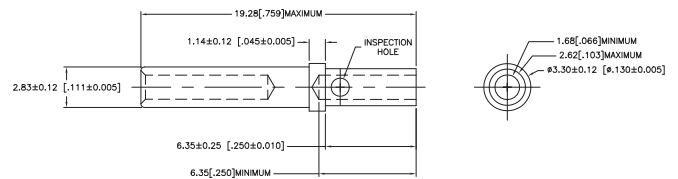


ROCKSOLID™ CONTACTS


PART NUMBER: 65-54942-14
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 14AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

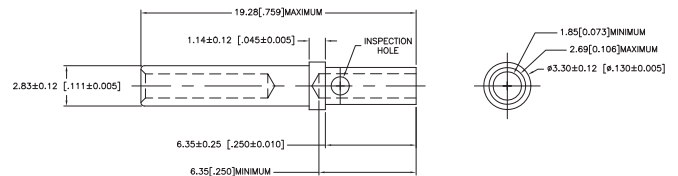

PART NUMBER: 65-54942-16
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 16AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

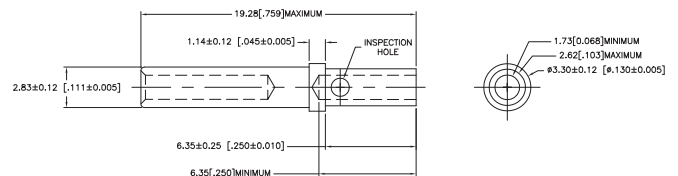


PART NUMBER: 65-54942-20
DESCRIPTION: CONTACT, SOCKET, ROCKSOLID, SIZE 16
AWG RANGE: 20AWG
MATERIAL: COPPER ALLOY
PLATING: GOLD
CONTACT GENERAL DATA SPECIFICATION: S2-15217
AVAILABLE CRIMPERS: CA-5D12 & CA-5E12
CRIMPER SPECIFICATIONS: S2-15219 & S2-15220
CRIMP INFORMATION DRAWING: S2-15218

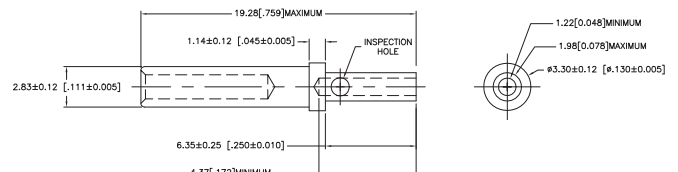

ATT-16-00 WITH CAVITY A & B

CONTACT P/N:	INSULATION ϕ	CAVITY	WIRE SIZE
AT60-16-01**	PIN .075 - .140	B	1.5mm ²
AT62-16-01**	SOC [1.91 - 3.56]	A	16AWG
		A	1.0mm ²
AT60-14-01**	PIN .095 - .150	B	14AWG
AT62-14-01**	SOC [2.41 - 3.81]	B	2.0mm ²
		B	1.5mm ²
		A	1.5mm ²
		A	16AWG
		A	1.0mm ²
AT60-16-06**	PIN .055 - .100	A	16AWG
AT62-16-06**	SOC [1.40 - 2.54]	A	1.0mm ²

CAVITY VIEW OF
CRIMPER NUMBER
ATT-16-00

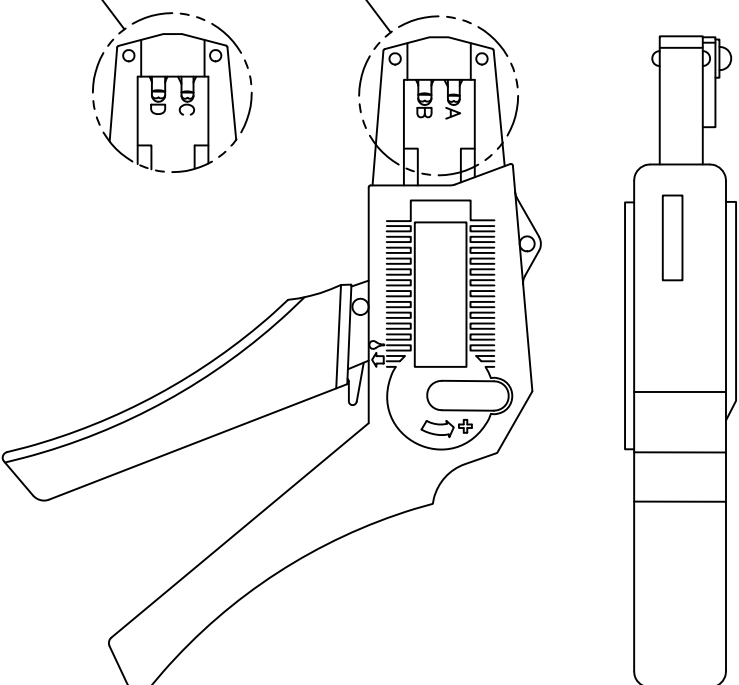

CAVITY VIEW OF
CRIMPER NUMBER
ATT-16-01

USE CRIMPER NUMBER:
ATT-16-01 WITH CAVITY C & D

CONTACT P/N:	INSULATION ϕ	CAVITY	WIRE SIZE
AT60-16-01**	.075 - .140	D	18AWG
AT62-16-01**	[.1.91 - 3.56]	D	.75mm ²
AT60-16-06**	.055 - .100	D	18AWG
AT62-16-06**	[1.40 - 2.54]	D	.75mm ²
		C	.50mm ²

NOTES (UNLESS OTHERWISE SPECIFIED):

1. ALL DIMENSIONS IN INCHES [MILLIMETERS]
2. FOR PLATING CODES ** SEE CONTACT DATA DRAWINGS.
3. THIS TOOL IS FOR CRIMPING SIZE 16 CONTACTS ONLY TO WIRES LISTED IN THE CHARTS.
4. DEUTSCH IPD CROSS REFERENCE PART NUMBERS ARE DTT-16-00 AND DTT-16-01.

REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER 016571	6/12/09	B.D.B.	M.R.F.

QUANTITY		PART NUMBER	DESCRIPTION	UNIT
MATERIALS LIST				
UNLESS OTHERWISE SPECIFIED				
1) All dimensions are in inches. 2) Tolerances are as follows: 1/2 in. DEC. ±0.005 finished ±1/64 3/4 in. DEC. ±0.005 finished ±1/32 4) Finish: S-20020 5) Note: See -20020				
MATERIAL SPECIFICATIONS:		U CUSTOMER:		
PROCESS SPECIFICATIONS:		THE USE OF THIS DOCUMENT IS UNLIMITED. DESIGN FEATURES SHOWN ARE NOT TO BE PROPERTY OF AMPHENOL CORP. ALL RIGHTS ARE RESERVED. NO REPRODUCTION OR MANUFACTURING OF DOCUMENTS REFERRED TO HEREIN MAY BE MADE WITHOUT PERMISSION.		
TEST ASST:		SIZE (FROM NO. 100) NO.: B 10644 S2-15223 SCALE: NONE S2-15223 SHEET 1 OF 1 REASON FOR A-1		
SINE Systems Corporation A Subsidiary of Amphenol Corporation 47424 Midway Drive Chilton Township, MI 48036 INSTRUCTIONS, ATT-16-00 & 01 CRIMPER, HAND, STAMPED CONTACTS				

ALL REFERENCES TO DEUTSCH PRODUCTS OR SPECIFICATIONS ARE FOR COMPARISON PURPOSES ONLY, AND REFER TO DEUTSCH INDUSTRIAL PRODUCTS.

REVISIONS				
REV	ZONE	ECO	DESCRIPTION	DATE
A1	-	-	RELEASE NUMBER 016571	6/12/09
BY	APP			
B.D.B.	M.F.F.			

STAMPED CONTACT PART NUMBER 1000=PIN 1000=SOCKET	SIZE	CRIMP HEIGHT	CRIMP WIDTH	CONDUCTOR PUNCH NUMBER	CONDUCTOR ANVIL NUMBER	CRIMP TENSILE REFERENCE
A160-14-011x A162-14-011x INSULATION RANGE 0.095-0.150(2.41-3.81)	14 AWG	0.055(1.40)	0.094(2.39)			
	2.00mm ²	0.055(1.40)	0.094(2.39)			
	1.50mm ²	0.053(1.35)	0.094(2.39)			
	16 AWG	0.050(1.27)	0.094(2.39)	A117-083-0200	A117-183-0200	25(111)
A160-16-011x A162-16-011x INSULATION RANGE 0.075-0.140(1.91-3.56)	16 AWG	0.050(1.27)	0.094(2.39)			
	1.00mm ²	0.050(1.27)	0.094(2.39)			
	18 AWG	0.048(1.24)	0.094(2.39)			
	0.75mm ²	0.048(1.22)	0.094(2.39)			
A160-16-065x A162-16-065x INSULATION RANGE 0.055-0.100(1.40-2.54)	16 AWG	0.050(1.27)	0.079(2.01)			
	1.00mm ²	0.050(1.27)	0.079(2.01)			
	18 AWG	0.048(1.22)	0.079(2.01)			
	20 AWG	0.048(1.22)	0.079(2.01)			



CROSS REFERENCE

INSULATION DIAMETER RANGE	INSULATION PUNCH NUMBER	INSULATION ANVIL NUMBER
0.120-0.150	[3.05-3.81]	A117-225-0200
0.105-0.125	[2.67-3.18]	A117-226-0200
0.085-0.111	[2.16-2.82]	A117-227-0200
0.075-0.105	[1.91-2.67]	A117-228-0200
0.063-0.094	[1.62-2.39]	A117-229-0200
0.050-0.075	[1.27-1.91]	A117-230-0200

SINE PART NUMBER	DEUTSCH PART NUMBER
MPX-3953	DCT1620-02-00
A117-083-0200	1017-083-0200
A117-082-0200	1017-082-0200
A117-183-0200	1017-183-0200
A117-182-0200	1017-182-0200
A117-225-0200	1017-225-0200
A117-226-0200	1017-226-0200
A117-227-0200	1017-227-0200
A117-228-0200	1017-228-0200
A117-229-0200	1017-229-0200
A117-230-0200	1017-230-0200
A117-325-0200	1017-325-0200
A117-326-0200	1017-326-0200
A117-327-0200	1017-327-0200
A117-328-0200	1017-328-0200
A117-329-0200	1017-329-0200
A117-330-0200	1017-330-0200

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN INCHES(mm).
2. FORCES ARE IN POUNDS(LBS) AND NEWTONS(N).
3. "X"= PLATING SUFFX. SEE INDIVIDUAL CONTACT DRAWING.
4. WIRE STRIP LENGTH: 0.175±0.029(4.43±0.64). BROKEN OR MISSING CONDUCTOR STRANDS ARE NOT ACCEPTABLE.
5. USE A BLADE MICROMETER (0.100(2.54) MIN SPINDLE AND 0.060(0.010(1.50(0.040) ANVIL) TO MEASURE THE CONDUCTOR CRIMP. SEE SECTION AA.
6. CRIMP TENSILE STRENGTH IS DETERMINED AT A PULL RATE SPEED OF 1.00 INCH(25.4) PER MINUTE. INSULATION WINGS ARE REMOVED FOR TEST. ACTUAL CRIMP TENSILE STRENGTH DEPENDS ON WIRE/CONDUCTOR SIZE. VALUES ON THIS SPECIFICATION ARE FOR REFERENCE ONLY.
7. INSULATION DIAMETER RANGE IS DETERMINED BY CONNECTOR AND ITS WIRE SEAL SIZE. SEE CONNECTOR DRAWING FOR INSULATION RANGE.
8. INSULATION CRIMP DIAMETER SHOULD BE THE EQUAL OR LESS THAN THE DIAMETER OF THE WIRE INSULATION (HARD OR TEFLON INSULATION MAY BE AN EXCEPTION). INSULATION CRIMP SHALL NOT AFFECT REMOVAL TOOL PERFORMANCE AND SHALL NOT DAMAGE CONNECTOR CROMMET SEAL.
9. CONDUCTOR TYPE ARE PER SAEJ1128(AWG) AND ISO 6122(METRIC)
10. FOR CONTACT MATERIAL AND PERFORMANCE DATA, SEE DRAWING S2-15217.
11. REFER TO S2-15223 AND S2-15224 AND CROSS REFERENCE CHARTS FOR CRIMP TOOL DATA.

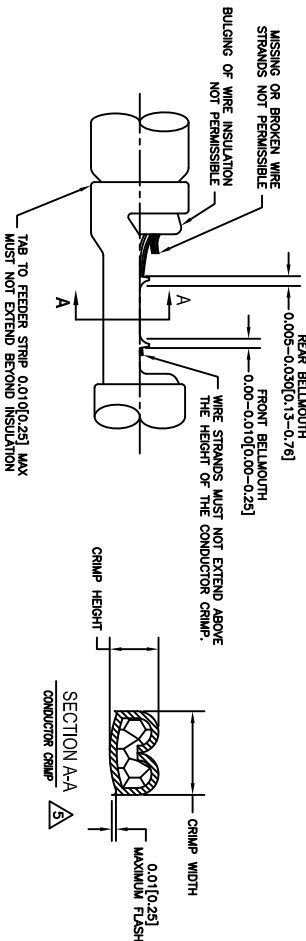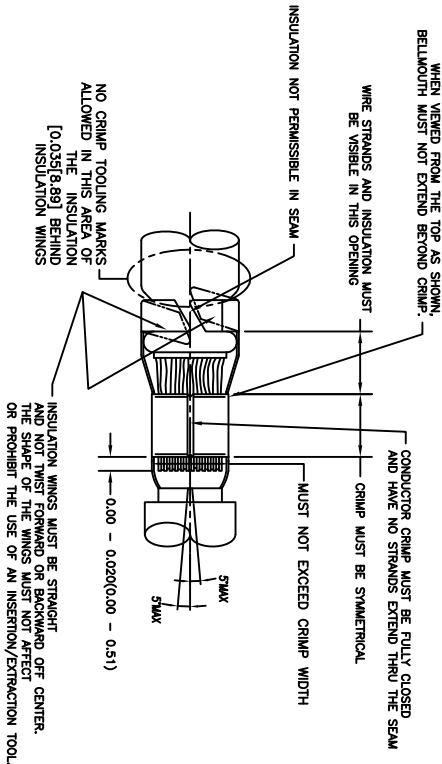


ALL REFERENCES TO DEUTSCH PRODUCTS OR SPECIFICATIONS ARE FOR COMPARISON PURPOSES ONLY, AND REFER TO DEUTSCH INDUSTRIAL PRODUCTS.

PART NUMBER		DESCRIPTION		ITEM
MATERIALS LIST				
QUANTITY				
UNLESS OTHERWISE SPECIFIED				
1) All dimensions are in inches.				
2) Pl. DEC 2000 to Provisions 31/4				
3) Pl. DEC 2000 to Provisions 31/4				
4) Reduction Standards Per:				
A) SAE J1128				
B) SAE J1128				
C) SAE J1128				
D) SAE J1128				
E) SAE J1128				
F) SAE J1128				
G) SAE J1128				
H) SAE J1128				
I) SAE J1128				
J) SAE J1128				
K) SAE J1128				
L) SAE J1128				
M) SAE J1128				
N) SAE J1128				
O) SAE J1128				
P) SAE J1128				
Q) SAE J1128				
R) SAE J1128				
S) SAE J1128				
T) SAE J1128				
U) SAE J1128				
V) SAE J1128				
W) SAE J1128				
X) SAE J1128				
Y) SAE J1128				
Z) SAE J1128				
AA) SAE J1128				
AB) SAE J1128				
AC) SAE J1128				
AD) SAE J1128				
AE) SAE J1128				
AF) SAE J1128				
AG) SAE J1128				
AH) SAE J1128				
AI) SAE J1128				
AJ) SAE J1128				
AK) SAE J1128				
AL) SAE J1128				
AM) SAE J1128				
AN) SAE J1128				
AO) SAE J1128				
AP) SAE J1128				
AQ) SAE J1128				
AR) SAE J1128				
AS) SAE J1128				
AT) SAE J1128				
AU) SAE J1128				
AV) SAE J1128				
AW) SAE J1128				
AX) SAE J1128				
AY) SAE J1128				
AZ) SAE J1128				
BA) SAE J1128				
BB) SAE J1128				
BC) SAE J1128				
BD) SAE J1128				
BE) SAE J1128				
BF) SAE J1128				
BG) SAE J1128				
BH) SAE J1128				
BI) SAE J1128				
BJ) SAE J1128				
BK) SAE J1128				
BL) SAE J1128				
BM) SAE J1128				
BN) SAE J1128				
BO) SAE J1128				
BP) SAE J1128				
BQ) SAE J1128				
BR) SAE J1128				
BS) SAE J1128				
BT) SAE J1128				
BU) SAE J1128				
BV) SAE J1128				
BW) SAE J1128				
BX) SAE J1128				
BY) SAE J1128				
BZ) SAE J1128				
CA) SAE J1128				
CB) SAE J1128				
CC) SAE J1128				
CD) SAE J1128				
CE) SAE J1128				
CF) SAE J1128				
CG) SAE J1128				
CH) SAE J1128				
CI) SAE J1128				
CJ) SAE J1128				
CK) SAE J1128				
CL) SAE J1128				
CM) SAE J1128				
CN) SAE J1128				
CO) SAE J1128				
CP) SAE J1128				
CQ) SAE J1128				
CR) SAE J1128				
CS) SAE J1128				
CT) SAE J1128				
CU) SAE J1128				
CV) SAE J1128				
CW) SAE J1128				
CX) SAE J1128				
CY) SAE J1128				
CZ) SAE J1128				
DA) SAE J1128				
DB) SAE J1128				
DC) SAE J1128				
DD) SAE J1128				
DE) SAE J1128				
DF) SAE J1128				
DG) SAE J1128				
DH) SAE J1128				
DI) SAE J1128				
DJ) SAE J1128				
DK) SAE J1128				
DL) SAE J1128				
DM) SAE J1128				
DN) SAE J1128				
DO) SAE J1128				
DP) SAE J1128				
DQ) SAE J1128				
DR) SAE J1128				
DS) SAE J1128				
DT) SAE J1128				
DU) SAE J1128				
DV) SAE J1128				
DW) SAE J1128				
DX) SAE J1128				
DY) SAE J1128				
DZ) SAE J1128				
EA) SAE J1128				
EB) SAE J1128				
EC) SAE J1128				
ED) SAE J1128				
EE) SAE J1128				
EF) SAE J1128				
EG) SAE J1128				
EH) SAE J1128				
EI) SAE J1128				
EJ) SAE J1128				
EK) SAE J1128				
EL) SAE J1128				
EM) SAE J1128				
EN) SAE J1128				
EO) SAE J1128				
EP) SAE J1128				
EQ) SAE J1128				
ER) SAE J1128				
ES) SAE J1128				
ET) SAE J1128				
EU) SAE J1128				
EV) SAE J1128				
EW) SAE J1128				
EX) SAE J1128				
EY) SAE J1128				
EZ) SAE J1128				
FA) SAE J1128				
FB) SAE J1128				
FC) SAE J1128				
FD) SAE J1128				
FE) SAE J1128				
FF) SAE J1128				
FG) SAE J1128				
FH) SAE J1128				
FI) SAE J1128				
FJ) SAE J1128				
FK) SAE J1128				
FL) SAE J1128				
FM) SAE J1128				
FN) SAE J1128				
FO) SAE J1128				
FP) SAE J1128				
FQ) SAE J1128				
FR) SAE J1128				
FS) SAE J1128				
FT) SAE J1128				
FU) SAE J1128				
FV) SAE J1128				
FW) SAE J1128				
FX) SAE J1128				
FY) SAE J1128				
FZ) SAE J1128				
GA) SAE J1128				
GB) SAE J1128				
GC) SAE J1128				
GD) SAE J1128				
GE) SAE J1128				
GF) SAE J1128				
GG) SAE J1128				
GH) SAE J1128				
GI) SAE J1128				
GJ) SAE J1128				
GK) SAE J1128				
GL) SAE J1128				
GM) SAE J1128				
GN) SAE J1128				
GO) SAE J1128				
GP) SAE J1128				
GQ) SAE J1128				
GR) SAE J1128				
GS) SAE J1128				
GT) SAE J1128				
GU) SAE J1128				
GV) SAE J1128				
GW) SAE J1128				
GX) SAE J1128				
GY) SAE J1128				
GZ) SAE J1128				
HA) SAE J1128				
HB) SAE J1128				
HC) SAE J1128				
HD) SAE J1128				
HE) SAE J1128				
HF) SAE J1128				
HG) SAE J1128				
HH) SAE J1128				
HI) SAE J1128				
HJ) SAE J1128				
HK) SAE J1128				
HL) SAE J1128				
HM) SAE J1128				
HN) SAE J1128				
HO) SAE J1128				
HP) SAE J1128				
HQ) SAE J1128				
HR) SAE J1128				
HS) SAE J1128				
HT) SAE J1128				
HU) SAE J1128				
HV) SAE J1128				
HW) SAE J1128				
HX) SAE J1128				
HY) SAE J1128				
HZ) SAE J1128				
IA) SAE J1128				
IB) SAE J1128				
IC) SAE J1128				
ID) SAE J1128				
IE) SAE J1128				
IF) SAE J1128				
IG) SAE J1128				
IH) SAE J1128				
II) SAE J1128				
IJ) SAE J1128				
IK) SAE J1128				
IL) SAE J1128				
IM) SAE J1128				
IN) SAE J1128				
IO) SAE J1128				
IP) SAE J1128				
IQ) SAE J1128				
IR) SAE J1128				
IS) SAE J1128				
IT) SAE J1128				
IU) SAE J1128				
IV) SAE J1128				
IW) SAE J1128				
IX) SAE J1128				
IY) SAE J1128				
IZ) SAE J1128				
JA) SAE J1128				
JB) SAE J1128				
JC) SAE J1128				
JD) SAE J1128				
JE) SAE J1128				
JF) SAE J1128				
JG) SAE J1128				
JH) SAE J1128				
JI) SAE J1128				
JJ) SAE J1128				
JK) SAE J1128				
JL) SAE J1128				
JM) SAE J1128				
JN) SAE J1128				
JO) SAE J1128				
JP) SAE J1128				
JQ) SAE J1128				
JR) SAE J1128				
JS) SAE J1128				
JT) SAE J1128				
JU) SAE J1128				
JV) SAE J1128				
JW) SAE J1128				
JX) SAE J1128				
JY) SAE J1128				
JZ) SAE J1128				
KA) SAE J1128				
KB) SAE J1128				
KC) SAE J1128				
KD) SAE J1128				
KE) SAE J1128				
KF) SAE J1128				
KG) SAE J1128				
KH) SAE J1128				
KI) SAE J1128				
KJ) SAE J1128				
KK) SAE J1128				
KL) SAE J1128				
KM) SAE J1128				
KN) SAE J1128				
KO) SAE J1128				
KP) SAE J1128				
KQ) SAE J1128				
KR) SAE J1128				
KS) SAE J1128				
KT) SAE J1128				
KU) SAE J1128				
KV) SAE J1128				
KW) SAE J1128				
KX) SAE J1128				
KY) SAE J1128				
KZ) SAE J1128				
LA) SAE J1128				
LB) SAE J1128				
LC) SAE J1128				
LD) SAE J1128				
LE) SAE J1128				
LF) SAE J1128				
LG) SAE J1128				
LH) SAE J1128				
LI) SAE J1128				
LJ) SAE J1128				
LK) SAE J1128				
LL) SAE J1128				
LM) SAE J1128				
LN) SAE J1128				
LO) SAE J1128				
LP) SAE J1128				
LQ) SAE J1128				
LR) SAE J1128				
LS) SAE J1128				
LT) SAE J1128				
LU) SAE J1128				
LV) SAE J1128				
LW) SAE J1128				
LX) SAE J1128				
LY) SAE J1128				
LZ) SAE J1128				
MA) SAE J1128				
MB) SAE J1128				
MC) SAE J1128				
MD) SAE J1128				
ME) SAE J1128				
MF) SAE J1128				
MG) SAE J1128				
MH) SAE J1128				
MI) SAE J1128				
MJ) SAE J1128				
MK) SAE J1128				
ML) SAE J1128				
MM) SAE J1128				
MN) SAE J1128				
MO) SAE J1128				
MP) SAE J1128				
MQ) SAE J1128				
MR) SAE J1128				
MS) SAE J1128				
MT) SAE J1128				
MU) SAE J1128				
MV) SAE J1128				
MW) SAE J1128				
MX) SAE J1128				
MY) SAE J1128				
MZ) SAE J1128				
NA) SAE J1128				
NB) SAE J1128				
NC) SAE J1128				
ND) SAE J1128				
NE) SAE J1128				
NF) SAE J1128				
NG) SAE J1128				
NH) SAE J1128				
NI) SAE J1128				
NJ) SAE J1128				
NK) SAE J1128				
NL) SAE J1128				
NM) SAE J1128				
NN) SAE J1128				
NO) SAE J1128				
NP) SAE J1128				
NQ) SAE J1128				
NR) SAE J1128				
NS) SAE J1128				
NT) SAE J1128				
NU) SAE J1128				
NV) SAE J1128				
NW) SAE J1128				
NX) SAE J1128				
NY) SAE J1128				
NZ) SAE J1128				
OA) SAE J1128				
OB) SAE J1128				
OC) SAE J1128				
OD) SAE J1128				
OE) SAE J1128				
OF) SAE J1128				
OG) SAE J1128				
OH) SAE J1128				
OI) SAE J1128				
OJ) SAE J1128				
OK) SAE J1128				
OL) SAE J1128				
OM) SAE J1128				
ON) SAE J1128				
OO) SAE J1128				
OP) SAE J1128				
OQ) SAE J1128				
OR) SAE J1128				
OS) SAE J1128				
OT) SAE J1128				
OU) SAE J1128				
OV) SAE J1128				
OW) SAE J1128				
OX) SAE J1128				
OY) SAE J1128				
OZ) SAE J1128				
PA) SAE J1128				
PB) SAE J1128				
PC) SAE J1128				
PD) SAE J1128				
PE) SAE J1128				
PF) SAE J1128				
PG) SAE J1128				
PH) SAE J1128				
PI) SAE J1128				
PJ) SAE J1128				
PK) SAE J1128				
PL) SAE J1128				
PM) SAE J1128				
PN) SAE J1128				
PO) SAE J1128				
PP) SAE J1128				
PQ) SAE J1128				
PR) SAE J1128				
PS) SAE J1128				
PT) SAE J1128				
PU) SAE J1128				
PV) SAE J1128				
PW) SAE J1128				
PX) SAE J1128				
PY) SAE J1128				
PZ) SAE J1128				
QA) SAE J1128				
QB) SAE J1128				
QC) SAE J1128				
QD) SAE J1128				
QE) SAE J1128				
QF) SAE J1128				
QG) SAE J1128				
QH) SAE J1128				
QI) SAE J1128				
QJ) SAE J1128				
QK) SAE J1128				
QL) SAE J1128				
QM) SAE J1128				
QN) SAE J1128				
QO) SAE J1128				
QP) SAE J1128				
QQ) SAE J1128				
QR) SAE J1128				
QS) SAE J1128				
QT) SAE J1128				
QU) SAE J1128				
QV) SAE J1128				
QW) SAE J1128				
QX) SAE J1128				
QY) SAE J1128				
QZ) SAE J1128				
RA) SAE J1128				
RB) SAE J1128				
RC) SAE J1128				
RD) SAE J1128				
RE) SAE J1128				
RF) SAE J1128				
RG) SAE J1128				
RH) SAE J1128				
RI) SAE J1128				
RJ) SAE J1128				
RK) SAE J1128				
RL) SAE J1128				
RM) SAE J1128				
RN) SAE J1128				
RO) SAE J1128				
RP) SAE J1128				
RQ) SAE J1128				
RR) SAE J1128				
RS) SAE J1128				
RT) SAE J1128				
RU) SAE J1128				
RV) SAE J1128				
RW) SAE J1128				
RX) SAE J1128				
RY) SAE J1128				
RZ) SAE J1128				
SA) SAE J1128				
SB) SAE J1128				
SC) SAE J1128				
SD) SAE J1128				
SE) SAE J1128				
SF) SAE J1128				
SG) SAE J1128				
SH) SAE J1128				
SI) SAE J1128				
SJ) SAE J1128				
SK) SAE J1128				
SL) SAE J1128				
SM) SAE J1128				
SN) SAE J1128				
SO) SAE J1128				
SP) SAE J1128				
SQ) SAE J1128				
SR) SAE J1128				
SS) SAE J1128				
ST) SAE J1128				
SU) SAE J1128				
SV) SAE J1128				
SW) SAE J1128				
SX) SAE J1128				
SY) SAE J1128				
SZ) SAE J1128				
TA) SAE J1128				
TB) SAE J1128				
TC) SAE J1128				
TD) SAE J1128				
TE) SAE J1128				
TF) SAE J1128				
TG) SAE J1128				
TH) SAE J1128				
TI) SAE J1128				
TJ) SAE J1128				
TK) SAE J1128				
TL) SAE J1128				
TM) SAE J1128				
TN) SAE J1128				
TO) SAE J1128				
TP) SAE J1128				
TQ) SAE J1128				
TR) SAE J1128				
TS) SAE J1128				
TT) SAE J1128				
TU) SAE J1128				
TV) SAE J1128				
TW) SAE J1128				
TX) SAE J1128				
TY) SAE J1128				
TZ) SAE J1128				
UA) SAE J1128				
UB) SAE J1128				
UC) SAE J1128				
UD) SAE J1128				
UE) SAE J1128				
UF) SAE J1128				
UG) SAE J1128				
UH) SAE J1128				
UI) SAE J1128				
UJ) SAE J1128				
UK) SAE J1128				
UL) SAE J1128				
UM) SAE J1128				
UN) SAE J1128				
UO) SAE J1128				
UP) SAE J1128				
UQ) SAE J1128				
UR) SAE J1128				
US) SAE J1128				
UT) SAE J1128				
UU) SAE J1128				
UV) SAE J1128				
UW) SAE J1128				
UX) SAE J1128				
UY) SAE J1128				
UZ) SAE J1128				
VA) SAE J1128				
VB) SAE J1128				
VC) SAE J1128				
VD) SAE J1128				
VE) SAE J1128				
VF) SAE J1128				

REVISIONS				DATE	BY	APP
REV	ZONE	ECO	DESCRIPTION	6/12/09	B.D.B.	M.F.F.
A1	-	-	RELEASE NUMBER 016571			

CONTACT LOCATOR "TURRET"
THREE POSITION FOR SIZE
12, 16 & 20 MALE AND
FEMALE CONTACTS





"TURRET"
RELEASE LATCH

SELECTOR FOR
CRIMP SETTING

THREADED HOLE FOR
ATTACHMENT OF
BENCH MOUNT FIXTURE


10.00 INCH
MAXIMUM



THREADED OPENING
FOR COMPRESSED
AIR FITTING

- NOTES:
1. THE CA-5E12 IS A COMPRESSED AIR OPERATED HAND CRIMPER FOR ELECTRICAL CONTACTS. IT IS ADJUSTABLE TO 3 CONTACT SIZES (12, 16 & 20) AND 8 INDENTER CRIMP POSITIONS FOR DIFFERENT WIRE SIZES (12AWG THRU 26 AWG).

2. 80-120 PSI COMPRESSED AIR.
3. WEIGHT: 3.1 LBS
4. SELECTING CONTACT SIZE: PRESS THE RELEASE LATCH ON SIDE OF THE CONTACT LOCATOR "TURRET". ROTATE TO THE DESIRED CONTACT SIZE. THE TOP OF THE "TURRET" IS EMBOSSED WITH THE CONTACT SIZES.
5. SELECTING WIRE SIZE: GRASP THE SELECTOR AND ROTATE TO THE DESIRED NUMBER.

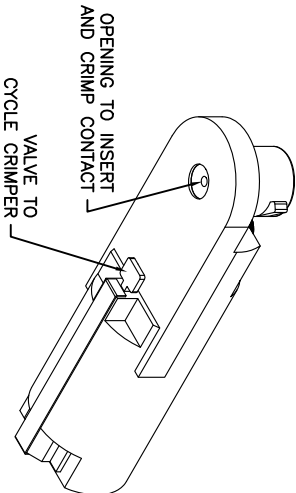


OPENING TO INSERT
AND CRIMP CONTACT

VALVE TO
CYCLE CRIMPER

GAGE PART NO.	A GO DIA.	B NO-GO DIA.	SELECTOR NUMBER
G125	.0390	.0440	4

GAGING INSTRUCTIONS

CAUTION!
DO NOT CRIMP GAGE!




GREEN "GO"

RED "NO-GO"


"GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "GO" GAGE END AS SHOWN. GAGE MUST PASS FREELY BETWEEN INDENTER TIPS.

"NO-GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "NO-GO" GAGE END AS SHOWN. THE "NO-GO" MAY PARTIALLY ENTER THE INDENTER OPENING, BUT MUST NOT PASS COMPLETELY THROUGH THE OPENING.



GREEN

SELECTOR NUMBER	A GO DIA.	B NO-GO DIA.
1	.0280	.0330
2	.0320	.0370
3	.0360	.0410
4	.0390	.0440
5	.0450	.0500
6	.0520	.0570
7	.0590	.0640
8	.0680	.0730




RED

INDENTER


CONTACT SIZE		SELECTOR NUMBER							
CONTACT SIZE	LOCATOR "TURRET" POSITION	26	24	22	20	18	16	14	12
20-20	RED	1	2	3	4				
16-22	BLUE	4	5	6					
16-20	BLUE	1	2	3	4				
16-16	BLUE				4	5	6		
12-16	YELLOW				4	5	6		
12-12	YELLOW						7	8	

QUANTITY		PART NUMBER		DESCRIPTION		ITEM
MATERIALS LIST						
UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		
1) All dimensions are in inches.		DESIGN		6/2/209		
2) Tolerances are as indicated.		BENDMAN		6/2/209		
3) All dimensions are to be maintained.		CHECKED:		RBOC 6/3/209		
4) All dimensions are to be maintained.		DRAWN BY:		BENDMAN		
5) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
6) All dimensions are to be maintained.		GUSTOMER:				
7) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
8) All dimensions are to be maintained.		GUSTOMER:				
9) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
10) All dimensions are to be maintained.		GUSTOMER:				
11) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
12) All dimensions are to be maintained.		GUSTOMER:				
13) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
14) All dimensions are to be maintained.		GUSTOMER:				
15) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
16) All dimensions are to be maintained.		GUSTOMER:				
17) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
18) All dimensions are to be maintained.		GUSTOMER:				
19) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
20) All dimensions are to be maintained.		GUSTOMER:				
21) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
22) All dimensions are to be maintained.		GUSTOMER:				
23) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
24) All dimensions are to be maintained.		GUSTOMER:				
25) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
26) All dimensions are to be maintained.		GUSTOMER:				
27) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
28) All dimensions are to be maintained.		GUSTOMER:				
29) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
30) All dimensions are to be maintained.		GUSTOMER:				
31) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
32) All dimensions are to be maintained.		GUSTOMER:				
33) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
34) All dimensions are to be maintained.		GUSTOMER:				
35) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
36) All dimensions are to be maintained.		GUSTOMER:				
37) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
38) All dimensions are to be maintained.		GUSTOMER:				
39) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
40) All dimensions are to be maintained.		GUSTOMER:				
41) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
42) All dimensions are to be maintained.		GUSTOMER:				
43) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
44) All dimensions are to be maintained.		GUSTOMER:				
45) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
46) All dimensions are to be maintained.		GUSTOMER:				
47) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
48) All dimensions are to be maintained.		GUSTOMER:				
49) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
50) All dimensions are to be maintained.		GUSTOMER:				
51) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
52) All dimensions are to be maintained.		GUSTOMER:				
53) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
54) All dimensions are to be maintained.		GUSTOMER:				
55) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
56) All dimensions are to be maintained.		GUSTOMER:				
57) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
58) All dimensions are to be maintained.		GUSTOMER:				
59) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
60) All dimensions are to be maintained.		GUSTOMER:				
61) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
62) All dimensions are to be maintained.		GUSTOMER:				
63) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
64) All dimensions are to be maintained.		GUSTOMER:				
65) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
66) All dimensions are to be maintained.		GUSTOMER:				
67) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
68) All dimensions are to be maintained.		GUSTOMER:				
69) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
70) All dimensions are to be maintained.		GUSTOMER:				
71) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
72) All dimensions are to be maintained.		GUSTOMER:				
73) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
74) All dimensions are to be maintained.		GUSTOMER:				
75) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
76) All dimensions are to be maintained.		GUSTOMER:				
77) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
78) All dimensions are to be maintained.		GUSTOMER:				
79) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
80) All dimensions are to be maintained.		GUSTOMER:				
81) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
82) All dimensions are to be maintained.		GUSTOMER:				
83) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
84) All dimensions are to be maintained.		GUSTOMER:				
85) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
86) All dimensions are to be maintained.		GUSTOMER:				
87) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
88) All dimensions are to be maintained.		GUSTOMER:				
89) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
90) All dimensions are to be maintained.		GUSTOMER:				
91) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
92) All dimensions are to be maintained.		GUSTOMER:				
93) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
94) All dimensions are to be maintained.		GUSTOMER:				
95) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
96) All dimensions are to be maintained.		GUSTOMER:				
97) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
98) All dimensions are to be maintained.		GUSTOMER:				
99) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
100) All dimensions are to be maintained.		GUSTOMER:				
101) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
102) All dimensions are to be maintained.		GUSTOMER:				
103) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
104) All dimensions are to be maintained.		GUSTOMER:				
105) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
106) All dimensions are to be maintained.		GUSTOMER:				
107) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
108) All dimensions are to be maintained.		GUSTOMER:				
109) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
110) All dimensions are to be maintained.		GUSTOMER:				
111) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
112) All dimensions are to be maintained.		GUSTOMER:				
113) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
114) All dimensions are to be maintained.		GUSTOMER:				
115) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
116) All dimensions are to be maintained.		GUSTOMER:				
117) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
118) All dimensions are to be maintained.		GUSTOMER:				
119) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
120) All dimensions are to be maintained.		GUSTOMER:				
121) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
122) All dimensions are to be maintained.		GUSTOMER:				
123) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		
124) All dimensions are to be maintained.		GUSTOMER:				
125) All dimensions are to be maintained.		APPROVAL:		BENDMAN 6/3/209		

REVISIONS			
REV	ZONE	ECO	DESCRIPTION
1	-	-	RELEASE NUMBER 016571
DATE	6/12/09	BY	M.S.F.

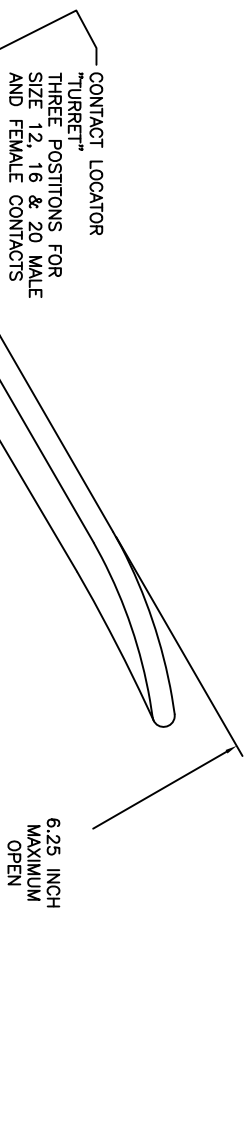

GAGE PART NO.	A GO DIA.	B NO-GO DIA.	SELECTOR NUMBER
G125	.0390	.0440	4

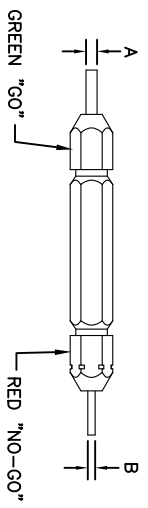


"GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "GO" GAGE END AS SHOWN. GAGE MUST PASS FREELY BETWEEN INDENTER TIPS.

"NO-GO" GAGING: OPERATE TOOL TO FULLY CLOSED POSITION. INSERT "NO-GO" GAGE END AS SHOWN. THE "NO-GO" MAY PARTIALLY ENTER THE INDENTER OPENING, BUT MUST NOT PASS COMPLETELY THROUGH THE OPENING.

GAGING INSTRUCTIONS

CAUTION!
DO NOT CRIMP GAGE!

SELECTOR NUMBER	A GO DIA.	B NO-GO DIA.
1	.0280	.0330
2	.0320	.0370
3	.0360	.0410
4	.0390	.0440
5	.0450	.0500
6	.0520	.0570
7	.0590	.0640
8	.0680	.0730



CONTACT SIZE	LOCATOR "TURRET" POSITION COLOR	26 RED	24 BLUE	22 BLUE	20 BLUE	18 BLUE	16 BLUE	14 BLUE	12 BLUE
20-20	RED	1	2	3	4				
16-22	BLUE	4	5	6					
16-20	BLUE	1	2	3	4				
16-16	BLUE				4	5	6		
12-16	YELLOW				4	5	6		
12-12	YELLOW					7	8		

- NOTES:
- THE CA-5D12 IS A HAND OPERATED CRIMPER FOR ELECTRICAL CONTACTS. IT IS ADJUSTABLE TO 3 CONTACT SIZES (12, 16 & 20) AND 8 INDENTER CRIMP POSITIONS FOR DIFFERENT WIRE SIZES (12AWG THRU 26 AWG).
 - WEIGHT: 1.64 LBS
 - SELECTING CONTACT SIZE: PRESS THE RELEASE LATCH ON SIDE OF THE CONTACT LOCATOR "TURRET". ROTATE TO THE DESIRED CONTACT SIZE. THE TOP OF THE "TURRET" IS EMBOSSED WITH THE CONTACT SIZES.
 - SELECTING WIRE SIZE: REMOVE THE LOCKING CLIP. GRASP THE SELECTOR AND ROTATE TO THE DESIRED NUMBER.

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
SIGNATURES DATE			
DRAWN: BERNIM 6/3/09			
CHECKED: FROCK 6/3/09			
ENGINEER: BERNIM			
APPROVAL: BERNIM 6/3/09			
CUSTOMER:			
THE USE OF THIS DOCUMENT IS SPECIFIC TO THE PROJECT AND NOT BE USED FOR ANY OTHER PROJECT. ANY REUSE OF THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF AMPHENOL CORP. IS PROHIBITED. ALL DOCUMENTS RETAINED HEREON ARE CONFIDENTIAL AND NOT BE RELEASED TO THE PUBLIC.			
PROCESS SPECIFICATIONS:			
N/A			
NEXT ASSY:			
SCALE: NONE			
SIZE: 1/8" X 1/4" X 1/8"			
C 10K44			
S2-15219			
SHEET 1 OF 1			

SINE Systems Corporation
A Subsidiary of Amphenol Corporation
44724 Moley Drive
Canton Township, MI 48036

INSTRUCTIONS FOR CA-5D12 CRIMPER, HAND, MACHINED CONTACTS


REVISIONS				
REV	ZONE	ECO	DESCRIPTION	
1			RELEASE NUMBER 016571	
DATE	BY	APPR		
6/12/09	B.D.B.	M.R.F.		

CONTACT P/N	SIZE TYPE	WIRE SIZE	REF. ONLY TENSILE LBS[N]
AT60-202-16XX	16PIN	1.5mm ² 16AWG	35[156]
AT62-201-16XX	16SOC	1.0mm ² 18AWG	25[111]
A		0.75mm ² 20AWG	20[89]
		0.50mm ²	

RECOMMENDED STRIP LENGTH	
CONTACT SIZE	STRIP LENGTH INCH[MM]
16	0.250-0.312[6.35-7.92]


CRIMP TOOLING					
CONTACT SIZE	CRIMP TOOL PART NUMBER	CONTACT LOCATOR "TURRET" POSITION	WIRE SELECTOR NUMBER	GO GAGE INCH[MM]	"NOGO" GAGE INCH[MM]
16	CA-5D12 CA-5E12	BLUE	6	0.052[1.32]	0.057[1.45]
16	CA-5D12 CA-5E12	BLUE	4	0.039[.991]	0.044[1.12]

- NOTES: UNLESS OTHERWISE SPECIFIED
- MINIMUM +/-0.0005 [0.013] TOLERANCE STEEL GAGE PINS. DO NOT CRIMP GAGE PINS. CLOSE DIE, THEN USE GAGE PINS.
 - WHEN XX=31, CONTACT PLATING IS GOLD WHEN XX=141, CONTACT PLATING IS NICKEL
 - PULL RATE OF 1.0 IN [25.4] PER MINUTE. ACTUAL STRENGTH DEPENDS ON WIRE SIZE.
 - FOR CONTACT PERFORMANCE, MATERIAL SPECIFICATIONS AND APPLICATION DETAILS, SEE DRAWING S2-15217.
 - CONDUCTOR STRANDS MUST BE VISIBLE THRU THE INSPECTION HOLE PRIOR TO CRIMP.
 - PROPER CRIMP TOOLING WILL PRODUCE A CRIMP CENTERED BETWEEN THE INSPECTION HOLE AND CRIMP BARREL END.
 - WIRE SIZES PER SAE J1128 AND J1560 [DIN 72551-6] REFERENCE INSTRUCTION MANUALS S2-15219 AND S2-15220 FOR CA-5D12 AND CA-5E12 HAND AND PNEUMATIC CRIMPER.
 - THE CRIMP HEIGHT DIMENSION AFTER CRIMPING MAY VARY FROM THE VALUES LISTED FOR THE "GO-NOGO" PINS.



SECTION A-A
CRIMP CROSS-SECTION

0.100[2.54] MAX

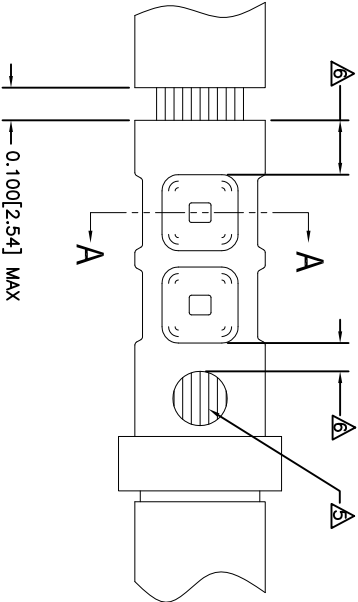

PART NUMBER		DESCRIPTION		ITEM
MATERIALS LIST				
QUANTITY		UNLESS OTHERWISE SPECIFIED		
1) All dimensions are in inches.				
2) Dimensions in parentheses are in millimeters.				
3) Pl. DEC 30.00 of Revision 31/04				
4) Pl. DEC 30.00 of Revision 31/04				
5) Revision Standards Per: ASME Y14.5-2002				
6) Issue: SD-20020				
DRAWING SPECIFICATIONS		APPROVAL: BERNUM 6/3/09		
CUSTOMER:		SIGNATURES DATE		
M/A		BERNUM 6/3/09		
PROCESS SPECIFICATIONS:		CHECKED: FORGE 6/3/09		
N/A		DRAWN: BERNUM		
N/A		APPROVAL: BERNUM 6/3/09		
THE USE OF THIS DOCUMENT IS SPECIFICALLY FOR THE PART SHOWN HEREON AND THE DIMENSIONS ARE SUBJECT TO MODIFICATION WITHOUT NOTICE. ALL				

REVISIONS				
REV	ZONE	ECO	DESCRIPTION	DATE
A1	-	-	RELEASE NUMBER 016371	6/12/09
BY	APP			
B.D.B.	M.R.F.			

4

3

2

1

SOLID CONTACT SIZE	SOLID CONTACT PART NUMBERS		WIRE SIZE AWG(mm ²)	RECOMMENDED STRIP LENGTH INCH (mm)	MIN CONTACT RETENTION LBS (N)	REF CRIMP RETENTION LBS (N)	MAX RATED AMPS@125°C CONTINUOUS
	PN	SOCKET					
16	AT60-202-16**	AT62-201-16**	16-20 [1.5-0.5]	0.25-0.31 [6.35-7.92]	25 [111]	35-20 [156-89]	13

S&F CONTACT SIZE	STAMPED CONTACT PART NUMBERS		WIRE SIZE AWG (mm ²)	WIRE INSULATION O.D. RANGE	RECOMMENDED STRIP LENGTH INCH (mm)	MIN CONTACT RETENTION LBS (N)	REF CRIMP RETENTION LBS (N)	MAX RATED AMPS@125°C CONTINUOUS
	PN	SOCKET						
16	AT60-14-01**	AT62-14-01**	14-16 [2.0-1.0]	.100 - .150 [2.54 - 3.81]	0.150-0.200 [3.81-5.08]	25 [111]	25 [111]	13
16	AT60-16-01**	AT62-16-01**	16-18 [1.0-0.75]	.075 - .100 [1.90 - 2.54]	0.150-0.200 [3.81-5.08]	25 [111]	25 [111]	13
16	AT60-16-06**	AT62-16-06**	18-20 [0.75-0.50]	.065 - .095 [1.40 - 2.41]	0.150-0.200 [3.81-5.08]	25 [111]	25-15 [111+67]	13

△

△

NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE INCHES(MM).
 2. ALL FORCES ARE IN LBS(POUNDS) AND "N" (NEWTONS).
- △ CONTACT RETENTION TEST PULL RATE SHALL BE 1.0 INCH(25.4) PER MINUTE MAXIMUM. WIRE SIZE WILL AFFECT THE TRUE STRENGTH OF THE CRIMP.
- △ WIRE SIZES AND INSULATION RANGES ARE FOR REFERENCE ONLY. THE ACTUAL INSULATION RANGE DEPENDS ON CONNECTOR GROMMET SEALING SIZE.

SEE SPECIFICATIONS LISTED BELOW FOR INDIVIDUAL CRIMP INFORMATION:

"SOLID" CONTACTS	SIZE	"STAMPED" CONTACTS	SIZE
S2-15218	16	S2-15222	16
		S2-15221	16/20

- △ MAXIMUM RATED CURRENT IN CHART DEPENDS ON CONTACT SIZE. ACTUAL RATED CURRENT DEPENDS ON WIRE SIZE.
- △ CONTACT FACTORY FOR ALL AVAILABLE PLATING ON SPECIFIC CONTACTS.
- △ AMPHENOL SINE PERFORMANCE SPECIFICATIONS REQUIRE THE USE OF AMPHENOL SINE APPROVED TOOLING.

CONTACT RESISTANCE STRENGTH (LESS DROP THROUGH WIRE)			
WIRE AWG	TEST CURRENT	MILLIVOLT DROP SOLID	MILLIVOLT DROP S&F
14	18	60	100
16	13	60	100
18	10	60	100
20	7.5	60	100

MATERIAL SPECIFICATION
AND PLATING ** CODES

PN: COPPER ALLOY
SOCKET: COPPER ALLOY WITH STAINLESS STEEL SLEEVE

SOLID MACHINED CONTACT PLATING OPTIONS: △
31= GOLD*
14= NICKEL

STAMPED CONTACT PLATING OPTIONS: △
22= NICKEL
44= GOLD*
88= SELECTIVE GOLD*

GOLD* = PLATING IS AVAILABLE (RECOMMENDED) FOR ONLY (<5V) CIRCUIT APPLICATIONS
MATERIALS AND PLATINGS ARE ROHS COMPLIANT

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED			
1) All dimensions are in inches.			
2) Plating is standard on all contacts.			
3) Plating is standard on all sockets.			
4) Plating is standard on all pins.			
5) Plating is standard on all pins.			
6) Plating is standard on all pins.			
7) Plating is standard on all pins.			
8) Plating is standard on all pins.			
9) Plating is standard on all pins.			
10) Plating is standard on all pins.			
11) Plating is standard on all pins.			
12) Plating is standard on all pins.			
13) Plating is standard on all pins.			
14) Plating is standard on all pins.			
15) Plating is standard on all pins.			
16) Plating is standard on all pins.			
17) Plating is standard on all pins.			
18) Plating is standard on all pins.			
19) Plating is standard on all pins.			
20) Plating is standard on all pins.			
21) Plating is standard on all pins.			
22) Plating is standard on all pins.			
23) Plating is standard on all pins.			
24) Plating is standard on all pins.			
25) Plating is standard on all pins.			
26) Plating is standard on all pins.			
27) Plating is standard on all pins.			
28) Plating is standard on all pins.			
29) Plating is standard on all pins.			
30) Plating is standard on all pins.			
31) Plating is standard on all pins.			
32) Plating is standard on all pins.			
33) Plating is standard on all pins.			
34) Plating is standard on all pins.			
35) Plating is standard on all pins.			
36) Plating is standard on all pins.			
37) Plating is standard on all pins.			
38) Plating is standard on all pins.			
39) Plating is standard on all pins.			
40) Plating is standard on all pins.			
41) Plating is standard on all pins.			
42) Plating is standard on all pins.			
43) Plating is standard on all pins.			
44) Plating is standard on all pins.			
45) Plating is standard on all pins.			
46) Plating is standard on all pins.			
47) Plating is standard on all pins.			
48) Plating is standard on all pins.			
49) Plating is standard on all pins.			
50) Plating is standard on all pins.			
51) Plating is standard on all pins.			
52) Plating is standard on all pins.			
53) Plating is standard on all pins.			
54) Plating is standard on all pins.			
55) Plating is standard on all pins.			
56) Plating is standard on all pins.			
57) Plating is standard on all pins.			
58) Plating is standard on all pins.			
59) Plating is standard on all pins.			
60) Plating is standard on all pins.			
61) Plating is standard on all pins.			
62) Plating is standard on all pins.			
63) Plating is standard on all pins.			
64) Plating is standard on all pins.			
65) Plating is standard on all pins.			
66) Plating is standard on all pins.			
67) Plating is standard on all pins.			
68) Plating is standard on all pins.			
69) Plating is standard on all pins.			
70) Plating is standard on all pins.			
71) Plating is standard on all pins.			
72) Plating is standard on all pins.			
73) Plating is standard on all pins.			
74) Plating is standard on all pins.			
75) Plating is standard on all pins.			
76) Plating is standard on all pins.			
77) Plating is standard on all pins.			
78) Plating is standard on all pins.			
79) Plating is standard on all pins.			
80) Plating is standard on all pins.			
81) Plating is standard on all pins.			
82) Plating is standard on all pins.			
83) Plating is standard on all pins.			
84) Plating is standard on all pins.			
85) Plating is standard on all pins.			
86) Plating is standard on all pins.			
87) Plating is standard on all pins.			
88) Plating is standard on all pins.			
89) Plating is standard on all pins.			
90) Plating is standard on all pins.			
91) Plating is standard on all pins.			
92) Plating is standard on all pins.			
93) Plating is standard on all pins.			
94) Plating is standard on all pins.			
95) Plating is standard on all pins.			
96) Plating is standard on all pins.			
97) Plating is standard on all pins.			
98) Plating is standard on all pins.			
99) Plating is standard on all pins.			
100) Plating is standard on all pins.			

4

3

2

1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru