


# Display for Digital Signals Types FK3C3, FK4C3

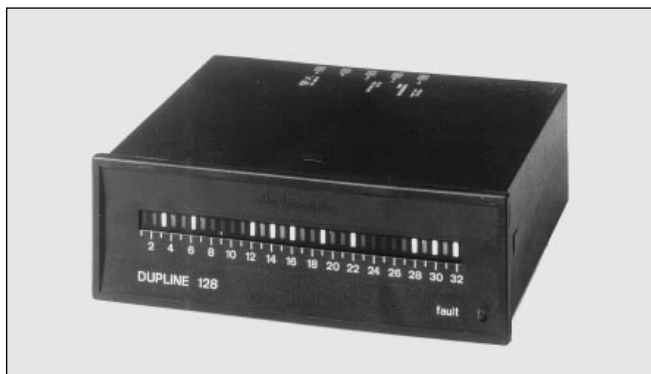

- 8-, 16- or 32-channel status indicator
- 8-, 16- or 32-dot LED display
- NPN transistor output for loss of Dupline® carrier
- Horizontal or vertical panel mounting, DIN 43700
- AC/DC power supply

## Product Description

Dupline® display for panel mounting. Status indication of 8, 16 or 32 channels in 8-, 16- or 32-segment single-point LED representation. Display function normal or

inverted for fast locating of deviations from normal operation, e.g. missing start-up conditions, open doors and windows, machine fault annunciation etc.

## Ordering Key

**FK3C 3508 024**

Type: Dupline®  
Display type  
Housing  
Type no.  
Supply

## Type Selection

| Supply                       | Ordering no.<br>8 channels<br>8-dot LED         | Ordering no<br>16 channels<br>16-dot LED        | Ordering no.<br>32 channels<br>32-dot LED       |
|------------------------------|-------------------------------------------------|-------------------------------------------------|-------------------------------------------------|
| 24 VAC<br>120 VAC<br>220 VAC | FK3C 3508 024<br>FK3C 3508 120<br>FK3C 3508 220 | FK3C 3616 024<br>FK3C 3616 120<br>FK3C 3616 220 | FK4C 3732 024<br>FK4C 3732 120<br>FK4C 3732 220 |
| 12 VDC                       | *                                               | *                                               | *                                               |
| Code module                  | FMK A to FMK P                                  | FMK A-B to O-P                                  | FMK A-D to M-P                                  |

\* All AC-types may be supplied with 12 VDC at pins 2 & 3

## Display/Output Specifications

|                       | F.3C 3508 ...<br>( 8 channels) | F.3C 3616 ...<br>(16 channels) | F.4C 3732 ...<br>(32 channels) |
|-----------------------|--------------------------------|--------------------------------|--------------------------------|
| <b>Display</b>        |                                |                                |                                |
| Display format        | Channel status                 | Channel status                 | Channel status                 |
| Display range         | 8 dots                         | 16 dots                        | 32 dots                        |
| Display type          | LED                            | LED                            | LED                            |
| Size of dots          | 5 x 5 mm                       | 6 x 3 mm                       | 5 x 2 mm                       |
| Display colour        | Red                            | Red                            | Red                            |
| Display test          | None                           | None                           | None                           |
| Transmission protocol | Binary                         | Binary                         | Binary                         |

## Display/Output Specifications (cont.)

|                               | F.3C 3508 ...<br>( 8 channels) | F.3C 3616 ...<br>(16 channels) | F.4C 3732 ...<br>(32 channels) |
|-------------------------------|--------------------------------|--------------------------------|--------------------------------|
| <b>Output</b>                 | 1 NPN transistor               | 1 NPN transistor               | 1 NPN transistor               |
| Output voltage range $V_{BB}$ | 4 to 35 VDC (or $V_{DD}$ in)   | 4 to 35 VDC (or $V_{DD}$ in)   | 4 to 35 VDC (or $V_{DD}$ in)   |
| Reverse-polarity protection   | Yes                            | Yes                            | Yes                            |
| Current per output            | ≤ 100 mA                       | ≤ 100 mA                       | ≤ 100 mA                       |
| Short-circuit protection      | None                           | None                           | None                           |
| Built-in protective diodes    | None                           | None                           | None                           |
| Off-state leakage current     | ≤ 100 $\mu$ A                  | ≤ 100 $\mu$ A                  | ≤ 100 $\mu$ A                  |
| Output voltage drop           | ≤ 1.5 V                        | ≤ 1.5 V                        | ≤ 1.5 V                        |
| Cable length                  | ≤ 3 m                          | ≤ 3 m                          | ≤ 3 m                          |
| Dielectric voltage            |                                |                                |                                |
| Output - Dupline®             | None                           | None                           | None                           |
| Output connection             | 2.8 mm faston                  | 2.8 mm faston                  | 2.8 mm faston                  |
| <b>Dupline® connection</b>    | 2.8 mm faston                  | 2.8 mm faston                  | 2.8 mm faston                  |
| <b>Response time</b>          | < 2 pulse trains               | < 2 pulse trains               | < 2 pulse trains               |

## Supply Specifications

|                                    |                                   |
|------------------------------------|-----------------------------------|
| <b>Power supply AC types</b>       | Overvoltage cat. III (IEC 60664)  |
| Operational voltage                |                                   |
| through pins A1 & A2               | 220 230 VAC +6%, -15% (IEC 60038) |
| 120                                | 120 VAC ± 10% (IEC60038)          |
| 024                                | 24 VAC ± 10%                      |
| Frequency                          | 45 to 65 Hz                       |
| Voltage interruption               | ≤ 40 ms                           |
| Rated operational power            | Typ. 6 VA                         |
| Rated impulse withstand            |                                   |
| voltage                            | 220 4 kV                          |
| 120                                | 2.5 kV                            |
| 024                                | 800 V                             |
| Dielectric voltage                 |                                   |
| Supply - Dupline®                  | ≥ 2 kVAC (rms)                    |
| Supply - Output                    | ≥ 2 kVAC (rms)                    |
| <b>Alternative DC supply</b>       | Overvoltage cat. III (IEC 60664)  |
| Operational voltage ( $V_{DD}$ in) |                                   |
| through pins 2 & 3                 | 12 VDC ± 10%                      |
| FK...                              | (ripple included)                 |
| Reverse polarity protection        | Yes                               |
| Rated operational current          |                                   |
| FK3C 3508                          | ≤ 125 mA                          |
| FK3C 3616                          | ≤ 250 mA                          |
| FK4C 3732                          | ≤ 500 mA                          |
| Inrush current                     | ≤ 1 A                             |
| Transient protection voltage       | 800 V                             |
| Dielectric voltage                 |                                   |
| Supply - Dupline®                  | None                              |
| Supply - Output                    | None                              |
| <b>Supply connection</b>           | 2.8 mm faston                     |

## General Specifications

|                                  |                                           |
|----------------------------------|-------------------------------------------|
| <b>Output-off delay</b>          |                                           |
| upon loss of Dupline® carrier    | ≤ 3 s, (LCD irregular display indication) |
| <b>Power ON delay</b>            | Undefined ≤ 1 s                           |
| <b>Indication for</b>            |                                           |
| Loss of Dupline® carrier         | LED, red                                  |
| <b>Environment</b>               |                                           |
| Degree of protection             | IP 40                                     |
| Pollution degree                 | 3 (IEC 60664)                             |
| Operating temperature            | 0° to +50°C (+32° to +122°F)              |
| Storage temperature              | -20° to +60°C (-4° to +140°F)             |
| <b>Humidity (non-condensing)</b> | 20 to 80%                                 |
| <b>Mechanical resistance</b>     |                                           |
| Shock                            | 15 G (11 ms)                              |
| Vibration                        | 2 G (6 to 55 Hz)                          |
| <b>Dimensions</b>                |                                           |
| <b>Material</b>                  |                                           |
| (see "Technical Information")    | F.3C: 96 x 48 - Housing                   |
|                                  | F.4C: 144 x 48 - Housing                  |
| <b>Weight</b>                    |                                           |
| F.3C 3508                        | 300 g                                     |
| F.3C 3616                        | 300 g                                     |
| F.4C 3732                        | 400 g                                     |
| <b>Approvals</b>                 | CSA, UL                                   |

## Mode of Operation

8-, 16- or 32-channel status indicator with LED dot display.

The displays are used to monitor 1, 2 or 4 Dupline® channel groups.

The output dots turn on when the respective channels of the selected channel groups

are activated by transmitters. Each dot represents the status of one Dupline® channel. The lowest figure on the front plate indicates the lowest channel of the first channel group and the highest figure indicates the highest channel of the last channel group selected by the code module.


In case of Dupline® carrier loss the fault LED and the output (pins 2 & 5) turn on. Reaction time typically 1 s.

### Note:

- Upon loss of Dupline® carrier the channel dots of an LED display turn off.


- If DC-supplied displays are used the length of the supply bus must not exceed 3 m in order to avoid disturbances unbalancing the Dupline®.

## Operation Diagram

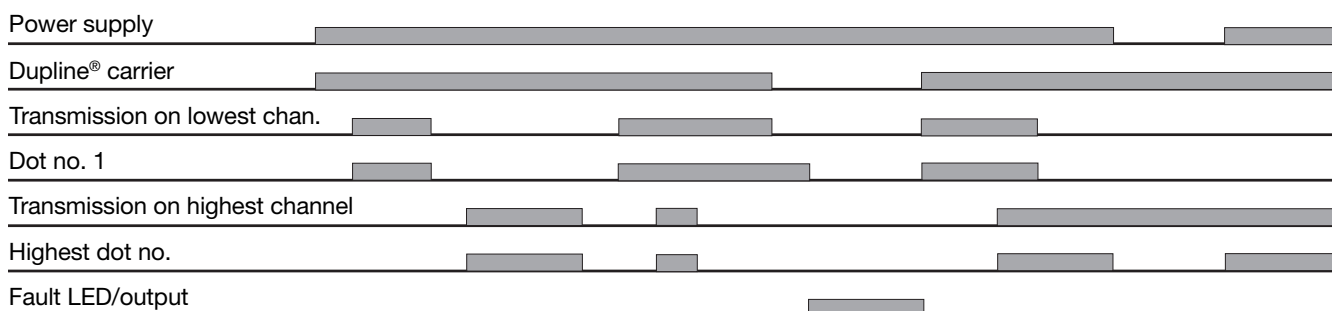


## Wiring Diagrams

### AC supply



S: signal wire

### DC supply



S: signal wire

## Additional Information

Scope of supply:

- 1 x Display F.C...
- 1 x Front plate for horizontal mounting
- 1 x Front plate for vertical mounting

## Accessories

For further information refer to "Accessories".

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)