

## Multiple RS-232 drivers and receivers


### Features

- Meets and exceeds the requirements of EIA/TIA-232-E and ITUV.28 standard
- Single chip with easy interface between UART and serial port connector of IBM PC/AT™ and compatibles
- Designed to support data rates up to 120 kbps
- Pinout compatible with ST75C185

### Description

The ST75185C contains three drivers and five receivers. The pinout matches the DB9S connector design in order to decrease the part count, reduce the board space required and allow easy interconnection of the UART and serial port connector of IBM PC/AT™ and compatibles. The bipolar circuits and processing of the ST75185C provides a rugged low-cost solution for this function at the expense of quiescent power and external passive components relative to the ST75C185.

The ST75185C complies with the requirements of the EIA/TIA 232-E and ITU (formally CCITT) v.28 standards. These standards are for data interchange between a host computer and peripheral at signalling rates up to 20 k-bits/s. The switching speeds of the ST75185C are fast enough to support rates up to 120 K-bits/s with lower capacitive loads (shorter cables). Inter-operability at the higher signalling rates cannot be assured unless the designer has design control of the cable and the interface circuits at the both ends. For inter-operability at signalling rates to

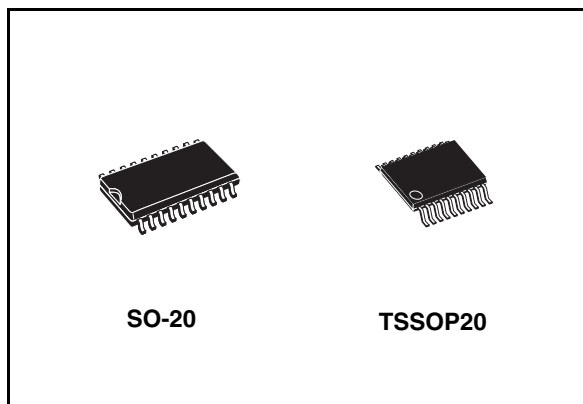

120 k-bits/s, use of EIA/ITA-423-B (ITU v.10) and EIA/ITA-422-B (ITU v.11) standards are recommended.

The ST75185C is characterized for operation over the range of 0°C to 70 °C.

**Table 1. Device summary**

| Order codes | Temperature range | Packages                | Packaging           |
|-------------|-------------------|-------------------------|---------------------|
| ST75185CTR  | 0 to 70 °C        | TSSOP20 (tape and reel) | 2500 parts per reel |
| ST75185CDR  | 0 to 70 °C        | SO-20 (tape and reel)   | 1000 parts per reel |

Contents

1 Pin configuration ..... 3

2 Maximum ratings ..... 4

3 Electrical characteristics ..... 6

4 Typical application ..... 9

5 Typical characteristics ..... 13

6 Application information: diodes on power supply ..... 15

7 Package mechanical data ..... 16

8 Revision history ..... 21



# 1 Pin configuration

Figure 1. Pin connection IEC logic symbol and logic diagram

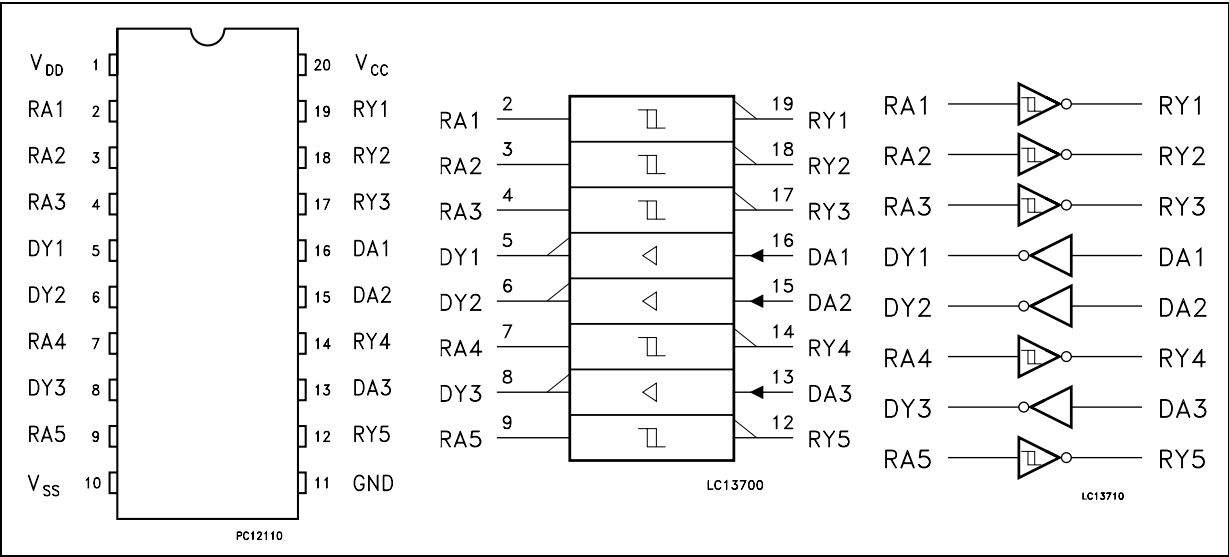


Table 2. Pin description

| Pin n° | Symbol          | Name and function      |
|--------|-----------------|------------------------|
| 1      | V <sub>DD</sub> | Supply voltage (+12 V) |
| 2      | RA1             | First receiver input   |
| 3      | RA2             | Second receiver input  |
| 4      | RA3             | Third receiver input   |
| 5      | DY1             | First driver output    |
| 6      | DY2             | Second driver output   |
| 7      | RA4             | Fourth receiver input  |
| 8      | DY3             | Third driver output    |
| 9      | RA5             | Fifth receiver input   |
| 10     | V <sub>SS</sub> | Supply voltage (-12V)  |
| 11     | GND             | Ground                 |
| 12     | RY5             | Fifth receiver output  |
| 13     | DA3             | Third driver input     |
| 14     | RY4             | Fourth receiver output |
| 15     | DA2             | Second driver input    |
| 16     | DA1             | First driver input     |
| 17     | RY3             | Third receiver output  |
| 18     | RY2             | Second receiver output |
| 19     | RY1             | First receiver output  |
| 20     | V <sub>CC</sub> | Supply voltage (+5 V)  |

## 2 Maximum ratings

**Table 3. Absolute maximum ratings over operating free-air temperature range**

| Symbol    | Parameter                                      | Value                        | Unit |
|-----------|------------------------------------------------|------------------------------|------|
| $V_{DD}$  | Supply voltage <sup>(1)</sup>                  | 15                           | V    |
| $V_{SS}$  | Supply voltage <sup>(1)</sup>                  | -15                          | V    |
| $V_{CC}$  | Supply voltage <sup>(1)</sup>                  | 10                           | V    |
| $V_I$     | Input voltage range (Driver)                   | -15 to 7                     | V    |
| $V_I$     | Input voltage range (Receiver)                 | -30 to 30                    | V    |
| $V_O$     | Output voltage range (Driver)                  | -15 to 15                    | V    |
| $I_O$     | Receiver low level output current              | 20                           | mA   |
| $P_D$     | Continuous total power dissipation             | See dissipation rating table |      |
| $T_A$     | Operating free-air temperature range           | 0 to 70                      | °C   |
| $T_{STG}$ | Storage temperature range                      | -65 to + 150                 | °C   |
| $T_L$     | Lead temperature 1.6 mm. from case for 10 sec. | 260                          | °C   |

1. All voltage are with respect to the network ground terminal.

*Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.*

**Table 4. Dissipation rating table**

| Package          | Power rating<br>at $T_A \leq 25^\circ\text{C}$ | Derating factor<br>above $T_A = 25^\circ\text{C}$ | Power rating<br>at $T_A \leq 70^\circ\text{C}$ |
|------------------|------------------------------------------------|---------------------------------------------------|------------------------------------------------|
| MICROPACKAGE (D) | 1125 mW                                        | 9.0 mW/°C                                         | 720 mW                                         |

**Table 5. Thermal data**

| Symbol     | Parameter                           | TSSOP20              | Unit |
|------------|-------------------------------------|----------------------|------|
| $R_{thJC}$ | Thermal resistance junction-case    | 27.22                | °C/W |
| $R_{thJA}$ | Thermal resistance junction-ambient | 114.5 <sup>(1)</sup> | °C/W |

1. This value is referred to single-layer PCB, JEDEC standard test board.

**Table 6. Recommended operating conditions**

| Symbol   | Parameter                            |          | Min. | Max.     | Unit. |
|----------|--------------------------------------|----------|------|----------|-------|
| $V_{DD}$ | Supply voltage                       |          | 7.5  | 15       | V     |
| $V_{SS}$ | Supply voltage                       |          | -7.5 | -15      | V     |
| $V_{CC}$ | Supply voltage                       |          | 4.5  | 5.5      | V     |
| $V_I$    | Driver input voltage                 |          | 0    | $V_{CC}$ | V     |
| $I_{OH}$ | High level output current            | Driver   |      | -6       | mA    |
|          |                                      | Receiver |      | -0.5     |       |
| $I_{OL}$ | Low level output current             | Driver   |      | 6        | mA    |
|          |                                      | Receiver |      | 16       |       |
| $T_A$    | Operating free-air temperature range |          | 0    | 70       | °C    |

### 3 Electrical characteristics

Table 7. Supply currents

| Symbol          | Parameter                           | Test conditions                                   |                 |                                   | Value |      |      | Unit |
|-----------------|-------------------------------------|---------------------------------------------------|-----------------|-----------------------------------|-------|------|------|------|
|                 |                                     | V <sub>DD</sub>                                   | V <sub>SS</sub> |                                   | Min.  | Typ. | Max. |      |
| I <sub>DD</sub> | Supply current from V <sub>DD</sub> | 9                                                 | -9              | No load.<br>all inputs at<br>1.9V |       |      | 15   | mA   |
|                 |                                     | 12                                                | -12             |                                   |       |      | 19   |      |
|                 |                                     | 15                                                | -15             |                                   |       |      | 25   |      |
|                 |                                     | 9                                                 | -9              | No load.<br>all inputs at<br>0.8V |       |      | 4.5  | mA   |
|                 |                                     | 12                                                | -12             |                                   |       |      | 5.5  |      |
|                 |                                     | 15                                                | -15             |                                   |       |      | 9    |      |
| I <sub>SS</sub> | Supply current from V <sub>SS</sub> | 9                                                 | -9              | No load.<br>all inputs at<br>1.9V |       |      | -15  | mA   |
|                 |                                     | 12                                                | -12             |                                   |       |      | -19  |      |
|                 |                                     | 15                                                | -15             |                                   |       |      | -25  |      |
|                 |                                     | 9                                                 | -9              | No load.<br>all inputs at<br>0.8V |       |      | -3.2 | mA   |
|                 |                                     | 12                                                | -12             |                                   |       |      | -3.2 |      |
|                 |                                     | 15                                                | -15             |                                   |       |      | -3.2 |      |
| I <sub>CC</sub> | Supply current from V <sub>CC</sub> | No load. All inputs at 5V<br>V <sub>CC</sub> = 5V |                 |                                   |       |      | 30   | mA   |

$V_{DD} = 9\text{ V}$ ,  $V_{SS} = -9\text{ V}$ ,  $V_{CC} = 5\text{ V}$ , unless otherwise specified.

**Table 8. Driver electrical characteristics over operating free-air temperature range**

| Symbol      | Parameter                                                          | Test conditions                                                                                       | Value |      |       | Unit          |
|-------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------|------|-------|---------------|
|             |                                                                    |                                                                                                       | Min.  | Typ. | Max.  |               |
| $V_{OH}$    | High level output voltage                                          | $V_{IL} = 0.8\text{ V}$ , $R_L = 3\text{ k}\Omega$<br>(See <a href="#">Figure 3</a> )                 | 6     | 7.5  |       | V             |
| $V_{OL}$    | Low level output voltage<br>( <a href="#">Note 3</a> )             | $V_{IH} = 1.9\text{ V}$ , $R_L = 3\text{ k}\Omega$<br>(See <a href="#">Figure 3</a> )                 |       | -7.5 | -6    | V             |
| $I_{IH}$    | High level input current                                           | $V_I = 5\text{ V}$ (See <a href="#">Figure 4</a> )                                                    |       |      | 10    | $\mu\text{A}$ |
| $I_{IL}$    | Low level input current                                            | $V_I = 0\text{ V}$ (See <a href="#">Figure 4</a> )                                                    |       |      | -1.6  | mA            |
| $I_{OS(H)}$ | High level short circuit output current ( <a href="#">Note 4</a> ) | $V_{IL} = 0.8\text{ V}$ , $V_O = 0\text{ V}$<br>(See <a href="#">Figure 3</a> )                       | -4.5  | -12  | -19.5 | mA            |
| $I_{OS(L)}$ | Low level short circuit output current                             | $V_{IH} = 2\text{ V}$ , $V_O = 0\text{ V}$<br>(See <a href="#">Figure 3</a> )                         | 4.5   | 12   | 19.5  | mA            |
| $R_O$       | Output resistance                                                  | $V_{DD} = V_{SS} = V_{CC} = 0\text{ V}$<br>$V_O = -2\text{ to }2\text{ V}$ ( <a href="#">Note 3</a> ) | 300   |      |       | $\Omega$      |

**Note:** 1 The algebraic convention, where the more positive (less negative) limits designated as maximum, is used in this datasheet for logic levels only (e.g. if -10 V is a maximum, the typical value is a more negative voltage).

2 Output short circuit conditions must maintain the total power dissipation below absolute maximum ratings.

3 Test conditions are those specified by EIA-232-E and as listed above.

$V_{DD} = 12\text{ V}$ ,  $V_{SS} = -12\text{ V}$ ,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25\text{ }^\circ\text{C}$

**Table 9. Driver switching characteristics**

| Symbol    | Parameter                                        | Test conditions                                                                                                                                   | Value |      |      | Unit          |
|-----------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|------|---------------|
|           |                                                  |                                                                                                                                                   | Min.  | Typ. | Max. |               |
| $t_{PLH}$ | Propagation Delay Time, Low to High Level Output | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 15\text{ pF}$<br>(See <a href="#">Figure 5</a> , <a href="#">Figure 6</a> )                         |       | 315  | 500  | ns            |
| $t_{PHL}$ | Propagation Delay Time, High to Low Level Output | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 15\text{ pF}$<br>(See <a href="#">Figure 5</a> , <a href="#">Figure 6</a> )                         |       | 75   | 175  | ns            |
| $t_{TLH}$ | Transition Time Low to High Level Output         | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 15\text{ pF}$<br>(See <a href="#">Figure 5</a> , <a href="#">Figure 6</a> )                         |       | 60   | 100  | ns            |
|           |                                                  | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 2500\text{ pF}$<br>( <a href="#">Note 4</a> , <a href="#">Figure 5</a> , <a href="#">Figure 6</a> ) |       | 1.7  | 2.5  | $\mu\text{s}$ |
| $t_{THL}$ | Transition Time High to Low Level Output         | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 15\text{ pF}$<br>(See <a href="#">Figure 5</a> , <a href="#">Figure 6</a> )                         |       | 40   | 7.5  | ns            |
|           |                                                  | $R_L = 3\text{ to }7\text{ k}\Omega$ , $C_L = 2500\text{ pF}$<br>( <a href="#">Note 4</a> , <a href="#">Figure 5</a> , <a href="#">Figure 6</a> ) |       | 1.5  | 2.5  | $\mu\text{s}$ |

4 Measured between -3 V and 3 V points of output waveform (EIA-232-E conditions), all unused inputs are tied.

**Table 10. Receiver electrical characteristics over operating conditions**

| Symbol    | Parameter                              | Test conditions                                                          | Value |      |      | Unit |
|-----------|----------------------------------------|--------------------------------------------------------------------------|-------|------|------|------|
|           |                                        |                                                                          | Min.  | Typ. | Max. |      |
| $V_{T+}$  | Positive going threshold voltage       | (See <a href="#">Figure 9</a> )                                          |       | 2.2  | 2.4  | V    |
| $V_{T-}$  | Negative going threshold voltage       | $T_A = 25\text{ }^{\circ}\text{C}$ (See <a href="#">Figure 9</a> )       | 0.75  | 0.97 |      | V    |
| $V_{hys}$ | Input hysteresis ( $V_{T+} - V_{T-}$ ) |                                                                          | 0.5   |      |      | V    |
| $V_{OH}$  | High level output voltage              | $I_{OH} = -0.5\text{ mA}$ $V_{IH} = 0.75\text{ V}$                       | 2.6   | 4    | 5    | V    |
|           |                                        | Inputs Open                                                              | 2.6   |      |      |      |
| $V_{OL}$  | Low level output voltage               | $V_I = 3\text{ V}$ $I_{OL} = 10\text{ mA}$                               |       | 0.2  | 0.45 | V    |
| $I_{IH}$  | High level input current               | $V_I = 25\text{ V}$ (See <a href="#">Figure 9</a> )                      | 3.6   |      | 8.3  | mA   |
|           |                                        | $V_I = 3\text{ V}$ (See <a href="#">Figure 9</a> )                       | 0.43  |      |      |      |
| $I_{IL}$  | Low level input current                | $V_I = -25\text{ V}$ (See <a href="#">Figure 9</a> )                     | -3.6  |      | -8.3 | mA   |
|           |                                        | $V_I = -3\text{ V}$ (See <a href="#">Figure 9</a> )                      | -0.43 |      |      |      |
| $I_{OS}$  | Short-circuit output current           | $V_I = 0\text{ V}$ $V_O = 0\text{ V}$<br>(See <a href="#">Figure 7</a> ) |       | -3.4 | -12  | mA   |

Note: All typical values are at  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{CC} = 5\text{ V}$ ,  $V_{DD} = 9\text{ V}$  and  $V_{SS} = -9\text{ V}$

$V_{DD} = 12\text{ V}$ ,  $V_{SS} = -12\text{ V}$ ,  $V_{CC} = 5\text{ V}$   $T_A = 25\text{ }^{\circ}\text{C}$

**Table 11. Receiver switching characteristics**

| Symbol    | Parameter                                       | Test conditions                                                                  | Value |      |      | Unit |
|-----------|-------------------------------------------------|----------------------------------------------------------------------------------|-------|------|------|------|
|           |                                                 |                                                                                  | Min.  | Typ. | Max. |      |
| $t_{PLH}$ | Propagation delay time low to high level output | $R_L = 5\text{ k}\Omega$ $C_L = 50\text{ pF}$<br>(See <a href="#">Figure 9</a> ) |       | 400  | 1000 | ns   |
| $t_{PHL}$ | Propagation delay time high to low level output | $R_L = 5\text{ k}\Omega$ $C_L = 50\text{ pF}$<br>(See <a href="#">Figure 9</a> ) |       | 70   | 150  | ns   |
| $t_{TLH}$ | Transition time low to high level output        | $R_L = 5\text{ k}\Omega$ $C_L = 50\text{ pF}$<br>(See <a href="#">Figure 9</a> ) |       | 200  | 525  | ns   |
| $t_{THL}$ | Transition time high to low level output        | $R_L = 5\text{ k}\Omega$ $C_L = 50\text{ pF}$<br>(See <a href="#">Figure 9</a> ) |       | 20   | 60   | ns   |



## 4 Typical application

Figure 2. Application circuits


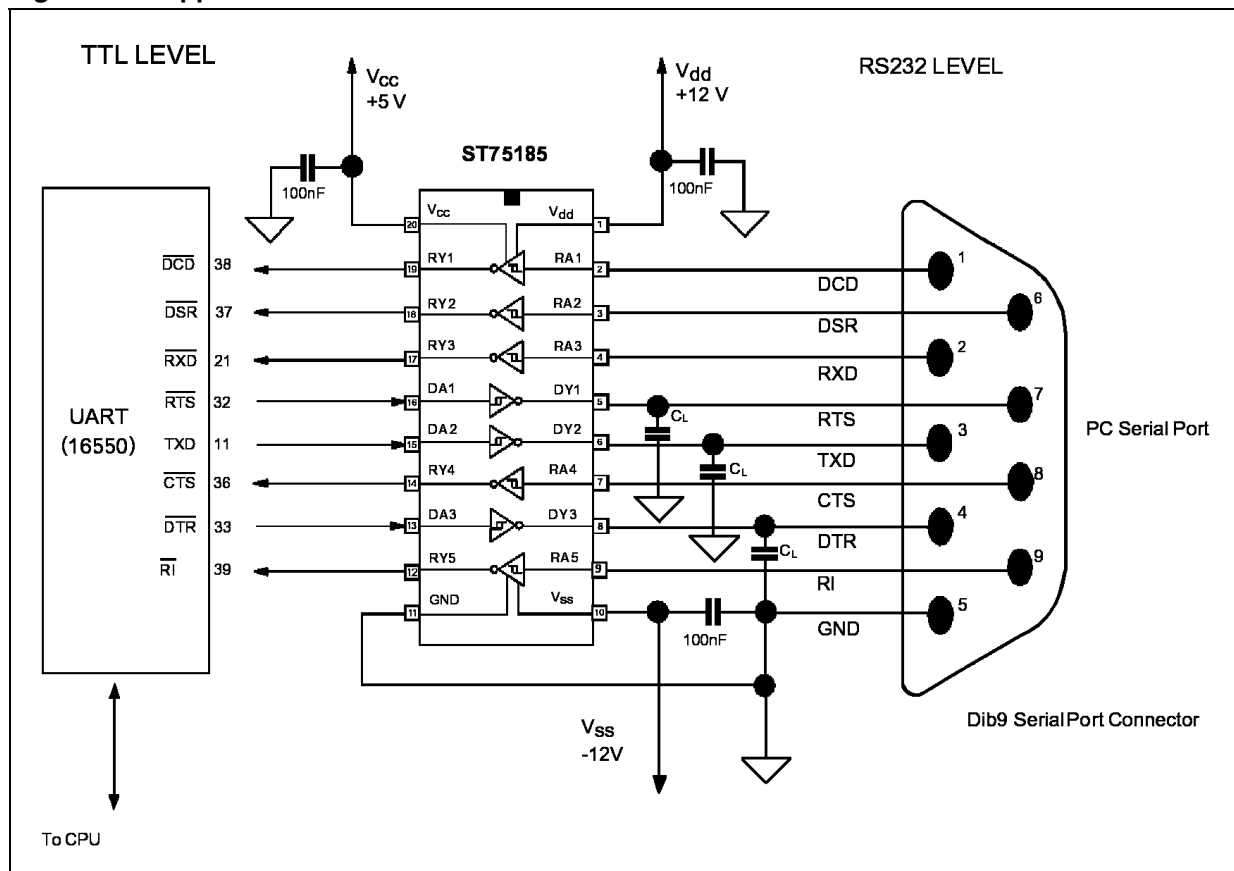


Figure 3. Driver test circuit for  $V_{OH}$ ,  $I_{SO(H)}$  and  $I_{SO(L)}$

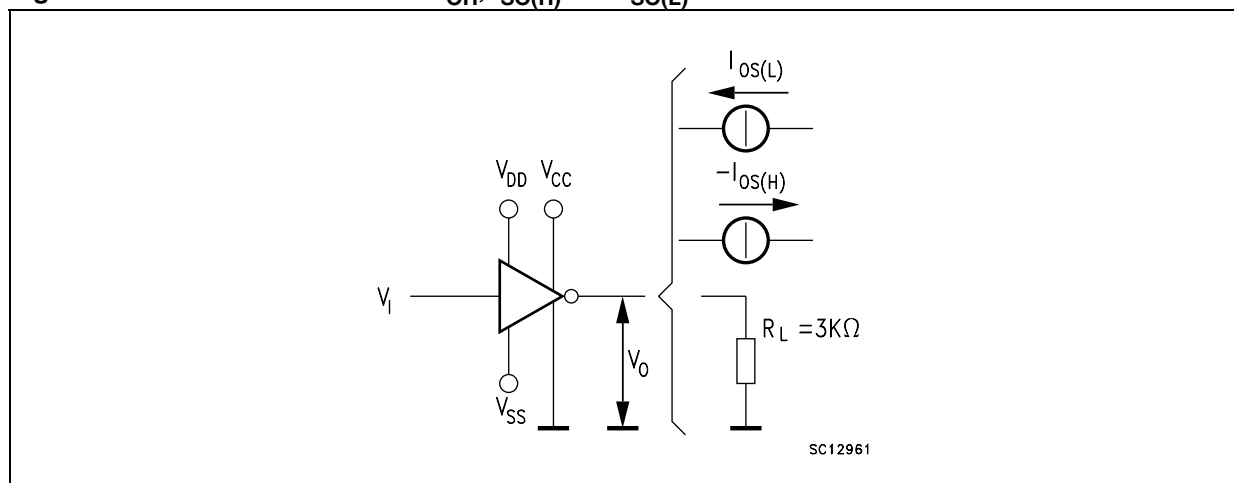

The diagram shows an inverter circuit. The input is connected to a pull-up resistor (P.G.) and the output is connected to a load resistor ( $R_L$ ) and a load capacitor ( $C_L$ ). The supply voltages are  $V_{DD}$ ,  $V_{CC}$ , and  $V_{SS}$ . The output is also connected to a ground symbol. The text "(see note A)" is next to the P.G. block, and "(see note B)" is next to the  $C_L$  capacitor.

The diagram illustrates the timing characteristics of a CMOS inverter. The input signal is a square wave with a high level of 3V and a low level of 0V. The output signal is an inverted square wave with a high level of  $V_{OH}$  and a low level of  $V_{OL}$ . The propagation delay  $t_{PHL}$  is the time from the input rising to 50% to the output falling to 50%. The propagation delay  $t_{PLH}$  is the time from the input falling to 50% to the output rising to 50%. The output signal also shows intermediate voltage levels at 90%, 50%, and 10% during the transitions.

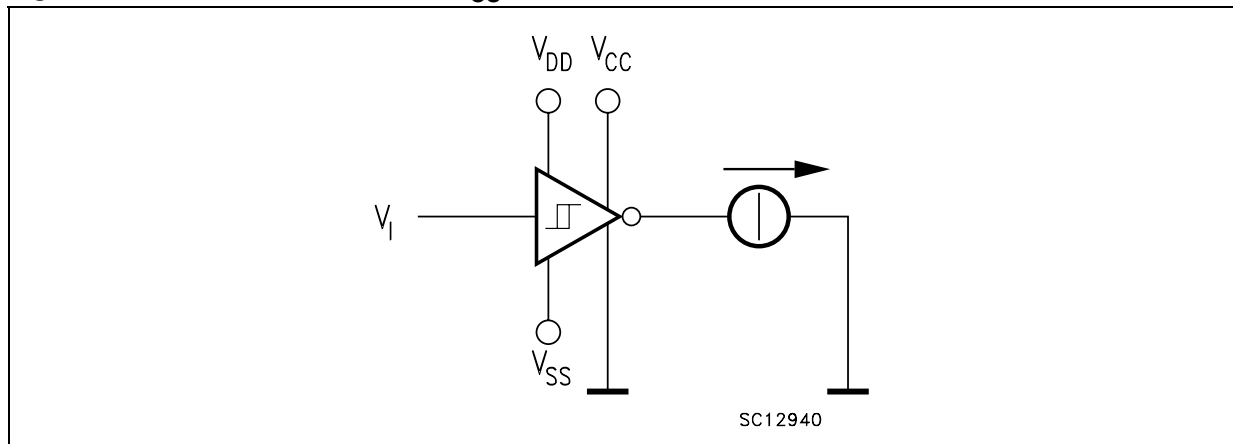
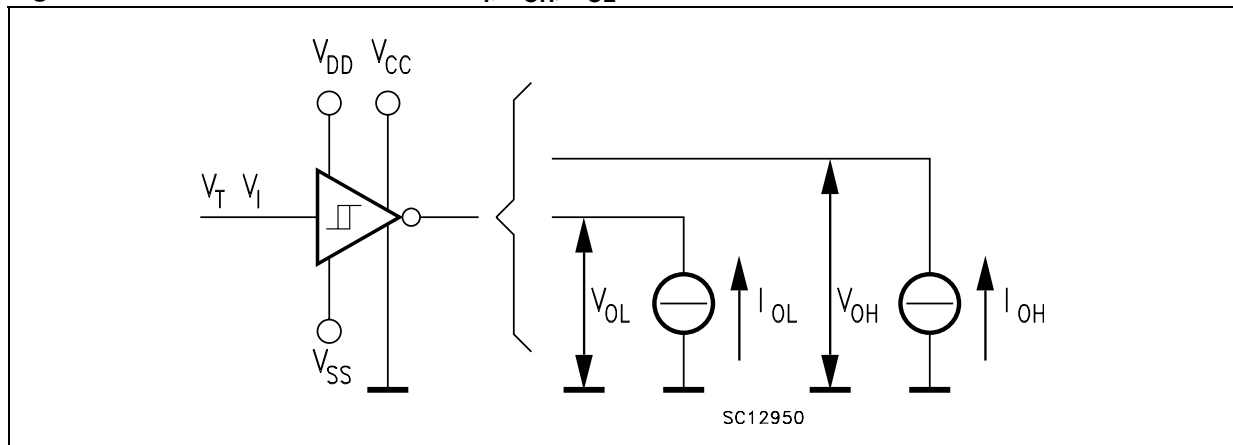
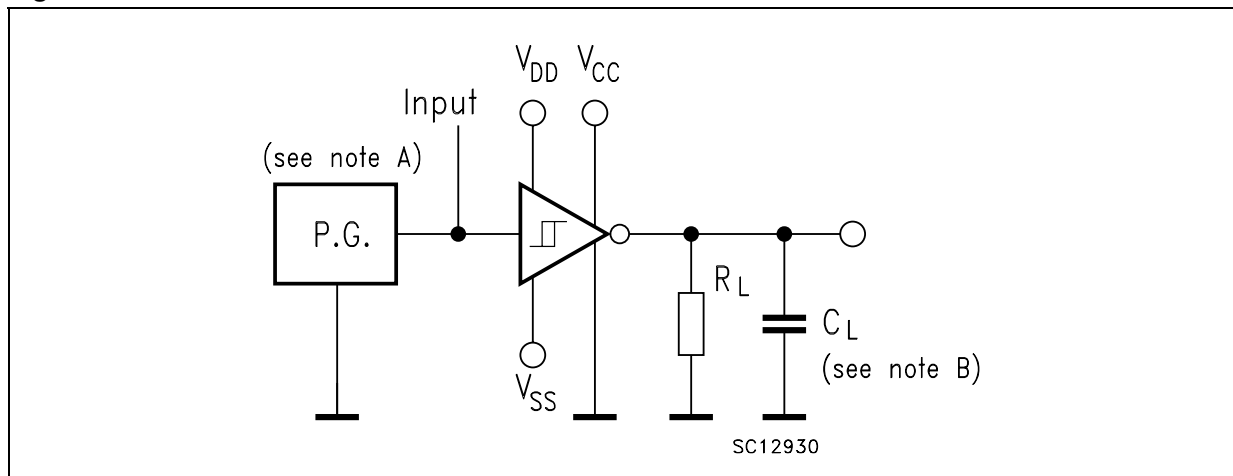
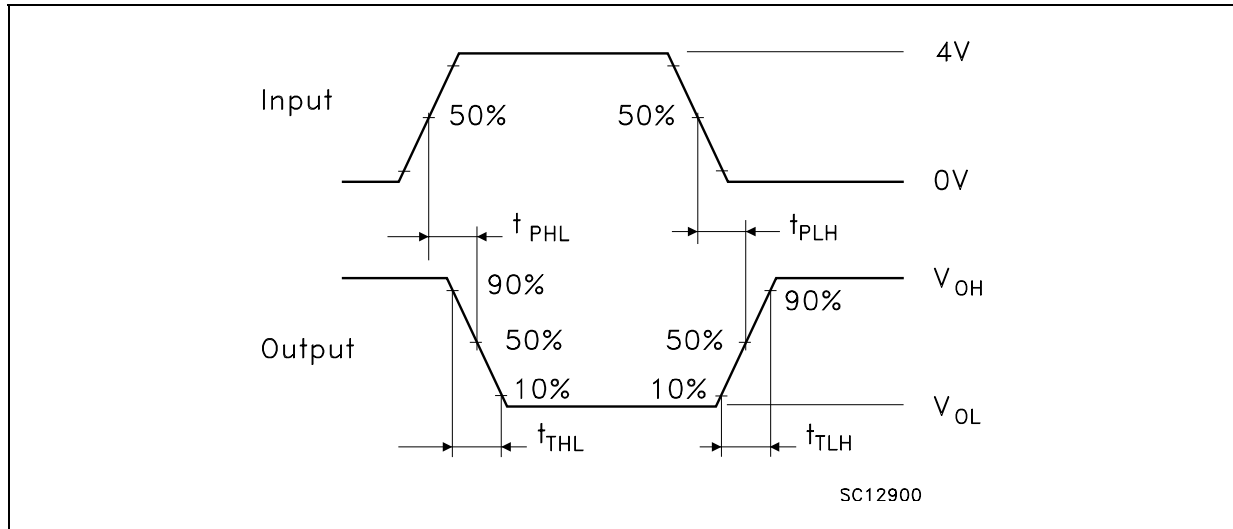
Figure 7. Receiver test circuit for  $I_{OS}$ Figure 8. Receiver test circuit for  $V_T$ ,  $V_{OH}$ ,  $V_{OL}$ 

Figure 9. Receiver test circuit



**Figure 10. Receiver voltage waveforms**

- Note: 1 The pulse generator has the following characteristics:  $t_W = 25 \mu s$ ,  $PRR = 20 \text{ kHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r = t_f < 50 \text{ ns}$
- 2  $C_L$  includes probe and jig capacitance.

5 Typical characteristics

Figure 11. Driver voltage transfer characteristics

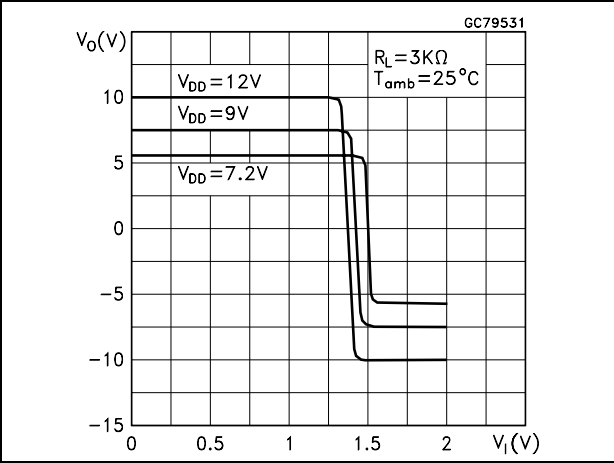


Figure 12. Driver short circuit output current vs. free-air temperature

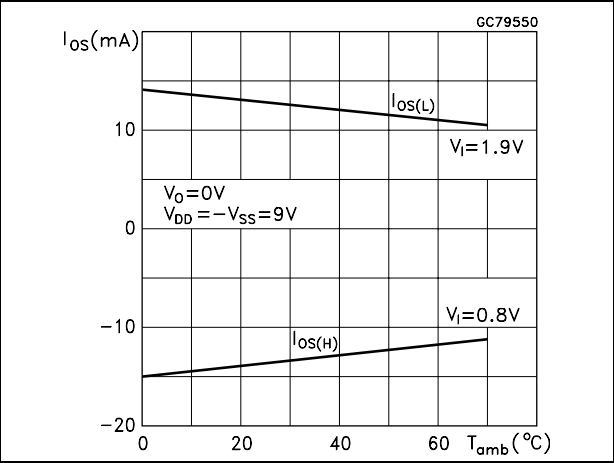


Figure 13. Device supply current vs. temperature

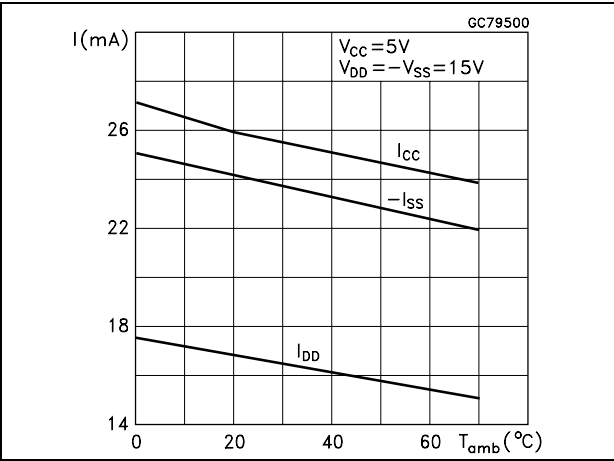


Figure 14. Driver output current vs. output voltage

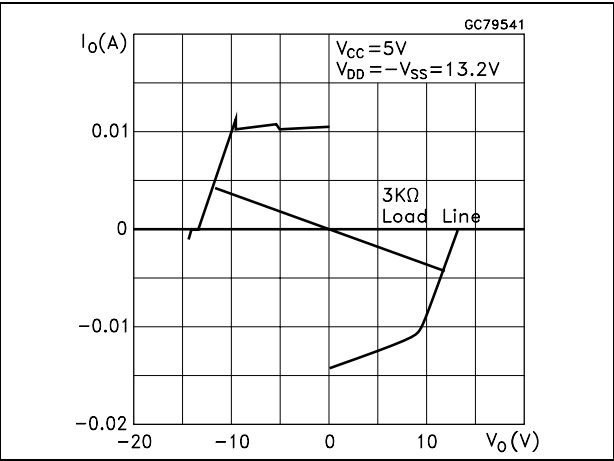


Figure 15. Driver output slew rate vs. load capacitance

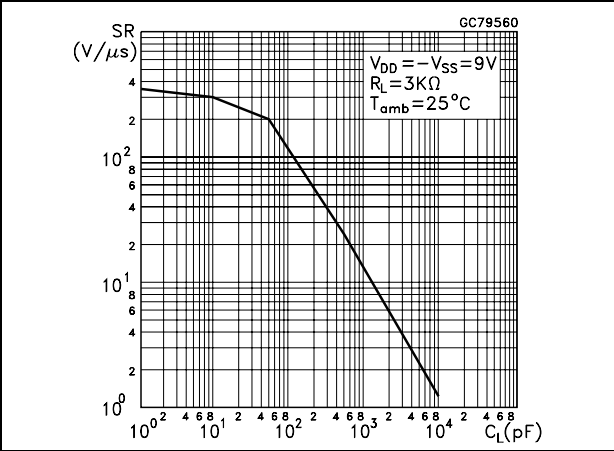


Figure 16. Receiver threshold vs. temperature


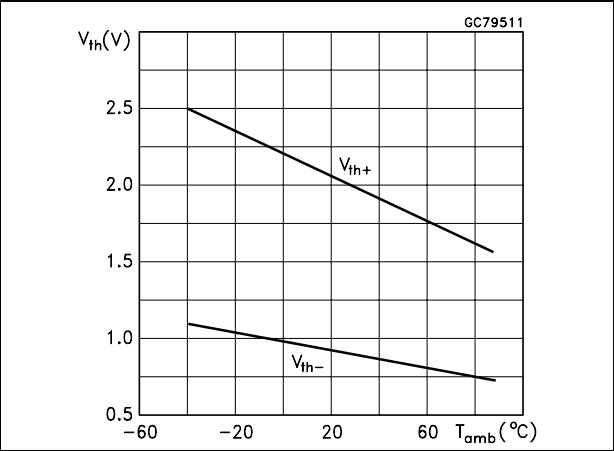



Figure 17. Receiver threshold vs. supply voltage

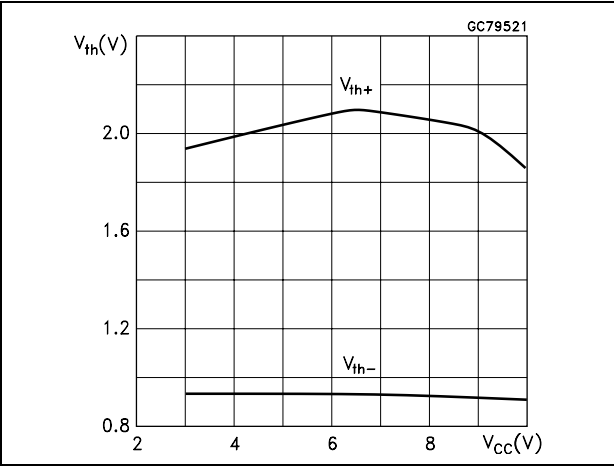

## 6 Application information: diodes on power supply

Diodes placed in series with the  $V_{DD}$  and  $V_{SS}$  leads protect the ST75185C in the fault condition in which the devices output are shorted to  $\pm 15$  V and the power supplies are at low state and provide low-impedance path to ground (see [Figure 18](#)).

Figure 18. Diodes on power supply

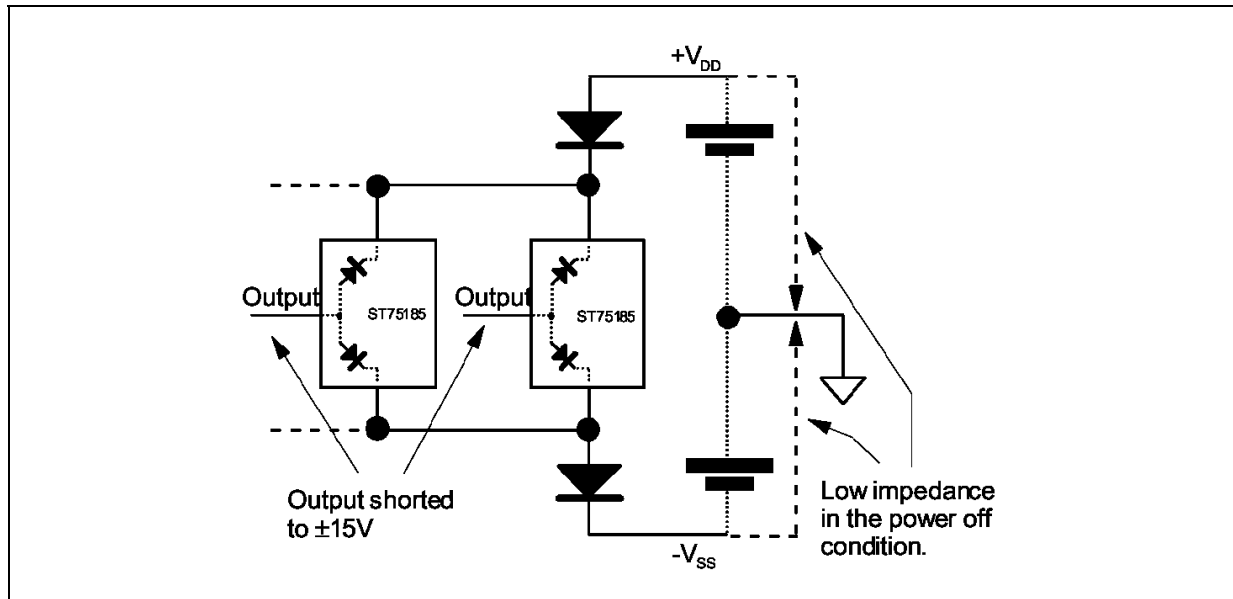


## 7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.




SO-20 mechanical data

| Dim. | mm.   |      |       | inch. |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | Min.  | Typ. | Max.  | Min.  | Typ.  | Max.  |
| A    | 2.35  |      | 2.65  | 0.093 |       | 0.104 |
| A1   | 0.1   |      | 0.30  | 0.004 |       | 0.012 |
| B    | 0.33  |      | 0.51  | 0.013 |       | 0.020 |
| C    | 0.23  |      | 0.32  | 0.009 |       | 0.013 |
| D    | 12.60 |      | 13.00 | 0.496 |       | 0.512 |
| E    | 7.4   |      | 7.6   | 0.291 |       | 0.299 |
| e    |       | 1.27 |       |       | 0.050 |       |
| H    | 10.00 |      | 10.65 | 0.394 |       | 0.419 |
| h    | 0.25  |      | 0.75  | 0.010 |       | 0.030 |
| L    | 0.4   |      | 1.27  | 0.016 |       | 0.050 |
| k    | 0°    |      | 8°    | 0°    |       | 8°    |
| ddd  |       |      | 0.100 |       |       | 0.004 |

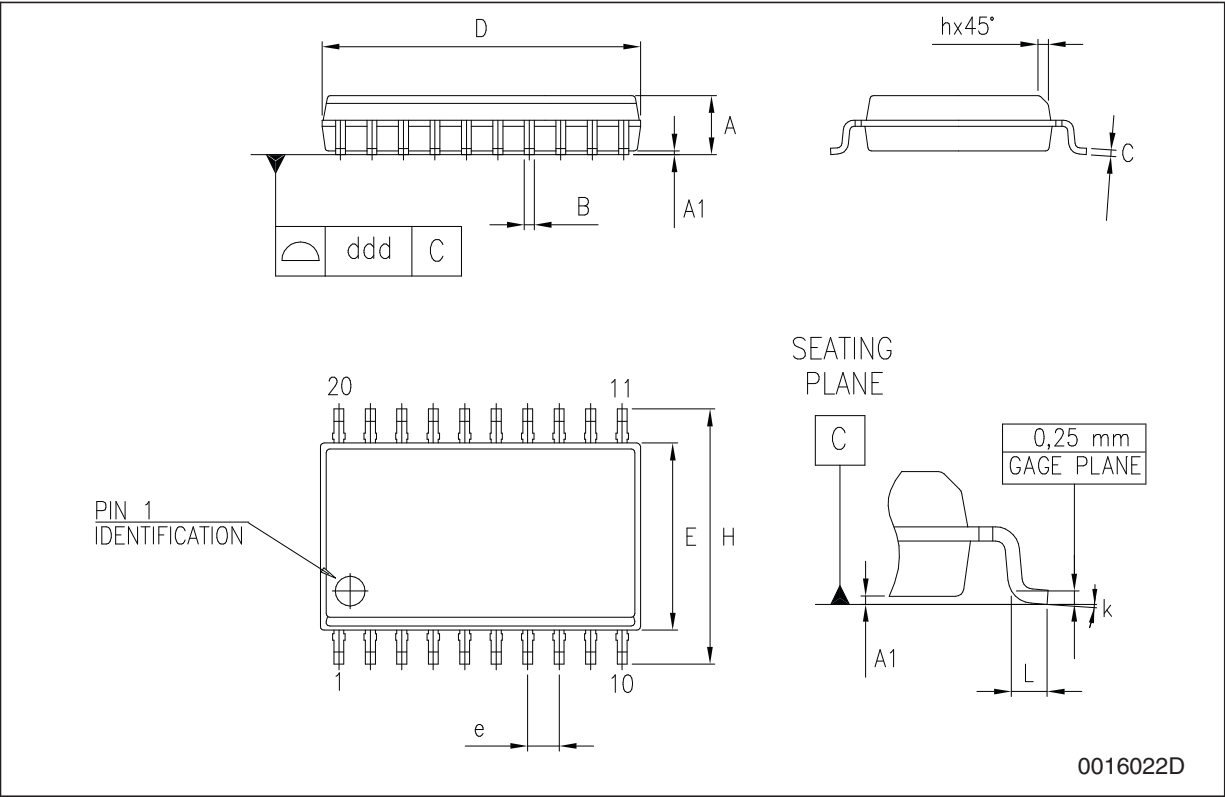


TSSOP20 mechanical data

| Dim. | mm.  |          |      | inch. |            |        |
|------|------|----------|------|-------|------------|--------|
|      | Min. | Typ.     | Max. | Min.  | Typ.       | Max.   |
| A    |      |          | 1.2  |       |            | 0.047  |
| A1   | 0.05 |          | 0.15 | 0.002 | 0.004      | 0.006  |
| A2   | 0.8  | 1        | 1.05 | 0.031 | 0.039      | 0.041  |
| b    | 0.19 |          | 0.30 | 0.007 |            | 0.012  |
| c    | 0.09 |          | 0.20 | 0.004 |            | 0.0079 |
| D    | 6.4  | 6.5      | 6.6  | 0.252 | 0.256      | 0.260  |
| E    | 6.2  | 6.4      | 6.6  | 0.244 | 0.252      | 0.260  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169 | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°    |            | 8°     |
| L    | 0.45 | 0.60     | 0.75 | 0.018 | 0.024      | 0.030  |

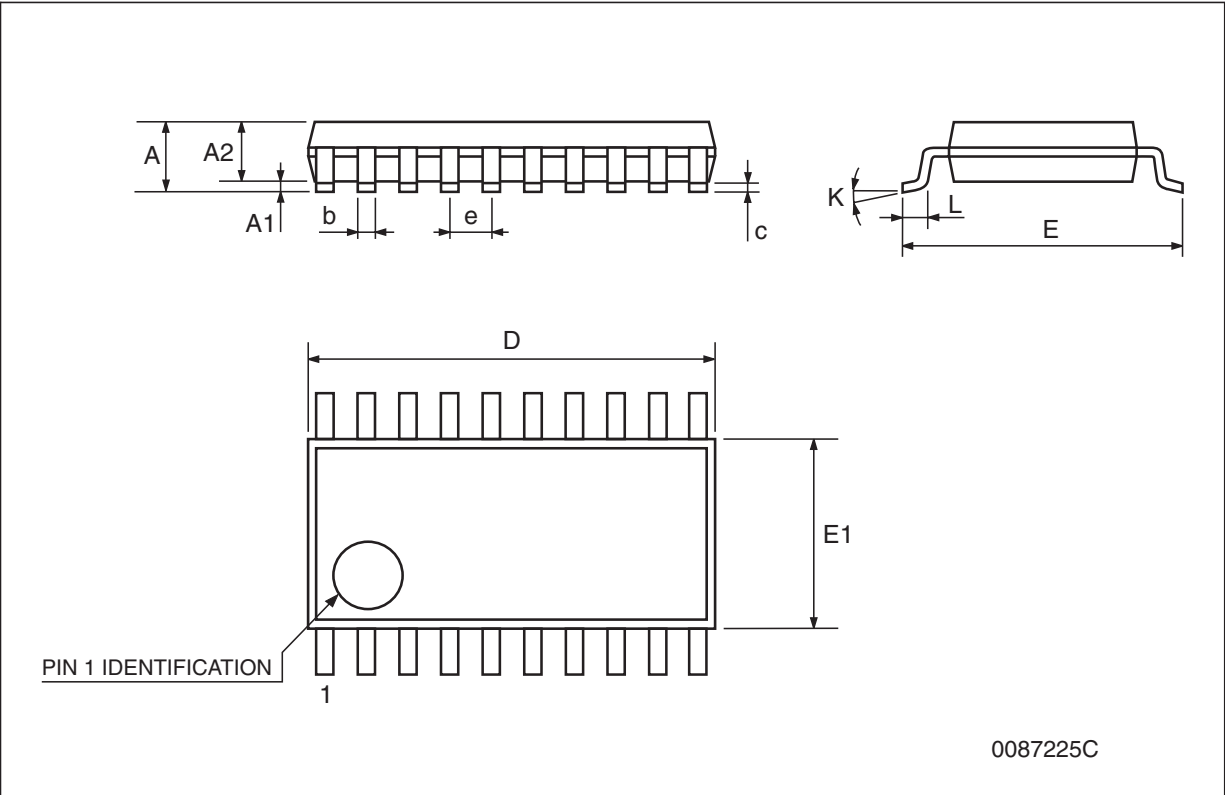


Tape & reel SO-20 mechanical data

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 30.4 |       |      | 1.197  |
| Ao   | 10.8 |      | 11   | 0.425 |      | 0.433  |
| Bo   | 13.2 |      | 13.4 | 0.520 |      | 0.528  |
| Ko   | 3.1  |      | 3.3  | 0.122 |      | 0.130  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 11.9 |      | 12.1 | 0.468 |      | 0.476  |

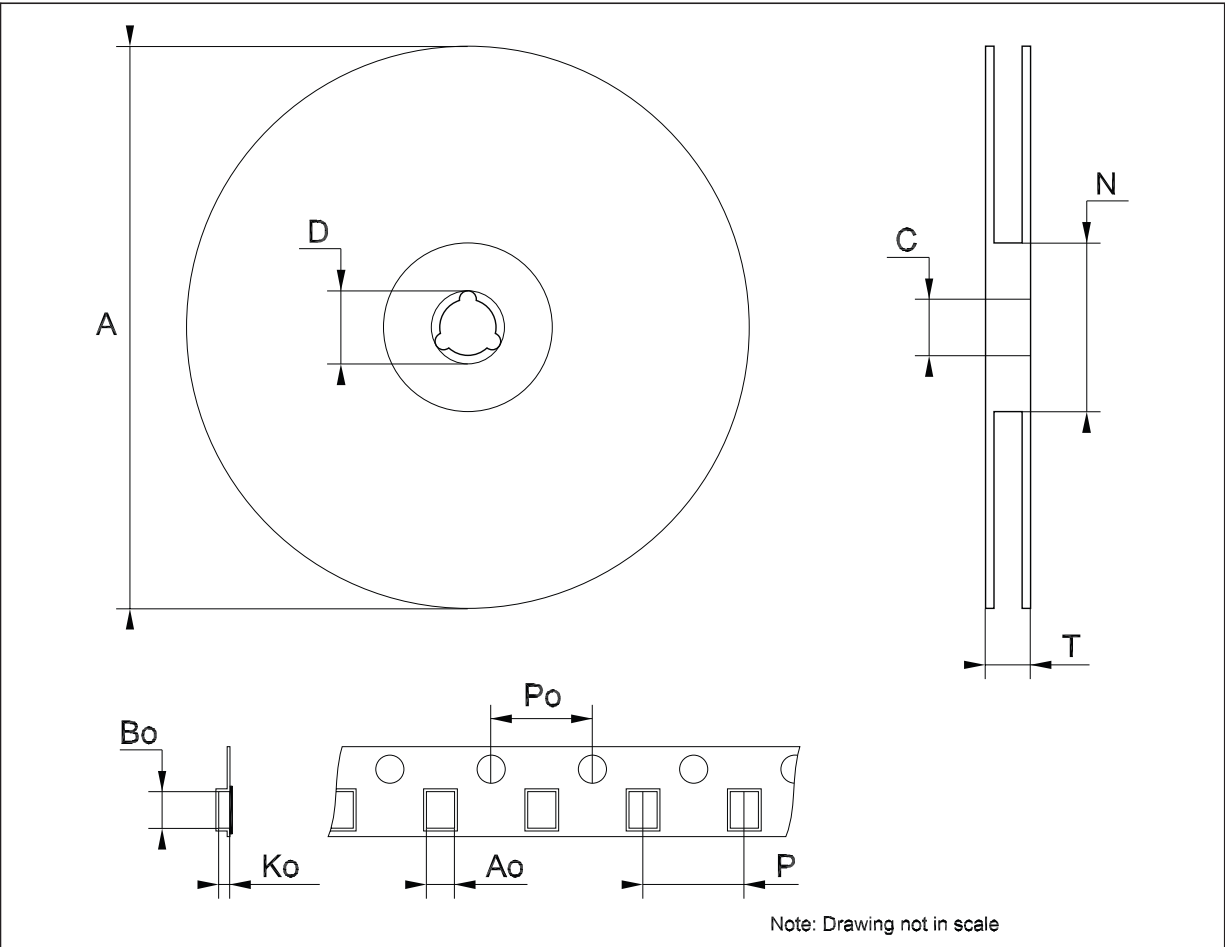

Tape & reel TSSOP20 mechanical data

| Dim. | mm.  |      |      | inch. |      |        |
|------|------|------|------|-------|------|--------|
|      | Min. | Typ. | Max. | Min.  | Typ. | Max.   |
| A    |      |      | 330  |       |      | 12.992 |
| C    | 12.8 |      | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |      |      | 0.795 |      |        |
| N    | 60   |      |      | 2.362 |      |        |
| T    |      |      | 22.4 |       |      | 0.882  |
| Ao   | 6.8  |      | 7    | 0.268 |      | 0.276  |
| Bo   | 6.9  |      | 7.1  | 0.272 |      | 0.280  |
| Ko   | 1.7  |      | 1.9  | 0.067 |      | 0.075  |
| Po   | 3.9  |      | 4.1  | 0.153 |      | 0.161  |
| P    | 11.9 |      | 12.1 | 0.468 |      | 0.476  |

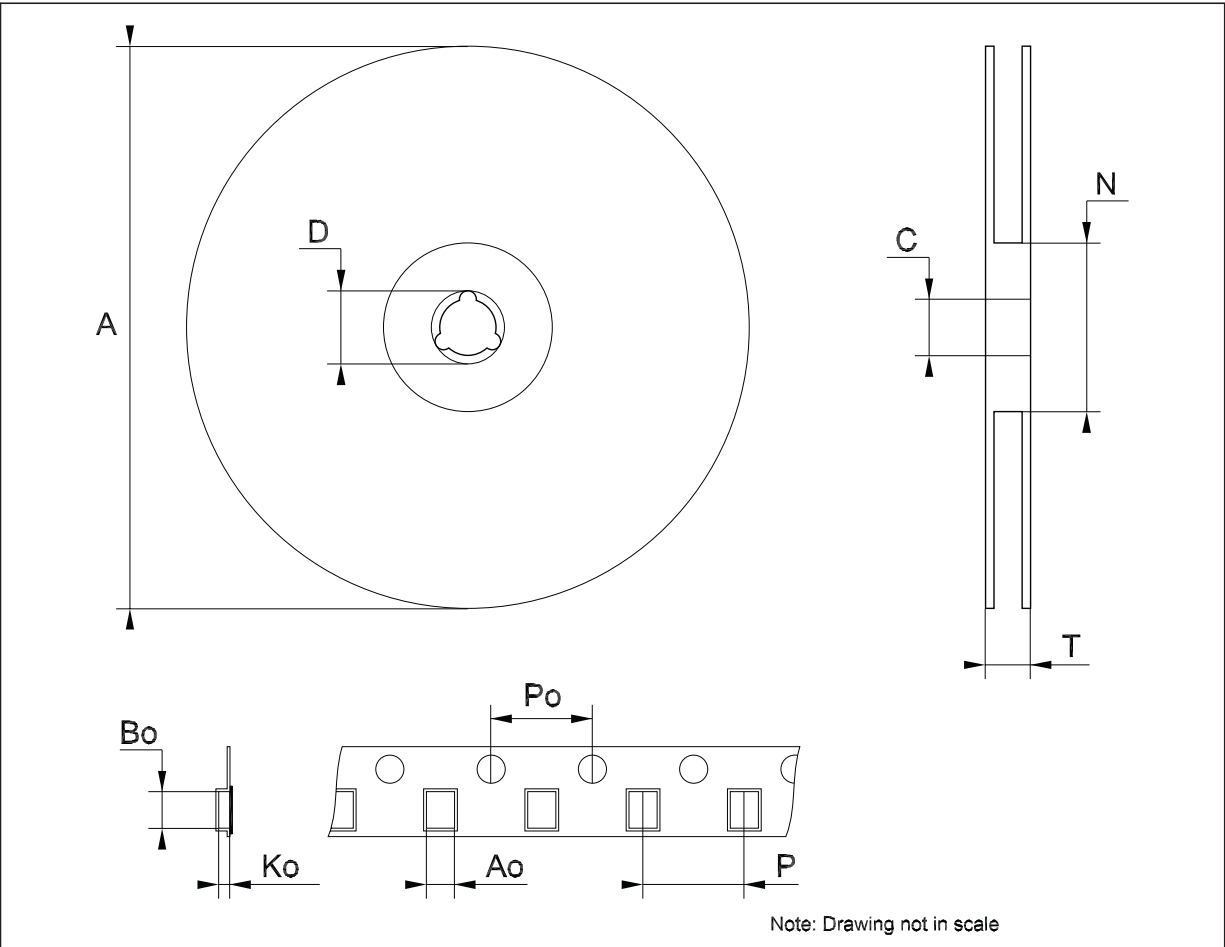

## 8 Revision history

**Table 12. Document revision history**

| Date        | Revision | Changes                                      |
|-------------|----------|----------------------------------------------|
| 28-Apr-2006 | 15       | Order codes updated.                         |
| 01-Jun-2006 | 16       | Modified: <a href="#">Figure 2</a> .         |
| 19-Dec-2007 | 17       | Added: <a href="#">Table 5</a> .             |
| 07-Apr-2009 | 18       | Modified <a href="#">Table 5 on page 4</a> . |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)