

# Dialight

## 585 Series

### CLUSTER BASED LED

### T3 1/4 Miniature Bayonet (BA9s)




#### FEATURES / BENEFITS

- ▲ High brightness with low current draw - uses up to 90% less energy than an incandescent
- ▲ Long life - up to 100K hours
- ▲ True non-polarized configurations available
- ▲ No heat generated
- ▲ Mounts directly into industry standard socket
- ▲ Resistant to shock and vibration
- ▲ Super bright LED cluster design
- ▲ Available in 6, 14, and 28 VDC, 120 VAC

Dialight's line of based LED lamps is designed to directly replace many popular subminiature and miniature incandescent lamps. The benefits of LED technology over incandescent are significant: They offer long life, are shock resistant, withstand vibration and provide energy conservation.

#### SPECIFICATIONS

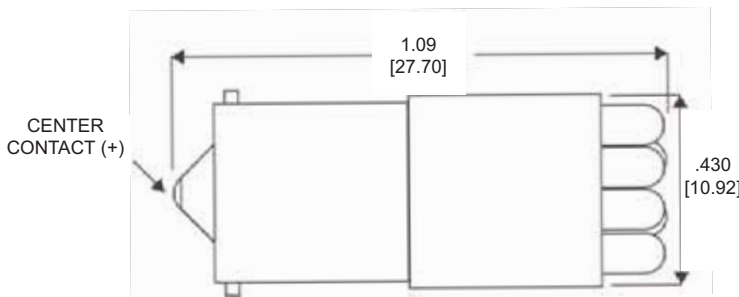

*Measurements are typical  
Dimensions are inches [mm]*

- ▲ Operating Voltages: 6, 14, 28 VDC, 120 VAC
- ▲ Polarized and non-polarized available
- ▲ Operating temperature: -30°C to +85°C
- ▲ Storage temperature: -40°C to +100°C
- ▲ Replaces incandescent lamp numbers\*: 44, 47, 313, 755, 1815, 1819, 1847, 1850, 1866, 1889, 1891, 1892, 1893 and 1895

\* See Dialight's Incandescent lamp/based LED cross reference for a complete listing

#### CONSIDERATIONS

- ▲ Since lens caps act as filters for the light emitted from the based LED, it is important to match the emitting color of the LED. If not matched properly, the overall light output may be substantially reduced. Dialight recommends using transparent lenses, which will optimize the light output.
- ▲ If you are unfamiliar with the polarity of the circuit, Dialight recommends using a non-polarized version.
- ▲ Although these lamps can be operated at a lower voltage, which will increase the life, the intensity will be reduced.
- ▲ Operation of the based LED at a higher voltage should not exceed 10% above the recommended voltage.
- ▲ Dialight does not recommend that based LED lamps be used in neon sockets.

Dialight reserves the right to make changes at any time in order to supply the best product possible.



**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA  
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEL585E001\_D

### POLARIZED

| Part Number | Color  | Peak Wavelength (nm) | Nominal Voltage (VDC) | Forward Current TYP.-(mA) | Intensity TYP.-(mcd) |
|-------------|--------|----------------------|-----------------------|---------------------------|----------------------|
| 585-5211    | Red    | 660                  | 6                     | 60                        | 480                  |
| 585-5311    | Green  | 565                  | 6                     | 60                        | 420                  |
| 585-5511    | Yellow | 592                  | 6                     | 90                        | 1800                 |
| 585-5213    | Red    | 660                  | 14                    | 40                        | 480                  |
| 585-5313    | Green  | 565                  | 14                    | 40                        | 420                  |
| 585-5513    | Yellow | 592                  | 14                    | 60                        | 1800                 |
| 585-5215    | Red    | 660                  | 28                    | 20                        | 560                  |
| 585-5315    | Green  | 565                  | 28                    | 20                        | 490                  |
| 585-5515    | Yellow | 592                  | 28                    | 30                        | 2100                 |

### NON-POLARIZED

| Part Number | Color  | Peak Wavelength (nm) | Nominal Voltage (VDC) | Forward Current TYP.-(mA) | Intensity TYP.-(mcd) |
|-------------|--------|----------------------|-----------------------|---------------------------|----------------------|
| 585-5223    | Red    | 660                  | 14                    | 40                        | 480                  |
| 585-5323    | Green  | 565                  | 14                    | 40                        | 420                  |
| 585-5523    | Yellow | 592                  | 14                    | 60                        | 1800                 |
| 585-5225    | Red    | 660                  | 28                    | 20                        | 560                  |
| 585-5325    | Green  | 565                  | 28                    | 20                        | 490                  |
| 585-5525    | Yellow | 592                  | 28                    | 30                        | 2100                 |
| 585-5256    | Red    | 660                  | 120 VAC               | 9                         | 252                  |
| 585-5356    | Green  | 565                  | 120 VAC               | 9                         | 220                  |
| 585-5556    | Yellow | 592                  | 120 VAC               | 9                         | 945                  |

### Based LEDs SELECTION

With the technological advancements in Light Emitting Diodes (LEDs) brightness can now rival the incandescent lamp when used in similar packages. These advancements have created a new type of product called the based LED - an LED with the functionality of an incandescent bulb.

The following styles are currently available in red, green, yellow, blue and white:

- ▲ T1 3/4 Midget Flange                      ▲ T1 3/4 Bi-Pin                                      ▲ T1 3/4 Wedge (T5)                      ▲ T2 Telephone Slide
- ▲ T3 1/4 Miniature Bayonet (BA9S)      ▲ T3 1/4 Miniature Screw (E10)              ▲ T3 1/4 Wedge (T10)                      ▲ 15mm SC Bayonet (BA15s)

Dialight's line of based LEDs continues to grow. Please visit our website for more information.  
[www.dialight.com](http://www.dialight.com)

Dialight reserves the right to make changes at any time in order to supply the best product possible.

**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • [www.dialight.com](http://www.dialight.com)



MDEL585E001\_D

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)