

SBT-90 LEDs




Table of Contents

Technology Overview2

Binning Structure3

Chromaticity Bins4

Product Shipping & Labeling Information.....5

Ordering Information6

Electrical Characteristics ...7

Optical Characteristics8

White Characteristics.....9

Radiation Patterns 10

Output vs Temp ,Lifetime and Spectrum..... 11

Mechanical Dimensions .. 12

Solder Profile 14

History of Changes 15

Features:

- Extremely high optical output from a 9 mm² square emitter:
 - Up to 2300 lumens at 13.5A from a single chip (White)
 - Over 1,600 lumens at 13.5A (Red)
 - Choice of 5700K or 6500K color point
- High thermal conductivity package - junction to case thermal resistance of only 0.5 °C/W
- Large, monolithic chip with uniform emitting area of 9 mm²
- Unencapsulated die with low profile protective window optimizes optical coupling in etendue-limited applications
- Electrically isolated thermal path
- Environmentally friendly: RoHS compliant

Applications

- Fiber-coupled illumination
- Architectural and Entertainment lighting
- Projection and micro-display based applications
- High-Brightness and large format LCD back-light units
- Edge-illuminated lighting guides
- High output, Etendue-limited lighting applications

Technology Overview

Luminus LED benefit from a suite of innovations in the fields of chip technology, packaging and thermal management. These breakthroughs allow illumination engineers and designers to achieve solutions that are high brightness and high efficiency.

Luminus Technology

Luminus' technology enables large area LED chips with uniform brightness over the entire LED chip surface. The optical power and brightness produced by these large monolithic chips enable solutions which replace arc and halogen lamps where arrays of traditional high power LEDs cannot.

Packaging Technology

Thermal management is critical in high power LED applications. With a thermal resistance from junction to heat sink of 0.5°C/W , Luminus SBT-90 LEDs have the lowest thermal resistance of any LED on the market. This allows the LED to be driven at higher current densities while maintaining a low junction temperature, thereby resulting in brighter solutions and longer lifetimes.

Reliability

Designed from the ground up, Luminus LEDs are one of the most reliable light sources in the world today. They have passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity, and have been fully qualified for use in extreme high power and high current applications. With very low failure rates and median lifetimes that typically exceed 60,000 hours, Luminus LEDs are ready for even the most demanding applications.

Environmental Benefits

Luminus LEDs Whitehelp reduce power consumption and the amount of hazardous waste entering the environment. All Luminus LED products manufactured by Luminus are RoHS compliant and free of hazardous materials, including lead and mercury.

Understanding Luminus LED Test Specifications

Every Luminus LED is fully tested to ensure that it meets the high quality standards expected from Luminus' products.

Testing Temperature

Luminus surface mount LEDs are typically tested with a 20 msec input pulse and a junction temperature of 25°C . Expected flux values in real world operation can be extrapolated based on the information contained within this product data sheet.

Multiple Operating Points

The tables on the following pages provide typical optical and electrical characteristics. Since the LEDs can be operated over a wide range of drive conditions (currents from less than 1A to 13.5A, and duty cycle from <1% to 100%), multiple drive conditions are listed.

SBT-90 White LEDs are production tested at 9.0 A. The values shown at other current conditions are for additional reference at other possible drive conditions.

SBT-90 Red LEDs are productions tested of 13.5A

SBT-90 Binning Structure

SBT-90 LEDs are tested for luminous flux and chromaticity of the drive current specified below and placed into one of the following luminous flux (FF) and chromaticity (WW) bins:

Flux Bins

| Color | Flux Bin (FF) | Minimum Flux (lm) @ 9.0A | Maximum Flux (lm) @ 9.0A |
|---|---------------|---------------------------|---------------------------|
| W57S/ W65S 5700K / 6500K, Standard CRI (typ. 70) | NA | 1,590 | 1,710 |
| | NB | 1,710 | 1,830 |
| | PA | 1830 | 1966 |
| | PB | 1966 | 2100 |
| | QA | 2100 | 2260 |
| | QB | 2260 | 2420 |
| Red | Flux Bin (FF) | Minimum Flux (lm) @ 13.5A | Minimum Flux (lm) @ 13.5A |
| | BM | 770 | 970 |
| | BN | 970 | 1150 |
| | BP | 1150 | 1350 |
| | BQ | 1350 | 1570 |
| | BR | 1570 | 1850 |


Wavelength Bins

| Color | Wavelength Bin (WW) | Minimum Wavelength @ 13.5A | Maximum Wavelength @ 13.5A |
|-------|---------------------|----------------------------|----------------------------|
| Red | R3 | 615 | 619 |
| | R4 | 619 | 623 |
| | R5 | 623 | 627 |

*Note: Luminus maintains a +/- 6% tolerance on flux measurements. Luminus maintains a +/- 2% tolerance on CRI measurements.

Chromaticity Bins

Luminus' Standard Chromaticity Bins: 1931 CIE Curve

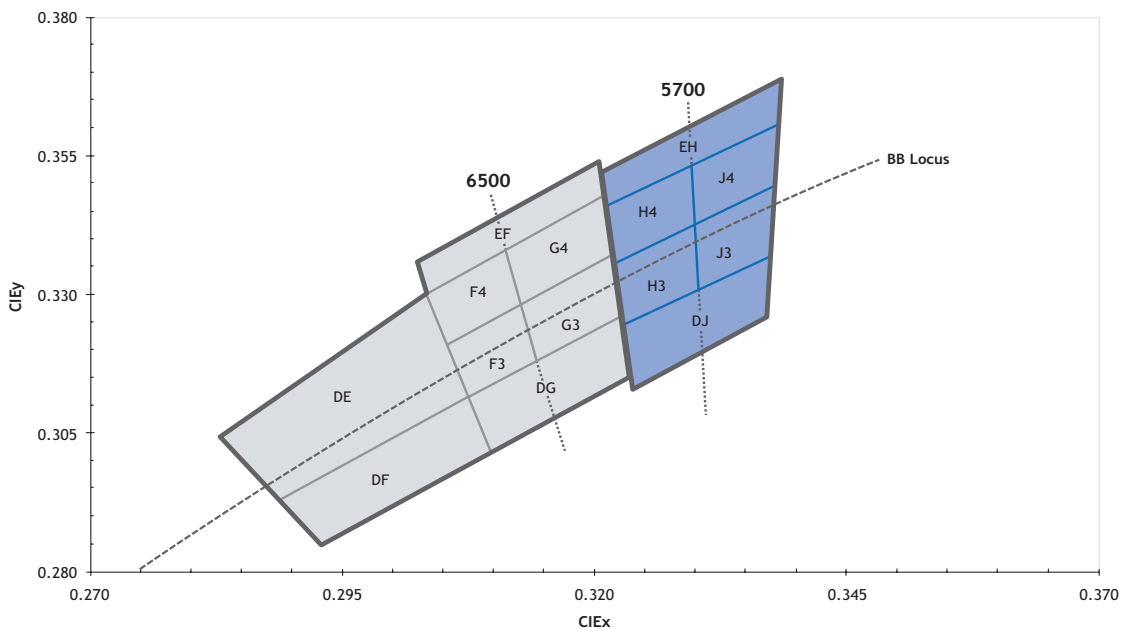

The following tables describe the four chromaticity points that bound each chromaticity bin. Chromaticity bins are grouped together based on the color temperature.

| 6500K Chromaticity Bins | | |
|-------------------------|------------------|------------------|
| Bin Code (WW) | CIE _x | CIE _y |
| DG | 0.307 | 0.311 |
| | 0.322 | 0.326 |
| | 0.323 | 0.316 |
| | 0.309 | 0.302 |
| F3* | 0.305 | 0.321 |
| | 0.313 | 0.329 |
| | 0.315 | 0.319 |
| | 0.307 | 0.311 |
| F4* | 0.303 | 0.330 |
| | 0.312 | 0.339 |
| | 0.313 | 0.329 |
| | 0.305 | 0.321 |
| G3* | 0.313 | 0.329 |
| | 0.321 | 0.337 |
| | 0.322 | 0.326 |
| | 0.315 | 0.319 |
| G4* | 0.312 | 0.339 |
| | 0.321 | 0.348 |
| | 0.321 | 0.337 |
| | 0.313 | 0.329 |
| EF | 0.302 | 0.335 |
| | 0.320 | 0.354 |
| | 0.321 | 0.348 |
| | 0.303 | 0.330 |
| DE | 0.283 | 0.304 |
| | 0.303 | 0.330 |
| | 0.307 | 0.311 |
| | 0.289 | 0.293 |
| DF | 0.289 | 0.293 |
| | 0.307 | 0.311 |
| | 0.309 | 0.302 |
| | 0.293 | 0.285 |

| 5700K Chromaticity Bins | | |
|-------------------------|------------------|------------------|
| Bin Code (WW) | CIE _x | CIE _y |
| DJ | 0.322 | 0.324 |
| | 0.337 | 0.337 |
| | 0.336 | 0.326 |
| | 0.323 | 0.314 |
| H3* | 0.321 | 0.335 |
| | 0.329 | 0.342 |
| | 0.329 | 0.331 |
| | 0.322 | 0.324 |
| H4* | 0.321 | 0.346 |
| | 0.329 | 0.354 |
| | 0.329 | 0.342 |
| | 0.321 | 0.335 |
| J3* | 0.329 | 0.342 |
| | 0.337 | 0.349 |
| | 0.337 | 0.337 |
| | 0.330 | 0.331 |
| J4* | 0.329 | 0.354 |
| | 0.338 | 0.362 |
| | 0.337 | 0.349 |
| | 0.329 | 0.342 |
| EH | 0.320 | 0.352 |
| | 0.338 | 0.368 |
| | 0.338 | 0.362 |
| | 0.321 | 0.346 |

*Sub-bins within ANSI defined quadrangles per ANSI C78.377-2008

Product Shipping & Labeling Information

All SBT-90 products are packaged and labeled with their respective bin as outlined in the tables on pages 3 & 4. When shipped, each package will only contain one bin. The part number designation is as follows:

| SBT-90 White | | | | | |
|------------------------|---------------------|-------------------------------|-----------------------|---------------------|---------------------|
| SBT | 90 | WNNX | F71 | FF | WW |
| Product Family | Chip Area | Color | Package Configuration | Flux Bin | Chromaticity Bin |
| Surface Mount (window) | 9.0 mm ² | CCT & CRI See Note 1 below | Internal Code | See page 3 for bins | See page 3 for bins |

Note 1: WNNX nomenclature corresponds to the following:

W = White

NN = color temperature, where:

65 corresponds to 6500K

57 corresponds to 5700K

X = color rendering index, where:

S (standard) corresponds to a typical CRI of 70

Example:

The part label SBT-90-W65S-F71-NA-G4 refers to a 6500K standard CRI white, SBT-90 emitter, with a flux range from 1,590 to 1,710 lumens and a chromaticity value within the box defined by the four points (0.313, 0.329), (0.321, 0.337), (0.321, 0.348), (0.312, 0.339).

| SBT-90- Red | | | | | |
|------------------------|---------------------|--------|-----------------------|---------------|----------------|
| SBT | 90 | R | F75 | FF | WW |
| Product Family | Chip Area | Color | Package Configuration | Flux Bin | Wavelength Bin |
| Surface Mount (window) | 9.0 mm ² | R: Red | Internal Code | See bins page | See bins page |

Example:

The part number SBT-90-R-F75-BK-R4 refers to a red part, with a flux range of 600 - 770 lumens and a wavelength range of 619 nm to 623 nm.

Note 2: Some flux and chromaticity bins may have limited availability. Application specific bin kits, consisting of multiple bins, may be available.

Ordering Information

| Ordering Part Number ^{1,2} | Color | Description |
|-------------------------------------|-------------|--|
| SBT-90-W57S-F71-NA100 | 5700K White | White SBT-90 consisting of a 9mm ² LED on ceramic substrate |
| SBT-90-W65S-F71-NA100 | 6500K White | |
| SBR-90-W57S-R71-NA100 | 5700K White | SBR-90 evaluation module consisting of a SBT-90 surface mount device mounted on an aluminum star board |
| SBR-90-W65S-R71-NA100 | 6500K White | |

| Ordering Part Number ² | Color | Description |
|-----------------------------------|-------|--|
| SBT-90-R-F75-HN100 | Red | Red SBT-90 consisting of a 9 mm ² LED on a ceramic substrate |
| SBR-90-R-R75-HN100 | Red | SBR-90 evaluation module consisting of a SBT-90 surface mount device mounted on an aluminum star board |

Note 1: NA100 - denotes a bin kit comprising of all flux bins with a minimum flux of 1,590 lumens and chromaticity bins at the 6500K color point.

Note 2: For ordering information on all available bin kits, please see PDS-001788: SBT-90 Binning & Labeling document.

SBT- 90- Electrical Characteristics¹

| White | | | | |
|------------------------------|----------------|-------------------------|--|-------------------|
| Drive Condition ² | | 9.0 A | | |
| Parameter | Symbol | Values at Test Currents | | Unit |
| Current Density | j | 1.0 | | A/mm ² |
| Forward Voltage | V _F | 3.5 | | V |

Common Characteristics

| Parameter | Symbol | White | Red | Unit |
|--|--------|-------|-------|-----------------|
| Emitting Area | | 9.0 | 9.0 | mm ² |
| Emitting Area Dimensions | | 3 x 3 | 3 x 3 | mm |
| Forward Voltage Temperature Coefficient ³ | | -2.45 | -1.3 | mV/C |
| Thermal Coefficient of Photometric Flux | | | -0.96 | %/C |

Absolute Maximum Ratings

| Parameter | Symbol | White | Red | Unit |
|---|--------------------|----------|----------|------|
| Absolute Minimum Operating Current | | 0.2 | 0.2 | A |
| Maximum Current ⁴ | | 13.5 | 13.5 | A |
| Maximum Junction Temperature ⁵ | T _{j-max} | 150 | 125 | °C |
| Storage Temperature Range | | -40/+100 | -40/+100 | °C |

Note 1: All ratings are based on operation at room temperature.

Note 2: Listed drive conditions are typical for common applications. SBT-90 devices can be driven at currents ranging from 1A to 13.5A and at duty cycles ranging from 1% to 100%. Drive current and duty cycle should be adjusted as necessary to maintain the junction temperature desired to meet application lifetime requirements.

Note 3: Forward voltage temperature coefficient at current density of 1 A/mm² and heat sink temperature of 40°C. Contact Luminus for value at other drive conditions.

Note 4: Luminus SBT-90 LEDs are designed for operation to an absolute maximum forward drive current density of 1.5 A/mm². Product lifetime data is specified at recommended forward drive currents. Sustained operation at absolute maximum currents will result in a reduction of device lifetime compared to recommended forward drive currents. Actual device lifetimes will also depend on junction temperature. Refer to the lifetime derating curves for further information. In pulsed operation, rise time from 10-90% of forward current should be larger than 0.5 microseconds.

Note 5: Lifetime is dependent on LED junction temperature. Thermal calculations based on input power and thermal management system should be performed to ensure T_j is maintained below T_{j-max} rating or life will be reduced. Refer to lifetime plots on page 9 and lifetime and reliability application note for further information.

SBT-90-R Optical & Electrical Characteristics

| Red | | | |
|---|--------------------|---------------------|-------------------|
| Drive Condition ² | | 13.5A | |
| Parameter | Symbol | Values ³ | Unit |
| Current Density | j | 1.5 | A/mm ² |
| Forward Voltage | V _{F min} | 2.3 | V |
| | V _F | 2.7 | V |
| | V _{F max} | 3.6 | V |
| Luminous Flux ⁴ | Φ _{V,typ} | 1350 | lm |
| Dominant Wavelength ⁵ | λ _d | 620 | nm |
| FWHM | Δλ _{1/2} | 18 | nm |
| Chromaticity Coordinates ^{6,7} | x | 0.695 | - |
| | y | 0.305 | - |

Relative Luminous Flux vs. Forward Current¹

Forward Current vs. Forward Voltage


Note 1: All ratings are based on a junction test temperature T_j = 25°C. See Thermal Resistance section for T_j definition.

Note 2: Listed drive conditions are typical for common applications. SBT-90 devices can be driven at currents ranging from <1 A to 13.5 A and at duty cycles ranging from 1% to 100%. Drive current and duty cycle should be adjusted as necessary to maintain the junction temperature desired to meet application lifetime requirements.

Note 3: Unless otherwise noted, values listed are typical. Devices are production tested and specified at 13.5A. Other values are for reference only.

Note 4: Total flux from emitting area at listed dominant wavelength. Reported performance is included to show trends for a selected power level. For specific minimum and maximum values, use bin tables. For product roadmap and future performance of devices, contact Luminus.

Note 5: Minimum and Maximum Dominant Wavelengths are based on typical values +/- 5nm for Red.

Note 6: In CIE 1931 chromaticity diagram coordinates, normalized to X+Y+Z=1.

Note 7: For reference only.


SBT-90-W Characteristics
Relative Output Flux vs. Forward Current¹

Forward Current vs. Forward Voltage

Median Lifetime²

Lumen Maintenance vs. Time³

Typical Spectrum⁴

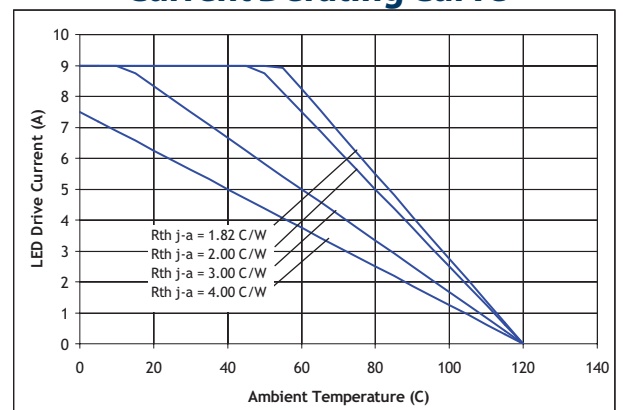Current Derating Curve


Note 1: Yellow squares indicate typical operating conditions.

Note 2: Median expected lifetime in dependence of junction temperature at 0.35 A/mm² in continuous operation. Lifetime defined as time to 70% of initial intensity. Based on lifetime test data of uncoated GaN devices at this time. Data can be used to model failure rate over typical product lifetime (contact Luminus for lifetime reliability test data for 1A/mm² condition).

Note 3: Lumen maintenance in dependence of time at 0.35 A/mm² in continuous operation with junction temperatures of 100 °C. Lumen maintenance calculation doesn't consider open and short circuit failure modes into account.

Note 4: Typical spectrum at current density of 0.35 A/mm² in continuous operation.

Typical Radiation Patterns

Typical Polar Radiation Pattern for White



Typical Angular Radiation Pattern for White



Thermal Resistance



Typical Thermal Resistance :

| | |
|--------------|----------|
| R_{j-c}^1 | 0.5 °C/W |
| R_{j-b}^1 | 1.2 °C/W |
| R_{j-hs}^2 | 1.4 °C/W |


Note 1: Thermal resistance values are based on FEA model results correlated to measured $R_{\theta j-hs}$ data.

Note 2: Thermal resistance is measured using a SAC305 solder, a Bergquist Al-clad MCPCB, and eGraf 1205 thermal interface material.

SBT-90-R Output vs. Temp., Lifetime and Spectrum



Median Lifetime Estimate vs. T_j¹

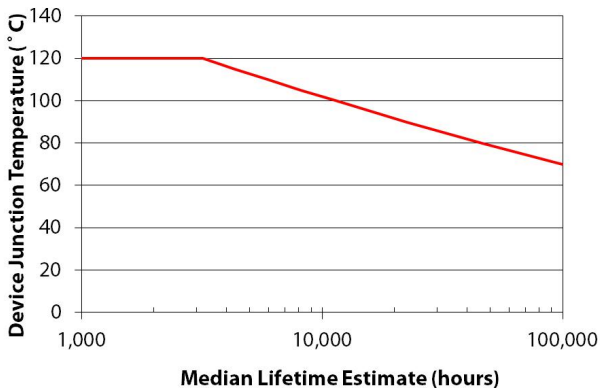

Lumen Maintenance²



Typical Spectrum³




Angular Distribution



Note 1. Median lifetime estimate as a function of junction temperature at 1.5A/mm² in continuous operation. Lifetime defined as time to 70% of initial intensity. Based on preliminary lifetime test data. Data can be used to model failure rate over typical product lifetime.

Note 2. Lumen maintenance vs. time at 1.5A/mm² in continuous operation, junction temperature equal to 25°C.

Note 3. Typical spectrum at current density of 1.5 A/mm² in continuous operation.

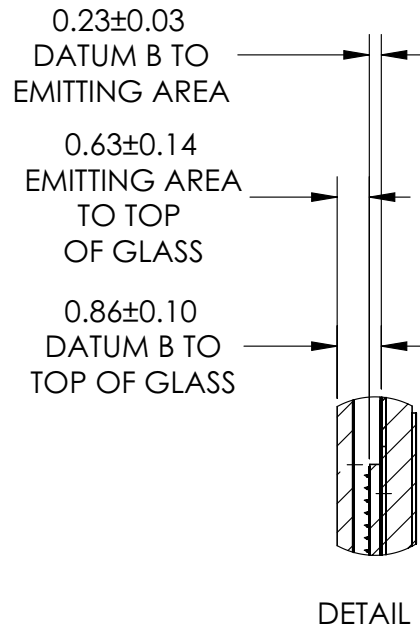Mechanical Dimensions – SBT-90 Emitter
DIMENSIONS IN MILLIMETERS


Mechanical Dimensions – SBT-90 Star Board


Note 1: Tolerances per IPC-610, Class 2

Note 2: For detail drawing of SBT-90, please see DWG-001553

Note 3: Recommended mounting screw: M3 or #4

Note 4: All dimensions in millimeters

Note 5: All anode pads on board are interconnected. All cathode pads on board are interconnected

Solder Profile

SAC 305 Reflow Profile Window For Low Density Boards



Lead free solder guideline for low density boards

| Solder Profile Stage | Lead-Free Solder |
|---------------------------------|--------------------|
| Profile length, Ambient to Peak | 2.75 - 3.5 minutes |
| Time above 217° C | 30 - 60 seconds |
| Cooldown Rate | ≤4° C/sec |
| Cooldown duration | 45 ± 15 sec |

Note 1: Temperatures are taken and monitored at the component copper layer

Note 2: Optimum profile may differ due to oven type, circuit board or assembly layout

Note 3: Recommended lead free, no-clean solder: AIM NC254-SAC305

Note 4: Refer to APN-001473 soldering and handling application note for additional solder profiles and details

Note 5: MSL- 1 Level

History of Changes

| Rev | Date | Description of Change |
|-----|------------|--|
| 15 | 06/16/2016 | Added SBT-90-W57S Product Editorial Fixes |
| 14 | 07/20/2016 | Updated graphs on page 8 and 11 |
| 13 | 06/04/2016 | Clarified minimum operating current |
| | | Updated thermal resistance values |
| | | Editorial Changes |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. Big Chip LEDs™ is a registered trademark of Luminus Devices, Inc., all rights reserved.

This product is protected by U.S. Patents 6,831,302; 7,074,631; 7,083,993; 7,084,434; 7,098,589; 7,105,861; 7,138,666; 7,166,870; 7,166,871; 7,170,100; 7,196,354; 7,211,831; 7,262,550; 7,274,043; 7,301,271; 7,341,880; 7,344,903; 7,345,416; 7,348,603; 7,388,233; 7,391,059 Patents Pending in the U.S. and other countries.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru