



Main

Range of product	Zelio Control
Product or component type	Industrial measurement and control relays
Relay type	Liquid level control relay
Relay name	RM4-L
Relay monitored parameters	Detection by resistive probes
Time delay	Adjustable 0.1...10 s
Power consumption	2.7 VA AC
Contacts type and composition	2 C/O

Complementary

[Un] rated nominal voltage	110...130 V AC 50/60 Hz
Operating voltage tolerance	0.85...1.1 Uc
Width	22.5 mm
Output contacts	2 C/O
Maximum electrode voltage	24 V AC
Maximum electrode current	1 mA
Maximum cable capacity	0 mF
Cable length	<= 1000 m
Sensitivity scale	25...500 kOhm HS (High Sensitivity) 2.5...50 kOhm St (Standard Sensitivity) 0.25...5 kOhm LS (Low Sensitivity)
Marking	CE : EMC 89/336/EEC CE : LVD 73/23/EEC
Overvoltage category	III conforming to IEC 60664-1
[Ui] rated insulation voltage	500 V conforming to IEC
Supply frequency	50/60 Hz +/- 5 %
Supply disconnection value	> 0.1 Uc
Operating position	Any position without derating
Connections - terminals	Screw terminals 2 x 2.5 mm ² , flexible cable without cable end Screw terminals 2 x 1.5 mm ² , flexible cable with cable end
Tightening torque	0.6...1.1 N.m
Mechanical durability	30000000 cycles
[Ith] conventional free air thermal current	8 A
[Ie] rated operational current	0.3 A at 115 V DC-13 70 °C conforming to VDE 0660 0.3 A at 115 V DC-13 70 °C conforming to IEC 60947-5-1/1991 0.1 A at 250 V DC-13 70 °C conforming to VDE 0660 0.1 A at 250 V DC-13 70 °C conforming to IEC 60947-5-1/1991 3 A at 250 V AC-15 70 °C conforming to VDE 0660 3 A at 250 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 24 V AC-15 70 °C conforming to VDE 0660 3 A at 24 V AC-15 70 °C conforming to IEC 60947-5-1/1991 3 A at 115 V AC-15 70 °C conforming to VDE 0660 3 A at 115 V AC-15 70 °C conforming to IEC 60947-5-1/1991 2 A at 24 V DC-13 70 °C conforming to VDE 0660 2 A at 24 V DC-13 70 °C conforming to IEC 60947-5-1/1991
Switching capacity in mA	10 mA at 12 V
Switching voltage	250 V AC <= 440 V AC
Contacts material	90/10 silver nickel contacts
Number of cables	2


CAD overall width	23 mm
CAD overall height	78 mm
CAD overall depth	80 mm
Terminals description ISO n°1	(15-16-18)OC (25-26-28)OC (A1-A2)CO (B1-B2-B3)CO
Output relay state	According to chosen function
9 mm pitches	2.5
Product weight	0.165 kg

Environment

Standards	EN/IEC 60255-6
Product certifications	CSA GL UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-20...65 °C
Relative humidity	15...85 % 3K3 conforming to IEC 60721-3-3
Vibration resistance	0.35 ms (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
IP degree of protection	IP50 (casing) conforming to IEC 60529 IP20 (terminals) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric test voltage	2.5 kV
Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	8 kV air conforming to IEC 61000-4-2 level 3 6 kV contact conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Protection against electric shocks	2 kV conforming to IEC 61000-4-5 level 3
Disturbance radiated/conducted	CISPR 11 group 1 - class A CISPR 22 - class A


Liquid Level Control Relays

Dimensions




Liquid Level Control Relays

Rail mounting




Screw fixing



Liquid Level Control Relays

RM4LG01 Wiring Diagram



A1- Supply voltage Electrodes (see table below)

A2,

B1,


B2,

B3

15-18 C/O contact of the output relay

Electrodes and level controlled	
B1	Reference or tank earth electrode
B2	High level
B3	Low level

RM4LA32 Wiring Diagram



A1- Supply voltage Electrodes (see table below)

A2,

B1,

B2,

B3

15-18 C/O contact of the output relay


25-28 2nd C/O contact of the output relay

25-26

Electrodes and level controlled	
B1	Reference or tank earth electrode
B2	High level
B3	Low level

Connection Examples

Control by Electrodes

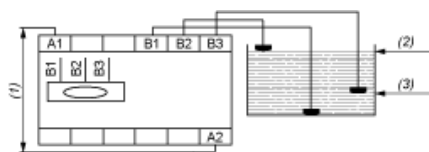


(1) Supply voltage

(2) High level

(3) Low level

Control by Probes

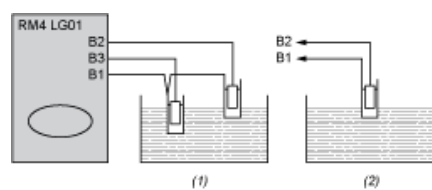


- (1) 2 levels
- (2) 1 level

Electrical Durability and Load Limit Curves


AC Load

Curve 1: Electrical durability of contacts on resistive load in millions of operating cycles



X Current broken in A
Y Millions of operating cycles

Curve 2: Reduction factor k for inductive loads (applies to values taken from durability Curve 1)



X Power factor on breaking ($\cos \varphi$)
Y Reduction factor K

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.5 A and $\cos \varphi = 0.3$.

For 0.5 A, curve 1 indicates a durability of approximately 1.5 million operating cycles.

As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2.


For $\cos \varphi = 0.3$: $k = 0.6$

The electrical durability therefore becomes:


1.5×10^6 operating cycles $\times 0.6 = 900\,000$ operating cycles

DC Load

Load limit curve




X Current in A
Y Voltage in V
1 $L/R = 20$ ms
2 L/R with load protection diode
3 Resistive load



Function Diagrams

Empty Function

Maximum level detection (2 electrodes or 1 probe LA9RM201)

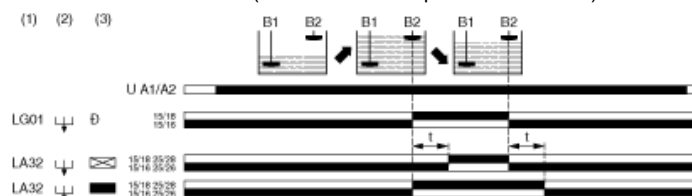

U A1/Supply voltage

A2

B1 Reference electrode

B2 High/low level electrode

(1) Type RM4

(2) Function switch

(3) Time delay switch

15/16 Output relays connections (refer to Connections and Schema)

15/18;


25/26,

25/28

Relay status: black color = energized.

On RM4LA32, a time delay can be set on energization or de-energization of the output relay.

Regulation between a maximum and a minimum level (3 electrodes or 2 probes LA9RM201)

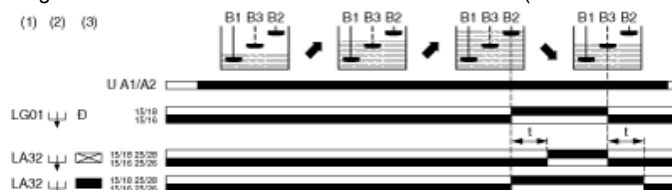

U A1/Supply voltage

A2

B1 Reference electrode

B2 High level electrode

B3 Low level electrode

(1) Type RM4

(2) Function switch

(3) Time delay switch

15/16 Output relays connections (refer to Connections and Schema)

15/18;

25/26,

25/28

Relay status: black color = energized.

On RM4LA32, a time delay can be set on energization or de-energization of the output relay.

Fill Function

Maximum level detection (2 electrodes or 1 probe LA9RM201)



U A1/Supply voltage

A2

B1 Reference electrode

B2 High/low level electrode

(1) Type RM4

(2) Function switch

(3) Time delay switch

15/16 Output relays connections (refer to Connections and Schema)

15/18;


25/26,

25/28

Relay status: black color = energized.

On RM4LA32, a time delay can be set on energization or de-energization of the output relay.

Regulation between a maximum and a minimum level (3 electrodes or 2 probes LA9RM201)

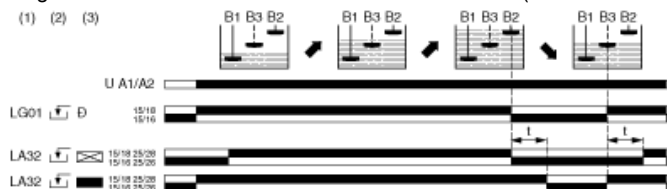

U A1/Supply voltage

A2

B1 Reference electrode

B2 High level electrode

B3 Low level electrode

(1) Type RM4

(2) Function switch

(3) Time delay switch

15/16 Output relays connections (refer to Connections and Schema)

15/18;

25/26,

25/28

Relay status: black color = energized.

On RM4LA32, a time delay can be set on energization or de-energization of the output relay.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru