

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0739440003](#)  
**Status:** **Active**  
**Overview:** [hdm](#)  
**Description:** 2.00mm (.079") Pitch HDM® Board-to-Board Backplane Header, Vertical, SMC, Solder Tail, Guide Pin Option, 72 Circuits

**Documents:**  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-73670-9999 \(PDF\)](#)

**Agency Certification**


CSA LR19980  
UL E29179

**General**

Product Family Backplane Connectors  
Series [73944](#)  
Application Backplane  
Component Type PCB Header  
Overview [hdm](#)  
Product Name HDM®  
Style N/A

**Physical**

Circuits (Loaded) 72  
Circuits (maximum) 72  
Color - Resin Black, Natural  
Durability (mating cycles max) 250  
First Mate / Last Break No  
Flammability 94V-0  
Guide to Mating Part Yes  
Keying to Mating Part Yes  
Material - Metal Phosphor Bronze, Stainless Steel  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Number of Columns 12  
Number of Pairs Open Pin Field  
Number of Rows 6  
Orientation Vertical  
PC Tail Length (in) 0.079 In  
PC Tail Length (mm) 2.00 mm  
PCB Locator No  
PCB Retention None  
PCB Thickness Recommended (in) 0.098 In  
PCB Thickness Recommended (mm) 2.50 mm  
Packaging Type Tube  
Pitch - Mating Interface (in) 0.079 In  
Pitch - Mating Interface (mm) 2.00 mm  
Pitch - Term. Interface (in) 0.079 In  
Pitch - Term. Interface (mm) 2.00 mm  
Plating min: Mating (µin) 30  
Plating min: Mating (µm) 0.75  
Plating min: Termination (µin) 100  
Plating min: Termination (µm) 2.5  
Polarized to PCB No

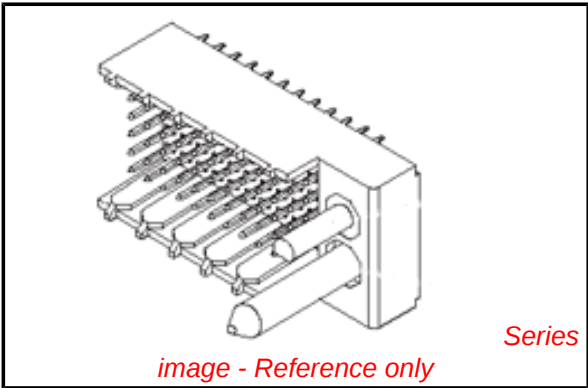

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
**Not Reviewed**  
**Halogen-Free**  
**Status**  
**Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[73944Series](#)

**Mates With**  
[73632](#) HDM PLUS® Board-to-Board Daughtercard Receptacle. [73780](#) HDM® Board-to-Board Daughtercard Receptacle

**Application Tooling | FAQ**  
*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*  
**Global**  

| Description                     | Product #                  |
|---------------------------------|----------------------------|
| HDM® Backplane Insertion Signal | <a href="#">0621001400</a> |
| Contact Tool                    |                            |
| Extraction Tool                 | <a href="#">0621001000</a> |

|                                |                 |
|--------------------------------|-----------------|
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | Yes             |
| Temperature Range - Operating  | -55°C to +105°C |
| Termination Interface: Style   | Through Hole    |

**Electrical**

|                               |          |
|-------------------------------|----------|
| Current - Maximum per Contact | 1A       |
| Data Rate                     | 1.0 Gbps |
| Real Signals (per 25mm)       | 75       |
| Shielded                      | No       |
| Voltage - Maximum             | 250V AC  |

**Material Info**

**Reference - Drawing Numbers**

|                         |               |
|-------------------------|---------------|
| Packaging Specification | PK-70873-0818 |
| Product Specification   | PS-73670-9999 |
| Sales Drawing           | SD-73944-001  |



HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/14/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

NOTES:

1. MATERIALS: HOUSING--LIQUID CRYSTAL POLYMER (LCP), GLASS FILLED, UL94V-0, COLOR: BLACK,  
TERMINAL: PHOSPHOR BRONZE.
2. FINISH: 0.75 MICROMETERS MINIMUM SELECTIVE GOLD (Au) IN MATING AREA  
2.50 MICROMETERS MINIMUM SELECTIVE TIN (Sn) IN TAIL AREA  
NICKEL (Ni) UNDERPLATE OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-73670-9999.
4. FOR MIXED CONTACT MATING LENGTHS, CONSULT FACTORY FOR AVAILABILITY.
5. SEE SHEET 2 FOR SPECIFIC MATERIAL NUMBERS.
6. PACKAGE PER PK-70873-0818.
7. PARTS MARKED WITH PART NUMBER AND DATE CODE, ON EITHER SIDE, APPROXIMATELY WHERE SHOWN.

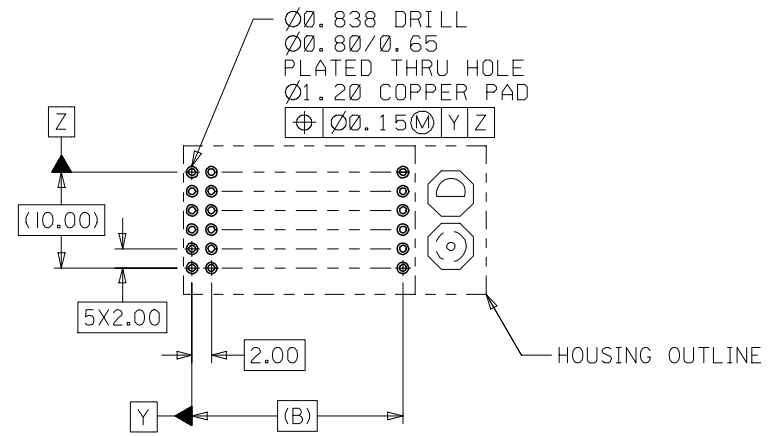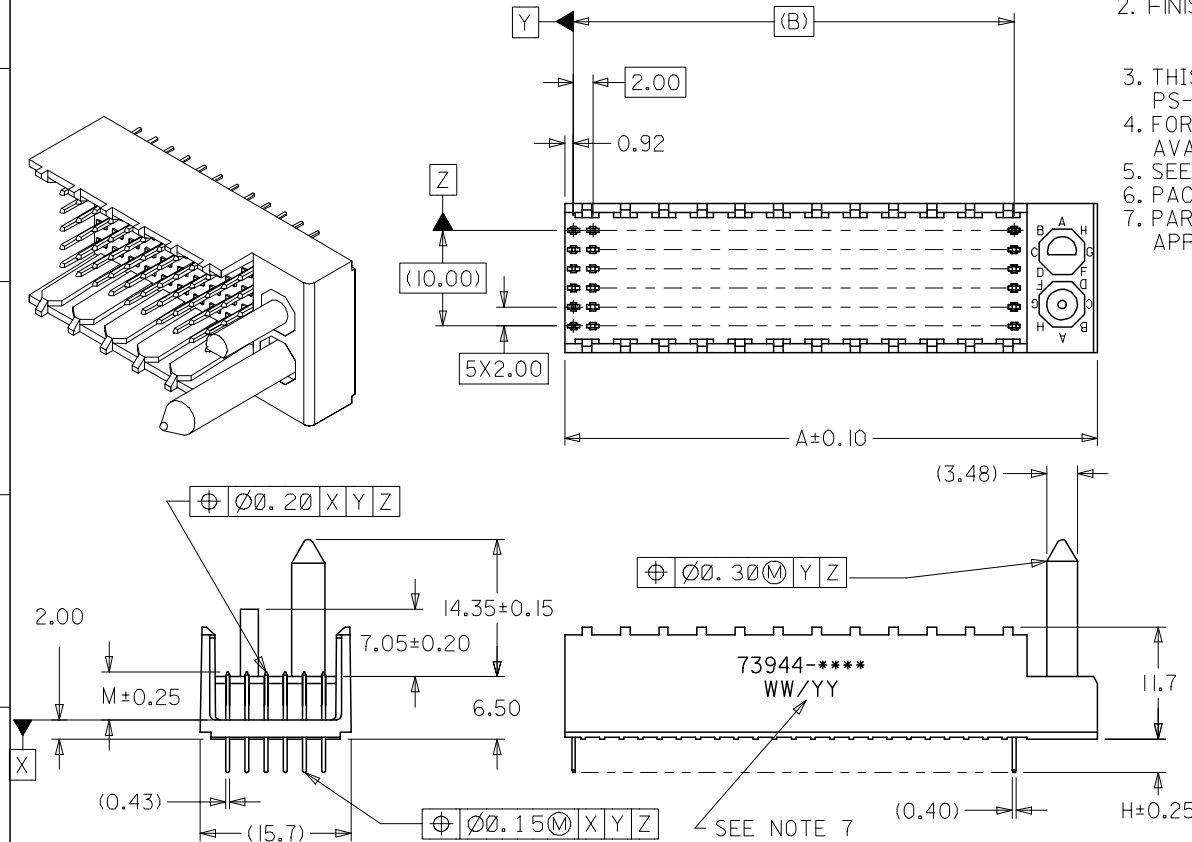


PCB LAYOUT: COMPONENT SIDE  
RECOMMENDED PCB THICKNESS: 2.50 MIN

|     |     |
|-----|-----|
| 2   | A   |
| 1   | G   |
| SHT | REV |

|                                                                                                                              |                                                  |                                                            |  |                            |  |                                                                                                                                  |                                                                                |                                   |
|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------|--|----------------------------|--|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------|
| MODIFY FINISH NOTE<br>EC NO: UCP2007-2259<br>DRWN:MSI BARRA 2007/03/13<br>CHKD:BBARKER 2007/03/21<br>APPR:SMILLER 2007/03/22 | QUALITY SYMBOLS<br><div>▽=0</div> <div>▽=0</div> | GENERAL TOLERANCES (UNLESS SPECIFIED)                      |  | DIMENSION STYLE<br>MM ONLY |  | SCALE<br>2:1                                                                                                                     | DESIGN UNITS<br>METRIC                                                         | <div>THIRD ANGLE PROJECTION</div> |
|                                                                                                                              |                                                  |                                                            |  | DRAWN BY<br>JB INGHAM      |  | DATE<br>1998/01/14                                                                                                               | TITLE<br>SALES ASSY HDM BACKPLANE<br>POLAR/GUIDE OPTION<br>SOLDER TAIL VERSION |                                   |
|                                                                                                                              |                                                  |                                                            |  | CHECKED BY<br>SREED        |  | DATE<br>1998/01/14                                                                                                               |                                                                                |                                   |
|                                                                                                                              |                                                  |                                                            |  | APPROVED BY<br>CBIXLER     |  | DATE<br>1998/01/14                                                                                                               |                                                                                |                                   |
|                                                                                                                              |                                                  |                                                            |  | MATERIAL NO.<br>SEE CHART  |  | DOCUMENT NO.<br>SD-73944-001                                                                                                     |                                                                                |                                   |
| G                                                                                                                            | REV                                              | DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS |  | SIZE<br>B                  |  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                                |                                   |

LOCATION A

LOCATION B

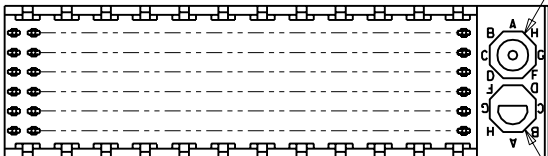

REF. MATERIAL NUMBER 73944-1009  
GUIDE PIN IS IN LOCATION A  
POLARIZING KEY IS IN LOCATION B, POSITION E

REF. MATERIAL NUMBER 73944-1008  
GUIDE PIN IS IN LOCATION B  
POLARIZING KEY IS IN LOCATION A, POSITION E

## MATERIAL NUMBER ASSIGNMENT

73944- \* \* \* \*

| NUMBER | CIRCUIT SIZE | DIM "A" | DIM "B" | DIM "H" |
|--------|--------------|---------|---------|---------|
| 0      | 72           | 31.60   | 22.00   | 2.00    |
| 1      | 144          | 55.60   | 46.00   | 2.00    |
| 2      | 72           | 31.60   | 22.00   | 2.50    |
| 3      | 144          | 55.60   | 46.00   | 2.50    |
| 4      | 72           | 31.60   | 22.00   | 3.00    |
| 5      | 144          | 55.60   | 46.00   | 3.00    |
| 6      | 72           | 31.60   | 22.00   | 3.50    |
| 7      | 144          | 55.60   | 46.00   | 3.50    |

| NUMBER | DIM "M" |
|--------|---------|
| 0      | 5.00    |
| 1      | 5.50    |
| 2      | 6.00    |

| NUMBER | GUIDE POST LOCATION | POLAR KEY POSITION |
|--------|---------------------|--------------------|
| 00     | B                   | A                  |
| 01     | A                   |                    |
| 02     | B                   |                    |
| 03     | A                   | B                  |
| 04     | B                   |                    |
| 05     | A                   | C                  |
| 06     | B                   |                    |
| 07     | A                   | D                  |
| 08     | B                   |                    |
| 09     | A                   | E                  |
| 10     | B                   |                    |
| 11     | A                   | F                  |
| 12     | B                   |                    |
| 13     | A                   | G                  |
| 14     | B                   |                    |
| 15     | A                   | H                  |
| 16     | B                   |                    |
| 17     | A                   | N/A                |
| 18     | N/A                 |                    |

SEE SHEET 1  
EC No. U81577  
DRWN: BINGHAM 98/02/03  
CHK: REED 98/02/03  
APPR: BIXLER 98/02/03

QUALITY SYMBOLS  
MAJOR  
CRITICAL

GENERAL TOLERANCES:  
(UNLESS SPECIFIED)  
mm INCH  
4 PLACES ±0. ±.  
3 PLACES ±0. ±.  
2 PLACES ±0. N/A ±.  
1 PLACE ±0. N/A ±.  
ANGULAR: ± 1/2°  
DRAFT WHERE APPLICABLE MUST  
REMAIN WITHIN DIMENSIONS

SCALE  
2 : 1  
DESIGN UNITS  
mm INCH  
DRAWN BY & DATE  
JBINGHAM 98/01/14  
CHECKED BY & DATE  
SREED 98/01/14  
APPROVED BY & DATE  
CBIXLER 98/01/14  
CAD FILENAME  
S73944X2.DGN

TITLE: SALES ASSY, HDM BACKPLANE  
POLAR/GUIDE OPTION  
SOLDER TAIL VERSION  
MOLEX INCORPORATED  
MATERIAL NO. SEE CHART  
DRAWING NO. SD-73944-001  
SHEET NO. 2  
SIZE B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)