

## Surge Protection Made Simple™ for UL Applications

**3-Pole BSP UL Series for 240 and 480Vac Three Phase 3 Wire Delta, 208, 480 and 600Vac Three Phase 3 Wire Wye and 240, 480Vac Impedance Grounded Systems**



### Description


The Cooper Bussmann 3-pole UL modular surge arresters for 240 and 480 3-phase Delta, and 120/208, 277/480 and 347/600Vac 3-phase Wye systems feature local, *easyID*™ visual indication and optional remote contact signaling. The unique module locking system fixes the protection module to the base part. Modules can be easily replaced without tools by simply depressing the release buttons. Integrated mechanical coding between the base and protection module ensures against installing an incorrect replacement module.

- Surge arrester according to UL 1449 3<sup>rd</sup> Edition, Type 2 Component Assembly helps meet UL 508A requirements
- Heavy-duty zinc oxide varistors for high discharge capacity
- "Thermo Dynamic Control" SPD monitoring device ensures high reliability against surge events
- Module locking system with module release button make module replacement easy without tools
- Up to 200kA Short-Circuit Current Rating (SCCR) make higher *assembly* SCCR ratings possible
- Optional remote signaling of all protection modules make status monitoring easy and accurate in any monitoring scheme
- No upstream overcurrent protection necessary to make installation easier and more economical
- Vibration and shock tested according to EN 60068-2 to withstand harsh environments

### Optional Remote Signaling Contact

The remote signaling contact versions have a floating changeover contact for use as a break or make contact for easy adoption in any monitoring application.

### Dimensions - mm

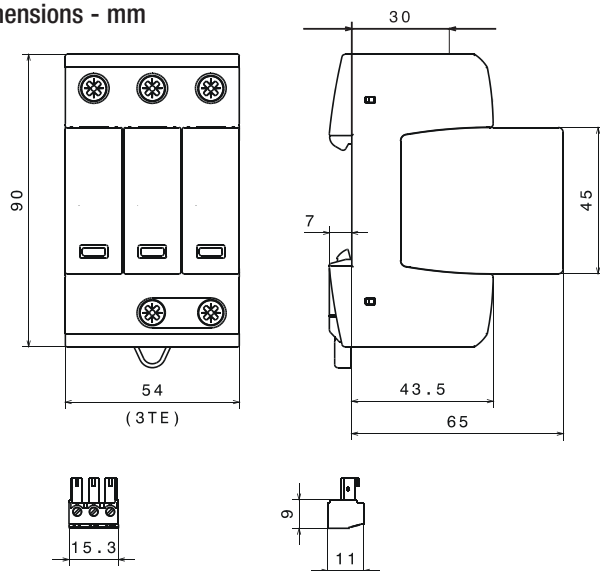

Shown with optional remote contact signaling



BSPM3208WYG  
BSPM3480WYG  
BSPM3600WYG  
BSPM3240DLG  
BSPM3480DLG



*easyID*™  
Visual Status Indication




Remote Signal  
Contact Available



## SCCR Rated BSP UL Series (Type 2)

### Circuit Diagrams

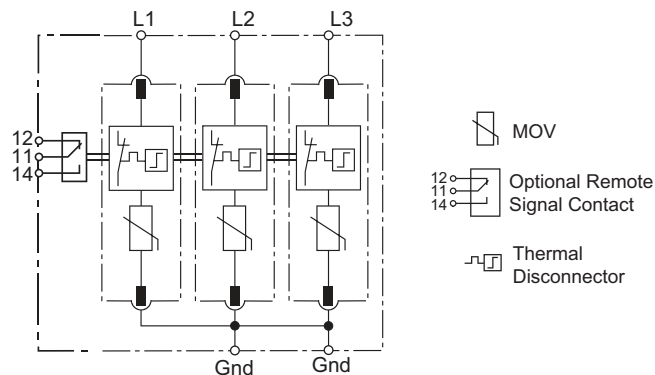


**BSPM3208WYG, BSPM3480WYG, BSPM3600WYG,  
BSPM3240DLG, BSPM3480DLG\***

Shown with optional remote contact signaling

\* For remote signaling contact, add "R" suffix to the part number. E.g., BSPM3480DLGR

| ORDERING INFORMATION                                                           |                          |                                             |              |              |              |              |
|--------------------------------------------------------------------------------|--------------------------|---------------------------------------------|--------------|--------------|--------------|--------------|
| Nominal System Voltage                                                         |                          | 120/208Vac                                  | 240Vac       | 277/480Vac   | 480Vac       | 347/600Vac   |
| Max. Continuous Operating AC Voltage MCOV [L-G/L-L]                            |                          | 275/550Vac                                  | 275/550Vac   | 385/770Vac   | 600/1200Vac  | 600/1200Vac  |
| Catalog Numbers:                                                               | Without Remote Signaling | BSPM3208WYG                                 | BSPM3240DLG  | BSPM3480WYG  | BSPM3480DLG  | BSPM3600WYG  |
|                                                                                | With Remote Signaling    | BSPM3208WYGR                                | BSPM3240DLGR | BSPM3480WYGR | BSPM3480DLGR | BSPM3600WYGR |
| Replacement Module                                                             | MOV Technology           | BPM275UL                                    | BPM275UL     | BPM385UL     | BPM600UL     | BPM600UL     |
| SPECIFICATIONS                                                                 |                          |                                             |              |              |              |              |
| Rated Voltage                                                                  |                          | 120-127Vac,<br>208-220Vac                   | 240Vac       | 277/480Vac   | 480Vac       | 347/600Vac   |
| Voltage Protection Rating V <sub>PR</sub> [L-G/L-L]                            |                          | 1kV/1.8kV                                   | 1kV/1.8kV    | 1.5kV/2.5kV  | 2kV/4kV      | 2kV/4kV      |
| SCCR                                                                           |                          | 200kA                                       | 200kA        | 200kA        | 125kA        | 125kA        |
| Nominal Discharge Current I <sub>n</sub> (kA)                                  |                          | 20kA                                        |              |              |              |              |
| Max. Discharge Current I <sub>max</sub> (kA)                                   |                          | 40kA                                        |              |              |              |              |
| Response Time t <sub>A</sub>                                                   |                          | ≤25 ns                                      |              |              |              |              |
| Frequency                                                                      |                          | 50/60Hz                                     |              |              |              |              |
| Number of Poles                                                                |                          | 3                                           |              |              |              |              |
| Number of Wires/Connection Points                                              |                          | 3 Wires / 4 Connection Points               |              |              |              |              |
| Operating Temperature Range                                                    |                          | -40°C to +80°C                              |              |              |              |              |
| Operating State/Fault Indication                                               |                          | Green (good) / Red (replace)                |              |              |              |              |
| Cross-Sectional Area (min.)                                                    |                          | 14AWG - Cu Stranded, Solid or Fine          |              |              |              |              |
| Cross-Sectional Area (max.)                                                    |                          | 2AWG - Cu Solid or Stranded, 4AWG - Cu Fine |              |              |              |              |
| Terminal Torque                                                                |                          | 45 lb-in                                    |              |              |              |              |
| For Mounting On                                                                |                          | 35mm DIN-Rail per to EN 60715               |              |              |              |              |
| Enclosure Material                                                             |                          | Thermoplastic, UL 94V0                      |              |              |              |              |
| Degree of Protection                                                           |                          | IP20 (finger-safe)                          |              |              |              |              |
| Location Category                                                              |                          | Indoor                                      |              |              |              |              |
| Capacity                                                                       |                          | 3 Mods, DIN 43880                           |              |              |              |              |
| Application                                                                    |                          | UL Type 2 Component Assembly                |              |              |              |              |
| Standard                                                                       |                          | UL 1449, 3 <sup>rd</sup> Edition            |              |              |              |              |
| Agency Information                                                             |                          | cURus, RoHS Compliant                       |              |              |              |              |
| Product Warranty                                                               |                          | Five Years*                                 |              |              |              |              |
| REMOTE CONTACT SIGNALING                                                       |                          |                                             |              |              |              |              |
| Remote Contact Signaling Type                                                  |                          | Changeover Contact                          |              |              |              |              |
| AC Switching Capacity (Volts/Amps)                                             |                          | 250V/0.5A                                   |              |              |              |              |
| DC Switching Capacity (Volts/Amps)                                             |                          | 250V/0.1A; 125V/0.2A; 75V/0.5A              |              |              |              |              |
| Conductor Ratings and Cross-Sectional Area for Remote Contact Signal Terminals |                          | 60/75°C Max. 1.5mm²/14AWG Solid/Flexible    |              |              |              |              |
| Ordering Information                                                           |                          | Order from Catalog Numbers Above            |              |              |              |              |


\* See Cooper Bussmann SPD Limited Warranty Statement (3A1502) for details at [www.cooperbussmann.com/surge](http://www.cooperbussmann.com/surge).

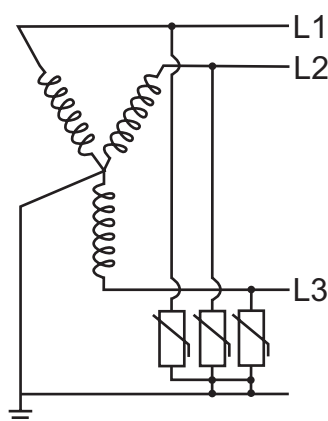


208, 480, 600Vac

Wye 3-Phase, 3 Wire + Ground

**BSPM3208WYG, BSPM3480WYG, BSPM3600WYG**

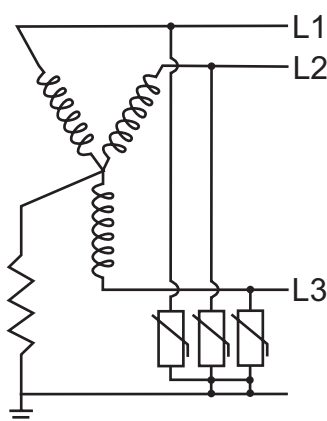

208V, 480V, 600Vac

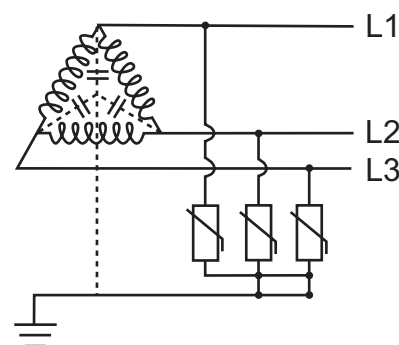

240, 480Vac

Delta 3-Phase, 3 Wire + Ground

**BSPM3240DLG, BSPM3480DLG**

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)