EI SERIES
CURRENT CONTROL RELAY

UL cUL listed

- **3 Product Types for Measurement Accuracy**
- **Under or Over Current - Selectable**
- **Space Saving 22.5mm Wide**
- **DIN-Rail / Surface Mount**

Three product types; EIL (2 to 500 mA), EIH (.1 to 10A) and EIT (10 to 100A with current transformers) provide selectable over or under current control.

AC/DC control without memory.

When the value of the controlled current, either AC or DC, reaches the threshold displayed on the front face, the output relay change state at the end of time delay T1. It returns to the initial state instantly when the current drops below the hysteresis threshold, or when the power supply is disconnected.

AC/DC control with memory.

When the value of the controlled current reaches the displayed threshold, the output relay changes status at the end of time period T1 and remains locked in this position. To reset the memory function the auxiliary supply must be disconnected.

Over-current function (UPPER).

The power-on time delay T2 prevents current peaks due to motor starting.
The delay on upward crossing of threshold T1 provides immunity to transients and other interference, thereby preventing spurious triggering of the output relay.

Under-current function (UNDER).

The power-on delay T2 prevents the occurrence of current troughs. The delay on downward crossing of threshold T1 provides immunity to random dips, thereby preventing spurious triggering of the output relay.

***Note**: In underload function, the absolute value of the hysteresis cannot be greater than the measurement range maximum.*

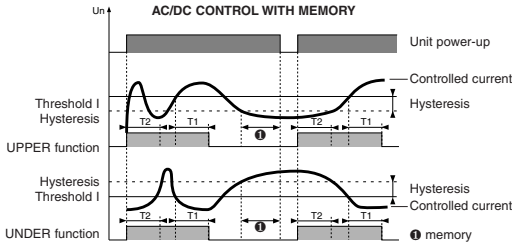

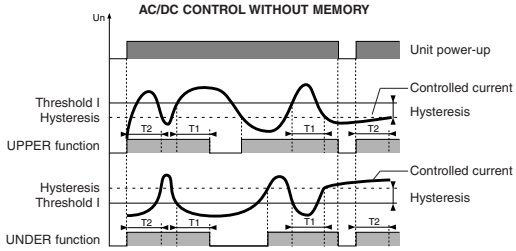

SPECIFICATIONS:

Input power	24 VDC, 24, 110 to 230 VAC ±15%, 50/60 Hz
Power Consumption	3 VA
Hysteresis Selection	5 to 50% of Displayed Threshold
Threshold Value	10 to 100% of Measurement Range
Setting Accuracy-Threshold	±10%
Repeat Accuracy	±0.1% with constant parameters
Voltage drift	±0.1% (±10% of input voltage)
Temperature drift	±0.02%
Power up delay T2	1 s to 20 s, ±30%
Delay on threshold overrun T1	0.1 s to 3 s, ±20%
Output relay	SPDT Relay
Contact Material	AgCdO
Maximum Loading	8A AC resist
Operating temperature	to 140°F, -20°C to 60°C
Storage temperature	-30°C to 70°C
Weight	(140g)





	Types	EIL			EIH			EIT
	Inputs	E1-M	E2-M	E3 M	E1-M	E2-M	E3 M	E1-M
Measurement range	Sensitivity	2 to 20 mA	10 to 100 mA	50 to 500 mA	.01 to 1 A	.5 to 5 A	1 to 10 A	10 to 100 A
	Input resistance	5 Ω	1 Ω	0.2 Ω	0.1 Ω	0.02 Ω	0.01 Ω	20 Ω

***Note:** 24VDC input power version. The input voltage and the measured current must be from separate sources. The "negative" poles of the auxiliary power supply and the measurement circuit are connected inside the unit*

DIMENSIONS: inches (mm)

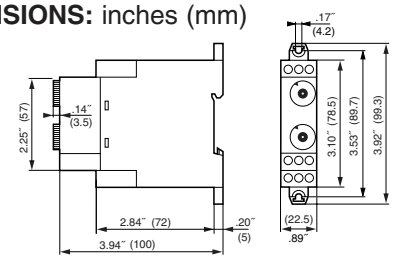



Transformer
ref. 26 852 304

PART NUMBER FOR ORDERING

Type	EIL	EIH	EIT
Measurement			10 to 100 A
range	2 to 500 mA	0.1 to 10 A	with current
Supply voltage			transformer
24 VDC	**84 871 020**	**84 871 030**	**84 871 040**
24 VAC	**84 871 021**	**84 871 031**	**84 871 041**
48 VAC	**84 871 022**	**84 871 032**	**84 871 042**
120 VAC	**84 871 023**	**84 871 033**	**84 871 043**
230 VAC	**84 871 024**	**84 871 034**	**84 871 044**
Current transformer			**26 852 304**

Products and specifications subject to change without notice.
Consult factory for application assistance.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru