

# NLSF3T125

## Quad Bus Buffer

### with 3-State Control Inputs

The NLSF3T125 is a high speed CMOS quad bus buffer fabricated with silicon gate CMOS technology. It achieves high speed operation similar to equivalent Bipolar Schottky TTL while maintaining CMOS low power dissipation.

The NLSF3T125 requires the 3-state control input ( $\overline{OE}$ ) to be set High to place the output into the high impedance state.

The T125 inputs are compatible with TTL levels. This device can be used as a level converter for interfacing 3.3 V to 5.0 V, because it has full 5.0 V CMOS level output swings.

The NLSF3T125 input structures provide protection when voltages between 0 V and 5.5 V are applied, regardless of the supply voltage. The output structures also provide protection when  $V_{CC} = 0$  V. These input and output structures help prevent device destruction caused by supply voltage – input/output voltage mismatch, battery backup, hot insertion, etc.

The internal circuit is composed of three stages, including a buffer output which provides high noise immunity and stable output. The inputs tolerate voltages up to 7.0 V, allowing the interface of 5.0 V systems to 3.0 V systems.

#### Features

- High Speed:  $t_{PD} = 3.8$  ns (Typ) at  $V_{CC} = 5.0$  V
- Low Power Dissipation:  $I_{CC} = 4.0$   $\mu$ A (Max) at  $T_A = 25^\circ$ C
- TTL-Compatible Inputs:  $V_{IL} = 0.8$  V;  $V_{IH} = 2.0$  V
- Power Down Protection Provided on Inputs
- Balanced Propagation Delays
- Designed for 2.0 V to 5.5 V Operating Range
- Low Noise:  $V_{OLP} = 0.8$  V (Max)
- Pin and Function Compatible with Other Standard Logic Families
- Latchup Performance Exceeds 300 mA
- ESD Performance: Human Body Model; > 2000 V, Machine Model; > 200 V
- Chip Complexity: 72 FETs or 18 Equivalent Gates
- These Devices are Pb-Free and are RoHS Compliant

#### FUNCTION TABLE

| NLSF3T125 |                 |        |
|-----------|-----------------|--------|
| Inputs    |                 | Output |
| A         | $\overline{OE}$ | Y      |
| H         | L               | H      |
| L         | L               | L      |
| X         | H               | Z      |




ON Semiconductor®

<http://onsemi.com>



QFN-16  
CASE 485G

#### MARKING DIAGRAM



NLSF3T125 = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

| Device         | Package             | Shipping†        |
|----------------|---------------------|------------------|
| NLSF3T125MNR2G | QFN-16<br>(Pb-Free) | 3000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NLSF3T125

## Active-Low Output Enables

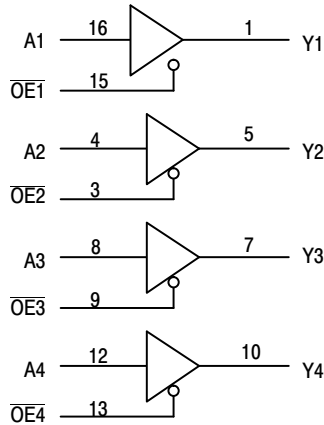


Figure 1. Logic Diagram

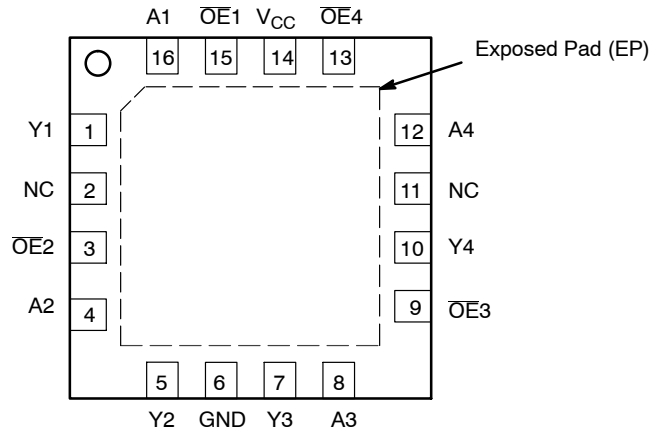


Figure 2. QFN – 16 Pinout (Top View)

## MAXIMUM RATINGS

| Symbol    | Parameter                                                     | Value                                  | Units       |
|-----------|---------------------------------------------------------------|----------------------------------------|-------------|
| $V_{CC}$  | DC Supply Voltage                                             | -0.5 to +7.0                           | V           |
| $V_{in}$  | DC Input Voltage                                              | -0.5 to +7.0                           | V           |
| $V_{out}$ | DC Output Voltage<br>Output in 3-State<br>High or Low State   | -0.5 to +7.0<br>-0.5 to $V_{CC} + 0.5$ | V           |
| $I_{IK}$  | Input Diode Current                                           | -20                                    | mA          |
| $I_{OK}$  | Output Diode Current ( $V_{OUT} < GND$ ; $V_{OUT} > V_{CC}$ ) | $\pm 20$                               | mA          |
| $I_{out}$ | DC Output Current, per Pin                                    | $\pm 25$                               | mA          |
| $I_{CC}$  | DC Supply Current, $V_{CC}$ and GND Pins                      | $\pm 75$                               | mA          |
| $P_D$     | Power Dissipation in Still Air<br>QFN Packages                | 500                                    | mW          |
| $T_{stg}$ | Storage Temperature                                           | -65 to +150                            | $^{\circ}C$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $GND \leq (V_{in} \text{ or } V_{out}) \leq V_{CC}$ . Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

# NLSF3T125

## RECOMMENDED OPERATING CONDITIONS

| Symbol     | Parameter                                                              | Min    | Max             | Units |
|------------|------------------------------------------------------------------------|--------|-----------------|-------|
| $V_{CC}$   | DC Supply Voltage                                                      | 2.0    | 5.5             | V     |
| $V_{in}$   | DC Input Voltage                                                       | 0      | 5.5             | V     |
| $V_{out}$  | DC Output Voltage<br>Output in 3-State<br>High or Low State            | 0<br>0 | 5.5<br>$V_{CC}$ | V     |
| $T_A$      | Operating Temperature                                                  | -40    | +85             | °C    |
| $t_r, t_f$ | Input Rise and Fall Time<br>$V_{CC} = 5.0 \text{ V} \pm 0.5 \text{ V}$ | 0      | 20              | ns/V  |

## DC ELECTRICAL CHARACTERISTICS

| Symbol    | Parameter                                                          | Test Conditions                                                                                                         | $V_{CC}$<br>(V)   | $T_A = 25^\circ\text{C}$                      |                   |                                                | $T_A \leq 85^\circ\text{C}$                   |                                                | $T_A \leq 125^\circ\text{C}$                  |                                                | Units         |
|-----------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------|-------------------|------------------------------------------------|-----------------------------------------------|------------------------------------------------|-----------------------------------------------|------------------------------------------------|---------------|
|           |                                                                    |                                                                                                                         |                   | Min                                           | Typ               | Max                                            | Min                                           | Max                                            | Min                                           | Max                                            |               |
| $V_{IH}$  | Minimum High-Level Input Voltage                                   | $2.3 \text{ V} \pm 0.3 \text{ V}$<br>$3.3 \text{ V} \pm 0.3 \text{ V}$<br>$5.0 \text{ V} \pm 0.5 \text{ V}$             |                   | $0.5 V_{CC}$<br>$0.4 V_{CC}$<br>$0.44 V_{CC}$ |                   |                                                | $0.5 V_{CC}$<br>$0.4 V_{CC}$<br>$0.44 V_{CC}$ |                                                | $0.5 V_{CC}$<br>$0.4 V_{CC}$<br>$0.44 V_{CC}$ |                                                | V             |
| $V_{IL}$  | Maximum Low-Level Input Voltage                                    | $2.3 \text{ V} \pm 0.3 \text{ V}$<br>$3.3 \text{ V} \pm 0.3 \text{ V}$<br>$5.0 \text{ V} \pm 0.5 \text{ V}$             |                   |                                               |                   | $0.3 V_{CC}$<br>$0.18 V_{CC}$<br>$0.18 V_{CC}$ |                                               | $0.3 V_{CC}$<br>$0.18 V_{CC}$<br>$0.18 V_{CC}$ |                                               | $0.3 V_{CC}$<br>$0.18 V_{CC}$<br>$0.18 V_{CC}$ | V             |
| $V_{OH}$  | Minimum High-Level Output Voltage<br>$V_{IN} = V_{IH}$ or $V_{IL}$ | $V_{OL} @ I_{OL}, 50 \text{ mA}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$<br>$I_{OH} = -50 \mu\text{A}$                         | 2.0<br>3.0<br>4.5 | 1.9<br>2.9<br>4.4                             | 2.0<br>3.0<br>4.5 |                                                | 1.9<br>2.9<br>4.4                             |                                                | 1.9<br>2.9<br>4.4                             |                                                | V             |
|           |                                                                    | $V_{IN} = V_{IH}$ or $V_{IL}$<br>$I_{OH} = -2.0 \text{ mA}$<br>$I_{OH} = -4.0 \text{ mA}$<br>$I_{OH} = -8.0 \text{ mA}$ | 2.0<br>3.0<br>4.5 | 1.82<br>2.58<br>3.94                          |                   |                                                | 1.72<br>2.48<br>3.80                          |                                                | 1.60<br>2.34<br>3.66                          |                                                |               |
|           |                                                                    |                                                                                                                         |                   |                                               |                   |                                                |                                               |                                                |                                               |                                                |               |
|           |                                                                    |                                                                                                                         |                   |                                               |                   |                                                |                                               |                                                |                                               |                                                |               |
| $V_{OL}$  | Maximum Low-Level Output Voltage<br>$V_{IN} = V_{IH}$ or $V_{IL}$  | $V_{OL} @ I_{OL}, 50 \text{ mA}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$<br>$I_{OL} = 50 \mu\text{A}$                          | 2.0<br>3.0<br>4.5 |                                               | 0.0<br>0.0<br>0.0 | 0.1<br>0.1<br>0.1                              |                                               | 0.1<br>0.1<br>0.1                              |                                               | 0.1<br>0.1<br>0.1                              | V             |
|           |                                                                    | $V_{IN} = V_{IH}$ or $V_{IL}$<br>$I_{OL} = 2.0 \text{ mA}$<br>$I_{OL} = 4.0 \text{ mA}$<br>$I_{OL} = 8.0 \text{ mA}$    | 2.0<br>3.0<br>4.5 |                                               |                   | 0.36<br>0.36<br>0.36                           |                                               | 0.44<br>0.44<br>0.44                           |                                               | 0.52<br>0.52<br>0.52                           |               |
|           |                                                                    |                                                                                                                         |                   |                                               |                   |                                                |                                               |                                                |                                               |                                                |               |
|           |                                                                    |                                                                                                                         |                   |                                               |                   |                                                |                                               |                                                |                                               |                                                |               |
| $I_{IN}$  | Maximum Input Leakage Current                                      | $V_{IN} = 5.5 \text{ V}$ or GND                                                                                         | 0 to 5.5          |                                               |                   | $\pm 0.1$                                      |                                               | $\pm 1.0$                                      |                                               | $\pm 1.0$                                      | $\mu\text{A}$ |
| $I_{CC}$  | Maximum Quiescent Supply Current                                   | $V_{IN} = V_{CC}$ or GND                                                                                                | 5.5               |                                               |                   | 2.0                                            |                                               | 20                                             |                                               | 40                                             | $\mu\text{A}$ |
| $I_{CCT}$ | Quiescent Supply Current                                           | Input: $V_{IN} = 3.4 \text{ V}$                                                                                         | 5.5               |                                               |                   | 1.35                                           |                                               | 1.50                                           |                                               | 1.65                                           | mA            |
| $I_{OZ}$  | Maximum 3-State Leakage Current                                    | $V_{IN} = V_{IH}$ or $V_{IL}$<br>$V_{OUT} = V_{CC}$ or GND                                                              | 5.5               |                                               |                   | $\pm 0.25$                                     |                                               | $\pm 2.5$                                      |                                               | $\pm 2.5$                                      | $\mu\text{A}$ |
| $I_{OPD}$ | Output Leakage Current                                             | $V_{OUT} = 5.5 \text{ V}$                                                                                               | 0.0               |                                               |                   | 0.5                                            |                                               | 5.0                                            |                                               | 10                                             | $\mu\text{A}$ |

# NLSF3T125

## AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0$ ns)

| Symbol                                                | Parameter                                                               | Test Conditions                                                                | $T_A = 25^\circ\text{C}$ |            |             | $T_A \leq 85^\circ\text{C}$ |             | $T_A \leq 125^\circ\text{C}$ |              | Units |
|-------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------|------------|-------------|-----------------------------|-------------|------------------------------|--------------|-------|
|                                                       |                                                                         |                                                                                | Min                      | Typ        | Max         | Min                         | Max         | Min                          | Max          |       |
| $t_{PLH}$ ,<br>$t_{PHL}$                              | Maximum Propagation Delay, A to Y                                       | $V_{CC} = 2.3 \pm 0.3$ V $C_L = 15$ pF                                         | 1.0                      | 14.5       | 16.9        | 1.0                         | 18.1        | 1.0                          | 19.2         | ns    |
|                                                       |                                                                         | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$C_L = 50$ pF                        | 1.0<br>1.0               | 5.6<br>8.1 | 8.0<br>11.5 | 1.0<br>1.0                  | 9.5<br>13.0 | 1.0<br>1.0                   | 12.0<br>16.0 | ns    |
|                                                       |                                                                         | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$C_L = 50$ pF                        | 1.0<br>1.0               | 3.8<br>5.3 | 5.5<br>7.5  | 1.0<br>1.0                  | 6.5<br>8.5  | 1.0<br>1.0                   | 8.5<br>10.5  | ns    |
| $t_{PZL}$ ,<br>$t_{PZH}$                              | Maximum Output Enable Time, OE to Y                                     | $V_{CC} = 2.3 \pm 0.3$ V $C_L = 15$ pF                                         | 1.0                      | 14.8       | 16.2        | 1.0                         | 17.4        | 1.0                          | 19.3         | ns    |
|                                                       |                                                                         | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 15$ pF<br>$R_L = 1.0$ k $\Omega$ $C_L = 50$ pF | 1.0<br>1.0               | 5.4<br>7.9 | 8.0<br>11.5 | 1.0<br>1.0                  | 9.5<br>13.0 | 1.0<br>1.0                   | 11.5<br>15.0 | ns    |
|                                                       |                                                                         | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 15$ pF<br>$R_L = 1.0$ k $\Omega$ $C_L = 50$ pF | 1.0<br>1.0               | 3.6<br>5.1 | 5.1<br>7.1  | 1.0<br>1.0                  | 6.0<br>8.0  | 1.0<br>1.0                   | 7.5<br>9.5   | ns    |
| $t_{PLZ}$ ,<br>$t_{PHZ}$                              | Maximum Output Disable Time, OE to Y                                    | $V_{CC} = 2.3 \pm 0.3$ V $C_L = 15$ pF                                         | 1.0                      | 15.4       | 18.0        | 1.0                         | 19.8        | 1.0                          | 22.0         | ns    |
|                                                       |                                                                         | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 50$ pF<br>$R_L = 1.0$ k $\Omega$               | 1.0                      | 9.5        | 13.2        | 1.0                         | 15.0        | 1.0                          | 18.0         | ns    |
|                                                       |                                                                         | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 50$ pF<br>$R_L = 1.0$ k $\Omega$               | 1.0                      | 6.1        | 8.8         | 1.0                         | 10.0        | 1.0                          | 12.0         | ns    |
| $t_{OSLH}$ ,<br>$t_{OSHL}$                            | Output-to-Output Skew                                                   | $V_{CC} = 3.3 \pm 0.3$ V $C_L = 50$ pF<br>(Note 1)                             |                          |            | 1.5         |                             | 1.5         |                              | 2.0          | ns    |
|                                                       |                                                                         | $V_{CC} = 5.0 \pm 0.5$ V $C_L = 50$ pF<br>(Note 1)                             |                          |            | 1.0         |                             | 1.0         |                              | 1.5          | ns    |
| $C_{in}$                                              | Maximum Input Capacitance                                               |                                                                                |                          | 4          | 10          |                             | 10          |                              | 10           | pF    |
| $C_{out}$                                             | Maximum Three-State Output Capacitance (Output in High Impedance State) |                                                                                |                          | 6          |             |                             |             |                              |              | pF    |
| Typical @ $25^\circ\text{C}$ , $V_{CC} = 5.0\text{V}$ |                                                                         |                                                                                |                          |            |             |                             |             |                              |              |       |
| $C_{PD}$                                              | Power Dissipation Capacitance (Note 2)                                  |                                                                                | 15                       |            |             |                             |             |                              |              | pF    |

- Parameter guaranteed by design.  $t_{OSLH} = |t_{PLHm} - t_{PLHn}|$ ,  $t_{OSHL} = |t_{PHLm} - t_{PHLn}|$ .
- $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC}/4$  (per buffer).  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$ .

## NOISE CHARACTERISTICS (Input $t_r = t_f = 3.0$ ns, $C_L = 50$ pF, $V_{CC} = 5.0$ V)

| Symbol    | Characteristic                           | $T_A = 25^\circ\text{C}$ |      | Units |
|-----------|------------------------------------------|--------------------------|------|-------|
|           |                                          | Typ                      | Max  |       |
| $V_{OLP}$ | Quiet Output Maximum Dynamic $V_{OL}$    | 0.3                      | 0.8  | V     |
| $V_{OLV}$ | Quiet Output Minimum Dynamic $V_{OL}$    | -0.3                     | -0.8 | V     |
| $V_{IHD}$ | Minimum High Level Dynamic Input Voltage |                          | 3.5  | V     |
| $V_{ILD}$ | Maximum Low Level Dynamic Input Voltage  |                          | 1.5  | V     |

SWITCHING WAVEFORMS

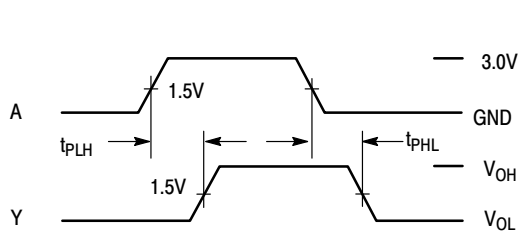


Figure 3.



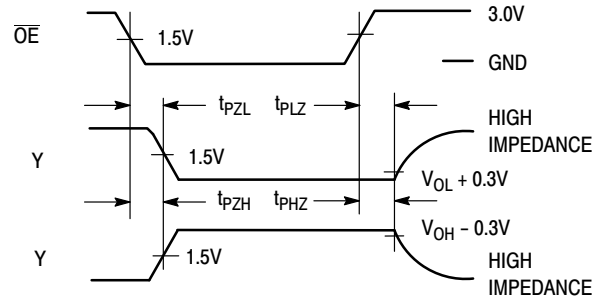


Figure 4.



\*Includes all probe and jig capacitance

Figure 5. Test Circuit

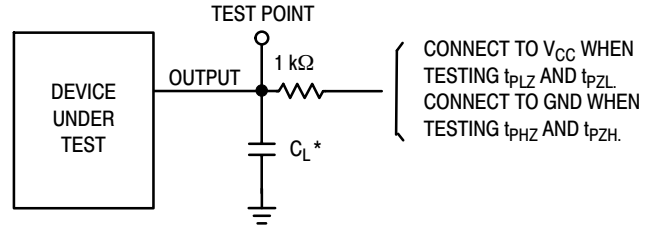




\*Includes all probe and jig capacitance

Figure 6. Test Circuit

# NLSF3T125

## PACKAGE DIMENSIONS

QFN16 3x3, 0.5P  
CASE 485G-01  
ISSUE F

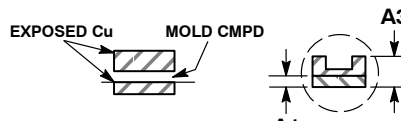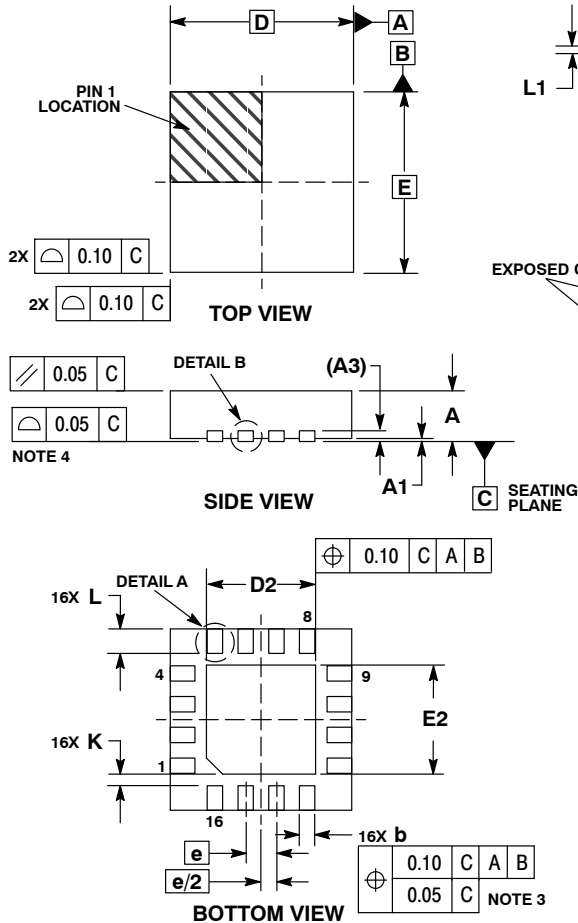


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| MILLIMETERS |          |      |      |
|-------------|----------|------|------|
| DIM         | MIN      | NOM  | MAX  |
| A           | 0.80     | 0.90 | 1.00 |
| A1          | 0.00     | 0.03 | 0.05 |
| A3          | 0.20 REF |      |      |
| b           | 0.18     | 0.24 | 0.30 |
| D           | 3.00 BSC |      |      |
| D2          | 1.65     | 1.75 | 1.85 |
| E           | 3.00 BSC |      |      |
| E2          | 1.65     | 1.75 | 1.85 |
| e           | 0.50 BSC |      |      |
| K           | 0.18 TYP |      |      |
| L           | 0.30     | 0.40 | 0.50 |
| L1          | 0.00     | 0.08 | 0.15 |

### RECOMMENDED SOLDERING FOOTPRINT\*

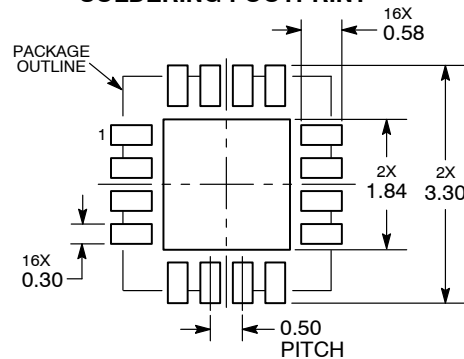

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

NLSF3T125/D

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)