



Dimensions: [mm]

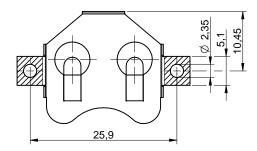



sectional drawing A-A








Scale - 1,5:1

Recommended Land Pattern: [mm]

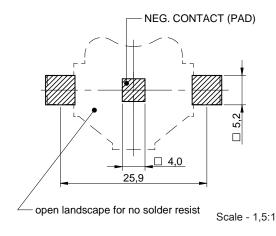

Properties:

Material	Phosphor Bronze				
Surface	Nickel				
Battery Type	2016,2020,2025,2032				

Packaging Properties:

Pac	kaging	Tape and Reel
-----	--------	---------------

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0

www.we-online.com eiSos@we-online.com WÜRTH ELEKTRONIK

CHECKED GENERAL TOLERANCE

JUSA DIN ISO 2768-1m

DESCRIPTION

CREATED

DaMa

Battery Holder WA-BCMC

79523141

| REVISION | STATUS | DATE (YYYY-MM-DD) | BUSINESS UNIT | PAGE | 001.000 | Valid | 2015-11-10 | eiCan | 1/5 |

Battery Type	Order Code							
2016 2020 2025 2022	79523211							
2016,2020,2025,2032	79523141							
0.420	79573231							
2430	79573131							

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0


www.we-online.com eiSos@we-online.com WÜRTH ELEKTRONIK


CREATED
DaMa
JUSa
DIN ISO 2768-1m


DESCRIPTION

Battery Holder WA-BCMC

Packaging Specification - Tape and Reel: [mm]

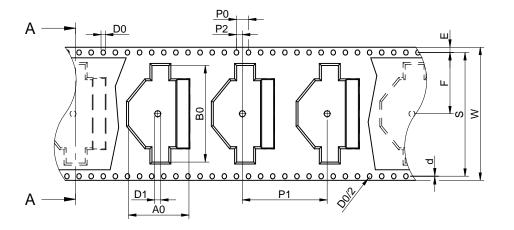



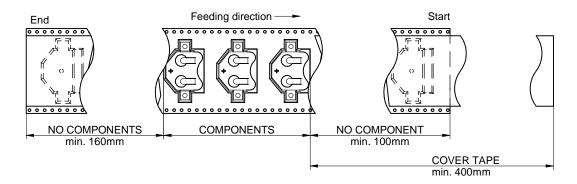

Tolerance

Tape width

W3.


Z

W2


close to center

Packaging is reffered to the international standard IEC 60286-3:2013

		A0	B0	W	T	T1	T2	K0	D0/2	D0	D1	E	S	F	P0	P1	P2	Tape Type	VPE / packaging unit
Tolerance		±0,1	±0,1	±0,3	±0,05	max.	typ.	±0,1	±0,05	+0,1/-0,0	+0,1/-0,0	±0,1	$\pm 0,1$	±0,1	$\pm 0,1$	±0,1	±0,1		pcs.
Dart Number	70522141	10.04	21.00	44.00	0.40	0.10	2 00	4.20	0.875	1.50	2.00	1 75	40.40	20.20	4 00	38 00	2 00	Polyetyrono	500

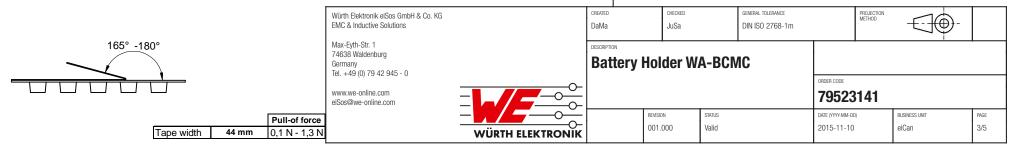

Classification Reflow Profile for SMT components:

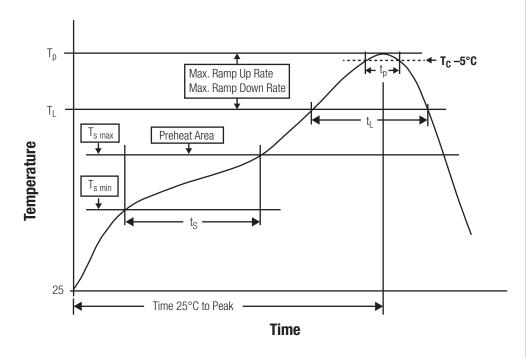

Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min ¹⁾	T _{s min}	150 °C
Preheat Temperature Max	T _{s max}	200 °C
Preheat Time t_s from $T_{s min}$ to $T_{s max}$	t _s	60 - 120 seconds
Ramp-up Rate (T _L to T _P)		3 °C/ second max.
Liquidous Temperature	T _L	217 °C
Time t_L maintained above T_L	t _L	60 - 150 seconds
Peak package body temperature	T _p	see table
Time within 5°C of actual peak temperaure	t p	20 - 30 seconds
Ramp-down Rate (T _L to T _P)		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

¹⁾ refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature:

Properties	Volume mm³ <350	Volume mm ³ 350-2000	Volume mm³ >2000		
PB-Free Assembly I Package Thickness < 1.6 mm ¹⁾	260 °C	260 °C	260 °C		
PB-Free Assembly I Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C		
PB-Free Assembly I Package Thickness ≥ 2.5 mm	250 °C	245 °C	245 °C		

¹⁾ refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

GENERAL TOLERANCE PROJECTION METHOD CREATED CHECKED Würth Elektronik eiSos GmbH & Co. KG **EMC & Inductive Solutions** DaMa JuSa DIN ISO 2768-1m Max-Eyth-Str. 1 74638 Waldenburg **Battery Holder WA-BCMC** Tel. +49 (0) 79 42 945 - 0 ORDER CODE www.we-online.com 79523141 eiSos@we-online.com DATE (YYYY-MM-DD) REVISION STATUS BUSINESS UNIT PAGE 001.000 Valid 4/5 2015-11-10 eiCan WÜRTH ELEKTRONIK

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle


Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

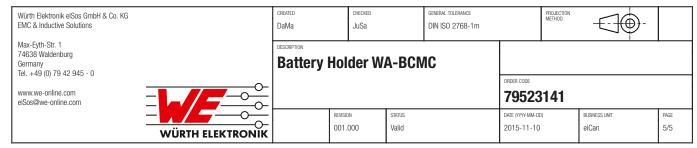



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru