

## Regional Service & Customization Centers

### China

Kunshan  
86-512-5777-5666

### Taiwan

Taipei  
886-2-2792-7818

### Netherlands

Eindhoven  
31-40-267-7000

### Poland

Warsaw  
48-22-33-23-730 / 741

### USA/ Canada

Milpitas, CA  
1-408-519-3898

## Worldwide Offices

### Greater China

#### China

**Toll Free** 800-810-0345  
Beijing 86-10-6298-4346  
Shanghai 86-21-3632-1616  
Shenzhen 86-755-8212-4222  
Chengdu 86-28-8545-0198  
Hong Kong 852-2720-5118

#### Taiwan

**Toll Free** 0800-777-111  
Rueiguang 886-2-2792-7818  
Yang Guang 886-2-2792-7818  
Xindian 886-2-2218-4567  
Taichung 886-4-2378-6250  
Kaohsiung 886-7-229-3600

### Asia Pacific

#### Japan

**Toll Free** 0800-500-1055  
Tokyo 81-3-6802-1021  
Osaka 81-6-6267-1887

#### Korea

**Toll Free** 080-363-9494  
Seoul 82-2-3663-9494

#### Singapore

Singapore 65-6442-1000

#### Malaysia

**Toll Free** 1800-88-1809  
Selangor 60-3-7725-4188  
Penang 60-4-537-9188

#### Indonesia

Jakarta 62-21-769-0525

#### Thailand

Bangkok 66-2-248-3140

#### India

**Toll Free** 1800-425-5070  
Bangalore 91-80-2545-0206

#### Australia

**Toll Free** 1300-308-531  
Melbourne 61-3-9797-0100  
Sydney 61-2-9476-9300

### Europe

#### Toll Free

00800-2426-8080

#### Germany

München 49-89-12599-0  
Hilden 49-2103-97885-0

#### France

Paris 33-1-4119-4666

#### Italy

Milano 39-02-9544-961

#### Benelux & Nordics

Breda 31-76-5233-100  
Roosendaal 31-165-550-505

#### UK

Reading 44-0118-929-4540

#### Poland

Warsaw 48-22-33-23-740 / 741

#### Russia

**Toll Free** 8-800-555-01-50  
Moscow 7-495-232-1692

### Americas

#### North America

**Toll Free** 1-888-576-9668  
Cincinnati 1-513-742-8895  
Milpitas 1-408-519-3898  
Irvine 1-949-789-7178

#### Brazil

**Toll Free** 0800-770-5355  
São Paulo 55-11-5592-5355

**ADVANTECH**

Enabling an Intelligent Planet

[www.advantech.com/eA](http://www.advantech.com/eA)

Please verify specifications before quoting. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.  
© Advantech Co., Ltd. 2012

2000020959

# Advantech Data Acquisition Solutions

Versatile Form Factors to Meet  
All Your DAQ Needs

- ✓ DAQ Software
- ✓ PCI & PCI Express Cards
- ✓ PC/104 & PCI-104 Modules
- ✓ USB DAQ Modules
- ✓ Signal Conditioners
- ✓ Motion Control



**ADVANTECH**

*Enabling an Intelligent Planet*

[www.advantech.com/eA](http://www.advantech.com/eA)

## Advantech Data Acquisition Solutions Overview

As a leading supplier of data acquisition products worldwide, Advantech offers a wide range of I/O devices with various interfaces and functions based on PC technology, from legacy ISA to modern USB, from signal-conditioning to graphical software tools. Advantech's industrial I/O products are reliable, accurate, affordable, and suitable for many industrial automation applications, such as T&M (Test & Measurement) and laboratory applications like monitoring, control, machine automation and production testing.

### Industrial I/O Product Lines



#### Signal Conditioning

Signal conditioning circuits improve the quality of signals generated by transducers before they are converted into digital signals by the PC's data acquisition hardware. Examples of signal conditioning are signal scaling, amplification, linearization, cold-junction compensation, filtering, attenuation, excitation, common-mode rejection, and so on. The ADAM-3000 series covers a wide range of signals from DC micro voltage to AC 400 V; and from mini-amp to 5 amp signals.



#### Data Acquisition Hardware






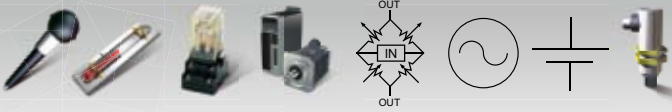
Every item of data acquisition hardware generally performs one or more of the following functions: analog input, analog output, digital input, digital output, counter/timer, and GPIB. Advantech offers dedicated products for each function in different interfaces, including USB, PCI, PCI Express, ISA, CompactPCI, PC/104 and PCI-104, for customers to choose from, regardless if the platform is an IPC, embedded PC, desktop computer or laptop.



#### Data Acquisition Software

Spanning a broad range of functionality from device drivers for controlling hardware interfaces to application software packages for developing systems, flexible software plays a vital role in developing automation and T&M applications. Not only does Advantech provide support for Windows 7, Windows XP, Windows CE, and Linux, but also offers graphic tools to help users deploy designs in shorter time.

## Comprehensive Product Offerings

<p><b>Development Tools</b></p>	
<p><b>Operating Systems</b></p>	
<p><b>Platforms</b></p>	
<p><b>DAQ Devices</b></p>	
<p><b>Wiring &amp; Signal Conditioners</b></p>	
<p><b>Sensors &amp; Actuators</b></p>	




## DAQNavi Greatly Reduces Costs and Improves Performance



### What is DAQNavi?

DAQNavi is a completed software package, for programmers to develop their application programs using Advantech DAQ boards or devices. This integrated software package includes drivers, SDK, tutorial and utility. With the user-friendly design, even the beginner can quickly get familiar with how to utilize DAQ hardware and write programs through the intuitive "Advantech Navigator" utility environment. Many example codes for different development environment dramatically decrease users' programming time and effort.

### DAQNavi Software Architecture

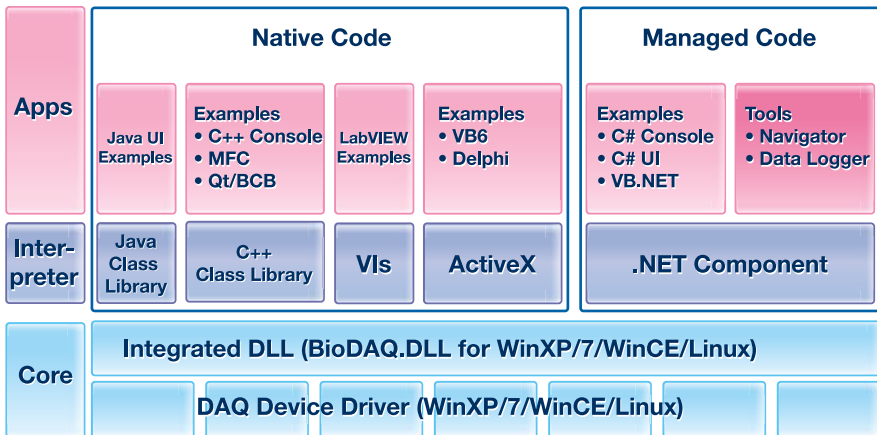

## Features



### Multiple Operating System Support

For different OS's, API functions will be the same, so users can simply install the driver without modifying the program when migrating between different operating systems. DAQNav supports Windows 7/Vista/XP/Server (32 and 64-bit) and the following Linux distributions: Ubuntu, Fedora, Mint, Redhat, and Susi.

\* For other Linux distributions, contact Advantech.



### LabVIEW Support

For LabVIEW users, DAQNav offers two programming options: Express VI and Polymorphic VIs. When users drag Express VI onto LabVIEW Block Diagrams, a pop-up intuitive wizard window will appear for configurations, making programming very easy. As for the Polymorphic VI, users can use several VIs and wiring diagrams to build advanced programs.



### .NET Support

DAQNav offers .NET component to benefit from unified platform features of the latest .NET technology. An intuitive window will appear when components are used in the .NET environment, and all configurations can be done by sequence. With Advantech Component-style class library (CSCL) technology, engineers can leverage the same programming tools in native environments such as Visual C++.



### C++, Delphi, VB and Java Support

DAQNav offers a C++ Class Library (for VC++ and BCB) and ActiveX (for VB and Delphi) for native programming environments with same interface as .NET Class Library. With the DAQNav Java Class Library, users can develop Java programs across different platforms (including Windows and Linux) using the Java engine.



### Easy-to-Use Advantech Navigator Utility

DAQNav provides one easy-to-use utility, called Advantech Navigator, to configure and test data acquisition devices before writing any program. It also offers a lot of tutorials and reference documentation.



### Application-oriented Example Scenarios

DAQNav defines commonly-used measurement and automation applications, named "scenarios". For each scenario, an example program is embedded within Advantech Navigator that you can execute it directly. Corresponding source code is provided, so you don't need to write your code from scratch.

## Easy-to-Use Advantech Navigator Utility



### SDKs


#### DAQ User Interface Manual

To shorten the development time, Advantech offer a lot of tutorial and reference documentation. You can find instructions for programming. It not only teaches you how to create an application project, but also how to write the program with a programming chart and example code.



### Video Tutorial

If you don't know how to start creating a project, Advantech offers a tutorial video for your reference.

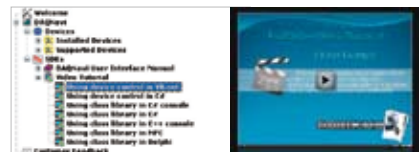

## Scenarios Commonly-used for Measurement and Automation Applications

Category	Scenario	Description
Analog Input	Instant AI	Read single AI value once
	Asynchronous One Buffered AI	Read a buffer of AI values once (Don't need to wait the acquisition is done to run other program)
	Synchronous One Buffered AI	Read a buffer of AI values once (Need to wait the acquisition is done to run other program)
	Streaming AI	Continuously read a buffer of AI values
Analog Output	Static AO	Change AO values once
	Asynchronous One Waveform AO	Change AO value based on a pre-defined waveform once (Don't need to wait the generation is done to run other program)
	Synchronous One Waveform AO	Change AO value based on a pre-defined waveform once (Need to wait the generation is done to run other program)
	Streaming AO	Continuously change AO value based on a pre-defined waveform

## Devices


You can see all your installed Advantech DAQ devices here, including the simulated DAQ device called "DemoDevice". In other words, you don't need any hardware installed on your computer to test all operations within DAQNav. For each device, there are four items you can select.

### Device Setting

You can perform all hardware configurations for the selected device.

### Device Test

You can test all hardware functionality here, without any programming.

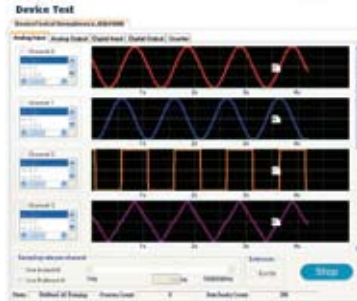


### Scenarios


For each scenario, an example program is embedded within Advantech Navigator so that you can execute it directly. Corresponding source code is provided, written in different languages (C#, VB .NET, C++, Delphi, Qt and Java). A wiring diagram for each scenario is available here.

### Reference

You can find the detailed user manuals for the selected device.

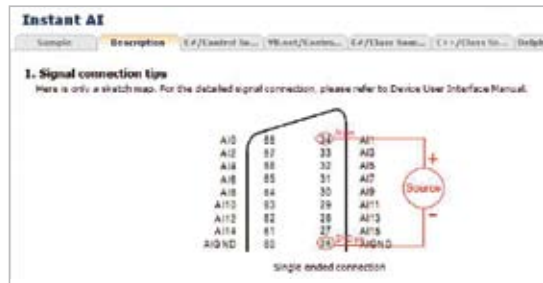

Category	Scenario	Description
Digital Input	Static DI	Read the selected DI port value once
	DI Interrupt	When DI bit meets a pre-defined edge change (rising or falling), an interrupt is generated
	DI Pattern Match Interrupt	When selected DI port meets pre-defined pattern, an interrupt is generated
	DI Status Change Interrupt	When the status of certain selected channel of DI port changes, an interrupt is generated
Digital Output	Static DO	Change DO values once
Timer/ Counter	Delayed Pulse Generation	When a trigger from counter gate is met, a pulse is generated after a specific period
	Pulse Output with Timer Interrupt	Continuously generate a periodic pulse train (using counter internal clock), and an event will be sent out at the same time.
	Event Counter	Continuously count the pulse number of signal from counter input
	Frequency Measurement	Measure frequency of signal from counter input
	Pulse Width Measurement	Measure pulse width of signal from counter input
	PWM Output	Generate PWM (Pulse Width Modulation) signal

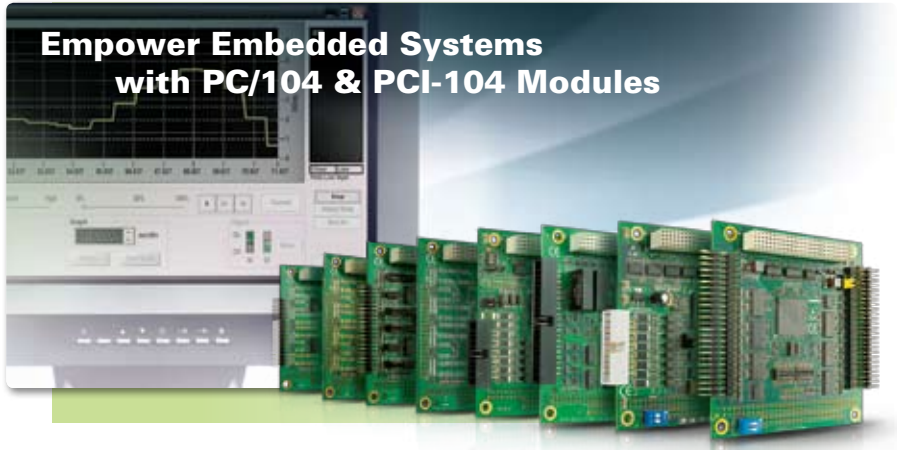


## Empower Embedded Systems with PC/104 & PCI-104 Modules

### Advantech's Complete Line of DAQ and Serial Communication Cards

Embedded computers are at the heart of many industrial, transportation, military, and aerospace applications. PC/104 and PCI-104 are the standard form factors used in embedded computing platforms due to their compact size, expansion capabilities, reliability, anti-vibration, wide operating temperature range and high-speed throughput features. Advantech provides a wide variety of PC/104 and PCI-104 module options, such as isolated digital I/O, analog I/O, relay, counter, and multifunction cards.

### Form Factors

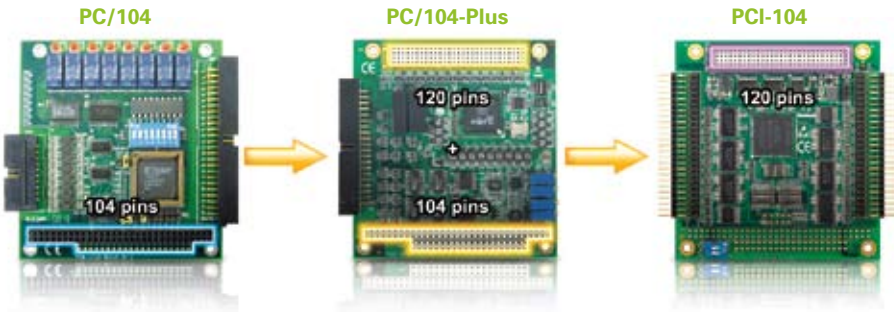

Form Factor	PC/104	PC/104-Plus	PCI-104
Release Year	1992	1997	2003
Connector	ISA (AT and XT)	ISA and PCI	PCI
Current Version	2.5	2.0	1.0

PC/104 & PCI-104

## Key Features



### Anti-vibration

PC/104 and PCI-104 products support 104 pin, 120 pin, or both for signal and data transmission. Each pin can be stacked into its corresponding connector shroud so firmly that could not only ensure no data errors will occur, but also provides excellent anti-vibration capabilities.



### Stackable/ Easy to Expand

The PC/104 and PCI-104 family supports standard ISA/PCI interfaces, uses open architectures, and are easy to expand. The consistent form factor allows different modules to be stacked on top of one another, providing users the versatility to easily expand I/O and functionality.



### Compact Size

With a standard dimension of 96 x 90 mm (L x H), the design of the PC/104 and PCI-104 saves more space than traditional I/O cards and is also a perfect solution for compact embedded systems.



### Wide Operating Temperature Range

Different from traditional IPCs, the PC/104 and PCI-104 form factors are capable of operating in temperatures from -40~85°C (-40~185°F) for reliable operation in harsh environments.



### Fast Read / Write Speed

While PCI-104 products use the standard PC/104 form factor, they have dropped the ISA interface, providing more bandwidth for data transmission and allowing faster read/ write speed than traditional ISA cards.



## PCI-104 Form Factors

### PCM-3730I

#### 32-ch Isolated Digital I/O PCI-104 Module



#### Features

- High-voltage isolation on input channels (2,500 Vdc)
- High output driving capacity
- Interrupt handling capability
- High-voltage isolation on output channels
- Wide operating temperature range (-20 ~ 70°C, -4 ~ 158°F)

#### Ordering Information

- **PCM-3730I** 32-ch Isolated Digital I/O PCI-104 Module
- **ADAM-3920** 20-pin DIN-rail Wiring Board
- **PCL-10120** 20-pin Flat Cable, 1 m/ 2m

#### Software Support



### PCM-3753I

#### 96-ch Digital I/O PCI-104 Module



#### Features

- Supports dry/wet contact
- Keeps the last output value after system hot reset
- "Pattern match" and "change of state" interrupt functions
- Interrupt output pin for simultaneously triggering external devices
- Output status read-back
- Wide operating temperature range (-20 ~ 70°C, -4 ~ 158°F)

#### Ordering Information

- **PCM-3753I** 96-ch Digital I/O PCI-104 Module w/50p Cable
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782B** 24-ch IDI Board w/ 20-pin & 50-pin Flat Cables
- **PCLD-785B** 24-ch Relay Board w/ 20-pin & 50-pin Flat Cables

#### Software Support



### PCM-3761I

#### 8-ch Relay and 8-ch Isolated Digital Input PCI-104 Module



#### Features

- 8 Form C type relay output channels
- Retained relay output values when hot system reset
- High-voltage isolation on input channels (2,500 Vdc)
- Wide input range (5 ~ 30 Vdc)
- Interrupt handling capability

#### Ordering Information

- **PCM-3761I** 8-ch Relay/Isolated Digital Input PCI-104 Module
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **PCL-10120** 20-pin Flat Cable, 1 m/ 2 m

#### Software Support



**PCM-3813I****100 kS/s, 12-bit, 32-ch Isolated Analog Input PCI-104 Module****Features**

- 32-ch single-ended or 16-ch differential analog input
- Programmable gain for each input channel
- Automatic channel/ gain/ SD scanning
- Isolation protection (2,500 Voc)
- Software polling, internal or external pacer sampling modes supported

**Ordering Information**

- **PCM-3813I** 100 kS/s, 12-bit Isolated AI PCI-104 Module
- **PCL-10141-0.2** IDE#2 40-pin to DB37(F) Flat Cable, 0.2 m
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

**Software Support****PCM-3810I****250 kS/s, 12-bit, 16-ch Multifunction PCI-104 Module****Features**

- 16-ch single-ended or 8-ch differential A/D input, switch selectable
- 12-bit A/D converter, up to 250 kHz sampling rate
- Programmable gain for each input channel
- Onboard ring buffer for analog input/output
- 2-ch analog output
- 16-ch digital input/output (5V/TTL compatible)
- 3-ch counter/timer

**Ordering Information**

- **PCM-3810I** 250 kS/s, 12-bit Multi. PCI-104 Module
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

**Software Support****PCM-3614I/3618I****4/8-port RS-232/422/485 PCI-104 Module****Features**

- Automatic RS-485 data flow control
- Shared IRQ settings for each port
- LED indicators: TX, RX
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Powerful and easy-to-use utility (ICOM Tools)
- Wide operating temperature range (-40 ~ 85°C, -40 ~ 185°F)

**Ordering Information**

- **PCM-3614I** 4-port RS-232/422/485 PCI-104 Module
- **PCM-3618I** 8-port RS-232/422/485 PCI-104 Module

**Software Support**

## PCM-3641I/3642I

### 4/8-port RS-232 PCI-104 Module



#### Features

- Transmission speeds up to 460 kbps
- Shared IRQ settings for each port
- Standard PC ports: COM1, COM2, COM3, COM4 compatible
- Powerful and easy-to-use utility (ICOM Tools)
- Wide operating temperature range (-40 ~ 85°C, -40 ~ 185°F)

#### Ordering Information

- **PCM-3641I** 4-port RS-232 PCI-104 Module
- **PCM-3642I** 8-port RS-232 PCI-104 Module

#### Software Support



## PCM-3680I

### 2-port CAN-bus PCI-104 Module with Isolation Protection



#### Features

- Operates two separate CAN networks at the same time
- High speed transmission up to 1 Mbps
- 16 MHz CAN controller frequency
- Optical isolation protection of 2,500 V<sub>oc</sub> ensures system reliability
- I/O address automatically assigned by PCI PnP
- Wide operating temperature range (-40 ~ 85°C, -40 ~ 185°F)

#### Ordering Information

- **PCM-3680I** 2-port CAN-bus PCI-104 Module w/ Iso. Protection

#### Software Support



## PC/104 Form Factors

### PCM-3680

### 2-port CAN-bus PC/104 Module with Isolation Protection



#### Features

- Operates two separate CAN networks simultaneously
- High speed transmission up to 500 kbps
- 16 MHz CAN controller frequency
- Optical isolation protection of 2,500 V<sub>oc</sub> ensures system reliability
- LEDs indicate transmit/receive status of each port
- Wide operating temperature range (-40 ~ 85°C, -40 ~ 185°F)

#### Ordering Information

- **PCM-3680** Dual-port Isolated CAN-bus PC/104 Module

#### Software Support



**PCM-3718H/HO/HG****100 kS/s, 12-bit, 16-ch PC/104 Multifunction Module****Features**

- 16-ch single-ended or 8-ch differential analog input
- 12-bit A/D converter, up to 100 KHz sampling rate with DMA transfer
- 1-ch analog output (PCM-3718HO only)
- 16-ch digital input/output (5V/TTL compatible)

**Software Support****Ordering Information**

- **PCM-3718H** 100 kS/s, 12-bit Multi. PC/104 Module
- **PCM-3718HG** 100 kS/s, 12-bit High-gain Multi. PC/104 Module
- **PCM-3718HO** 100 kS/s, 12-bit Multi. PC/104 Module w/AO
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCL-10120** 20-pin Flat Cable, 1 m/ 2 m

**PCM-3725****8-ch Relay and Isolated Digital Input PC/104 Module****Features**

- 8-ch relay output (Form C)
- Opto-isolated 8-ch digital input
- LED indicators to show activated relays
- Onboard relay driver circuits
- Onboard input signal conditioning circuits

**Software Support****Ordering Information**

- **PCM-3725** 8-ch Relay/Isolated Digital Input PC/104 Module
- **PCL-10120** 20-pin Flat Cable, 1 m/ 2m
- **PCL-10150-1.2** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables


**PCM-3730****16-ch Isolated Digital I/O PC/104 Module****Features**

- 5V/TTL compatible DI/O: 16-ch DI and 16-ch DO
- Opto-isolated DI/O: 8-ch DI and 8-ch DO
- Interrupt handling capability
- High output driving capacity

**Software Support****Ordering Information**

- **PCM-3730** 16-ch Isolated DI/O PC/104 Module w/ 20p Cable
- **PCL-10120** 20-pin Flat Cable, 1 m/ 2m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables

## Think Outside the Box

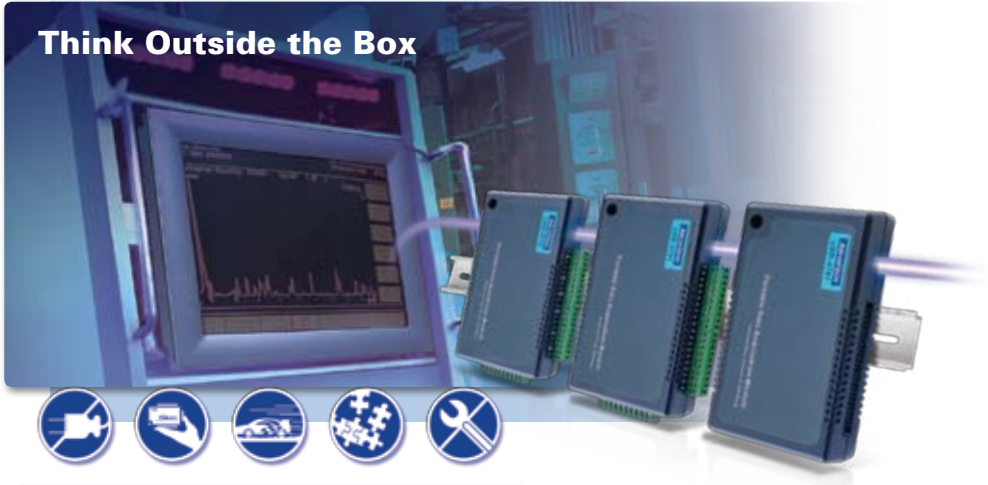

### Portable, Robust & Versatile USB DAQ Modules

Advantech's USB DAQ modules are known for their user-friendly design and ability to replace traditional serial and parallel devices as they eliminate the need for an external power and allow hot swapping. Through the Advantech USB DAQ series, users can easily upgrade their computing platforms with cutting edge technologies and realize cost-effective maintenance while allowing the data acquisition devices to operate as usual. By adding industrial-grade features, including lockable cables, multiple mounting methods and advanced detection functions, Advantech's USB data acquisition devices are a great fit for any industrial need.

### Mounting Schemes




#### DIN-rail Mount

Advantech's USB DAQ modules come with a bracket that facilitates the DIN-rail mounting onto industry standard streamlined systems.



#### Wall/Panel Mount

The wallmount kit can help users hang their modules on the wall or other flat surfaces.



#### VESA Mount

The VESA bracket can mount the USB data acquisition module to the VESA-ready appliances, such as Advantech's touch panel computers (TPC series) and the flat panel monitors (FPM series).

## Key Features



### Lockable USB Cable

**Reliable connections** are critical to automation control and online production. While the standard USB cable is designed for convenience, Advantech provides lockable USB cables to prevent the cable from being unplugged accidentally.



### 480Mbps High Speed Data Transfer

**Advanced data acquisition functions** can be accomplished. Up to 200 kS/s sampling rate, 16-bit resolution, 16-ch analog input, 48-ch digital I/O specifications, as well as interrupt, event counter, and pulse width modulation (PWM) functions are available on Advantech's USB data acquisition modules.



### Bus-powered

**No need for external power** these devices are highly mobile as they derive power from system USB ports, freeing users from the inconvenience of finding additional power sources.



### Detachable Screw Terminal & On-Module Pin Assignment Index

**Saving space & money** is the main benefit of using detachable screw terminals. Budgets can be saved by not having to buy additional cables and/or wiring boards, and extra space can be saved as well. Furthermore, Advantech's on-module pin assignment simplifies maintenance efforts and reduces incorrect connections that can cause damage to the system.



### Device Identification

**Easy identification** of each Advantech USB DAQ module can be set through a provided utility. This ensures that application programs control the correct modules, even if the computer is changed or the USB DAQ modules are switched or rearranged through the USB hub. With this feature, the development time of each control site can be shortened by reducing duplicate programs.



## USB-4711A

150 kS/s, 12-bit, 16-ch Multifunction USB Module



### Features

- 16-ch single-ended or 8-ch differential of 12-bit analog input
- 2-ch 12-bit analog output
- 8-ch digital input and 8-ch digital output
- One 32-bit event counter
- Frequency measurement
- One lockable USB cable for secure connection included

### Ordering Information

- **USB-4711A** 150 kS/s, 12-bit, 16-ch Multi-USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

### Software Support



## USB-4716

200 kS/s, 16-bit, 16-ch Multifunction USB Module



### Features

- 16-ch single-ended or 8-ch differential of 16-bit analog input
- 2-ch 16-bit analog output
- 8-ch digital input and 8-ch digital output
- One 32-bit counter
- Frequency measurement
- One lockable USB cable for secure connection included

### Ordering Information

- **USB-4716** 200 kS/s, 16-bit, 16-ch Multi-USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

### Software Support



## USB-4718

8-ch Thermocouple Input USB Module with 8-ch Isolated Digital Input



### Features

- 8-ch analog input for voltage, current, and thermocouple
- 2,500 V<sub>DC</sub> isolation
- Supports 0~20 and 4 ~ 20 mA current input
- 8-ch isolated digital input and 8-ch isolated digital output (5V/TTL compatible)
- One lockable USB cable for secure connection included

### Ordering Information

- **USB-4718** 8-ch Thermocouple Input USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

### Software Support



**USB-4750****32-ch Isolated Digital I/O USB Module****Features**

- Isolated DIO: 16-ch DI, 16-ch DO
- High sink current on isolated output channels (100 mA/channel)
- Supports 5 ~ 50 V<sub>DC</sub> isolated input channels
- Interrupt handling capability
- Timer/counter capability
- One lockable USB cable for secure connection included

**Ordering Information**

- **USB-4750** 32-ch Isolated Digital I/O USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

**Software Support****USB-4751/L****48/24-ch Digital I/O USB Module****Features**

- 48/24 TTL digital I/O lines
- Supports both dry and wet contact
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than the 8255
- Interrupt handling capability
- Timer/Counter interrupt capability
- 50-pin Opto-22 compatible box header
- One lockable USB cable for secure connection included

**Ordering Information**

- **USB-4751** 48-ch Digital I/O USB Module
- **USB-4751L** 24-ch Digital I/O USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

**Software Support****USB-4761****8-ch Relay and 8-ch Isolated Digital Input USB Module****Features**

- LED indicators to show activated relays
- 8 Form C type relay output channels
- Wide input range (5 ~ 30 V<sub>DC</sub>)
- Interrupt handling capability
- High-voltage isolation on input channels (2,500 V<sub>DC</sub>)
- High ESD protection (2,000 V<sub>DC</sub>)
- One lockable USB cable for secure connection included

**Ordering Information**

- **USB-4761** 8-ch Relay/Isolated Digital Input USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

**Software Support**

## USB-4702

10 kS/s, 12-bit, 8-ch Multifunction USB Module



### Features

- 8-ch analog input
- 12-bit resolution AI
- Sampling rate up to 10 kS/s
- 8-ch DI/8-ch DO, 2-ch AO and 1-ch 32-bit counter

### Ordering Information

- **USB-4702** 10 kS/s, 12-bit, 8-ch Multi-USB Module
- **PCL-10137-1** DB37 Cable, 1m
- **PCL-10137-2** DB37 Cable, 2m
- **PCL-10137-3** DB37 Cable, 3m
- **ADAM-3937** DB37 DIN-rail Wiring Board

### Software Support



## USB-4704

48 kS/s, 14-bit, 8-ch Multifunction USB Module



### Features

- 8 analog input channels
- 14-bit resolution AI
- Sampling rate up to 48 kS/s
- 8-ch DI/8-ch DO, 2-ch AO and one 32-bit counter
- Detachable screw terminal on modules
- Suitable for DIN-rail mounting

### Ordering Information

- **USB-4704** 48 kS/s, 14-bit, 8-ch Multi-USB Module
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket

### Software Support



## USB-4671

GPIO USB Module




### Features

- Complete IEEE 488.1 & 488.2 compatibility
- Full driver, library, and example support, including VB, VC, BCB and Delphi
- Provides powerful and easy-to-use configuration utility
- No GPIB cable required for instrument connection
- Plug & play installation and configuration

### Ordering Information

- **USB-4671** GPIB USB Module
- **PCL-10488-2** IEEE-488 Cable, 2 m

### Software Support



**USB-4620****5-port Full-speed Isolated USB 2.0 Hub****Features**

- 5 downstream USB 2.0 ports
- Compatible with USB 2.0 Full-speed, USB 1.1, USB 1.0
- 3,000 V<sub>DC</sub> voltage isolation for each downstream port
- Suitable for DIN-rail mounting
- One lockable USB cable included
- 10 ~ 30 V<sub>DC</sub> power input (power adapter not included)

**Ordering Information**


- **USB-4620** 5-port Full-speed Isolated USB 2.0 Hub
- **PWR-242** DIN-rail Power Supply
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket
- **USB-LOCKCABLE-AE** 1.8 M Lockable USB 2.0 Cable with Screw Kit

**USB-4622****5-port USB 2.0 Hub****Features**

- Compatible with USB 2.0 high speed, USB 2.0 full-speed, USB 1.1, USB 1.0
- 480 Mbps high-speed data transfer
- LED indicator
- 10 ~ 30 V<sub>DC</sub> power input (power adapter not included)
- Suitable for DIN-rail mounting
- One lockable USB cable included

**Ordering Information**

- **USB-4622** 5-port USB 2.0 Hub
- **PWR-242** DIN-rail Power Supply
- **1960004544** Wallmount Bracket
- **1960005788** VESA Mounting Bracket
- **USB-LOCKCABLE-AE** 1.8 M Lockable USB 2.0 Cable with Screw Kit

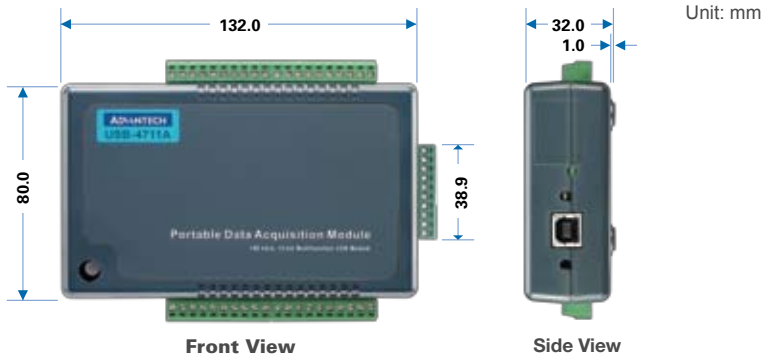**Dimensions**

## Complete PCI and PCI Express Card Range to Meet any Machine and Test Equipment Needs




### One Source for All High-precision PC-based Applications


With over 24 years of plug-in DAQ card design and manufacturing experience, Advantech has become a global leader, providing a full range of industrial data acquisition and control products. The most requested features are included for industrial and laboratory applications such as monitoring, control, data acquisition and automated testing.

### New Generation Interface for DAQ: PCI Express

PCI Express is a computer expansion bus standard designed to replace the older PCI bus standards. The PCI Special Interest Group (PCI-SIG) preserved and developed PCI specification to become the new standard PCI Express from 2003. PCI Express delivers 30 times the bandwidth of PCI bus, with a per-lane data rate 250 MB/s and a transfer rate of 2.5 GT/s. This new generation interface features high speed point-to-point architecture, high throughput performance, software backward compatibility, I/O simplification, etc. Following this technology trend, Advantech offers a series of PCI Express data acquisition cards with the same development software as PCI card, to satisfy different automation needs.

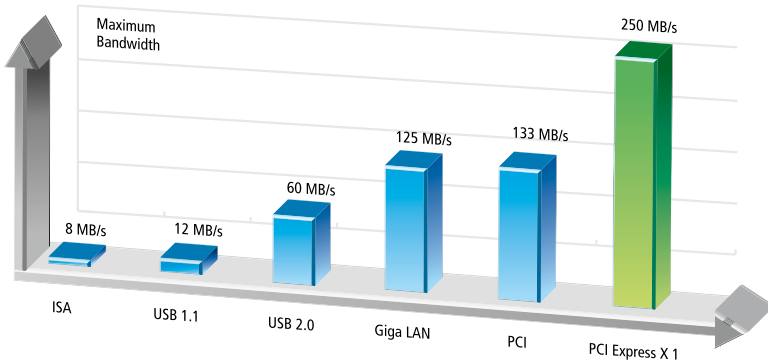


## Key Features



### BoardID Switch

BoardID DIP switch helps defines each card's unique identity when multiple identical PCI cards have been installed in the same computer. The BoardID switch is very useful when you build your system with multiple identical PCI cards. With the correct BoardID switch settings, you can easily identify and access each card during hardware configuration and software programming.



### High Density

High density means there are many input/output functions in one PCI card. In the past, customers were forced to buy more than one card to fulfill their application, but now just one card can achieve their goals. The biggest advantage of this feature is that it saves space, allowing more efficient installation.




### Auto Calibration

The built-in auto-calibration circuitry corrects gain and offset errors in analog input and analog output channels thereby eliminating the need for external equipment and user adjustments.



### Keeping the Output Values after System Reset

When the system is hot reset (power is not shut off), Advantech's DAQ cards with this function can either retain the last digital (or analog) output values, or return to its default configuration, depending on jumper setting. This practical function eliminates danger caused by misoperation during unexpected system reset.



### DMA - Direct Memory Access

A method of transferring data from or to memory at a high rate without involving the CPU. DMA is the hardware/software technique that allows the highest speed transfer of data, to or from RAM. DMA can provide the means to read or write data at precise times without restricting the microprocessor's tasks.



## Selection Guide

Model Name	Analog Input			Analog
	Sampling Rate	Resolution	Channel	Resolution
PCI-1710U	100 kS/s	12-bit	16	12-bit
PCI-1710UL	100 kS/s	12-bit	16	-
PCI-1710HGU*	100 kS/s	12-bit	16	12-bit
PCI-1711U	100 kS/s	12-bit	16 SE	12-bit
PCI-1711UL	100 kS/s	12-bit	16 SE	-
PCI-1712	1 MS/s	12-bit	16	12-bit
PCI-1712L	1 MS/s	12-bit	16	-
PCI-1716	250 kS/s	16-bit	16	16-bit
PCI-1716L	250 kS/s	16-bit	16	-
PCI-1741U	200 kS/s	16-bit	16	16-bit
PCI-1742U	1 MS/s	16-bit	16	16-bit
PCI-1747U	250 kS/s	16-bit	64	-
PCI-1718HDU	100 kS/s	12-bit	16	12-bit
PCI-1713U	100 kS/s	12-bit	32	-
PCI-1715U	500 kS/s	12-bit	32	-
PCI-1714UL	10 MS/s	12-bit	4 SE	-
PCI-1714U/ PCIE-1744	30 MS/s	12-bit	4 SE	-
PCI-1720U	-	-	-	12-bit
PCI-1721	-	-	-	12-bit
PCI-1723	-	-	-	16-bit
PCI-1724U	-	-	-	14-bit
PCI-1727U	-	-	-	14-bit
PCI-1730U /PCIE-1730	-	-	-	-
PCI-1735U	-	-	-	-
PCI-1737U	-	-	-	-
PCI-1757UP	-	-	-	-
PCI-1739U	-	-	-	-
PCI-1751	-	-	-	-
PCI-1753	-	-	-	-
PCI-1755	-	-	-	-
PCI-1750	-	-	-	-
PCI-1733	-	-	-	-
PCI-1734	-	-	-	-
PCI-1752U /PCIE-1752	-	-	-	-
PCI-1754 / PCIE-1754	-	-	-	-
PCI-1756 / PCIE-1756	-	-	-	-
PCI-1758UDI	-	-	-	-
PCI-1758UDO	-	-	-	-
PCI-1758UDIO	-	-	-	-
PCI-1760U /PCIE-1760	-	-	-	-
PCI-1761	-	-	-	-
PCI-1762	-	-	-	-
PCI-1780U	-	-	-	-
PCI-1671UP	-	-	-	-

\*Note: PCI-1710HGU offers more gain options than PCI-1710U to increase measurement accuracy.

Output	Digital Input	Digital Output	Timer/Counter	Connector
Channel	Channel	Channel	Channel	
2	16 TTL	16 TTL	1	68-pin SCSI
-	16 TTL	16 TTL	1	68-pin SCSI
2	16 TTL	16 TTL	1	68-pin SCSI
2	16 TTL	16 TTL	1	68-pin SCSI
-	16 TTL	16 TTL	1	68-pin SCSI
2	16 TTL (shared)		3	68-pin SCSI
-	16 TTL (shared)		3	68-pin SCSI
2	16 TTL	16 TTL	1	68-pin SCSI
-	16 TTL	16 TTL	1	68-pin SCSI
1	16 TTL	16 TTL	1	68-pin SCSI
2	16 TTL	16 TTL	1	68-pin SCSI
-	-	-	-	68-pin SCSI
1	16 TTL	16 TTL	1	1 x DB37, 2 x 20-pin
-	-	-	-	DB37
-	-	-	-	DB37
-	-	-	-	4 x BNC
-	-	-	-	4 x BNC
4	-	-	-	DB37
4	16 TTL (shared)		1	68-pin SCSI
8	16 TTL (shared)		-	68-pin SCSI
32	-	-	-	DB62
12	16 TTL	16 TTL	-	1 x DB37, 2 x 20-pin
-	16 TTL, 16 Isolated	16 TTL, 16 Isolated	-	1 x DB37, 4 x 20-pin
-	32 TTL	32 TTL	3	5 x 20-pin
-	24 TTL (shared)		-	1 x 50-pin, 2 x 20-pin
-	24 TTL (shared)		-	DB25
-	48 TTL (shared)		-	2 x 50-pin
-	48 TTL (shared)		3	68-pin SCSI
-	96 TTL (shared)		-	100-pin SCSI
-	32 TTL (shared, high speed)		-	100-pin SCSI
-	16 isolated	16 isolated	1	DB37
-	32 isolated	-	-	DB37
-	-	32 isolated	-	DB37
-	-	64 isolated	-	100-pin SCSI
-	64 isolated	-	-	100-pin SCSI
-	32 isolated	32 isolated	-	100-pin SCSI
-	128 isolated	-	-	dual 100-pin mini-SCSI
-	-	128 isolated	-	dual 100-pin mini-SCSI
-	64 isolated	64 isolated	-	dual 100-pin mini-SCSI
-	8 isolated	6 x Form A, 2 x Form C	10 (PCI), 2 (PCIE)	DB37
-	8 isolated	4 x Form A, 4 x Form C	-	DB37
-	16 isolated	16 Relay	-	DB62
-	8 TTL	8 TTL	8	68-pin SCSI
-	-	-	-	24-pin IEEE 488

## PCI Express

### PCIE-1730

#### 32-ch TTL and 32-ch Isolated Digital I/O PCI Express Card



#### Features

- 16-ch isolated DI & 16-ch isolated DO
- 16-ch TTL DI and 16-ch TTL DO
- High output driving capacity
- Interrupt handling capability
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)

#### Ordering Information

- **PCIE-1730** 32-ch Isolated Digital I/O PCIe Card

#### Software Support



- **PCL-10120** 20-pin Flat Cable
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-782\*** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-885\*** 16-ch Power Relay Board w/ 20p & 50p Flat Cables
- **PCLD-785\*** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137** DB37 Cable

\*Note: When you use PCLD-782/785/885 wiring board, remember to connect external power for relay usage.

### PCIE-1744

#### 30 MS/s, 12-bit, Simultaneous 4-ch Analog Input PCI Express Card



#### Features

- 4-ch single-ended analog input
- 12-bit A/D converter, with up to 30 MHz sampling rate
- Programmable gain
- Onboard FIFO memory (32,768 samples each channel)
- 4 A/D converters simultaneously sampling
- Multiple A/D triggering modes
- Programmable pacer/counter

#### Software Support



#### Ordering Information

- **PCIE-1744** 30 MS/s, 12-bit, Simultaneous 4-ch AI PCIe Card
- **ADAM-3909** DB9 DIN-rail Wiring Board
- **PCL-1010B-1** BNC to BNC Wiring Cable, 1 m
- **PCL-10901-1** DB9 to PS/2 Cable, 1 m
- **PCL-10901-3** DB9 to PS/2 Cable, 3 m

### PCIE-1752

#### 64-ch Isolated Digital Output PCI Express Card



#### Features

- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High sink current on isolated output channels (500mA max./ch)
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Output status read-back

#### Software Support



#### Ordering Information

- **PCIE-1752** 64-ch Isolated Digital Output PCI Express Card
- **PCL-10250-1** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **PCL-10250-2** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators
- **PCL-101100M-3** 100-pin SCSI to 100-pin SCSI Cable, 3 m
- **ADAM-39100** 100-pin DIN-rail Wiring Board

**PCIE-1754****64-ch Isolated Digital Input PCI Express Card****Features**

- Wide input range (10 ~ 30 V<sub>DC</sub>)
- High over-voltage protection (70 V<sub>DC</sub>)
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Interrupt handling capacity

**Software Support****Ordering Information**

- **PCIE-1754** 64-ch Isolated Digital Input PCI Express Card
- **PCL-10250-1** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **PCL-10250-2** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators
- **PCL-101100M-3** 100-pin SCSI to 100-pin SCSI Cable, 3 m
- **ADAM-39100** 100-pin DIN-rail Wiring Board

**PCIE-1756****64-ch Isolated Digital Input/Output PCI Express Card****Features**


- Wide input range (10 ~ 30 V<sub>DC</sub>) and output range (5 ~ 40 V<sub>DC</sub>)
- High sink current on isolated output channels (500mA max./ch)
- 2,000 V<sub>DC</sub> ESD protection
- Interrupt handling capability
- High over-voltage protection (70 V<sub>DC</sub>)
- High-voltage isolation (2,500 V<sub>DC</sub>)
- Output status read-back

**Software Support****Ordering Information**

- **PCIE-1756** 64-ch Isolated Digital I/O PCI Express Card
- **PCL-10250-1** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **PCL-10250-2** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/LED Indicators
- **PCL-101100M-3** 100-pin SCSI to 100-pin SCSI Cable, 3 m
- **ADAM-39100** 100-pin DIN-rail Wiring Board

**PCIE-1760****8-ch Relay and 8-ch Isolated Digital Input PCI Express Card with 2-ch Counter/Timer****Features**

- 8-ch isolated digital input and 8-ch relay output
- 2-ch counter input and 2-ch PWM output
- Jumper selectable dry or wet contact for DI
- LED indicators to show activated relays
- Programmable DI filter
- Pattern match interrupt for DI
- Change of state interrupt for DI

**Software Support****Ordering Information**

- **PCIE-1760** 8-ch Relay/DI PCIe Card w/ 2-ch Counter/Timer
- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

## Multifunction

### PCI-1710U/UL/HGU

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card



#### Features

- Programmable gain
- Two 12-bit analog output channels (PCI-1710U/HGU only)
- 16-ch digital input and 16-ch digital output
- 1-ch programmable counter
- Onboard FIFO memory (4,096 samples)

#### Ordering Information

- **PCI-1710U** 100 kS/s, 12-bit Multifunction Card
- **PCI-1710UL** 100 kS/s, 12-bit Multifunction Card w/o AO
- **PCI-1710HGU** 100 kS/s, 12-bit High-gain Multifunction Card
- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

#### Software Support



### PCI-1711U/UL

Entry-level 100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card



#### Features

- Programmable gain
- Two 12-bit analog output channels (PCI-1711U only)
- 16-ch digital input and 16-ch digital output
- 1-ch programmable counter
- Onboard FIFO memory (1,024 samples)

#### Ordering Information

- **PCI-1711U** Entry-level 100 kS/s, 12-bit Multifunction Card
- **PCI-1711UL** Entry-level 100 kS/s, 12-bit Multi. Card w/o AO
- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

#### Software Support



### PCI-1712/L

1 MS/s, 12-bit, 16-ch PCI Multifunction Card



#### Features

- Two 12-bit analog output channels with continuous waveform output function (PCI-1712 only)
- Three 16-bit programmable multifunction counter/timers up to 10 MHz
- Pre-, post-, about- and delay-trigger data acquisition modes for analog input channels
- 16-ch digital input and 16-ch digital output

#### Ordering Information

- **PCI-1712** 1 MS/s, 12-bit High-speed Multifunction PCI Card
- **PCI-1712L** 1 MS/s, 12-bit High-speed Multi. PCI Card w/o AO
- **PCLD-8712** DIN-rail Wiring Board for PCI-1712/L
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

#### Software Support



**PCI-1716/L****250 kS/s, 16-bit, 16-ch PCI Multifunction Card****Features**

- 16-ch single-ended or 8-ch differential or a combination of analog input
- Two 16-bit analog output channels (PCI-1716 only)
- 16-ch digital input and 16-ch digital output
- 1-ch programmable counter
- Onboard FIFO memory (1,024 samples)

**Ordering Information**

- **PCI-1716** 250 kS/s, 16-bit High-resolution Multi. Card
- **PCI-1716L** 250 kS/s, 16-bit High-res. Multi. Card w/o AO
- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

**Software Support****PCI-1718HDU****100 kS/s, 12-bit, 16-ch Universal PCI Multifunction Card****Features**

- 16-ch single-ended or 8-ch differential or a combination of analog input
- Programmable gain
- One 12-bit analog output channel
- 16-ch digital input and 16-ch digital output
- Onboard FIFO memory (1,024 samples)

**Ordering Information**

- **PCI-1718HDU** 100 kS/s, 12-bit, 16-ch Univ. PCI Multi. Card
- **PCL-10120** 20-pin Flat Cable, 1 m/2 m
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **PCLD-8115** Wiring Board w/ CJC Circuit & One DB37 Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter

**Software Support****PCI-1742U****1 MS/s, 16-bit, 16-ch Universal PCI Multifunction Card****Features**

- 16-ch single-ended or 8-ch differential or a combination of analog input
- Two 16-bit analog output channels
- 16-ch digital input and 16-ch digital output
- 1-ch programmable counter
- Onboard FIFO memory (1,024 samples)

**Ordering Information**

- **PCI-1742U** 1 MS/s, 16-bit, 16-ch Univ. PCI Multi. Card
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **PCLD-8710** DIN-rail Wiring Board w/ CJC

**Software Support**



## Analog Input

### PCI-1713U

100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card



#### Features

- 2,500 V<sub>DC</sub> isolation protection
- Programmable gain
- Onboard FIFO memory (4,096 samples)
- S/W, internal or external pacer sampling modes supported

#### Ordering Information

- **PCI-1713U** 100 kS/s, 12-bit, 32-ch Isolated AI PCI Card
- **PCLD-881B** Wiring Board for PCI-1713, PCI-1715U & PCL-813B
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m

#### Software Support



### PCI-1714U/UL

30/10 MS/s, 12-bit, Simultaneous 4-ch Analog Input Universal PCI Card



#### Features

- 4 A/D converters simultaneously sampling
- Programmable gain
- Multiple A/D triggering modes
- Onboard FIFO memory (PCI-1714U: 32,768 samples per channel; PCI-1714UL: 8,192 samples per channel)

#### Ordering Information

- **PCI-1714U** 30 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card
- **PCI-1714UL** 10 MS/s, 12-bit, Simultaneous 4-ch AI PCI Card
- **ADAM-3909** DB9 DIN-rail Wiring Board
- **PCL-1010B-1** BNC to BNC Wiring Cable, 1 m
- **PCL-10901** PS/2 to DB9 Cable, 1 m/3 m

#### Software Support



### PCI-1715U

500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card



#### Features

- 2,500 V<sub>DC</sub> isolation protection
- Programmable gain for each input channel
- Onboard FIFO buffer (1,024 samples)
- S/W, internal or external pacer sampling modes supported

#### Ordering Information

- **PCI-1715U** 500 kS/s 12-bit, 32-ch Isolated AI PCI Card
- **PCLD-881B** Wiring Board for PCI-1713, PCI-1715U & PCL-813B
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m

#### Software Support



## Analog Output

### PCI-1720U

#### 12-bit, 4-ch Isolated Analog Output Universal PCI Card



#### Features

- Multiple output ranges
- 2,500 V<sub>DC</sub> isolation protection
- Keeps the output settings and values after system hot reset
- Universal PCI and BoardID switch

#### Ordering Information

- **PCI-1720U** 12-bit, 4-ch Isolated AO Universal PCI Card
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

#### Software Support



### PCI-1723

#### 16-bit, 8-ch Analog Output PCI Card with 16-ch Digital I/O



#### Features

- Synchronized output function
- Auto calibration function
- Keeps the output settings and values after system hot reset
- 2-port (16-channel) user-defined digital input/output channels

#### Ordering Information

- **PCI-1723** 16-bit, 8-ch Non-isolated Analog Output PCI Card
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

#### Software Support



### PCI-1724U

#### 14-bit, 32-ch Isolated Analog Output Universal PCI Card



#### Features

- Flexible Output Range: +/-10 V, 0 ~ 20 mA and 4 ~ 20 mA
- Synchronized output function
- Keeps the output settings and values after system hot reset
- Universal PCI and BoardID switch

#### Ordering Information

- **PCI-1724U** 14-bit, 32-ch Isolated AO Universal PCI Card
- **PCL-10162** DB62 Cable, 1 m/3 m
- **ADAM-3962** DB62 DIN-rail Wiring Board

#### Software Support



## Digital I/O & Counter

### PCI-1730U

#### 32-ch Isolated Digital I/O Universal PCI Card



#### Features

- High output driving capacity
- Interrupt handling capability
- High-voltage isolation on output channels

#### Ordering Information

- **PCI-1730U** 32-ch Isolated Digital I/O PCI Card
- **PCL-10120** 20-pin Flat Cable, 1 m/2 m
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board

#### Software Support



- **PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **PCLD-786** 8-ch SSR I/O Module Board w/ 20-pin Flat Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m

### PCI-1733/1734

#### 32-ch Isolated Digital Input / Digital Output PCI Card



#### Features

- High output driving capacity
- Interrupt handling capability
- High-voltage isolation on output channels

#### Ordering Information

- **PCI-1733** 32-ch Isolated Digital Input PCI Card
- **PCI-1734** 32-ch Isolated Digital Output PCI Card
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m

#### Software Support



### PCI-1750

#### 32-ch Isolated Digital I/O and 1-ch Counter PCI Card



#### Features

- High voltage isolation on all isolated channels (2,500 V<sub>DC</sub>)
- High sink current on isolated output channels (200 mA/channel)
- Supports dry contact or 5 ~ 50 V<sub>DC</sub> isolated inputs
- Interrupt handling capability
- Timer/counter interrupt capability

#### Ordering Information

- **PCI-1750** 32-ch Isolated Digital I/O and Counter PCI Card
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

#### Software Support



**PCI-1751****48-ch Digital I/O and 3-ch Counter PCI Card****Features**

- Interrupt handling capability
- Timer/counter interrupt capability
- Supports both dry and wet contact
- Emulates mode 0 of 8255 PPI
- Buffered circuits for higher driving capacity than 8255

**Software Support****Ordering Information**

- **PCI-1751** 48-ch Digital I/O and Counter PCI Card
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **ADAM-3968/20** 68-pin SCSI to 3 20-pin Box Header Terminal
- **ADAM-3968/50** 68-pin SCSI to 2 50-pin Box Header Terminal
- **PCLD-8751** 48-ch Isolated Digital Input Board
- **PCLD-8761** 24-ch Replay/ Isolated Digital Input Board
- **PCLD-8762** 48-ch Relay Board

**PCI-1752U****64-ch Isolated Digital Output Universal PCI Card****Features**

- High-voltage isolation on output channels (2,500 VDC)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current on isolated output channels (200 mA max./channel)
- Output status read-back
- Channel-freeze function

**Software Support****Ordering Information**

- **PCI-1752U** 64-ch Isolated Digital Output Universal PCI Card
- **PCL-10250-1** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

**PCI-1753****96-ch Digital I/O PCI Card****Features**

- Interrupt output pin for simultaneously triggering external devices with the interrupt
- "Pattern match" and "change of state" interrupt functions for critical I/O monitoring
- Emulates mode 0 of 8255 PPI
- Supports both dry and wet contact

**Software Support****Ordering Information**

- **PCI-1753** 96-ch Digital I/O PCI Card
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board
- **ADAM-3968/20** 68-pin SCSI to 3 20-pin Box Header Terminal
- **ADAM-3968/50** 68-pin SCSI to 2 50-pin Box Header Terminal
- **PCLD-8751** 48-ch Isolated Digital Input Board
- **PCLD-8761** 24-ch Replay/ Isolated Digital Input Board
- **PCLD-8762** 48-ch Relay Board
- **PCL-10268** 100-pin to Two 68-pin SCSI Cables, 1 m/2 m

## PCI-1756

### 64-ch Isolated Digital I/O PCI Card



#### Features

- Either +/- voltage input for DI by group
- Output status readback
- High over-voltage protection (70 V<sub>DC</sub>) for DI
- Interrupt handling capability

#### Ordering Information

- **PCI-1756** 64-ch Isolated Digital I/O PCI Card
- **PCL-10250-1** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **ADAM-3951** 50-pin DIN-rail Wiring Board w/ LED Indicators

#### Software Support



## PCI-1758UDI

### 128-ch Isolated Digital Input Universal PCI Card



#### Features

- High ESD protection (2,000 V<sub>DC</sub>)
- Wide input range (5 ~ 25 V<sub>DC</sub>)
- Digital filter function
- Interrupt handling capability for each channel

#### Ordering Information

- **PCI-1758UDI** 128-ch Isolated DI Universal PCI Card
- **PCL-101100S** 100-pin SCSI Cable, 1 m/2 m
- **ADAM-39100** 100-pin DIN-rail SCSI Wiring Board

#### Software Support



## PCI-1758UDO

### 128-ch Isolated Digital Output Universal PCI Card



#### Features

- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink current for isolated output channels (90 mA max./Channel)
- Programmable power-up states
- Watchdog timer
- Output status read-back

#### Ordering Information

- **PCI-1758UDO** 128-ch Isolated DO Universal PCI Card
- **PCL-101100S** 100-pin SCSI Cable, 1 m/2 m
- **ADAM-39100** 100-pin DIN-rail SCSI Wiring Board

#### Software Support



**PCI-1760U****8-ch Relay and 8-ch Isolated Digital Input Universal PCI Card with 10-ch Counter/Timer****Features**

- 2 x Form C and 6 x Form A relay
- LED indicators to show activated relays
- Jumper selectable dry contact/wet contact input signals
- Up event counters for DI
- Programmable digital filter for DI
- Pattern match/"change of state" interrupt function for DI

**Ordering Information**

- **PCI-1760U** 8-ch Relay/IDI PCI Card w/ 10-ch Counter/Timer
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

**Software Support****PCI-1761****8-ch Relay and 8-ch Isolated Digital Input PCI Card****Features**

- 4 Form C and 4 Form A type relay output channels
- LED indicators to show activated relays
- Retained relay output values when hot system reset
- Interrupt handling capability

**Ordering Information**

- **PCI-1761** 8-ch Relay/Isolated Digital Input PCI Card
- **PCL-10137** DB37 Cable, 1 m/2 m/3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board

**Software Support****PCI-1780U****8-ch, 16-bit Counter/Timer Universal PCI Card****Features**

- Up to 20 MHz input frequency
- 8-ch digital TTL outputs and 8-ch digital TTL inputs
- Counter gate function
- Flexible interrupt source select
- Multiple counter clock source selectable
- Counter output programmable

**Ordering Information**

- **PCI-1780** 8-ch, 16-bit Counter/Timer Universal PCI Card
- **PCL-10168** 68-pin SCSI Shielded Cable, 1 m/2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

**Software Support**

## Compatibility Chart

Recommended Cables, I/O Wiring Terminal Boards and Isolated Digital I/O Terminals for Connecting to Data Acquisition Products:

### PCI, PCI Express, USB, PCI-104, PC/104 Module

### Cable



PCI-1710U/1710UL/1710HGU  
PCI-1711U/1711UL, PCI-1716/1716L  
PCI-1741U, PCI-1742U

PCL-10168

PCI-1712/1712L

PCL-10168

PCI-1718HDU/HGU

PCL-10137

PCI-1727U, PCI-1730U, PCIE-1730

PCL-10120, PCL-10121

PCI-1751, PCIE-1751

PCL-10137

ADAM-3937, PCLD-880

PCL-10168

PCI-1753

PCL-10268

PCI-1713U, PCI-1715U

PCL-10137

PCI-1720U, PCI-1733, PCI-1734, PCI-1750,  
PCI-1760U, PCIE-1760, PCI-1761, USB-4702

PCL-10137

PCI-1784U

PCL-10137

PCI-1752U, PCI-1754, PCI-1756  
PCIE-1752, PCIE-1754, PCIE-1756

PCL-10250

PCI-1724U, PCI-1762

PCL-10162

PCI-1737U, PCI-1739U, USB-4751/L

PCL-10150

PCI-1714U/1714UL, PCIE-1744

PCL-10901

PCI-1757UP

PCL-1010B

PCI-1747U, PCI-1721, PCI-1723, PCI-1780U

PCL-10125

PCL-10168

PCI-1735U

PCL-10120, PCL-10121

PCI-1755

PCL-10501+, PCL-10137, ADAM-3937

PCI-1758UD/1758UDO/1758UDIO

PCL-101100

PCI-1671UP, USB-4671

PCL-101100S

PCM-3718H/HO/HG, PCM-3730

PCL-10488

PCM-3724, PCM-3753I

PCL-10120, PCL-10121

PCM-3725, PCM-3780, PCM-3761I

PCL-10150

PCM-3810I

PCL-10120, PCL-10121

PCL-10150

PCM-3813I

PCL-10126

PCL-10150

PCM-3730I

PCL-10141

PCL-10120, PCL-10121

### I/O Wiring Terminal Board



### Extension Cable



### Digital I/O Terminal Board




PCLD-8710
ADAM-3968
PCLD-8712
ADAM-3937, PCLD-880 PCLD-8115, PCLD-789D
PCL-10502+, PCL-10120, PCL-10121
PCL-10503+, PCL-10137, ADAM-3937
ADAM-3968
PCLD-8751, PCLD-8761, PCLD-8762
ADAM-3968/50
ADAM-3968/20
ADAM-3937, PCLD-880, PCLD-881B
ADAM-3937
ADAM-3951
ADAM-3962
ADAM-3950, PCLD-782B, PCLD-785B, PCLD-885, PCLD-7216
ADAM-3909
ADAM-3925
ADAM-3968
PCL-10502+, PCL-10120, PCL-10121
PCL-10503+, PCL-10137, ADAM-3937
ADAM-39100
ADAM-3950, PCLD-782B, PCLD-785B PCLD-885, PCLD-7216
ADAM-3920
ADAM-3950
PCL-10125 — ADAM-3925
ADAM-3950
PCL-10137 — ADAM-3937
ADAM-3920

PCL-10120 PCL-10121
PCL-10150+ ADAM-3950 PCLD-782B PCLD-785B PCLD-885 PCLD-7216
PCL-10120

ADAM-3920
PCLD-782
PCLD-782B
PCLD-785
PCLD-785B
PCLD-786
PCLD-788
PCLD-885
PCLD-7216
ADAM-3920
PCLD-780
PCLD-782
PCLD-782B
PCLD-785
PCLD-785B
PCLD-786
PCLD-788
PCLD-885
PCLD-7216



## DIN-rail Mountable Signal Conditioning Modules

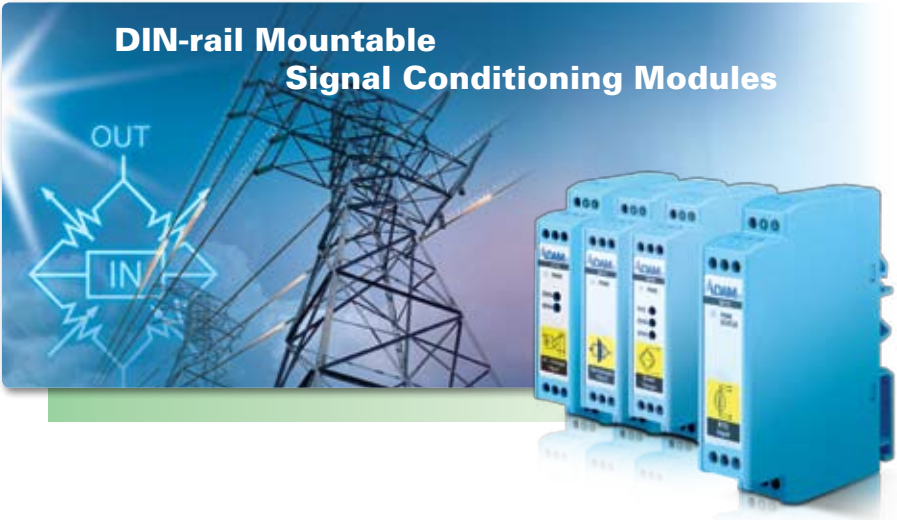

### Compact Design with 3-way Isolation Protection and Multiple Input Types

The ADAM-3000 Series consist of the most cost-efficient, field configurable, isolation-based, signal conditioners on the market today. The modules are easily installed to protect your instruments and process signals from the harmful effects of ground loops, motor noise, and other electrical interferences.

### Products

#### ADAM-3011



Isolated Thermocouple Input Module

#### Specifications

- Input Type: J, K, T, E, S, R, B Type Thermocouple
- Output Type: 0~10 V

#### Ordering Information

- **ADAM-3011** Isolated Thermocouple Input Module

#### ADAM-3013



Isolated RTD Input Module

#### Specifications

- Input Type: Pt or Ni Type RTD
- Output Type: 0~5 V, 0~10 V, 0~20 mA

#### Ordering Information

- **ADAM-3013** Isolated RTD Input Module

#### ADAM-3014



Isolated DC Input/Output Module

#### Specifications

- Input Type:  $\pm 10$  mV,  $\pm 50$  mV,  $\pm 100$  mV,  $\pm 0.5$  V,  $\pm 1$  V,  $\pm 5$  V,  $\pm 10$  V, 0~10 mV, 0~50 mV, 0~100 mV, 0~0.5 V, 0~1 V, 0~5 V, 0~10 V, 0~20mA,  $\pm 20$ mA
- Output Type:  $\pm 5$  V,  $\pm 10$  V, 0~10 V, 0~20 mA

#### Ordering Information

- **ADAM-3014** Isolated DC Input/Output Module

## Key Features



### Three-way Signal Isolation

Three-way (input/output/power) 1,000  $V_{DC}$  isolation.



### Easy Daisy Chain Power Wiring

Power can be connected conveniently from adjacent modules.



### Field Configurable I/O Range

The I/O range can be configured on site with switches inside the module.



### Small Dimensions & DIN-rail Mounting

Saves space and can be easily mounted on a DIN-rail.

## ADAM-3016



Isolated Strain Gauge Input Module

### Specifications

- Input Type:  
Electrical input:  $\pm 10$ ,  $\pm 20$ ,  $\pm 30$ ,  $\pm 100$  mV
- Excitation voltage: 1~10 V (60 mA max.)
- Output Type:  
 $\pm 5$  V,  $\pm 10$  V, 0~10 V, 0~20 mA

### Ordering Information

- **ADAM-3016** Isolated Strain Gauge Input Module

## ADAM-3112



Isolated AC Voltage Input Module

### Specifications

- Input Type:  
0~120, 0~250, 0~400  $V_{RMS}$   
0~120, 0~250, 0~400  $V_{DC}$
- Output Type:  
0~5  $V_{DC}$

### Ordering Information

- **ADAM-3112** Isolated AC Voltage Input Module

## ADAM-3114



Isolated AC Current Input Module


### Specifications

- Input Type:  
0~5  $A_{RMS}$ , 0~5  $A_{DC}$
- Output Type:  
0~5  $V_{DC}$

### Ordering Information

- **ADAM-3114** Isolated AC Current Input Module

## New Generation of Motion Control

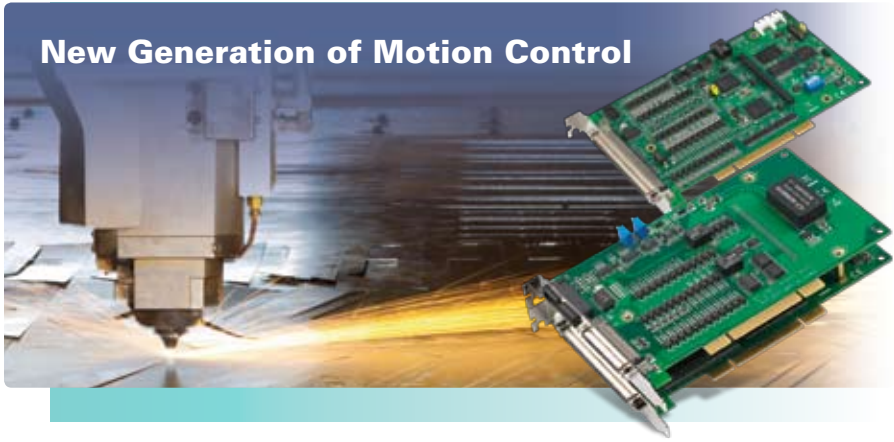

### Provide Comprehensive and Flexible Motion Control Selection and Functionalities

Since 1990, the Advantech Automation Team has been focusing on machine automation solutions to provide comprehensive system components. These components include: the human machine interface, industrial computers, embedded automation computers, data acquisition cards and motion control cards for various functions. Advantech not only provides a total solution for system integrators and machine builders but is also dedicated to developing critical motion control technology for the electronic machines and traditional machinery.

### Selection Guide

#### Centralized Motion Control Solutions



Category		Motion Control							Encoder	
Bus		PC/104	PCI					ISA	PCI	ISA
Model		PCM-3240	PCI-1220U	PCI-1240U	PCI-1243U	PCI-1245 PCI-1265	PCI-1245E	PCL-839+	PCI-1784U	PCL-833
Axes	Number of Axes	4	2	4	4	4/6/6	4	3	-	-
	Linear Interpolation	V	V	V	-	V	V	-	-	-
	2-axis Circle Interpolation	V	V	V	-	-/V/V	-	-	-	-
Advanced Functions	Encoder Channels	4	2	4	-	4/4/6	4	-	4	3
	Limit Switch Input Channels	8	4	8	8	8/8/12	8	6	-	-
	Home Input Channels	4	2	4	4	4/4/6	4	3	-	-
	Emergency Stop Input Channels	1	1	1	1	1	1	-	-	-
	Position Compare Event	V	V	V	-	V	-	-	-	-
	Position Latch	-	-	-	-	V	-	-	-	-
	Dimensions (mm)	96 x 90	175 x 100	175 x 100	175 x 100	175 x 100	175 x 100	185 x 100	185 x 100	185 x 100
Connector	2 x 50-pin IDC	50-pin SCSI	100-pin SCSI	DB62	100-pin SCSI 50-pin SCSI 20-pin IDC	100-pin SCSI	1 x DB37 2 x 20-pin	DB37	1 x DB25	
Wiring Boards	ADAM-3950 ADAM-3952	ADAM-3952 ADAM-3955	ADAM-3962	ADAM-3952 ADAM-3955	ADAM-3962	ADAM-3952 ADAM-3955	ADAM-3937 ADAM-3920	ADAM-3937	ADAM-3925	

## AMONET Motion Master Cards



Bus		PCI	PC/104+
Model		PCI-1202U	PCM-3202P
Advanced Functions	General Purpose DI Channels	8	-
	General Purpose DO Channels	4	-
	Remote Motion	V	V
	Remote I/O	V	V
Dimensions (mm)		175 x 100	96 x 90
Connectors		2 x RJ45	4 x RJ45
Digital I/O Slave Modules		AMAX-2752SY, AMAX-2754SY, AMAX-2756SY	
Motion Slave Modules		AMAX-2241/PMA, AMAX-2242/J2S, AMAX-2243/YS2	

## AMONET Motion Slave Modules



Model		AMAX-1220	AMAX-1240	AMAX-2241/ PMA	AMAX-2242/J2S	AMAX-2243/ YS2
Axes	Number of Axes	2	4	4	4	4
	Linear Interpolation	V	V	V	V	V
	2-axis Circle Interpolation	V	V	V	V	V
Advanced Functions	Encoder Channels	2	4	4	4	4
	Limit Switch Input Channels	4	8	8	8	8
	Emergency Stop Input Channels	1	1	1	1	1
	Home Input Channels	2	4	4	4	4
	Position Compare Event	-	V	V	V	V
	Position Latch	-	V	V	V	V
	Simultaneously Start/Stop among Modules	V	V	-	-	-
Power Consumption		2 W @ 24 V typical			5W @24V typical	
Dimensions (L x W x H)		141 x 108 x 60 mm			125 x 47.6 x 151 mm	

## Isolated Digital I/O Slave Modules



Model	AMAX-1752	AMAX-1754	AMAX-1756	AMAX-2752SY	AMAX-2754SY	AMAX-2756SY
Isolated Digital Input Channels	32	-	16	32	-	16
Isolated Digital Output Channels	-	32	16	-	32	16
Opto-Isolator Response	100 $\mu$ s (Max)			18 $\mu$ s (Max)		
Input Resistance	3.2k $\Omega$			1k $\Omega$		
Typical Power Consumption	600mW			1.2W		
Maximum Power Consumption	2W			13W	5W	8W
Dimensions (L x W x H)	141 x 95 x 60 mm			125 x 47.6 x 151 mm		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru