


# General Purpose Base Board for SCALE™-iDriver SID1182K with Booster Stage

<b>Application</b>	General purpose drives, UPS, solar power and others
<b>Specification</b>	Suitable for IGBT power modules in various housings Up to 800V DC-link voltage Electrical interfaces Basic Active Clamping Short-circuit detection with Advanced Soft Shut Down
<b>Author</b>	High-Power Application Engineering Department
<b>Document Number</b>	RDHP-1526
<b>Revision<sup>1</sup></b>	A.1

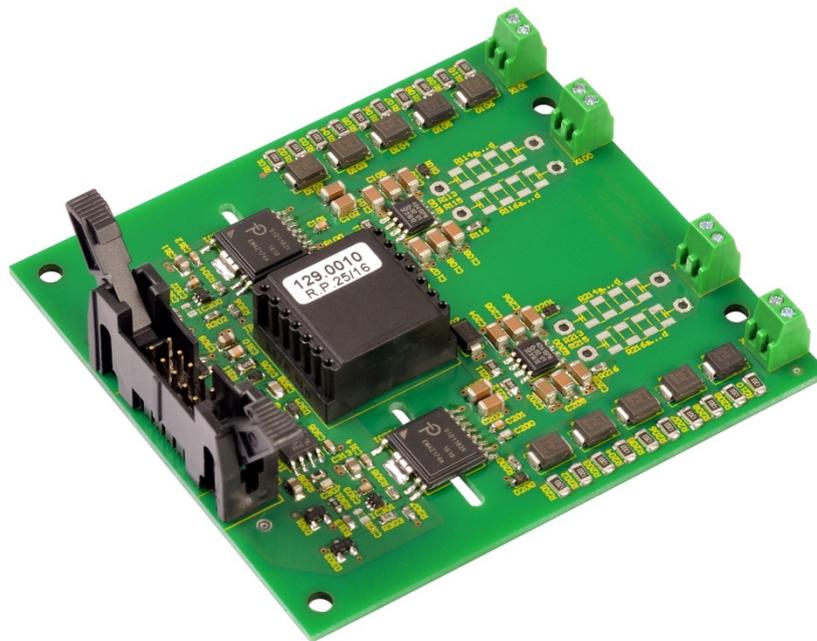

<sup>1</sup> The letter refers to the hardware revision. The number refers to the documentation revision.

## Scope

This application proposal provides a circuit design for a general purpose base board for driving various IGBT power modules.

The main features of the design are:

- Suitable for IGBT power modules in various housings such as 17mm dual, 17mm six-pack, 62mm, PrimePACK™, etc. with a maximum blocking voltage of 1200V
- Basic Active Clamping
- Short-circuit detection with Advanced Soft Shut Down (ASSD)
- External booster stage
- Electrical command inputs and status outputs
- 0V/5V command input logic
- 0V/5V status output logic
- Minimum pulse suppression
- 5V supply voltage
- Single PCB solution with soldered-in gate driver IC

## Intellectual Property Licensing

The design proposal, products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations.

A complete list of Power Integrations patents may be found at <https://www.power.com/>.

Power Integrations grants its customers a license under certain patent rights as set forth at <https://www.power.com/company/intellectual-property-licensing/>.

## Application Conditions

The design is proposed for the following application conditions:

- General purpose applications and IGBT power modules
- Adaptations such as adjustment of gate resistors can easily be done

## Design Description

In addition to the following design description, reference to the datasheet of the SID1182K gate driver IC family is recommended.

## Gate Resistors

Gate resistor values are not explicitly given as they depend on the IGBT power module used and on the application. Gate resistors of either SMD (size 1206) or THT (size PR02) package can be selected.

Turn-on gate resistors:

Channel	SMD Package	THT Package
1	R114a ... R114d	R113
2	R214a ... R214d	R213

Turn-off gate resistors:

Channel	SMD Package	THT Package
1	R116a ... R116d	R115
2	R216a ... R216d	R215

The gate resistors must be determined and assembled by the user.

## $V_{CEsat}$ Monitoring

SID1182K gate driver ICs from Power Integrations provide sense inputs for monitoring IGBT short-circuit conditions. The details of the  $V_{CEsat}$  monitoring function are described in the corresponding datasheet of the gate driver.

## Advanced Soft Shut Down (ASSD)

The driver ICs SID1182K of the SCALE-iDriver family feature an Advanced Soft Shut Down (ASSD) function, which reduces the turn-off  $di/dt$  to limit  $V_{CE}$  overvoltage spikes as soon as a short-circuit condition is detected. An excessive turn-off overvoltage is therefore avoided and the IGBT is turned off within its safe operating area.

The ASSD function is only active under short-circuit conditions, but not under normal operating conditions (e.g. at nominal current or in over-current conditions), i.e. it is triggered by the  $V_{CEsat}$  monitoring function.

The ASSD function may also have performance limitations, such as at high DC-link voltages and/or high commutation loop stray inductances. If the application is operated at these boundary conditions, it is recommended to implement Basic Active Clamping.

For further details concerning the ASSD function refer to the datasheet of the gate driver IC SID1182K.

## Basic Active Clamping

Active clamping is a technique designed to partially turn on the IGBT in case the collector-emitter voltage exceeds a predefined threshold. The IGBT is then kept in linear operation. Basic Active Clamping topologies

implement a single feedback path from the IGBT's collector through transient voltage suppressor (TVS) diodes to the IGBT gate.

Basic Active Clamping is recommended as an option in addition to the Advanced Soft Shut Down (ASSD) function in the following cases depending on actual application conditions:

- High DC-link voltage and/or high commutation loop stray inductances
- Turning-off overcurrents and/or high commutation loop stray inductances

---

## Minimum Pulse Suppression

---

This design possesses a minimum pulse suppression with a time constant  $\tau$  of typically 99ns. If required the setting can be changed by adjusting C300 and C301. The time constant  $\tau$  is given by the following equations:

$$\tau_1 = 99\Omega \cdot C300$$

$$\tau_2 = 99\Omega \cdot C301$$

Recommended values of C300 and C301 are in the range of 1nF ( $\tau_x = 99\text{ns}$ ) to 3.3nF ( $\tau_x = 327\text{ns}$ ), depending on actual application conditions.

---

## Blocking Time

---

During the blocking time, which is set to typically 10 $\mu\text{s}$ , the gate driver IC ignores incoming command signals. The blocking time starts once a fault was detected by the gate driver IC's secondary side (undervoltage lock-out or a short-circuit event) or when an undervoltage condition ends on the primary side.

For further details refer to the datasheet of the gate driver SID1182K.

## Interfaces

### Electrical Interfaces

X300		
Pin	Designation	Description
1	V5	5V supply (referenced to GND)
3	SO2	Status output channel 2
5	INB	Command input channel 2
7	SO1	Status output channel 1
9	INA	Command input channel 1

X300		
Pin	Designation	Description
2	GND	Ground
4	GND	Ground
6	GND	Ground
8	GND	Ground
10	GND	Ground

X100		
Pin	Designation	Description
1	E1	Emitter channel 1
2	G1	Gate channel 1

X101		
Pin	Designation	Description
1	C1	Collector channel 1
2	C1	Collector channel 1

X200		
Pin	Designation	Description
1	G2	Gate channel 2
2	E2	Emitter channel 2


X201		
Pin	Designation	Description
1	C2	Collector channel 2
2	C2	Collector channel 2

### CAD Data

The set of CAD data, which includes the circuit schematics, Gerber files, BOM and Pick-and-Place file are available as separate documents bundled together with this documentation.

### Layout Example

An example for a suitable layout is shown in the following picture. The recommended PCB thickness is 1.55mm.

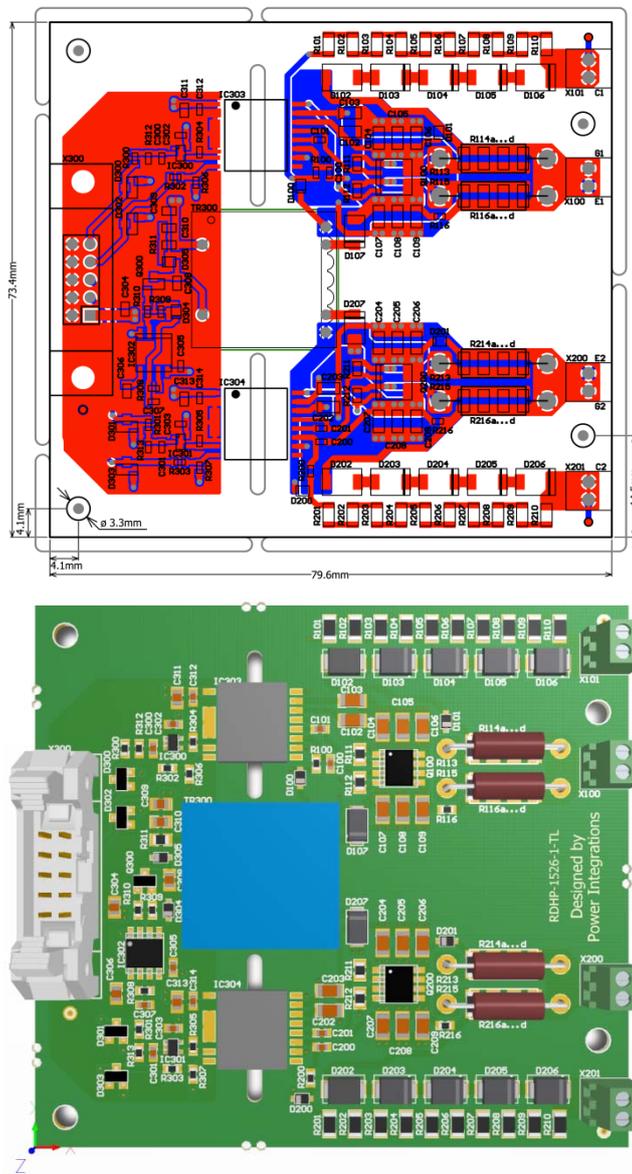

**Switching Characteristic**

**Turn-On/Off**


The measurement examples shown with the IGBT power module FF450R12KT4 from Infineon Technologies ( $R_{Gon} = 1\Omega$  and  $R_{Goff} = 1\Omega$ ) were carried out in a double-pulse test using a half-bridge topology setup at room temperature with an initial DC-link voltage of  $800V_{DC}$ . The adjusted load current is either  $450A$  ( $I_{nom}$ ) or  $900A$  ( $2x I_{nom}$ ).

Channel assignment:


Channel C2: Gate-emitter voltage

Channel C5: Collector current


Channel C7: Collector-emitter voltage

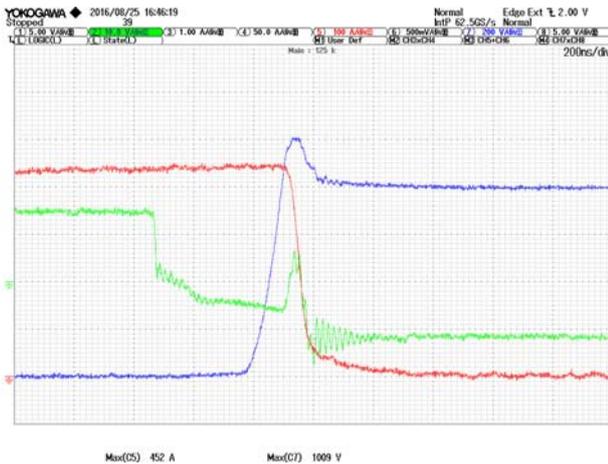

Turn-off bottom side ( $I_{nom}$ )

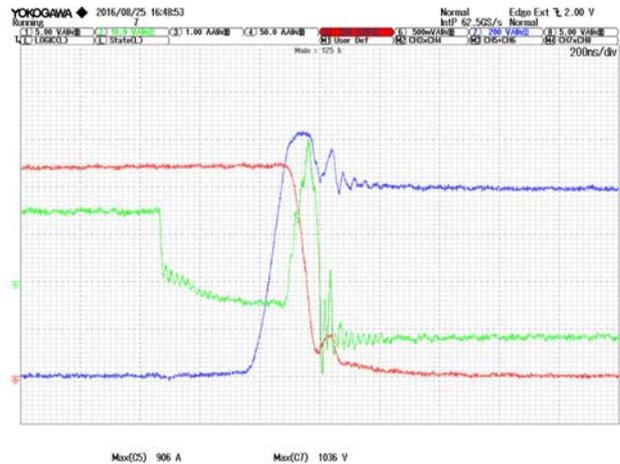


Turn-off bottom side ( $2x I_{nom}$ )

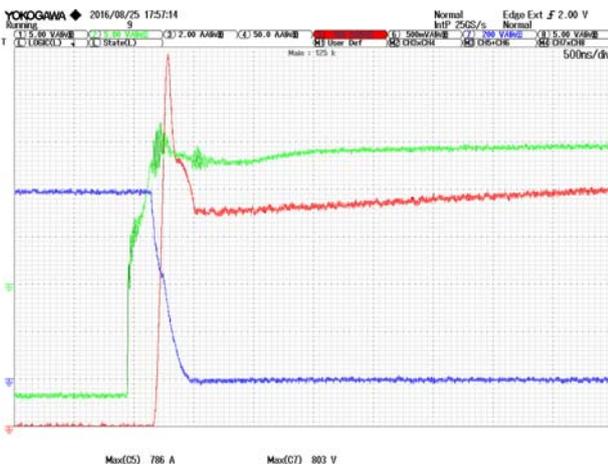


Turn-on bottom side ( $I_{nom}$ )




Turn-on bottom side ( $2x I_{nom}$ )

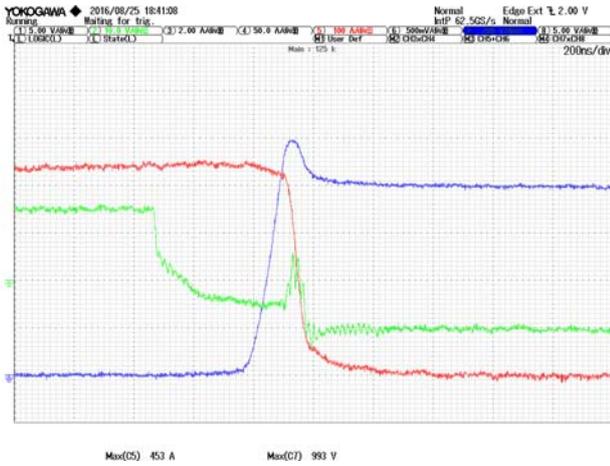


Turn-off top side ( $I_{nom}$ )

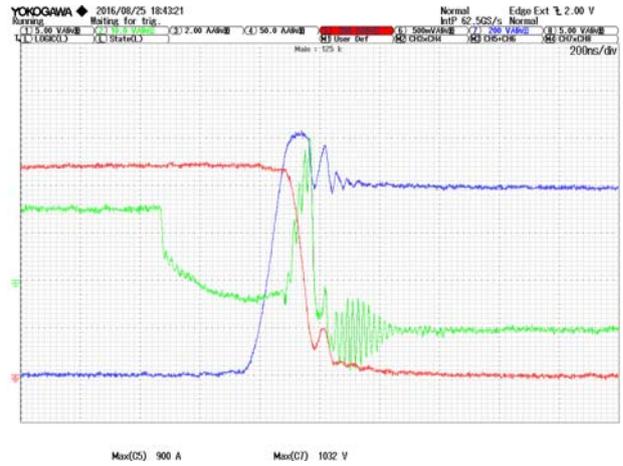

Turn-off top side ( $2x I_{nom}$ )

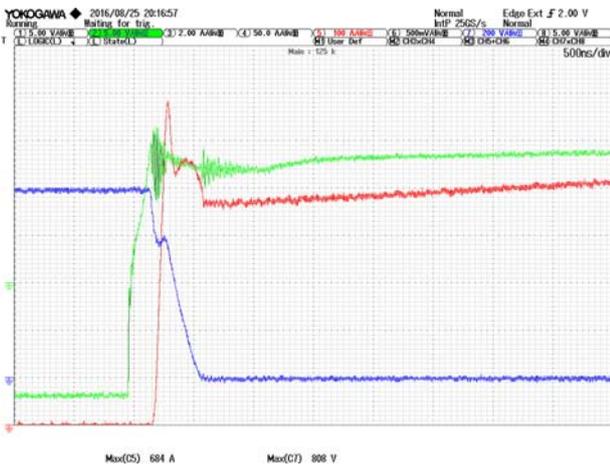

Turn-on top side ( $I_{nom}$ )

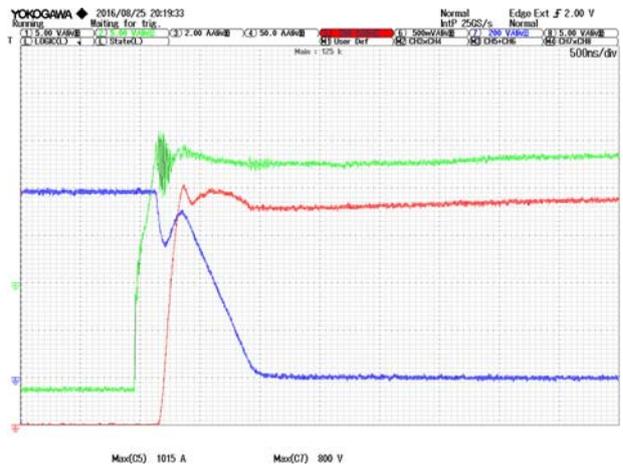

Turn-on top side ( $2x I_{nom}$ )

## Short-Circuit

The measurement examples shown with the IGBT power module FF450R12KT4 from Infineon Technologies ( $R_{Gon} = 1\Omega$  and  $R_{Goff} = 1\Omega$ ) were carried out at room temperature with an initial DC-link voltage of  $800V_{DC}$ .


Channel assignment:

Channel C1: Command input signal


Channel C2: Gate-emitter voltage

Channel C5: Collector current

Channel C7: Collector-emitter voltage

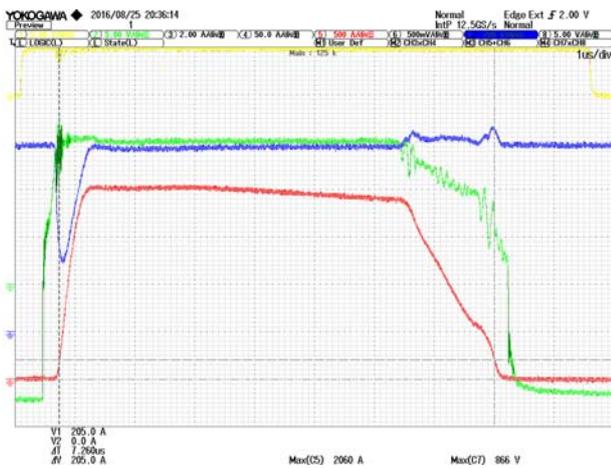

Bottom side

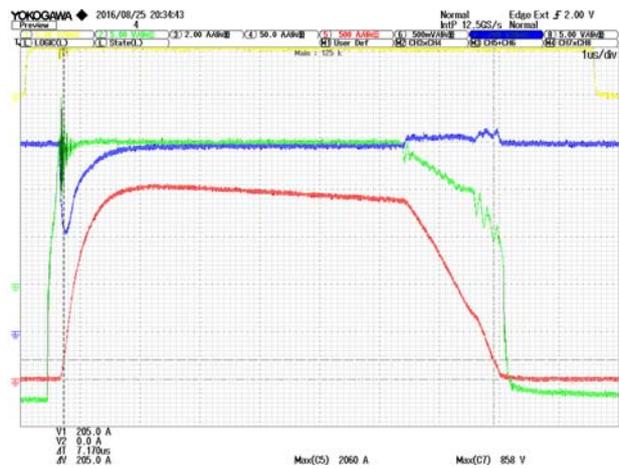

Top side

## Handling

To avoid possible failures caused by ESD, a handling- and assembly-process with persistent ESD protection is necessary /2/.

## References

- /1/ SID11x2K SCALE-iDriver Family Data Sheet, Power Integrations
- /2/ Application Note AN-0902, "Avoiding ESD with CONCEPT Drivers", Power Integrations

## Technical Support

Power Integrations provides expert help with your questions and problems:

Website <http://www.power.com/igbt-driver/go/support>

Email [igbt-driver.support@power.com](mailto:igbt-driver.support@power.com)

## Quality

The obligation to high quality is one of the central features laid down in the mission statement of Power Integrations. Our total quality management system assures state-of-the-art processes throughout all functions of the company, certified by ISO9001:2008 standards.

## Legal Disclaimer

Reference Designs are technical proposals concerning how to use Power Integrations' gate drivers in particular applications and/or with certain power modules. These proposals are "as is" and are not subject to any qualification process. The suitability, implementation and qualification are the sole responsibility of the end user.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. All parameters, numbers, values and other technical data included in the technical information were calculated and determined to our best knowledge in accordance with the relevant technical norms (if any). They may base on assumptions or operational conditions that do not necessarily apply in general. We exclude any representation or warranty, express or implied, in relation to the accuracy or completeness of the statements, technical information and recommendations contained herein. No responsibility is accepted for the accuracy or sufficiency of any of the statements, technical information, recommendations or opinions communicated and any liability for any direct, indirect or consequential loss or damage suffered by any person arising therefrom is expressly disclaimed.

## Power Integrations Sales Offices

### WORLD HEADQUARTERS

5245 Hellyer Avenue  
San Jose, CA 95138 USA  
Tel: +1-408-414-9200  
Fax: +1-408-414-9765  
Email: [usasales@power.com](mailto:usasales@power.com)

### AMERICAS WEST

5245 Hellyer Avenue  
San Jose, CA 95138 USA  
Tel: +1-408-414-8778  
Fax: +1-408-414-3760  
Email: [usasales@power.com](mailto:usasales@power.com)

### GERMANY (AC-DC/LED Sales)

Lindwurmstrasse 114  
80337 München, Germany  
Tel: +49-89-5527-39100  
Fax: +49-89-1228-5374  
Email: [eurossales@power.com](mailto:eurossales@power.com)

### INDIA (Mumbai)

Unit: 106-107, Sagar Tech Plaza-B  
Sakinaka, Andheri Kurla Road  
Mumbai, Maharashtra 400072 India  
Tel 1: +91-22-4003-3700  
Tel 2: +91-22-4003-3600  
Email: [indiasales@power.com](mailto:indiasales@power.com)

### JAPAN

Kosei Dai-3 Bldg.  
2-12-11, Shin-Yokohama, Kohoku-ku  
Yokohama-shi, Kanagawa  
Japan 222-0033  
Tel: +81-45-471-1021  
Fax: +81-45-471-3717  
Email: [japansales@power.com](mailto:japansales@power.com)

### TAIWAN

5F, No. 318, Nei Hu Rd., Sec. 1  
Nei Hu Dist.  
Taipei, 114 Taiwan  
Tel: +886-2-2659-4570  
Fax: +886-2-2659-4550  
Email: [taiwansales@power.com](mailto:taiwansales@power.com)

### AMERICAS EAST

7360 McGinnis Ferry Road  
Suite 225  
Suwannee, GA 30024 USA  
Tel: +1-678-957-0724  
Fax: +1-678-957-0784  
Email: [usasales@power.com](mailto:usasales@power.com)

### CHINA (Shanghai)

Room 2410, Charity Plaza  
No. 88 North Caoxi Road  
Shanghai, 200030 China  
Tel: +86-21-6354-6323  
Fax: +86-21-6354-6325  
Email: [chinasales@power.com](mailto:chinasales@power.com)

### GERMANY (IGBT Driver Sales)

HellwegForum 1  
59469 Ense, Germany  
Tel: +49-2938-64-39990  
Email: [igbt-driver.sales@power.com](mailto:igbt-driver.sales@power.com)

### INDIA (New Dehli)

#45, Top Floor  
Okhla Industrial Area, Phase - III  
New Dehli, 110020 India  
Tel 1: +91-11-4055-2351  
Tel 2: +91-11-4055-2353  
Email: [indiasales@power.com](mailto:indiasales@power.com)

### KOREA

RM602, 6FL, 22  
Teheran-ro 87-gil, Gangnam-gu  
Seoul, 06164 Korea  
Tel: +82-2-2016-6610  
Fax: +82-2-2016-6630  
Email: [koreasales@power.com](mailto:koreasales@power.com)

### UNITED KINGDOM

Bulding 5, Suite 21  
The Westbrook Centre  
Milton Road  
Cambridge, CB4 1YG United Kingdom  
Tel: +44-7823-557-484  
Email: [eurossales@power.com](mailto:eurossales@power.com)

### AMERICAS CENTRAL

333 Sheridan Road  
Winnetka, IL 60093 USA  
Tel: +1-847-721-6293  
Email: [usasales@power.com](mailto:usasales@power.com)

### CHINA (Shenzhen)

17/F, Hivac Building, No 2  
Keji South 8th Road, Nanshan District  
Shenzhen, 518057 China  
Tel: +86-755-8672-8689  
Fax: +86-755-8672-8690  
Email: [chinasales@power.com](mailto:chinasales@power.com)

### INDIA (Bangalore)

#1, 14th Main Road  
Vasanthangar  
Bangalore, 560052 India  
Tel 1: +91-80-4113-8020  
Tel 2: +91-80-4113-8028  
Fax: +91-80-4113-8023  
Email: [indiasales@power.com](mailto:indiasales@power.com)

### ITALY

Via Milanese 20  
20099 Sesto San Giovanni (MI), Italy  
Tel: +39-02-4550-8708  
Email: [eurossales@power.com](mailto:eurossales@power.com)

### SINGAPORE

51 Newton Road  
#19-01/05 Goldhill Plaza  
Singapore, 308900  
Tel 1: +65-6358-2160  
Tel 2: +65-6358-4480  
Fax: +65-6358-2015  
Email: [singaporesales@power.com](mailto:singaporesales@power.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Power Integrations:](#)

[RDHP-1526](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)