




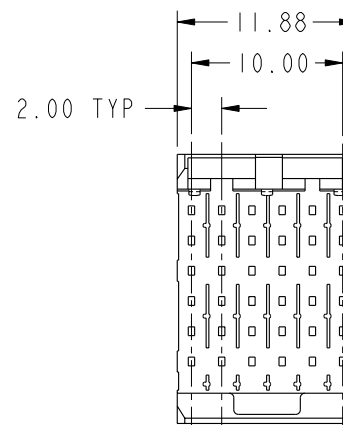

PRODUCT NUMBER	GROUND SPRING CONTACT FINGERS PLATING PERFORMANCE LEVEL	GROUND SPRING EON PRESS FIT TAIL PLATING
84818-1YY	TELCORDIA CO	STANDARD (SnPb)
84818-1YYLF		LEAD FREE (Sn)
84818-3YY	CUSTOMER SPECIAL	STANDARD (SnPb)
84818-3YYLF		LEAD FREE (Sn)
84818-5YY	TELCORDIA UE	STANDARD (SnPb)
84818-5YYLF		LEAD FREE (Sn)

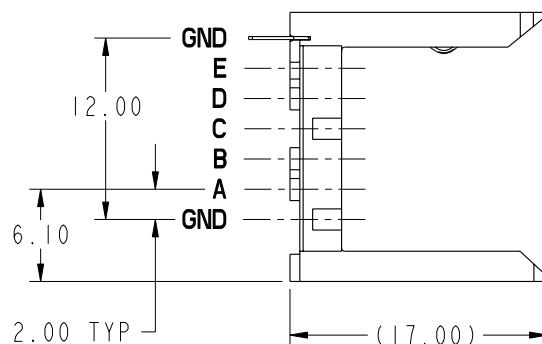


mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCi www.fciconnect.com		
ltr	ecn no.	dr	date	linear	0.X ±0.3				COPY		title VERTICAL SIGNAL HDR. SHROUD 5 ROW P.F. 30 POS. STANDARD	
A	V90180	L-IV	1999-03-17		0.XX ±0.13				projection			
B	VI2223	EPK	2001-09-17		.XXX ±.051							
C	V20659	CGD	2002-04-05	angles	0° ±2°							
D	V05-0797	VS	2005-09-01	dr	E, KROPER.	2001-09-17			product family		METRAL 1000	code
E	V06-0659	DCH	2006-06-12	enrg	J. VOLSTORF	2001-09-17			size		dwg no	213
F	V08-0073	HTB	2008-02-11	chr	J. VOLSTORF	2001-09-17	scale		A		84818	sheet 1 of 3
				appd	J. VOLSTORF	2001-09-17	2:1					
sheet index		revision sheet		F	F	F						
				1	2	3						




This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

PRODUCT NUMBER
SEE SHEET 1

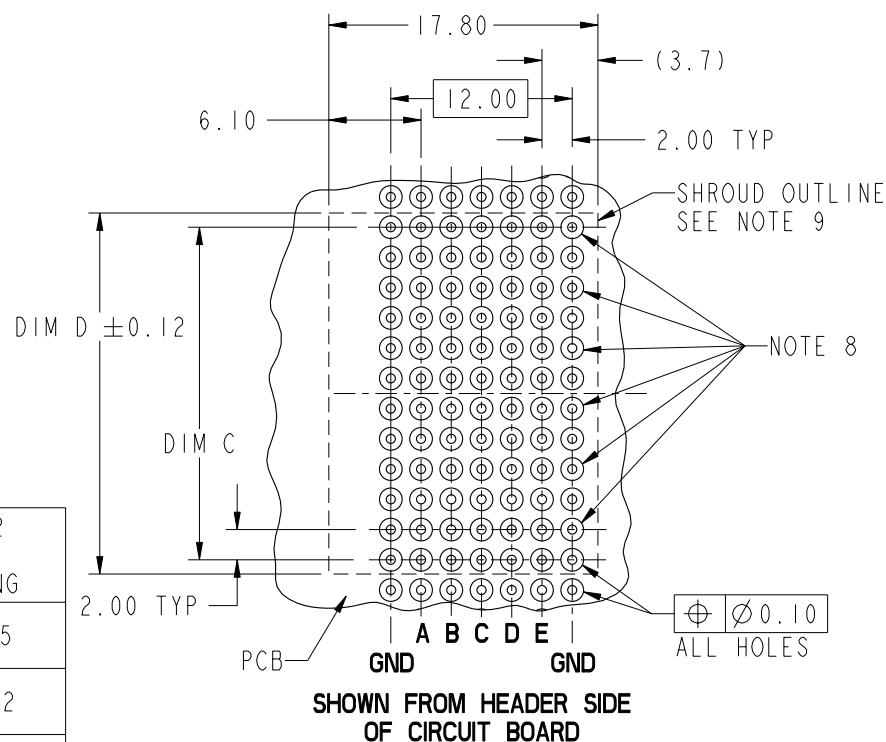

PRESS-FIT HOLES	OPTION 1 ROWS GND-PIN, A,B,C,D,E	OPTION 2 ROW GND-SPRING
HOLE DIAMETER AFTER PLATING	0.65-0.80	0.45-0.55
DRILLED HOLE	0.81-0.86 (0.85 DRILL)	0.60±0.02
COPPER PLATING	0.025 MIN	0.025 MIN
SnPb PLATING	0.005-0.015	0.005-0.015

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com			
ltr	ecr no.	dr	date	linear	0.X ±0.3	projection 	COPY		title VERTICAL SIGNAL HDR. SHROUD 5 ROW P.F. 30 POS. STANDARD		
F					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°	 MM scale 2:1	product family		METRAL 1000	code	
				dr	E. KROPER. 2001-09-17		size		dwg no	213	
				enr	J. VOLSTORF 2001-09-17					sheet	
				chr	J. VOLSTORF 2001-09-17					2	
				appd	J. VOLSTORF 2001-09-17						
sheet index	revision sheet										

PRODUCT NUMBER


SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."
3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
STRIPLINE SHIELDED MATERIAL: PHOSPHOR BRONZE
6. PLATING INFORMATION: SEE TABLE
7. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD.
8. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD. ALL OTHER HOLES ARE FOR THE HEADER.
9. THE 'SHROUD OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
10. CURRENT RATING: 1 AMP PER PIN
11. TEMPERATURE RANGE: -55°C TO +105°C
12. PRODUCTS WHERE THE PART NUMBERS ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
13. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. FOR LEAD FREE PART NUMBERS, ADD 'LF' SUFFIX. EXAMPLE: 84818-X01LF



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

mat'l code SEE NOTE 5				tolerances unless otherwise specified			CUSTOMER		 www.fciconnect.com					
ltr	ecn no.	dr	date	linear	0. X ± 0.3			COPY			title VERTICAL SIGNAL HDR. SHROUD 5 ROW P.F. 30 POS. STANDARD			
F					0. XX ± 0.13			projection						
					. XXX ± .051									
				angles	0° ± 2°						product family METRAL 1000	code 213		
				dr	E. KROPER.	2001-09-17			size A				dwg no 84818	sheet 3
				enrg	J. VOLSTORF	2001-09-17								
				chr	J. VOLSTORF	2001-09-17								
				appd	J. VOLSTORF	2001-09-17								
sheet index	revision sheet													

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru