

TYPICAL SWITCH ORDERING EXAMPLE

MB24

11

A2

G

40

—

F

A

Poles & Circuits

11	SPDT	ON	(ON)
61	DPDT	ON	(ON)

() = Momentary

Contact Materials & Ratings

W	Silver Rated 3A @ 125V AC
G	Gold Rated 0.4VA max @ 28V AC/DC max
A	Gold over Silver Rated 3A @ 125V AC & 0.4VA max @ 28V AC/DC max

Caps

F	.201" (5.1mm) Dia.
H	.295" (7.5mm) Dia.

Cap Colors

A	Black
B	White
C	Red

Bushings

A2	.280" (7.1mm) Smooth with Keyway
A1	.280" (7.1mm) Threaded with Keyway
E2	.285" (7.24mm) Smooth with D Flat
E1	.285" (7.24mm) Threaded with D Flat
S2	.350" (8.9mm) Smooth with Keyway
S1	.350" (8.9mm) Threaded with Keyway

Terminals

With Bracket

13	.250" (6.35mm) Straight PC with .465" (11.8mm) Bracket
15	.425" (10.8mm) Straight PC with .630" (16.0mm) Bracket
17	.964" (24.5mm) Straight PC with 1.150" (29.2mm) Bracket

With Reinforced Bracket

23	.250" (6.35mm) Straight PC with .465" (11.8mm) Bracket
25	.425" (10.8mm) Straight PC with .630" (16.0mm) Bracket
26	.750" (19.05mm) Straight PC with .953" (24.2mm) Bracket

With Terminal Support

30	Right Angle PC
40	Vertical PC

IMPORTANT:




Switches are supplied without UL, cULus & CSA marking unless specified. **UL, cULus & CSA recognized only when ordered with marking on the switch.**

Specific models, ratings, & ordering instructions are noted on General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE


MB2411A2G40-FA

.280" (7.1mm) Smooth Bushing
with Keyway
Black .201" (5.1mm)
Diameter Cap



SPDT
ON-(ON) Circuit
Vertical PC Terminals
Gold Contacts with
0.4VA Rating

POLES & CIRCUITS


Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch Schematics
		Normal 	Down 	Normal 	Down 	
SP	*MB2411	ON	(ON)	1-3	1-2	SPDT 
DP	MB2461	ON	(ON)	1-3 4-6	1-2 4-5	DPDT 

Note: Terminal numbers are not actually on the switch.
* When using terminal code 32, connected terminals and schematic are reversed.


BUSHINGS

Note: Plunger selection is not required for MB2400 pushbuttons.
The plunger can be used with or without a cap.


A2 .280" (7.1mm) Smooth with Keyway

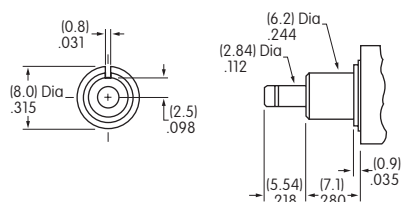


E2 .285" (7.24mm) Smooth with D Flat

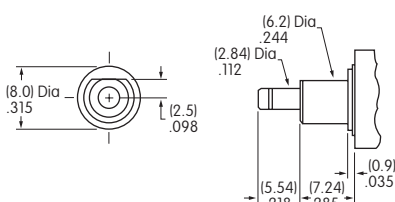


S2 .350" (8.9mm) Smooth with Keyway

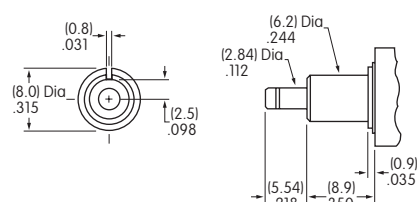


A1 .280" (7.1mm) Threaded with Keyway

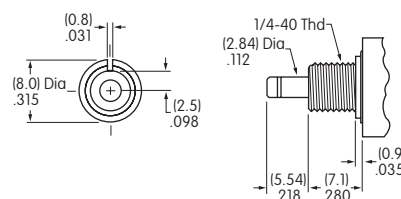

E1 .285" (7.24mm) Threaded with D Flat

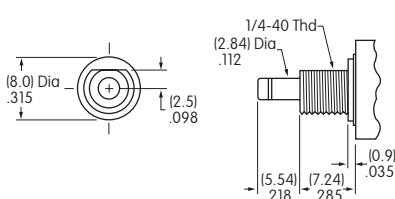

S1 .350" (8.9mm) Threaded with Keyway

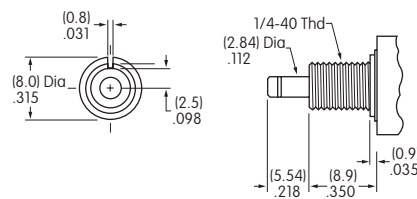


Maximum Panel Thickness with
Standard Hardware: .068" (1.74mm)

Maximum Panel Thickness with
Standard Hardware: .068" (1.74mm)


Maximum Panel Thickness with
Standard Hardware: .134" (3.40mm)

Panel Cutouts


For A1, A2, S1, or S2 Bushing
with Keyway



For E1 or E2 Bushing
with D Flat



With
Optional Locking Ring



Standard hardware includes 2 hex nuts & 1 lockwasher.
Hardware is illustrated following the Typical Switch Dimension drawings.

CONTACT MATERIALS & RATINGS

W
Silver over Silver
Power Level
3A @ 125V AC
G
Gold over Brass or Copper
Logic Level
0.4VA maximum @ 28V AC/DC maximum

Note: Complete explanation of operating range in Supplement section.

A
Gold over Silver
**Power Level
or Logic Level**
**3A @ 125V AC
or 0.4VA maximum @ 28V AC/DC maximum**

Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section for complete explanation of dual rating and operating range.

TERMINALS

Straight PC Mount with Bracket

13

**.250" (6.35mm)
Terminal with
.465" (11.8mm)
Bracket**

15

**.425" (10.8mm)
Terminal with
.630" (16.0mm)
Bracket**

17

**.964" (24.5mm)
Terminal with
1.150" (29.2mm)
Bracket**

23








**.250" (6.35mm)
Terminal with
.465" (11.8mm)
Bracket**

25



**.425" (10.8mm)
Terminal with
.630" (16.0mm)
Bracket**

26

**.750" (19.05mm)
Terminal with
.953" (24.2mm)
Bracket**


30
Right Angle PC

32

Right Angle PCB with Reverse Circuit
Available only in single pole with
0.4VA rating (code G)


40
Vertical PC


PCB footprints are on the following Typical Switch Dimension pages.


CAPS & CAP COLORS

F

**AT475
.201" (5.1mm)
Diameter Cap**

Material: Polyamide


Finish: Glossy


H

**AT496
.295" (7.5mm)
Diameter Cap**

Material: Polyamide

Finish: Glossy





**Cap Colors
Available:**

A
Black
B
White
C
Red

TYPICAL SWITCH DIMENSIONS



Straight PC • Bracket

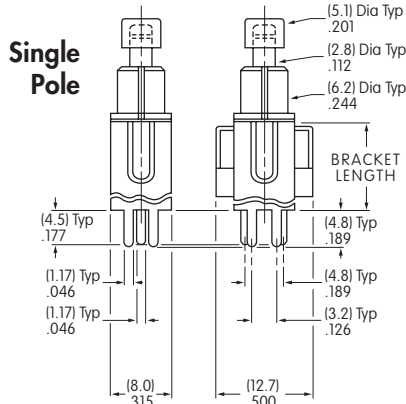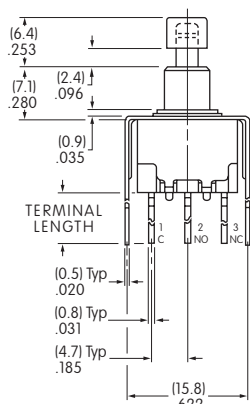

Double Pole



MB2411A2G13-FA



Terminal Code:	Terminal Length:	Bracket Length:
13	.250 (6.35mm)	.465 (11.8mm)
15	.425 (10.8mm)	.630 (16.0mm)
17	.964 (24.5mm)	1.150 (29.2mm)

Toggles

Rockers

Pushbuttons



Illuminated PB

Programmable

Keylocks

Rotaries



Straight PC • Reinforced Bracket

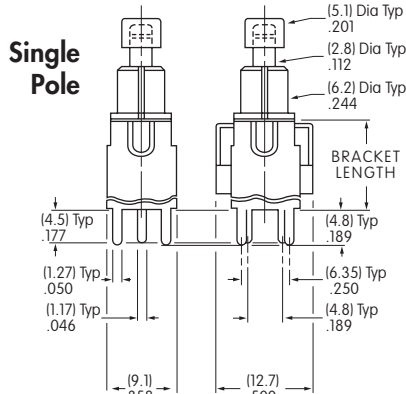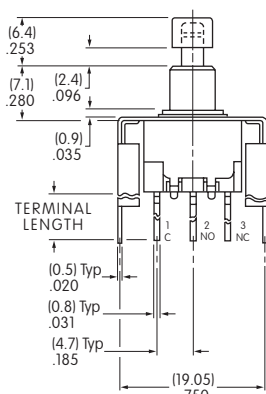

Double Pole



MB2411A2G23-FA



Terminal Code:	Terminal Length:	Bracket Length:
23	.250 (6.35mm)	.465 (11.8mm)
25	.425 (10.8mm)	.630 (16.0mm)
26	.750 (19.05mm)	.953 (24.2mm)

Slides

Tactiles

Tilt

Touch

Indicators





Accessories

Supplement

TYPICAL SWITCH DIMENSIONS

Right Angle PC





Single Pole



MB2411A2G30-FA

Right Angle PC





Double Pole

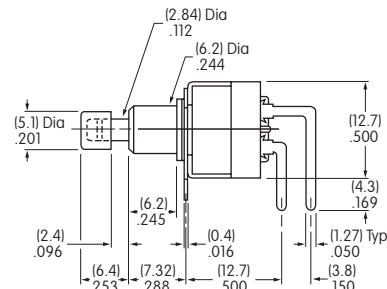

MB2461A2G30-FA

Right Angle PCB





Single Pole • Reverse Circuit





MB2411A2G32-FA

Vertical PC

Single Pole

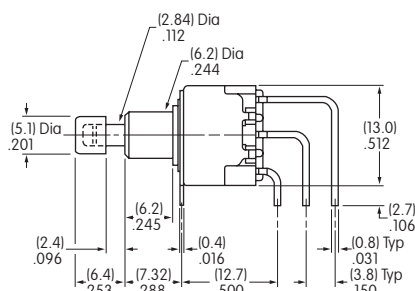

Double Pole



MB2411A2G40-FA



HARDWARE

Standard Hardware

AT513H Inch Threaded Hexagon Nut

2 included with each switch


Material:
Brass with Nickel Plating



AT509 Lockwasher

1 included with each switch


Material:
Steel with Zinc/Chromate



Optional Hardware



AT507H Locking Ring for A1 or S1 Bushing

Material:
Steel with Zinc/Chromate



AT515 Locking Ring for E1 Bushing

Material:
Steel with Zinc/Chromate



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru