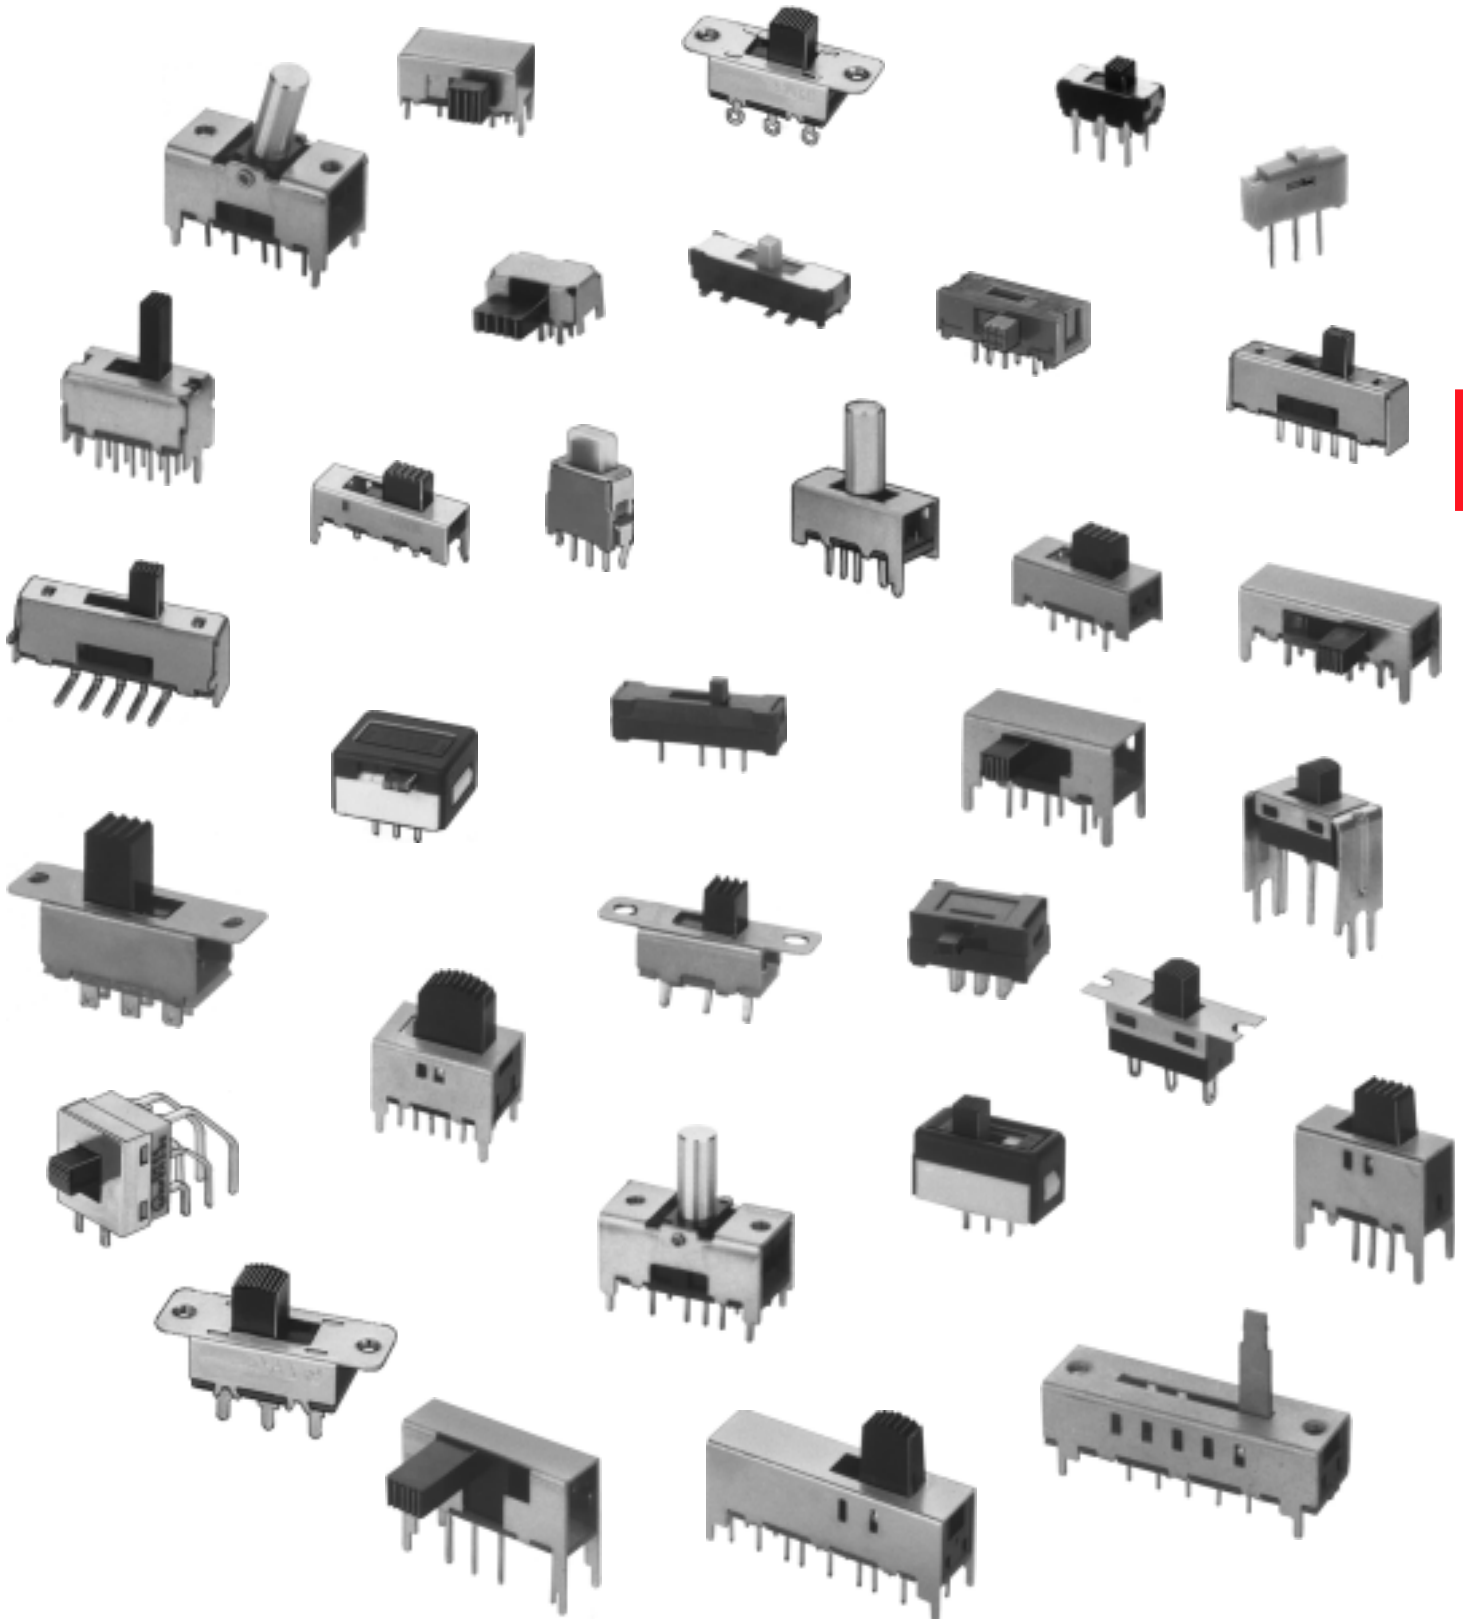


SLIDE SWITCHES

SEE PUSHBUTTON SWITCH SELECTION GUIDE ON NEXT PAGE

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



O

SLIDE SWITCHES

SLIDE SWITCH SELECTION GUIDE: This catalog contains an extensive variety of slide switches with numerous options and accessories. To facilitate easy selection of the desired switch for your application, the guide on page O2 lists the various Series with some key selection parameters.

MICROMINIATURE SLIDE SWITCHES								
SERIES	POLES	POS- ITIONS	RATINGS	WASH- ABLE	LIFE CYCLES	MOUNTING	ACTUATION	PAGE(S)
MJS	1&2	2&3	100 ma @ 12VDC	No	10,000	P.C. thru-hole	Vert. & rt. angle	O3-O4
MSSA	2	2	100 ma @ 30VDC or 125VAC & dry circuit	No	10,000	P.C. thru-hole	Vert. & rt. angle	O5
MA	1	2&3	300 ma @ 4VDC	No	10,000	Surface	Rt. angle	O6
MHSS	1&2	2	300 ma @ 6VDC	No	5000	P.C. thru-hole	Vert. & rt. angle	O7
MS	1,2&4	2&3	300 ma @ 6VDC	No	10,000	P.C. thru-hole & surface	Vert. & rt. angle	O8-O10
MMS	1,2,4&6	2&3	300 ma @ 30VDC	No	10,000	P.C. thru-hole	Vert. & rt. angle	O11-O12
MINIATURE SLIDE SWITCHES								
SERIES	POLES	POS- ITIONS	RATINGS	WASH- ABLE	LIFE CYCLES	MOUNTING	ACTUATION	PAGE(S)
MSTS	1&2	3	300 ma @ 28VDC	Yes	10,000	P.C. thru-hole	Vertical	O13
MHS	1&2	2&3	300 ma @ 30VDC	Yes	10,000	P.C. thru-hole	Vertical	O14-O17
SLB	1&2	2,3,4&5	300 ma @ 30VDC or 125 VAC	Yes	10,000	P.C. thru-hole	Vert. & rt. angle	O18-O25
SLC	1&2	2	300 ma @ 30VDC or 125 VAC	Yes	10,000	Panel	Vertical	O26
SLG	1	2	300 ma @ 30VDC or 125 VAC	Yes	10,000	P.C. thru-hole & panel	Vertical	O27
SLA	1&2	2	500 ma @ 125VAC	Yes	10,000	P.C. thru-hole & panel	Vertical	O28-O29

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALPHA-NUMERIC INDEX BY SERIES




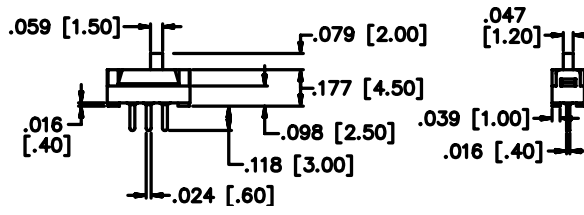




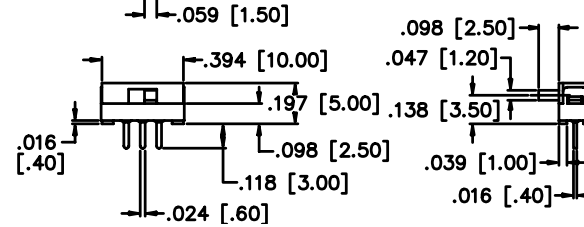




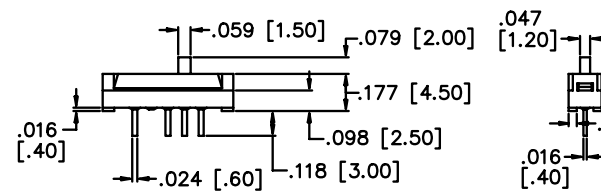

<u>SERIES</u>	<u>Page (s)</u>	<u>SERIES</u>	<u>Page (s)</u>
MA	O6	MSSA	O5
MHS	O14-O17	MSTS	O13
MHSS	O7	SLA	O28-O29
MJS	O3-O4	SLB	O18-O25
MMS	O11-O12	SLC	O26
MS	O8-O10	SLG	O27

MJS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


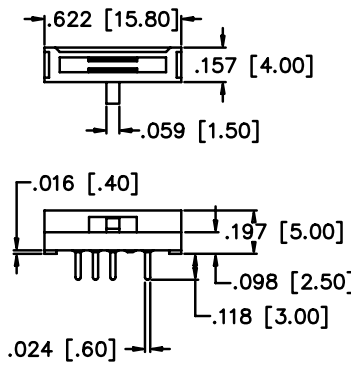


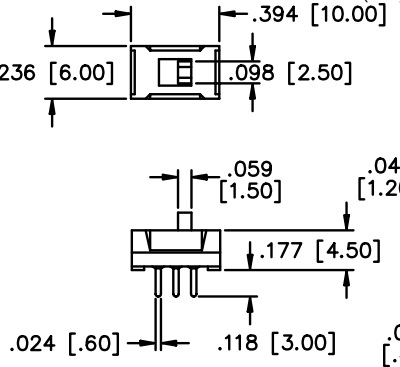


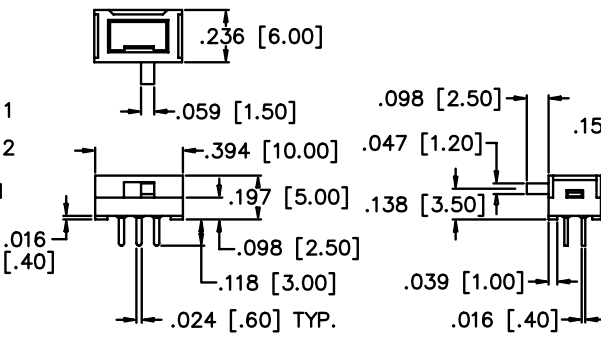

SPECIFICATIONS	FEATURES
Contact rating: 100 mA at 12 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS at sea level Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Actuation force: 225g (average) Solder heat resistance: 260°C max. for 5 seconds Washing not recommended	- Molded-in terminals minimize flux or solder entry. - Molded-in high temperature phenolic base. - Low Profile. - Bifurcated wiping contact design.
	MATERIALS
	Contacts & terminals: Silver plated Case & actuator: Thermoplastic Terminal seal: Molded-in

MODEL NO. MJS12	1P2T	 .079 (2.00) TRAVEL/THROW .402 [10.20] .157 [4.00]	 .157 [4.00] .079 [2.00] TYP. .039 [1.00] DIA., 4 PLCS.
 VERTICAL ACTUATOR	 ● = COMMON	 .059 [1.50] .079 [2.00] .047 [1.20] .177 [4.50] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .157 [4.00] .079 [2.00] TYP. .039 [1.00] DIA., 4 PLCS.
MODEL NO. MJS12R	1P2T	 .079 (2.00) TRAVEL/THROW .402 [10.20] .157 [4.00]	 .157 [4.00] .079 [2.00] .039 [1.00] DIA., 4 PLCS.
 RIGHT ANGLE ACTUATOR	 ● = COMMON	 .059 [1.50] .394 [10.00] .197 [5.00] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .157 [4.00] .079 [2.00] .039 [1.00] DIA., 4 PLCS.
MODEL NO. MJS13	1P3T	 .079 (2.00) TRAVEL/THROW 15.80 [.622] .157 [4.00]	 .039 [.60] DIA., 4 PLCS. .315 [8.00] .157 [4.00] .079 [2.00] TYP.
 VERTICAL ACTUATOR	 ● = COMMON	 .059 [1.50] .079 [2.00] .047 [1.20] .177 [4.50] .098 [2.50] .118 [3.00] .024 [.60] .016 [.40] .039 [1.00] .016 [.40]	 .039 [.60] DIA., 4 PLCS. .315 [8.00] .157 [4.00] .079 [2.00] TYP.

MJS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. MJS13R  RIGHT ANGLE ACTUATOR	.079 (2.00) TRAVEL/THROW 1P3T  SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MJS22  VERTICAL ACTUATOR	.079 (2.00) TRAVEL/THROW 2P2T  SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MJS22R  RIGHT ANGLE ACTUATOR	.079 (2.00) TRAVEL/THROW 2P2T  SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

MSSA Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS

Contact ratings: Gold; 0.4 Volt-Amps (VA) max. at 20 V max. (AC or DC)
 Silver; 100 mA at 125 VAC or 30 VDC
Initial contact resistance: 30 milliohms max.
Insulation resistance: 100 megohms min. at 250 VDC
Dielectric strength: 250 volts RMS at sea level
Electrical life: 10,000 cycles min.
Operating temperature range: -10°C to +60°C
Actuation force: 250g ± 150g
Solder heat resistance: 260°C max. for 3 seconds
Washing not recommended

FEATURES

- Low Profile.
- Epoxy sealed terminals.
- Cosmetic molded case.

MATERIALS

Contacts & terminals: Gold or silver available (see contact ratings)
Housing and Actuator: Thermoplastic
Base: High temperature thermoplastic
Terminal seal: Epoxy


MODEL NO. PLATING

MSSA22G GOLD


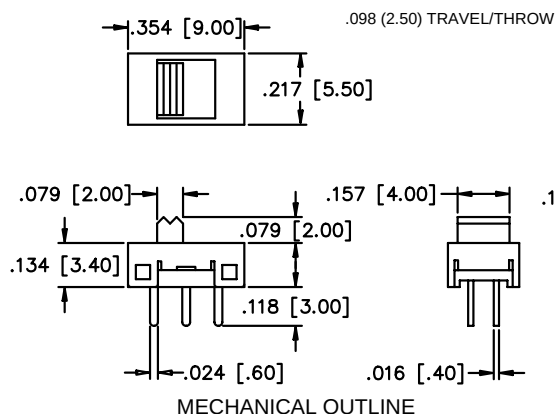


VERTICAL ACTUATOR

2P2T



SCHEMATIC

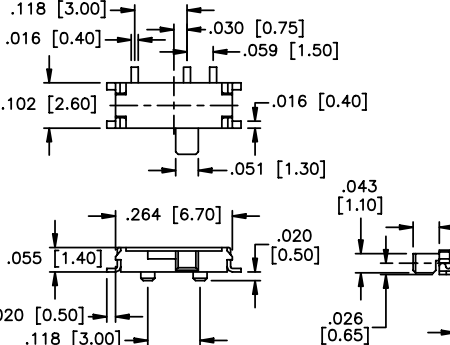
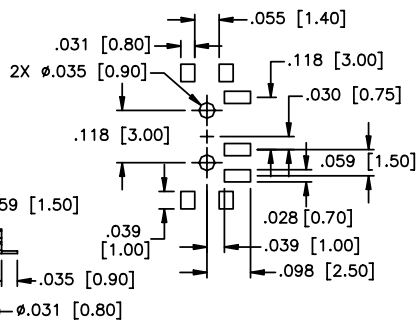


MA Series

Microminiature Memory Card

Slide Switches

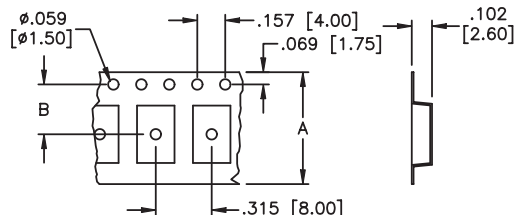
SPECIFICATIONS	FEATURES
Contact rating: 300 mA at 4 VDC Initial contact resistance: 70 milliohms max. Insulation resistance: 100 megohms min. at 100 VDC Dielectric strength: 100 VAC for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Actuation force: 200g ± 100g Solder heat resistance: Reflow - 260°C max. for 1 min. Manual - iron temperature 305 °C max. for 6 seconds. Washing not recommended	● Ultra-compact size. ● Low Profile. ● Surface mounting with restraining bosses. ● Reflow or hand solderable.
	MATERIALS
	Contacts: Silver plated beryllium copper Terminals: Silver plated brass Base: Liquid crystal polymer Cover: Tin plated steel Actuator: Liquid crystal polymer

MODEL NO.	1P2T
MA12R	
	
RIGHT ANGLE ACTUATOR	  


MODEL NO.			
MA12R/TR			
MA13R/TR			

Same as above models except supplied on tape & reel as shown.

Model No.	Dim. A	Dim. B	Dim. C
MA12RTR	.630 (16.0)	.217 (5.5)	.646 (16.4)
MA13R/TR	.945 (24.0)	.453 (11.5)	.960 (24.4)



Carrier tape dimensions diagram showing a side view of a 3-pin carrier tape. Dimensions include: Pin diameter $\phi .059$ [$\phi 1.50$], Pin pitch $.157$ [4.00], Pin thickness $.069$ [1.75], Pin offset $.102$ [2.60], Carrier width $.315$ [8.00], and overall dimensions A and B.



Reel dimensions diagram showing a top view of a reel with three pockets. Dimensions include: Reel diameter 12.99 [330.00], and Reel width C.

CARRIER TAPE

REEL DIMENSIONS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

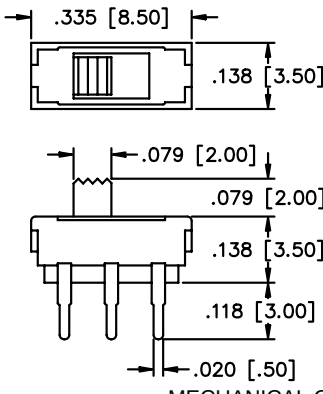


MHSS Series

Microminiature Slide Switches

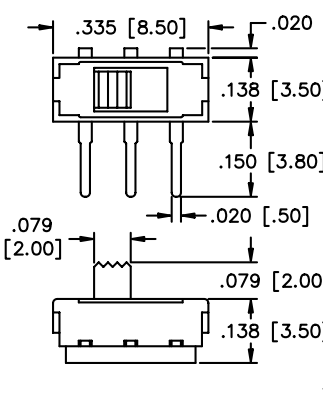


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 6 VDC Initial contact resistance: 60 milliohms max. Insulation resistance: 100 megohms min. at 100 VDC Dielectric strength: 100 VAC for 1 minute Electrical life: 5000 cycles min. Operating temperature range: -20°C to +70°C Solder heat resistance: 350°C max. for 3 seconds Washing not recommended	- Excellent tactile feed-back (detent action). - Molded-in terminals minimize flux or solder entry. - Ultra-compact case size. - Low profile.
	MATERIALS
	Contacts & terminals: Silver plated Case: 30% Glass filled nylon, type 6/6, black Actuator: Nylon, type 6/6, black (blue for MHSS2220 only)

MODEL NO.			
MHSS1104			
			
	VERTICAL ACTUATOR		

1P2T		
 ● = COMMON	SCHEMATIC	P.C. BOARD LAYOUT

MODEL NO.			
MHSS1105			
			
	RIGHT ANGLE ACTUATOR		

1P2T		
 ● = COMMON	SCHEMATIC	P.C. BOARD LAYOUT

MS Series

Microminiature Slide Switches

SPECIFICATIONS	FEATURES
Contact rating: 300 mA at 6 VDC Initial contact resistance: 70 milliohms max. Insulation resistance: 100 megohms max. at 500 VDC Dielectric strength: 500 volts RMS at sea level Electrical life: 10,000 cycles min. Operating temperature range: -10°C to +60°C Solder heat resistance: 260°C max. for 3 seconds Washing not recommended	- Low profile. - Insert molded terminals. - Stainless steel cover.
	MATERIALS
	Contacts & terminals: Silver plated Cover: Stainless steel Actuator: Thermoplastic Base: High temperature thermoplastic Terminal seal: Insert molded


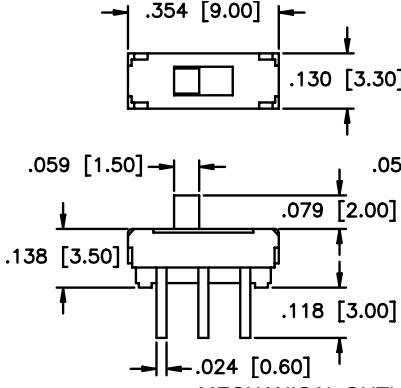
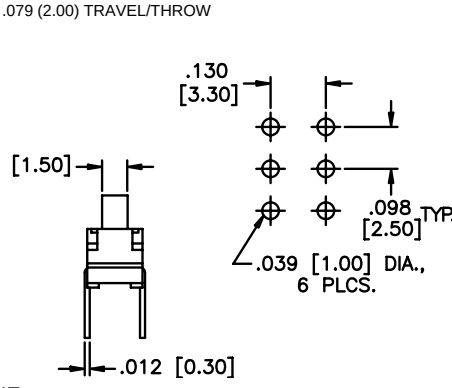

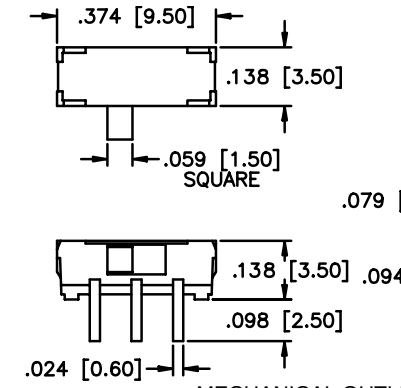
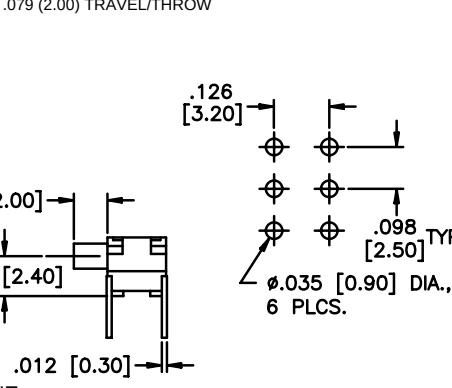

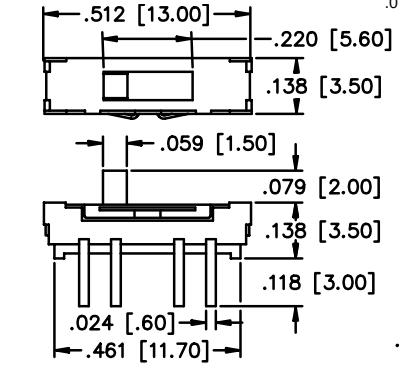
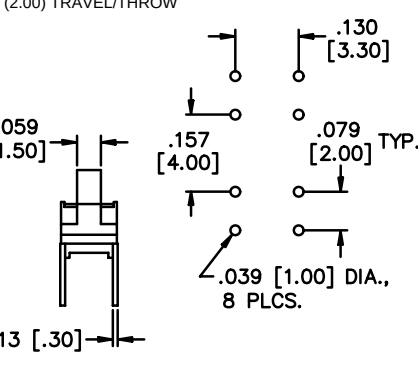

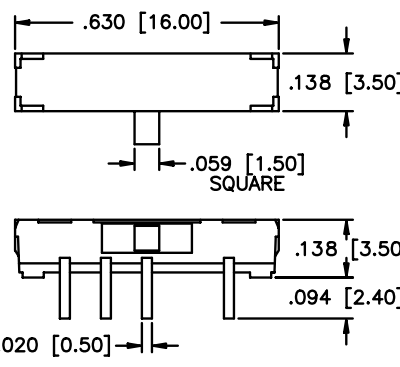
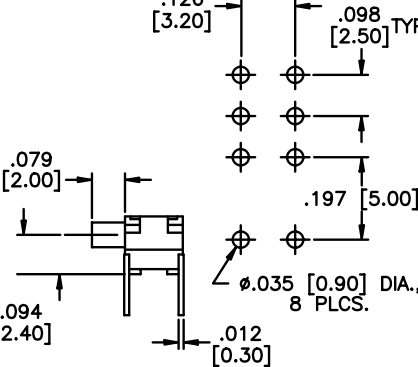
MODEL NO. MS12	1P2T SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. MS13	1P3T SCHEMATIC MECHANICAL OUTLINE P.C. BOARD CUTOUT
MODEL NO. MS13S	1P3T SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT


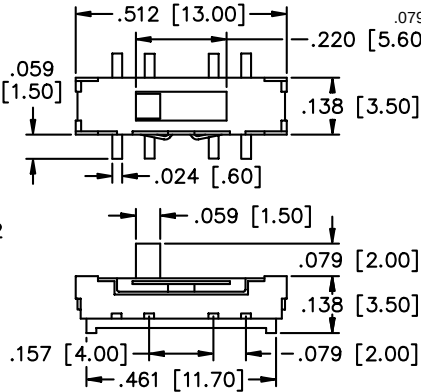
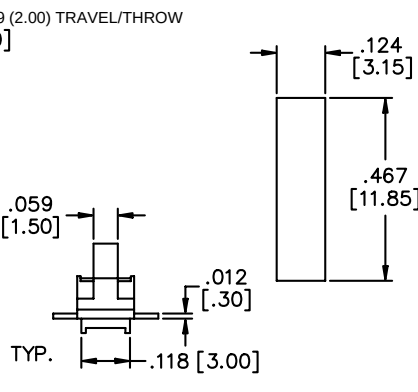

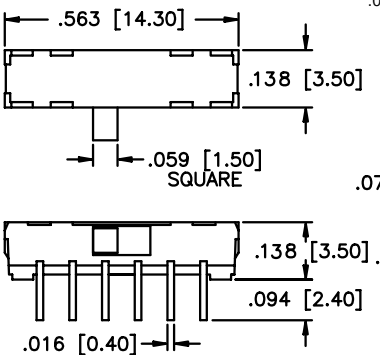
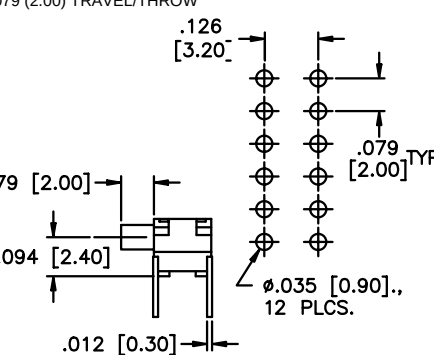
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. MS22  VERTICAL ACTUATOR	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MS22R  RIGHT ANGLE ACTUATOR	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MS23  VERTICAL ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. MS23R  RIGHT ANGLE ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

MODEL NO. MS23S  VERTICAL ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD CUTOUT
MODEL NO. MS42R  RIGHT ANGLE ACTUATOR	4P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT


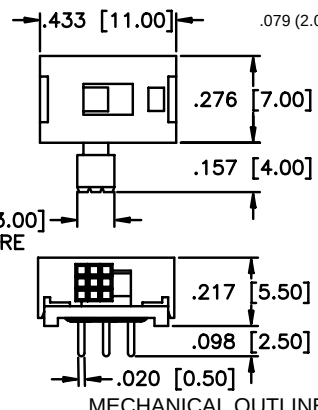
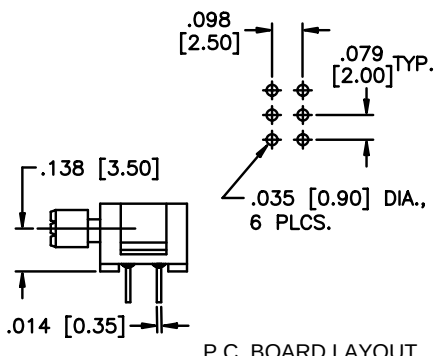

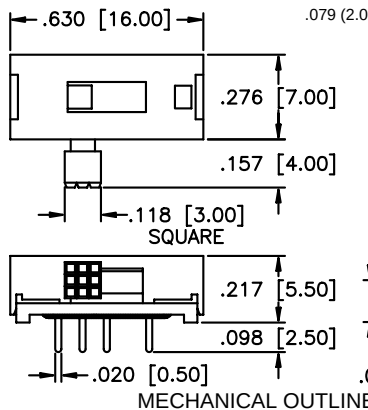
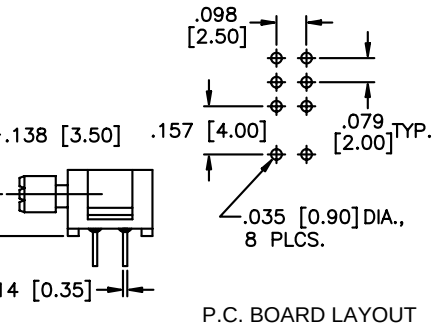

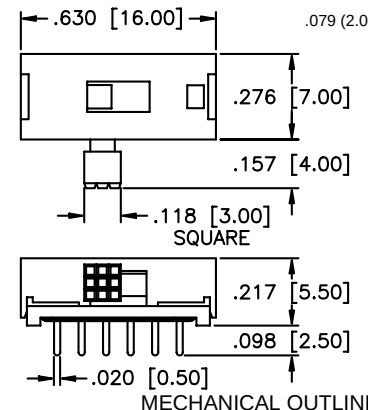
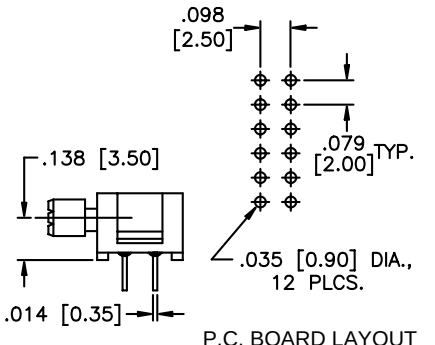
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MMS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


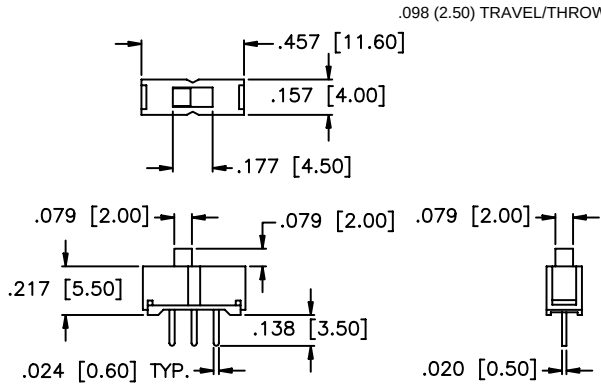


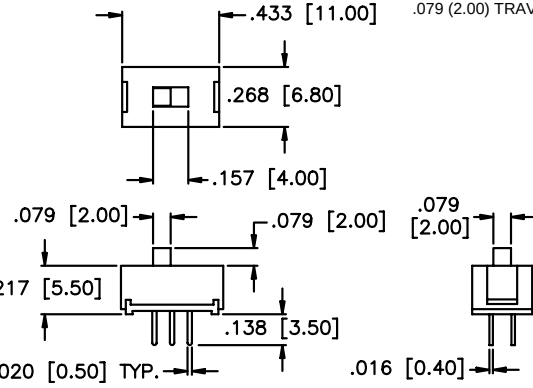


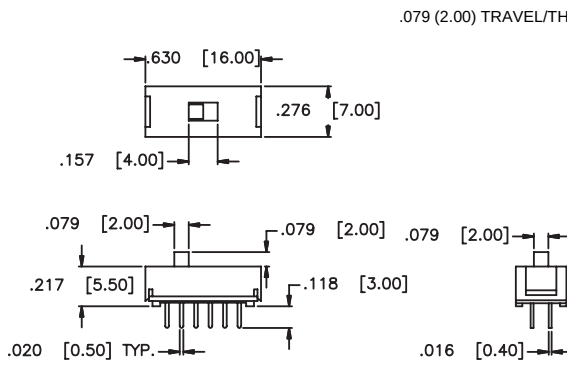


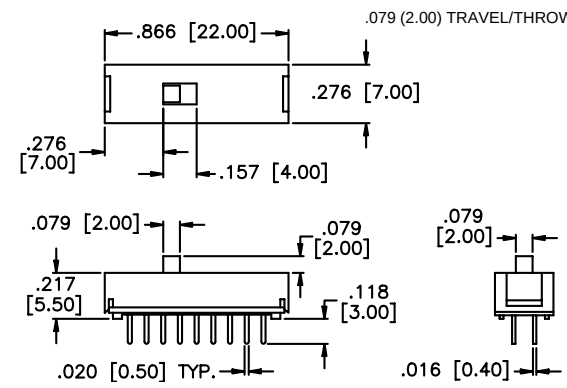
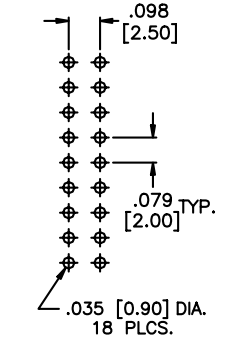
SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 30 VDC Initial contact resistance: 25 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +70°C Solder heat resistance: 255°C max. for 5 seconds max. Washing not recommended	• Bifurcated wiping contact design. • Low Profile. • Epoxy sealed terminals. • Cosmetic molded case.
	MATERIALS
	Contacts & terminals: Silver plated Case: Polyacetal Actuator: PBT Base: Glass filled PBT Terminal seal: Epoxy or phenol resin

MODEL NO.	
MMS22R	
 RIGHT ANGLE ACTUATOR	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO.	
MMS23R	
 RIGHT ANGLE ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO.	
MMS42R	
 RIGHT ANGLE ACTUATOR	4P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

MMS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. MMS1208  VERTICAL ACTUATOR	1P2T  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. MMS2214  VERTICAL ACTUATOR	2P2T  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. MMS42  VERTICAL ACTUATOR	4P2T  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. MMS6202  VERTICAL ACTUATOR	6P2T  ● = COMMON MECHANICAL OUTLINE  P.C. BOARD LAYOUT 

MSTS Series

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact rating: 300 mA at 28 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 VAC for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Solder heat resistance: 250°C max. for 5 seconds Actuation force: 200-600 grams Solvent washing permissible	- Miniature compact size. - Wash-through open frame construction. - Snap-in p.c. mounting bracket design. - Positive spring loaded ball detent mechanism. - Epoxy sealed terminals. - Gold plated contacts available - consult factory.
	MATERIALS Contacts & terminals: Silver plated brass Housing: Zinc plated steel Actuator: Polyacetal, color black Base: Phenolic laminated sheet Terminal seal: Epoxy

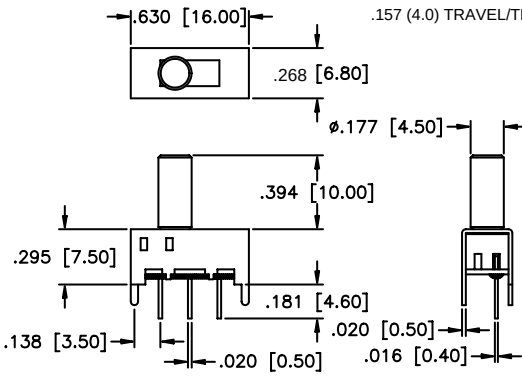


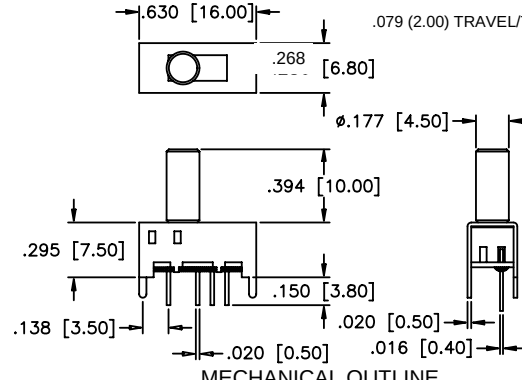

MODEL NO.	1P3T
MSTS1332K	
 VERTICAL ACTUATOR	1P3T SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT .098 (2.50) TRAVEL/THROW .130 [3.30] .669 [17.00] .236 [6.00] .128 [3.25] .394 [10.00] .118 [3.00] .157 [4.00] .118 [3.00] .205 [5.20] .323 [8.20] .024 [0.60] .016 [0.40] .039 [1.00] .098 [2.50] .110 [2.80] .161 [4.10] .200 [5.00] .220 [5.60] .638 [16.20] .045 [1.15] DIA., 2 PLCS. .035 [0.90] DIA., 4 PLCS. .020 [0.50]
MODEL NO.	2P3T
MSTS2332K	
 VERTICAL ACTUATOR	2P3T SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT .098 (2.50) TRAVEL/THROW .130 [3.30] .669 [17.00] .236 [6.00] .128 [3.25] .394 [10.00] .118 [3.00] .157 [4.00] .118 [3.00] .205 [5.20] .323 [8.20] .024 [0.60] .016 [0.40] .039 [1.00] .098 [2.50] .110 [2.80] .161 [4.10] .200 [5.00] .220 [5.60] .638 [16.20] .045 [1.15] DIA., 2 PLCS. .035 [0.90] DIA., 8 PLCS. .020 [0.50]

MHS Series

Miniature Slide Switches

with aluminum actuator

SPECIFICATIONS	FEATURES
Contact rating: 300 mA at 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 VAC for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Solder heat resistance: 260°C max. for 3 seconds Actuation force: 250 ±150 grams Solvent washing permissible	● Miniature compact size. ● Wash-through open frame construction. ● Positive spring loaded ball detent mechanism. ● Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated brass Housing: Tin plated steel Actuator: Aluminum alloy Base: Phenolic laminated sheet Terminal seal: Epoxy

MODEL NO.	1P2T
MHS122K	
 VERTICAL ACTUATOR	 SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO.	1P3T
MHS133K	
 VERTICAL ACTUATOR	 SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT


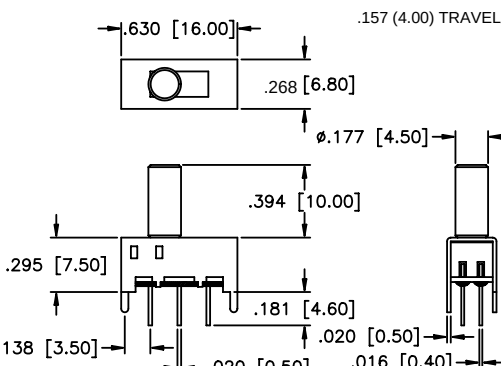
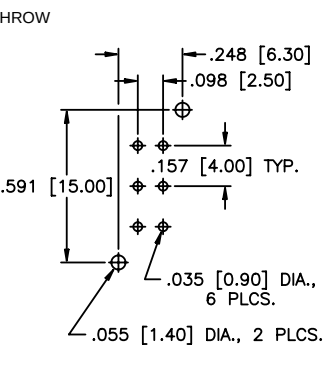

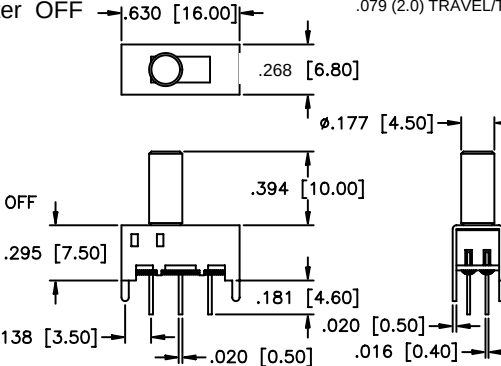
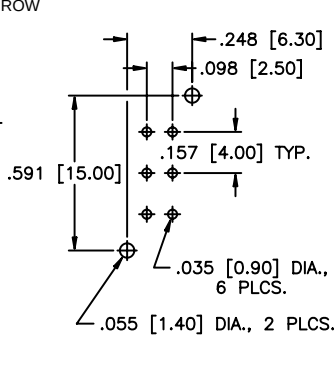

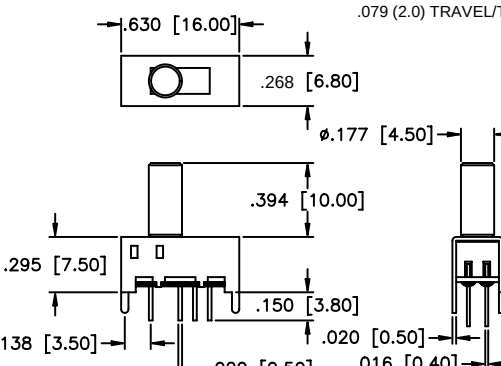
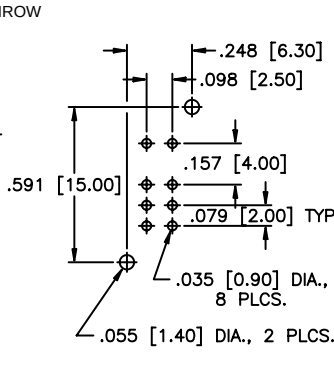
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MHS Series

Miniature Slide Switches

with aluminum actuator

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


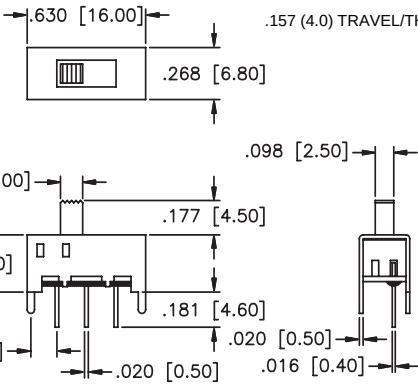


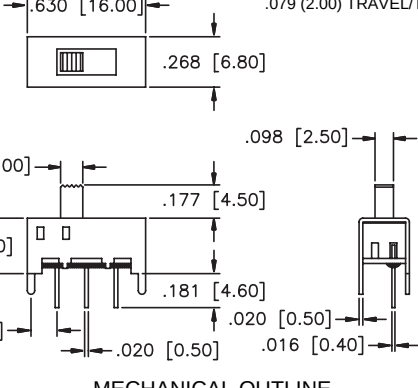


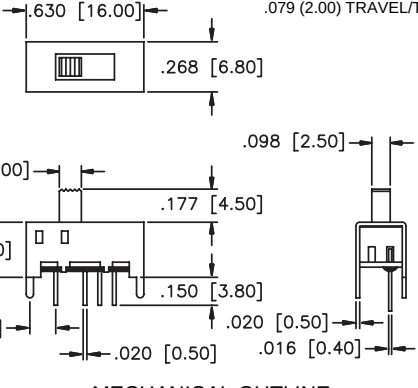

MODEL NO.	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT		
MHS222K			
 VERTICAL ACTUATOR			
MODEL NO.	2P2T w/center OFF  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT		
MHS223K			
 VERTICAL ACTUATOR			
MODEL NO.	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT		
MHS233K			
 VERTICAL ACTUATOR			

New!

MHS Series

Miniature Slide Switches

SPECIFICATIONS	FEATURES
Contact rating: 300 mA at 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 VAC for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Solder heat resistance: 260°C max. for 3 seconds Actuation force: 250 ±150 grams Solvent washing permissible	• Miniature compact size. • Wash-through open frame construction. • Positive spring loaded ball detent mechanism. • Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated brass Housing: Tin plated steel Actuator: Polyacetal Base: Phenolic laminated sheet Terminal seal: Epoxy

MODEL NO. MHS122	1P2T   
MODEL NO. MHS123	1P2T w/center OFF   
MODEL NO. MHS133	1P3T   

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MHS Series

Miniature Slide Switches

New!

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


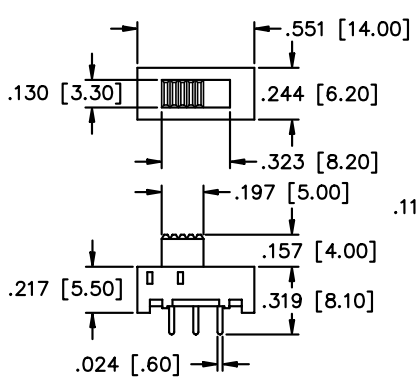
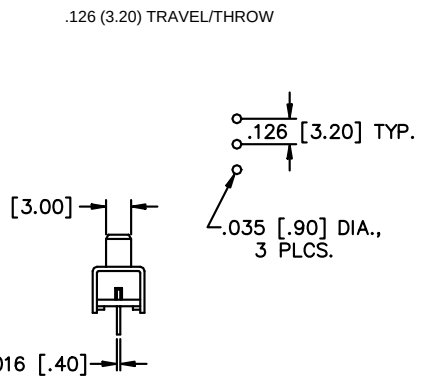

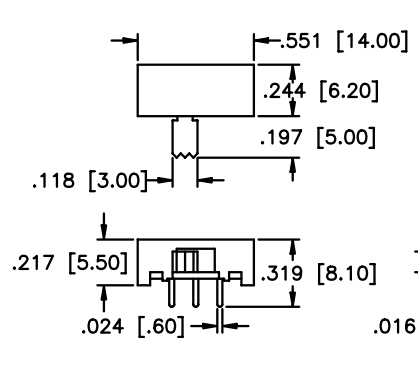
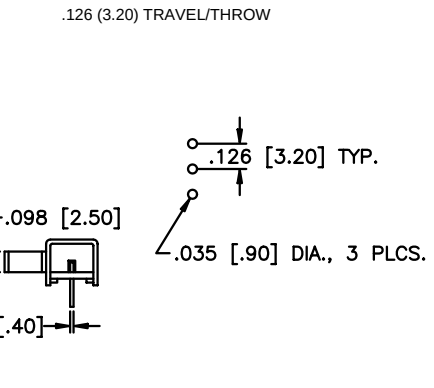

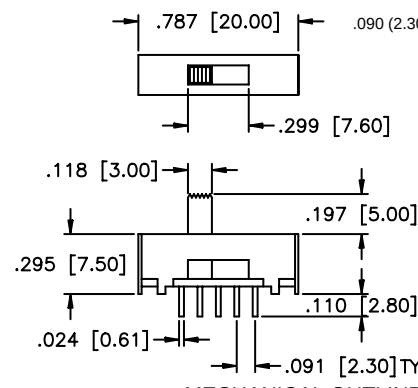
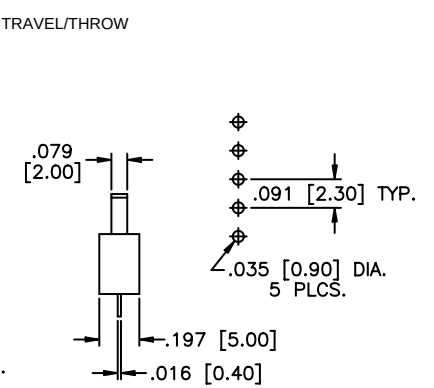
MODEL NO. MHS222 VERTICAL ACTUATOR	2P2T
MODEL NO. MHS223 VERTICAL ACTUATOR	2P2T w/center OFF
MHS233 VERTICAL ACTUATOR	2P3T

SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 125 VAC or 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 220g ± 100g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	- Miniature compact size. - Wash-through open frame construction. - Positive spring loaded ball detent mechanism. - Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated Frame: Zinc plated steel Actuator: Thermoplastic Base: Phenolic laminated sheet
	Terminal seal: Epoxy

MODEL NO. SLB12814	1P2T   
VERTICAL ACTUATOR	SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1281R5	1P2T   
RIGHT ANGLE ACTUATOR	SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1370	1P3T   
VERTICAL ACTUATOR	SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT


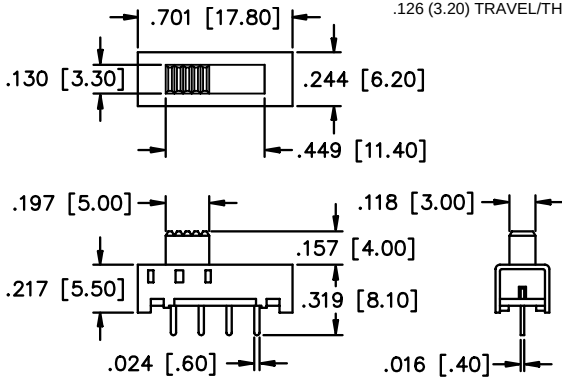


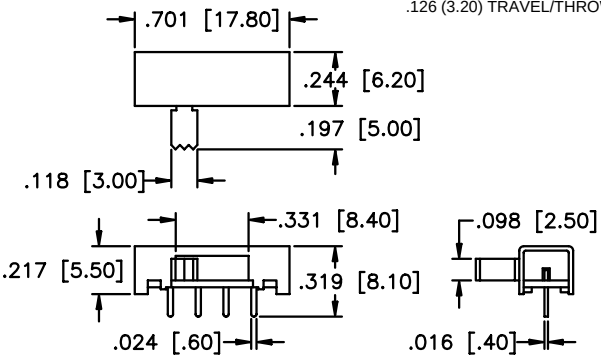



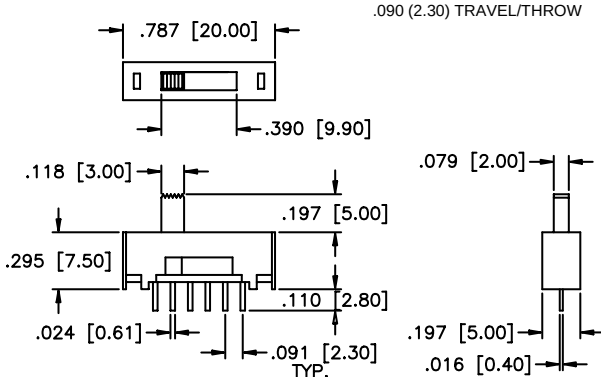


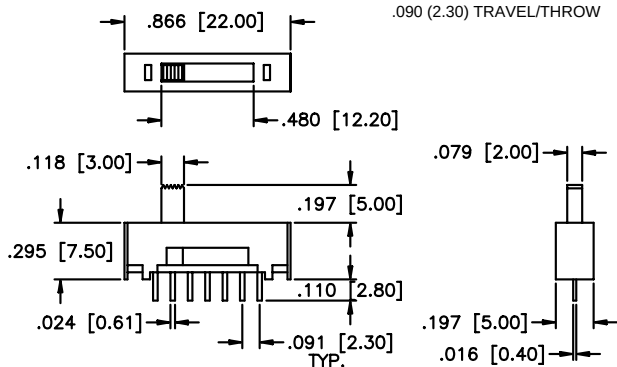

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


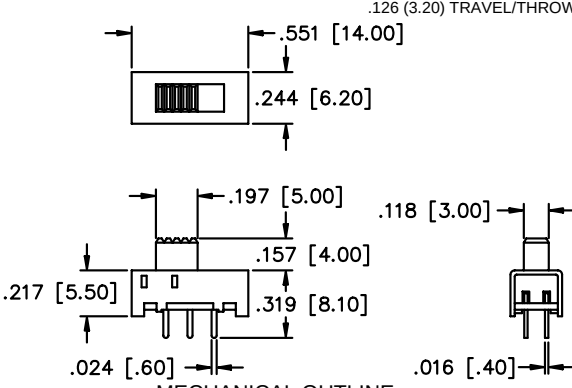


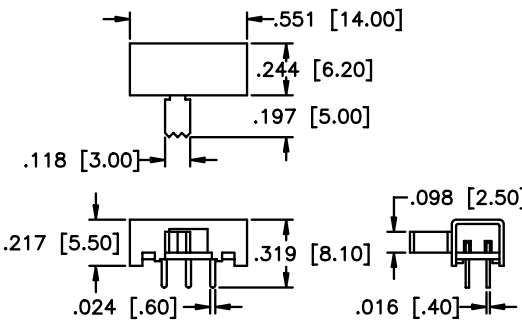


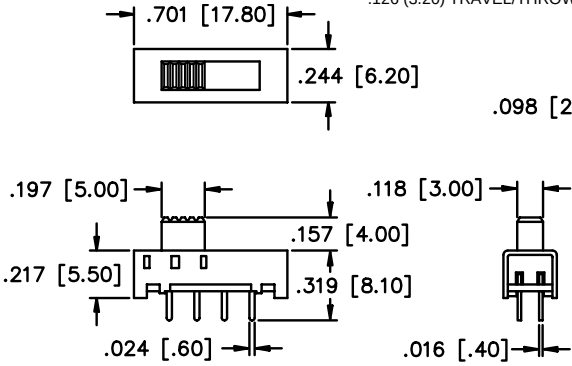


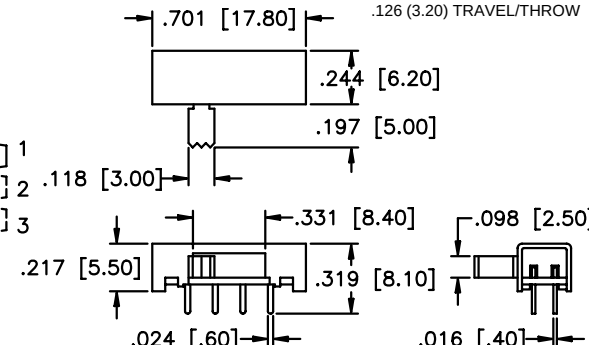

MODEL NO. SLB13814  VERTICAL ACTUATOR	1P3T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1381R5  RIGHT ANGLE ACTUATOR	1P3T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1470  VERTICAL ACTUATOR	1P4T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1570  VERTICAL ACTUATOR	1P5T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLB Series

(with p.c. board stand-off bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB22814	2P2T  VERTICAL ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB2281R5	2P2T  RIGHT ANGLE ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB23814	2P3T  VERTICAL ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 
MODEL NO. SLB2381R5	2P3T  RIGHT ANGLE ACTUATOR SCHEMATIC  MECHANICAL OUTLINE  P.C. BOARD LAYOUT 


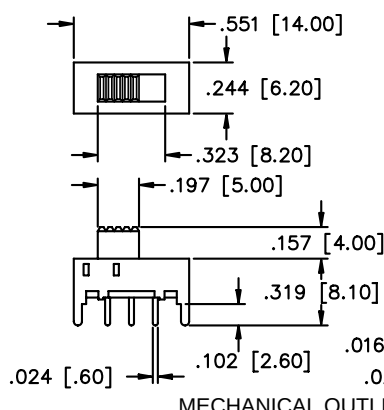
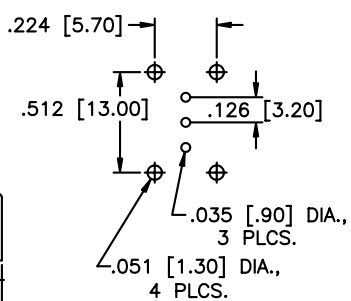


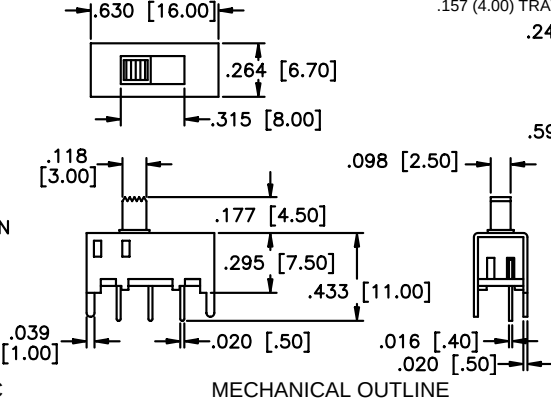


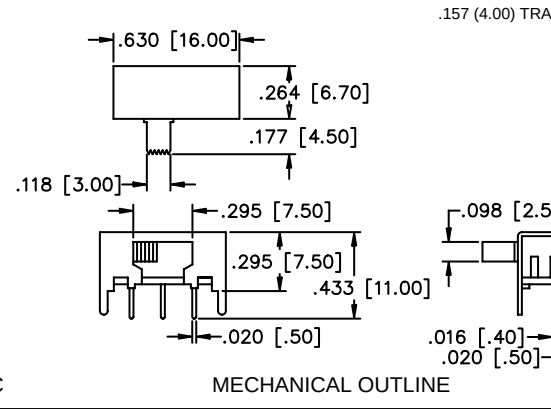

SLB Series

(with thru- p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 125 VAC or 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 220g ± 100g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	- Miniature compact size. - Wash-through open frame construction. - Positive spring loaded ball detent mechanism. - Epoxy sealed terminals.
	MATERIALS
	Contacts & terminals: Silver plated Frame: Zinc plated steel Actuator: Thermoplastic Base: Phenolic laminated sheet Terminal seal: Epoxy

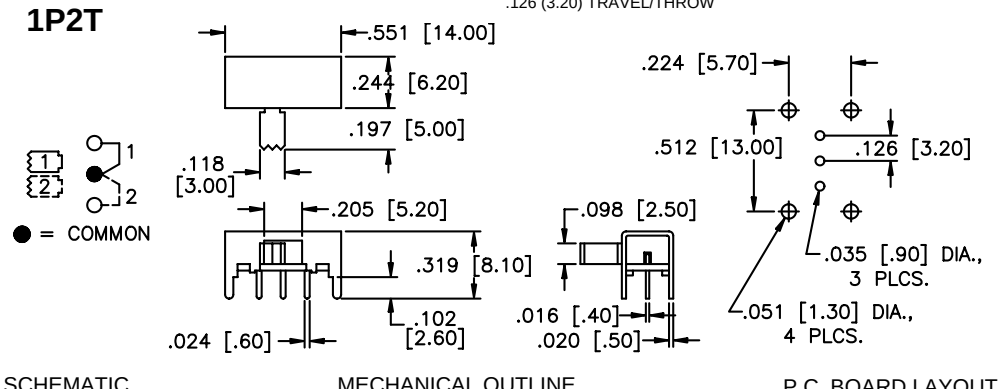
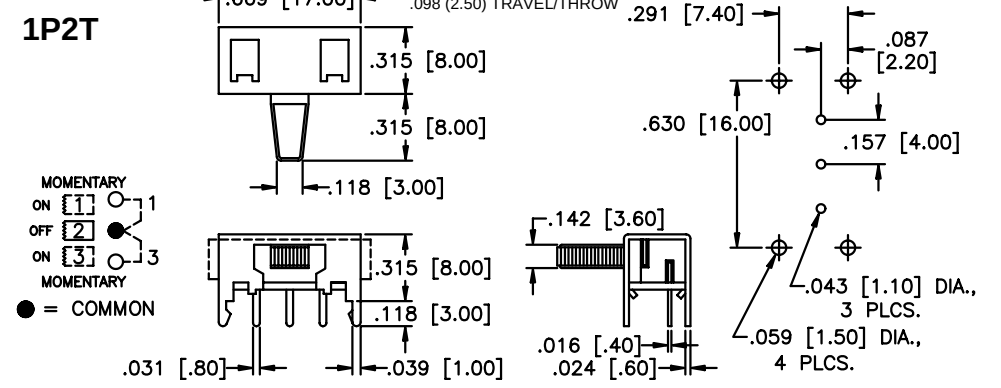

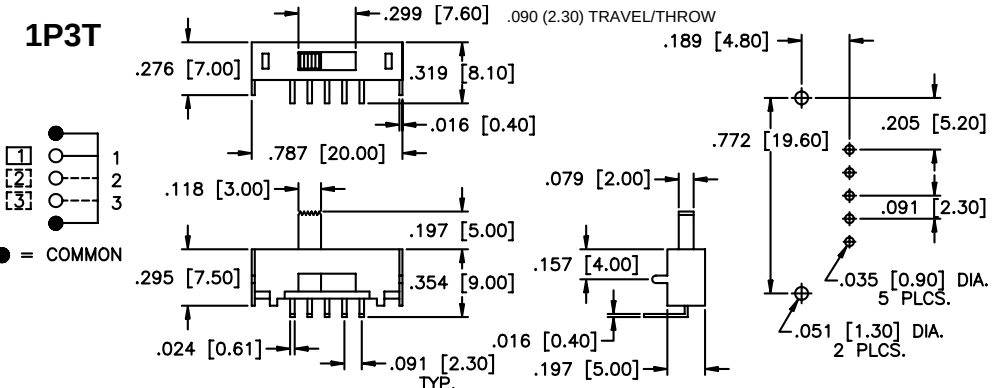
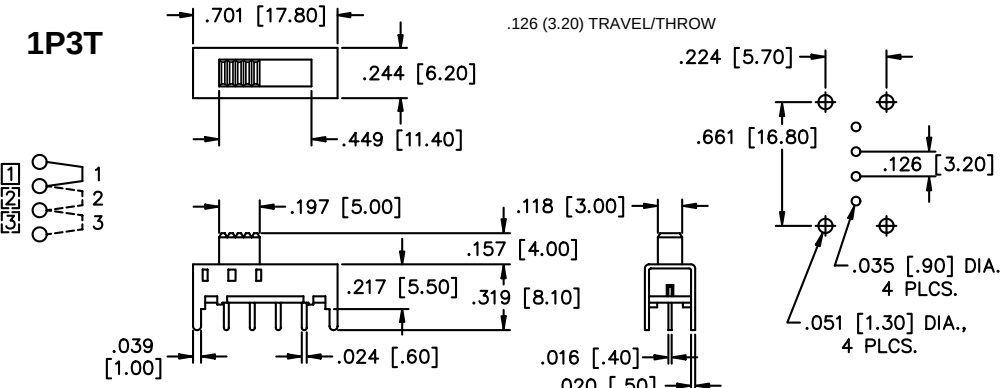
MODEL NO. SLB12804	1P2T  ● = COMMON  VERTICAL ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB124145	1P2T  ● = COMMON  VERTICAL ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB1240R45	1P2T  ● = COMMON  RIGHT ANGLE ACTUATOR	 MECHANICAL OUTLINE  P.C. BOARD LAYOUT

SLB Series

(with thru- p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB1280R5  RIGHT ANGLE ACTUATOR	1P2T .126 (3.20) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1250R8  RIGHT ANGLE ACTUATOR	1P2T .098 (2.50) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1370R  RIGHT ANGLE ACTUATOR	1P3T .090 (2.30) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB13804  VERTICAL ACTUATOR	1P3T .126 (3.20) TRAVEL/THROW  SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLB Series

(with thru-p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB134145 VERTICAL ACTUATOR	1P3T ● = COMMON SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1340R45 RIGHT ANGLE ACTUATOR	1P3T ● = COMMON SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1380R5 RIGHT ANGLE ACTUATOR	1P3T ● = COMMON SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLB1470R RIGHT ANGLE ACTUATOR	1P4T ● = COMMON SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLB Series


(with thru-p.c. board hole mounting bracket)

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MODEL NO.

SLB1570R

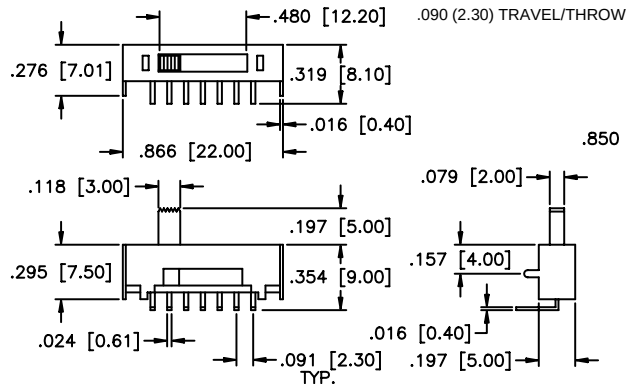


RIGHT ANGLE ACTUATOR

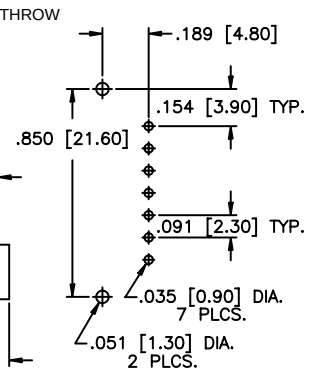
1P5T



SCHEMATIC



MECHANICAL OUTLINE



P.C. BOARD LAYOUT


MODEL NO.

SLB22804

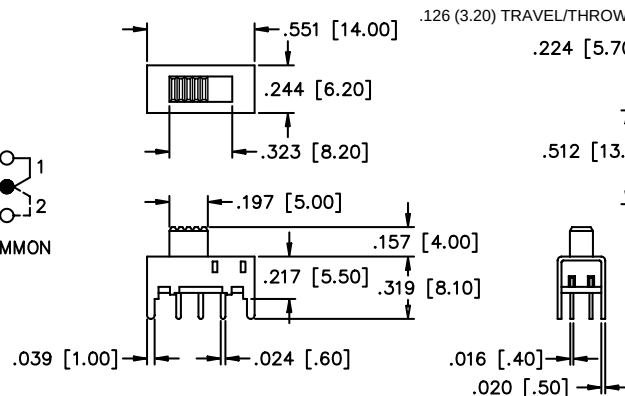


VERTICAL ACTUATOR

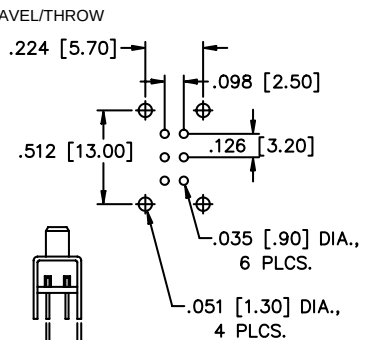
2P2T



SCHEMATIC



MECHANICAL OUTLINE



P.C. BOARD LAYOUT


MODEL NO.

SLB224145

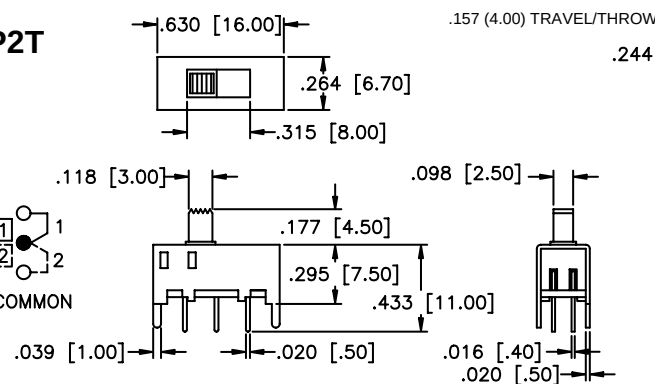


VERTICAL ACTUATOR

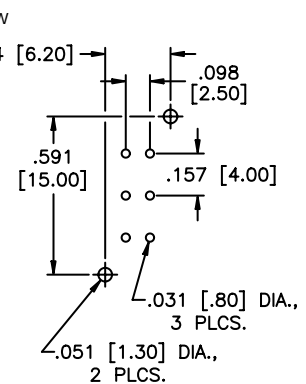
2P2T



SCHEMATIC



MECHANICAL OUTLINE



P.C. BOARD LAYOUT


MODEL NO.

SLB2240R45

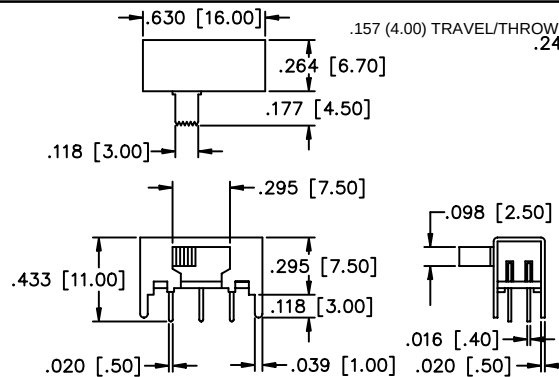


RIGHT ANGLE ACTUATOR

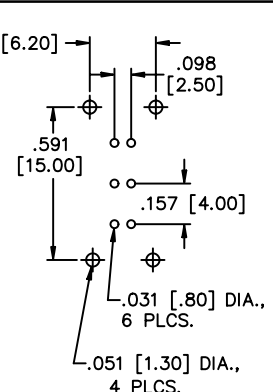
2P2T



SCHEMATIC



MECHANICAL OUTLINE


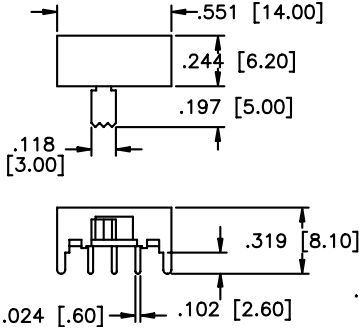
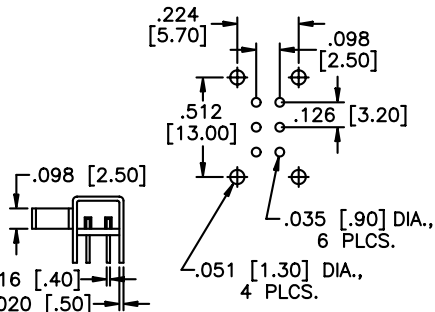

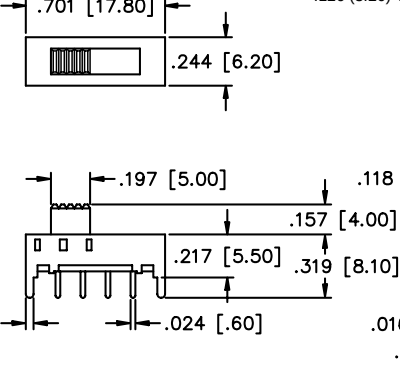
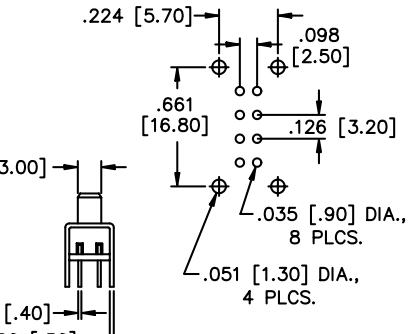


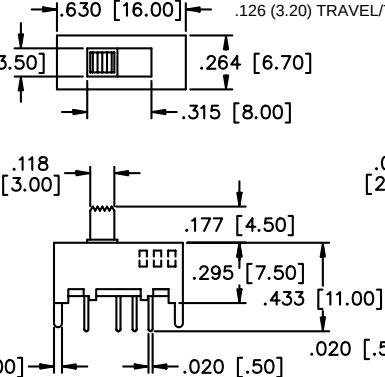
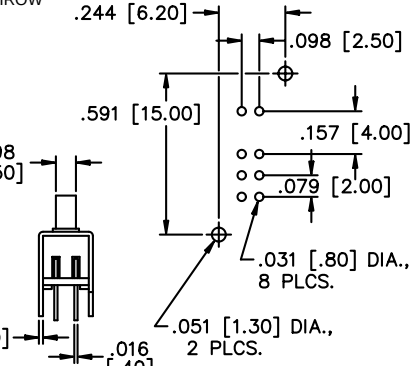

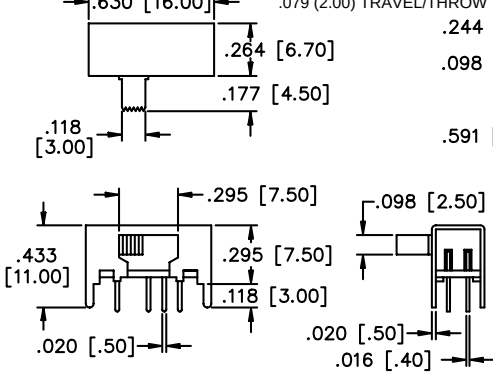
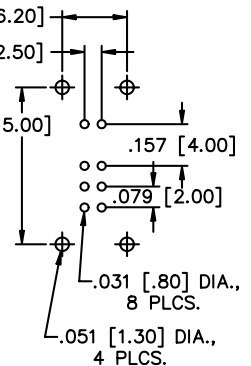


P.C. BOARD LAYOUT

SLB Series

(with thru-p.c. board hole mounting bracket)
Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL NO. SLB2280R5  RIGHT ANGLE ACTUATOR	2P2T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB23804  VERTICAL ACTUATOR	2P3T   MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB234145  VERTICAL ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLB2340R45  RIGHT ANGLE ACTUATOR	2P3T  ● = COMMON  MECHANICAL OUTLINE  P.C. BOARD LAYOUT

SLC Series

Miniature Slide Switches

SPECIFICATIONS

Contact ratings: 300 mA at 125 VAC or 30 VDC
Initial contact resistance: 20 milliohms max.
Insulation resistance: 100 megohms min. at 500 VDC
Dielectric strength: 500 volts RMS for 1 minute
Electrical life: 10,000 cycles min.
Operating temperature range: -20°C to +85°C
Actuation force: 220g ± 100g
Solder heat resistance: 260°C max. for 3 seconds
Solvent washing permissible

FEATURES


- Panel mounting with solder lug terminals.
- Wash-through open frame construction.
- Positive spring loaded ball detent mechanism.

MATERIALS

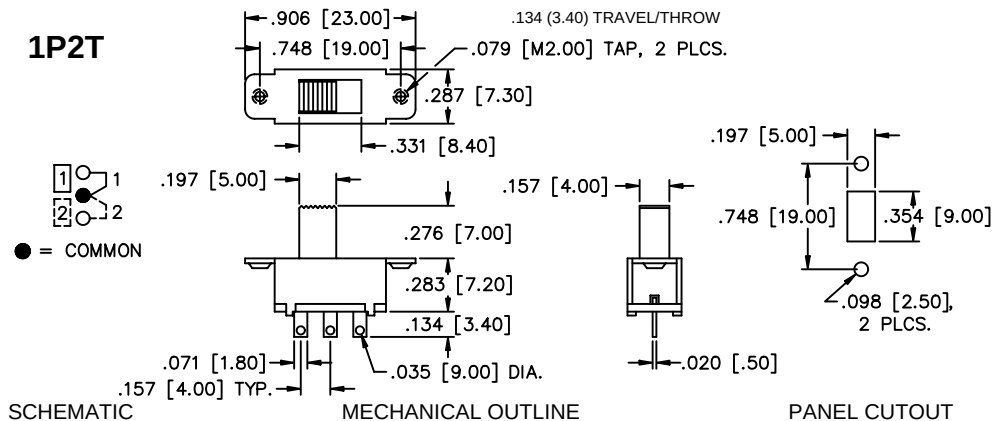
Contacts & terminals: Silver plated
Frame: Zinc plated steel
Actuator: Thermoplastic
Base: Phenolic laminated sheet

MODEL NO.

SLC12007



1P2T

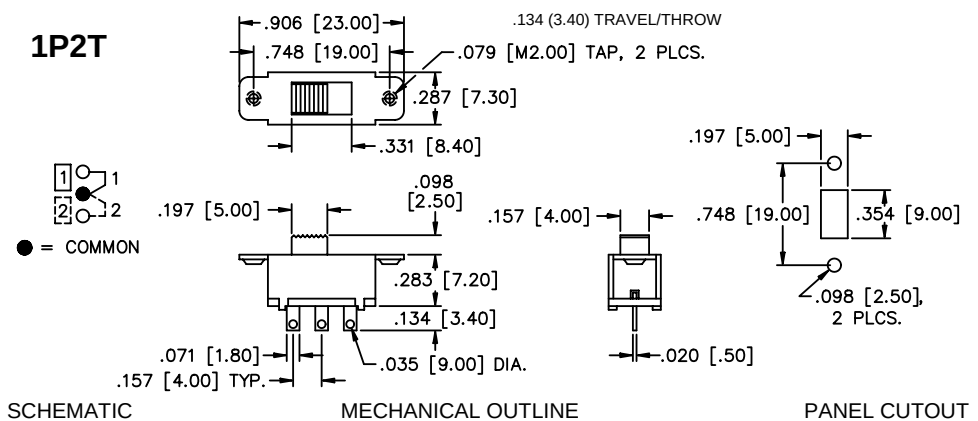


MODEL NO.

SLC120025




1P2T

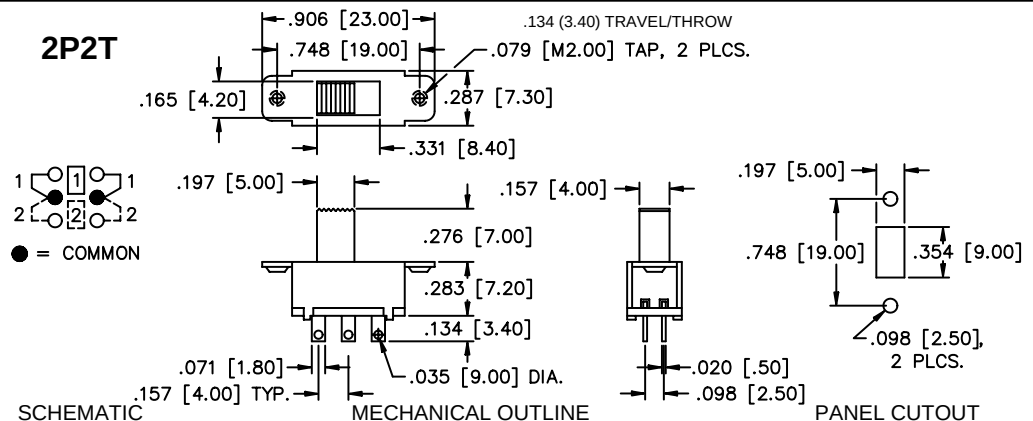


MODEL NO.

SLC22007



2P2T



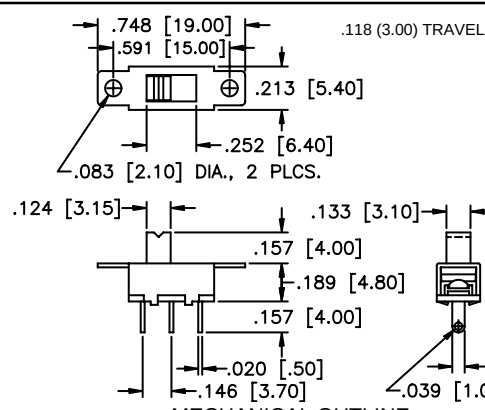


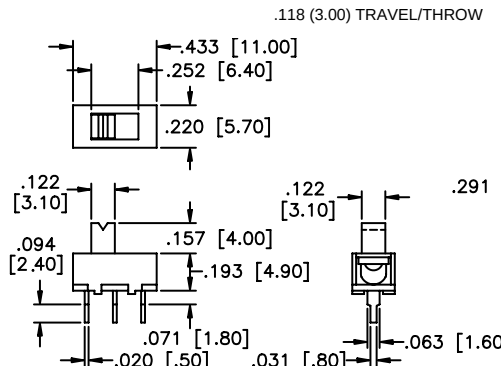



SLG Series

Miniature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
Contact ratings: 300 mA at 125 VAC or 30 VDC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 200g ± 75g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	• Wash-through open frame construction. • Panel and p.c. mounting models. • Positive spring loaded ball detent mechanism.
	MATERIALS
	Contacts & terminals: Silver plated Frame: Zinc plated steel Actuator: Thermoplastic Base: Phenolic laminated sheet

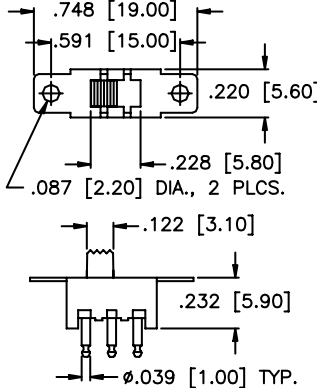


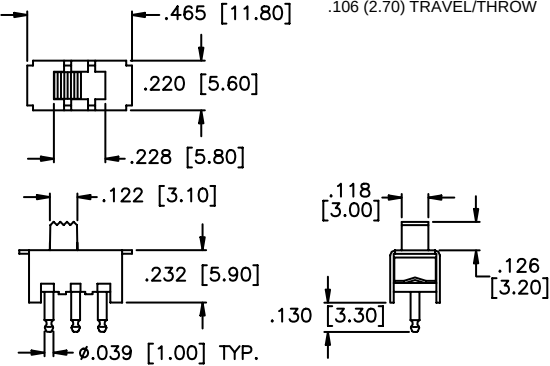


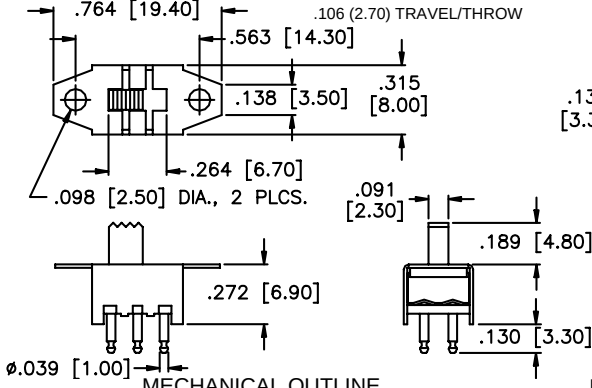

MODEL NO.	1P2T
SLG12004	
	  
	SCHEMATIC MECHANICAL OUTLINE PANEL CUTOUT
MODEL NO.	1P2T
SLG12014	
	  
VERTICAL MOUNTING	SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

SLA Series

Miniature Slide Switches

SPECIFICATIONS	FEATURES
Contact ratings: 500 mA at 125 VAC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 350g ± 200g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	• Miniature compact size. • Wash-through open frame construction. • Panel and p.c. mounting models.
	MATERIALS
	Contacts & terminals: Silver plated brass Frame: Zinc plated steel Actuator: PBT Thermoplastic Base: Phenolic laminated sheet

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MODEL NO. SLA1200	1P2T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLA1201	1P2T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT
MODEL NO. SLA2200	2P2T    SCHEMATIC MECHANICAL OUTLINE P.C. BOARD LAYOUT

MODEL NO.

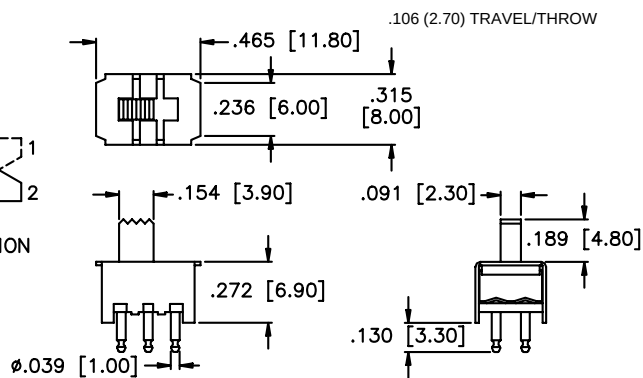
SLA2201




2P2T



SCHEMATIC



MECHANICAL OUTLINE



P.C. BOARD LAYOUT

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru