
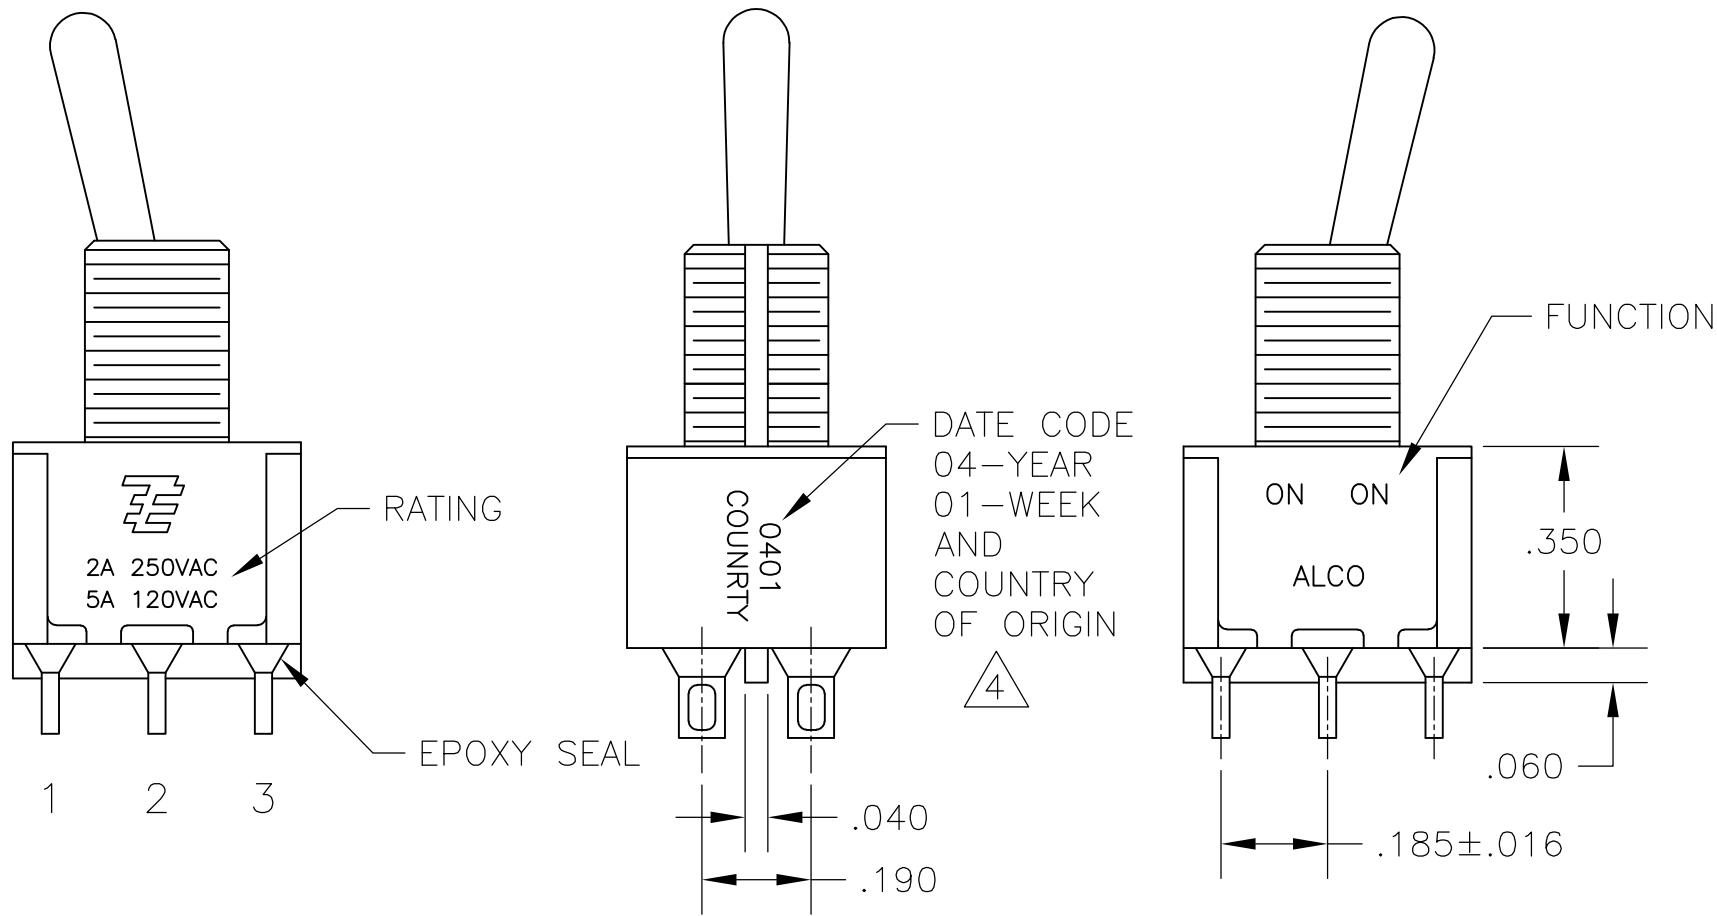


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		A5	REVISED PER ECO-14-005988	23APR2014	NK	RH

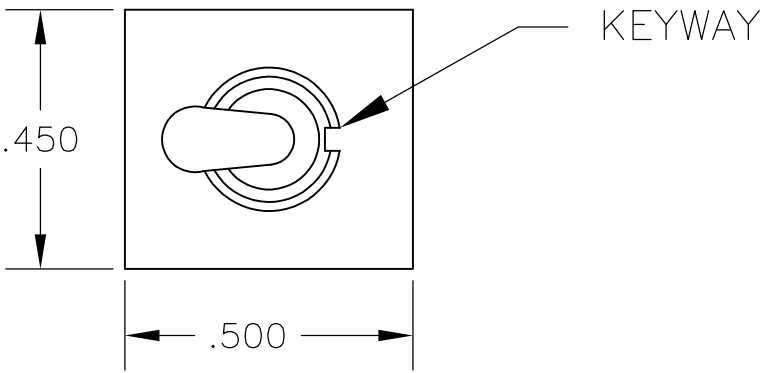

- 1
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
- 2
- EACH SWITCH WITH THREADED BUSHINGS SUPPLIED WITH THE FOLLWING MOUNTING HARDWARE:
(2) HEX NUTS
(1) INTERNAL TOOTH LOCKWASHER
(1) LOCATING RING.
- 3
- G CONTACT OPTION CAN BE USED FOR SIGNAL OR POWER LEVEL SWITCHING. IF SWITCH IS USED AT LEVELS EXCEEDING .4VA @ 20V AC/DC, SWITCH IS RENDERED FOR POWER SWITCHING ONLY DUE TO ARC REMOVAL OF GOLD PLATING. RATING MARKED ON FRAME IS 2A 250VAC, 5A 120 VAC.
- 4
- DATE CODE AND COUNTRY OF ORIGIN MAY APPEAR ON EITHER SIDE OF SWITCH.
- 5
- LENGTH OF TOGGLE REDUCED BY .020 WITH A, AV2, V30 OR V40 VERTICAL SUPPORT BRACKET OPTIONS.
- 6
- ALL LOGO, RATING, DATE CODE, AND FUNCTION MARKINGS TO BE LASER MARKED.

FUNCTION CHART			
FUNCTION			
01	ON	NONE	ON
08	ON	NONE	(ON)
TERMINALS CONNECTED	2-3, 5-6	---	1-2, 4-5
None: No mechanical position Off: Mechanical position with no electrical connection (On): Momentary action			

SPECIFICATIONS CHART	
RATING, B CONTACTS	.4VA MAX @20V MAX. AC OR DC
RATING, G CONTACTS—SEE NOTE 3	.4VA MAX @20V MAX. AC OR DC OR 5A @120 VAC OR 28 VDC (RESISTIVE)
	2A @250 VAC (RESISTIVE)
RATING, Q CONTACTS	5A @120 VAC OR 28 VDC (RESISTIVE)
	2A @250 VAC (RESISTIVE)
ELECTRICAL LIFE	6,000 CYCLES AT RATED LOAD
CONTACT RESISTANCE	10 MILLIOHMS MAX INITIAL @ 2-4VDC, 100ma
INSULATION RESISTANCE	1,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	1,000 V RMS AT SEA LEVEL
OPERATING TEMPRATURE	-30C TO 85C


PART NUMBER SEQUENCE CHART						
MODEL	FUNCTION	TOGGLE	BUSHING	TERMINAL	CONTACT	RoHS
EXAMPLE: A201SYCQ04	01	K	CW	A	B	04
	08	K1	D	AV2	G	
		L	D9	C	Q	
		L1	H	V30		
		L2	Y	V40		
		M	Y9	V70		
		P3		W		
		S		W4		
		T		Z		
		T1		Z3		

EXAMPLE: A201SYCQ04

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. ZITTO	18MAY05	TE Connectivity		
DIMENSIONS: INCHES		CHK M. ZITTO	-			
		APVD M. ZITTO	-	NAME GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)		
		PRODUCT SPEC	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010 4 PLC ± - ANGLES ± 2°		WEIGHT	-	A2	00779	C=1825138
MATERIAL		FINISH	-	RESTRICTED TO		
		CUSTOMER DRAWING		SCALE	SHEET	REV
				3:1	1 of 4	A5


M SHORT

DIM L	BUSHING TYPE	DIM L	BUSHING TYPE
.200	Y, H	.410	Y, H
.270	D, D9	.480	D, D9

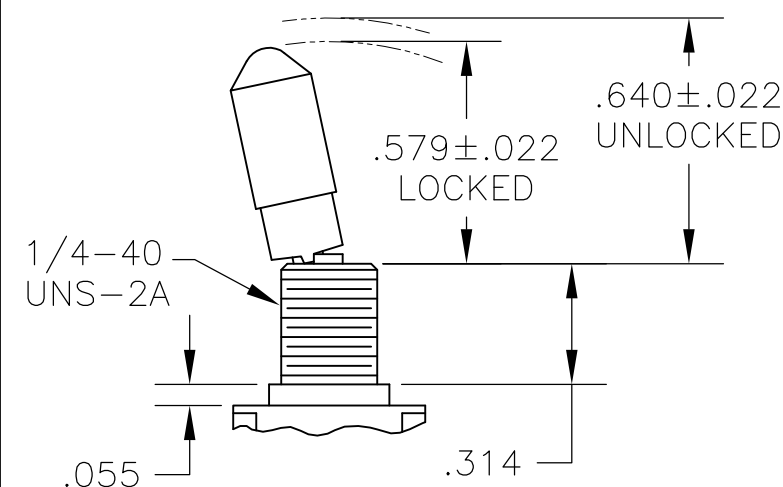


K

NO BUSHING OPTION NEEDED

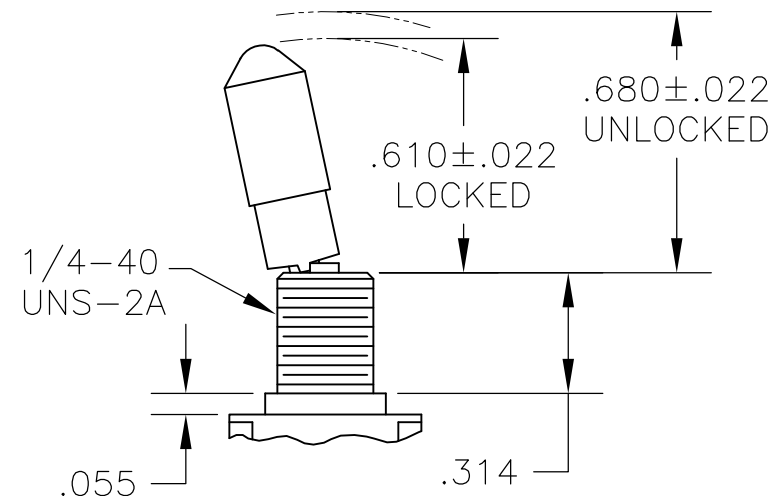


K1

NO BUSHING OPTION NEEDED

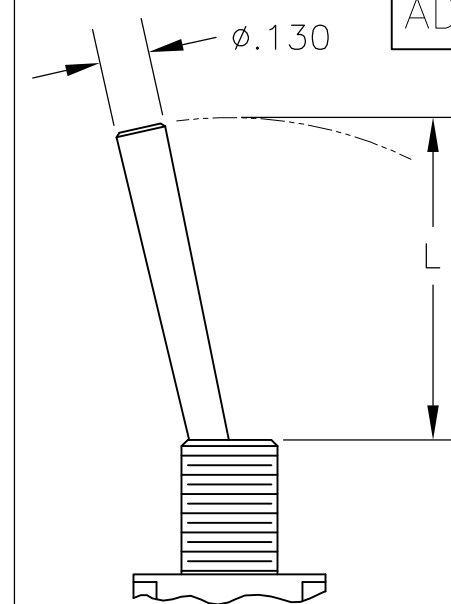


L LEVER


DIM L	BUSHING TYPE	DIM L	BUSHING TYPE	DIM L	BUSHING TYPE
.840	Y, H	.640	Y, H	.550	Y, H
.910	D, D9	.710	D, D9	.620	D, D9

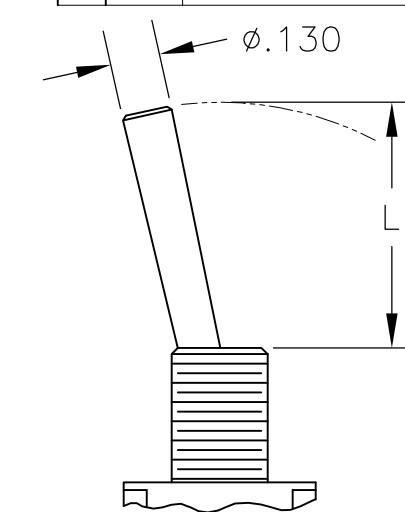


L1 LEVER

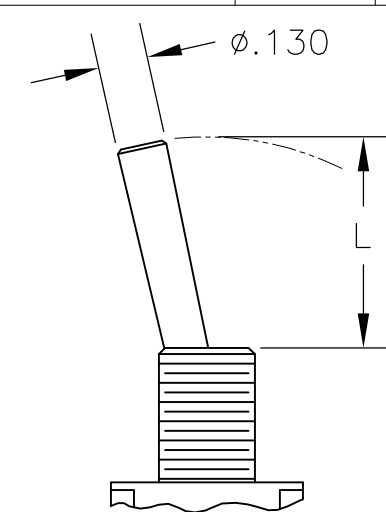


L2 LEVER

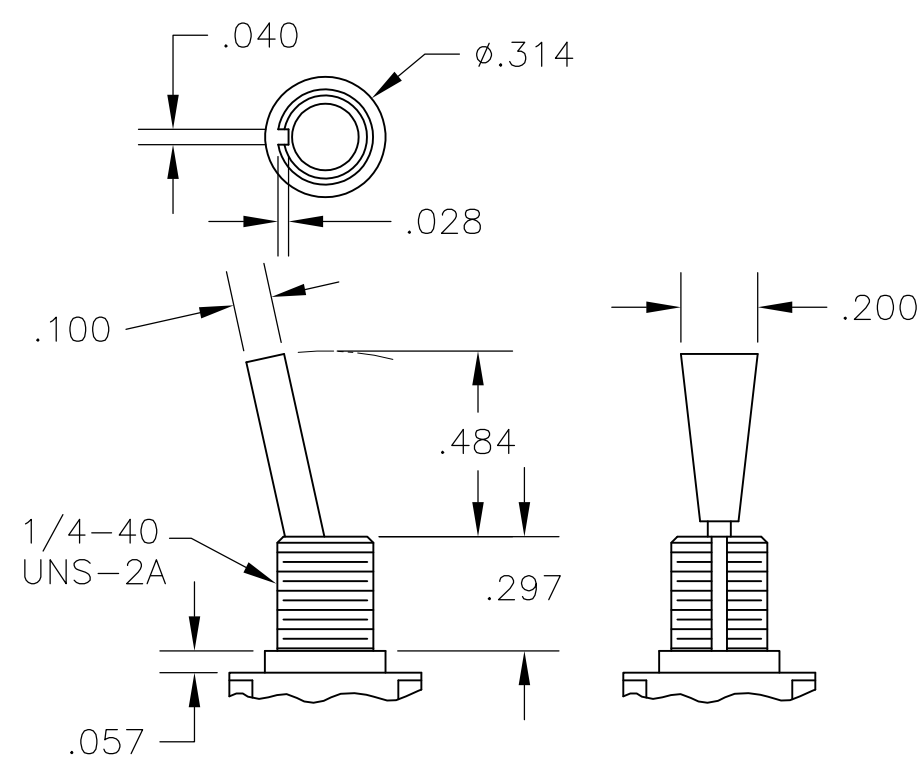

[P3] NO BUSHING OPTION NEEDED

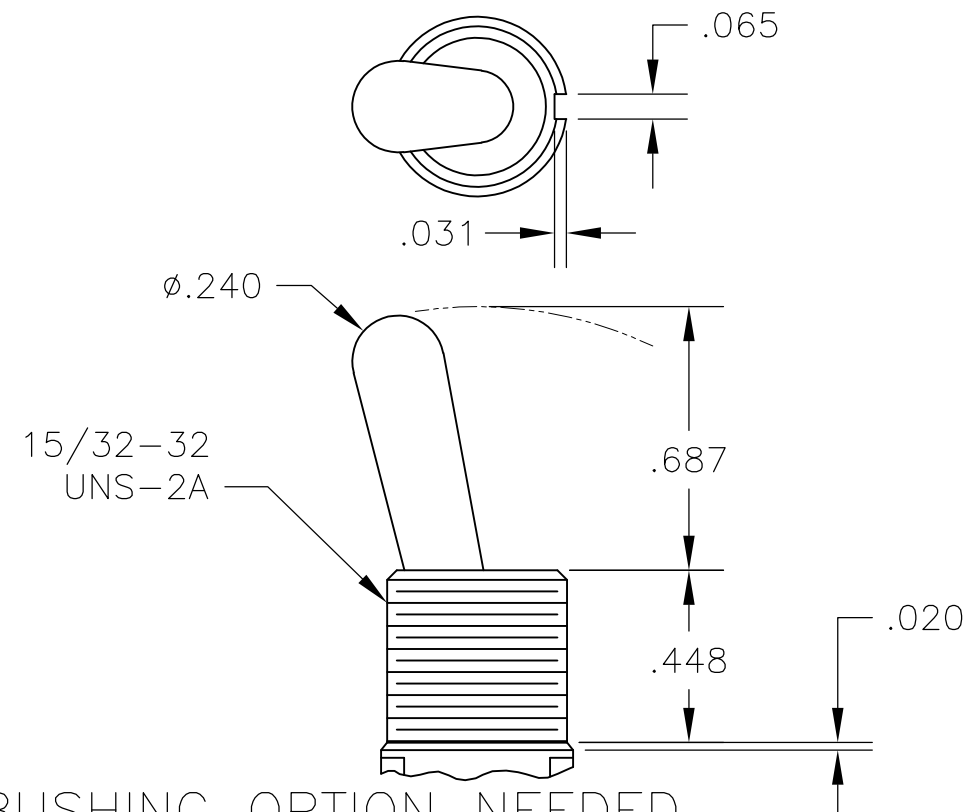

☐ NO BUSHING OPTION NEEDED

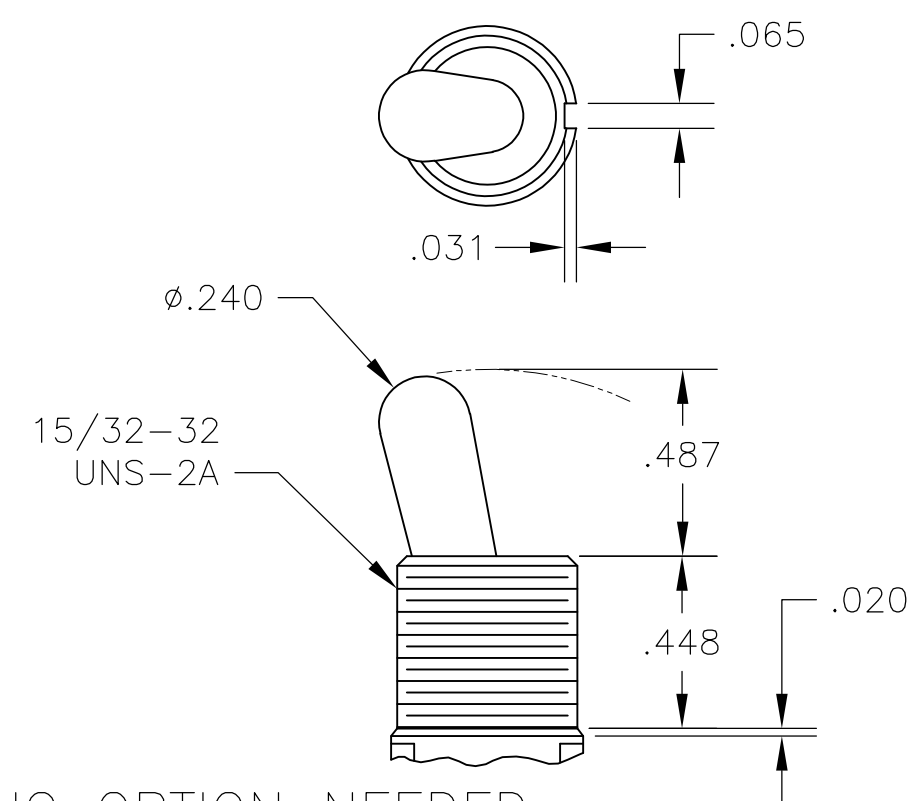

T1	NO BUSHING OPTION NEEDED
----	--------------------------

1/4-40
UNS-2A


.040

.028

.280

D THREADED


D9 UNTHREADED

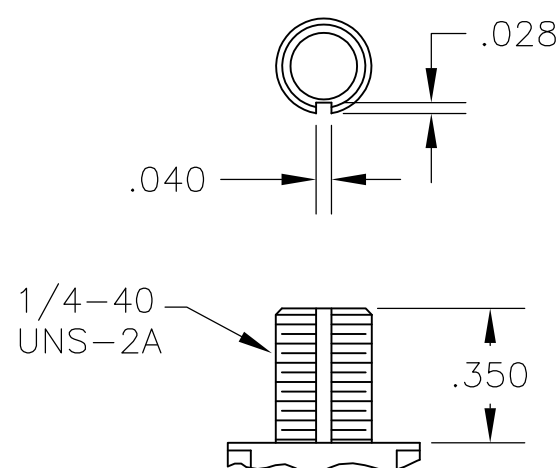


Y THREADED

Y9 UNTHREADED

CONTAINS O-RING BETWEEN
TOGGLE AND BUSHING AND
BETWEEN BUSHING AND PANEL

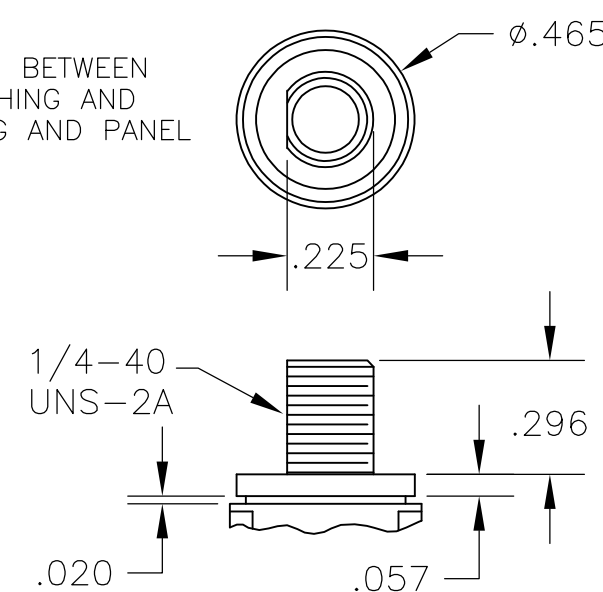

CW THREADED SPLASHPROOF

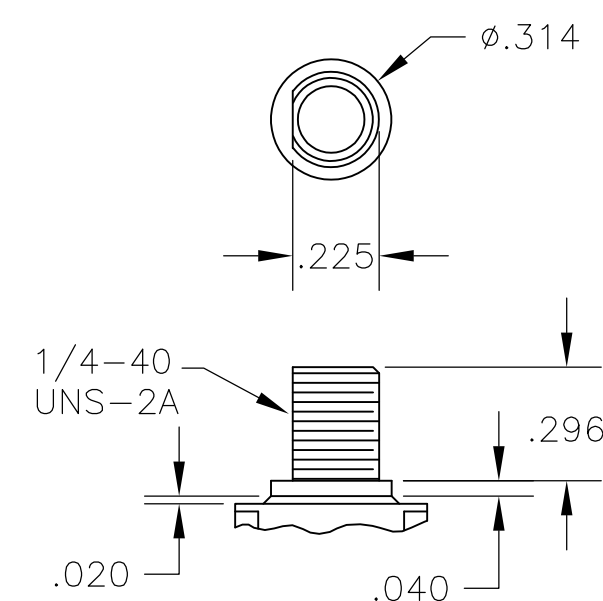





☐ HIGH TORQUE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		M. ZITTO		NAME	
INCHES				APVD P. BROUILLETTE		GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)	
		0 PLC ± —	PRODUCT SPEC	—			
		1 PLC ± —		—			
		2 PLC ± —		APPLICATION SPEC			
		3 PLC ± .010		—			
MATERIAL		4 PLC ± —	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		ANGLES ± ± —	—	A2	00779	C-1825138	—
—		—	CUSTOMER DRAWING		SCALE	SHEET	REV
					2:1	2 of 4	A5


LOC		DIST		REVISIONS						
AD		00		P	LTR	DESCRIPTION		DATE	DWN	APVD
					—	SEE SHEET 1		—	—	—

D

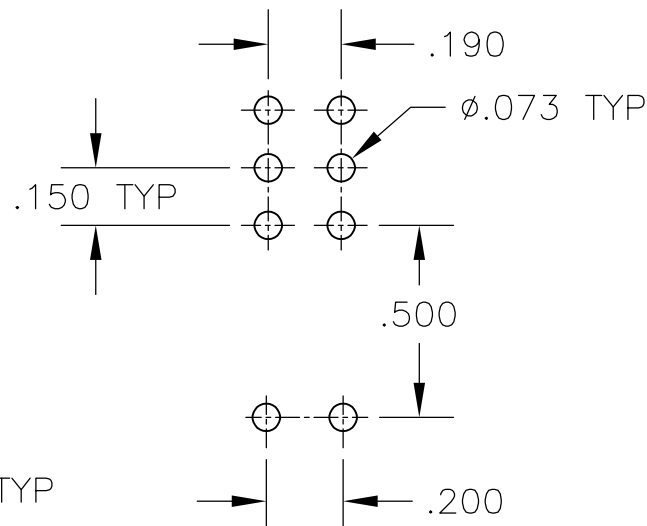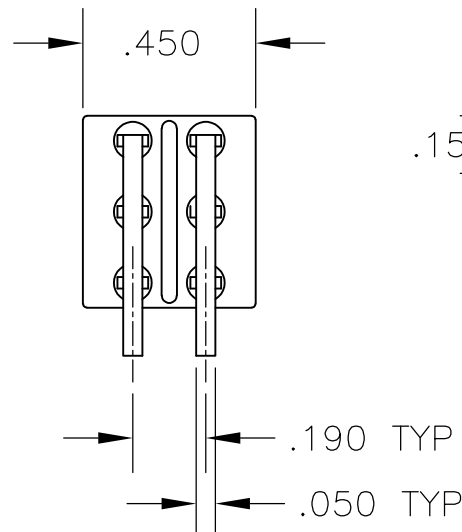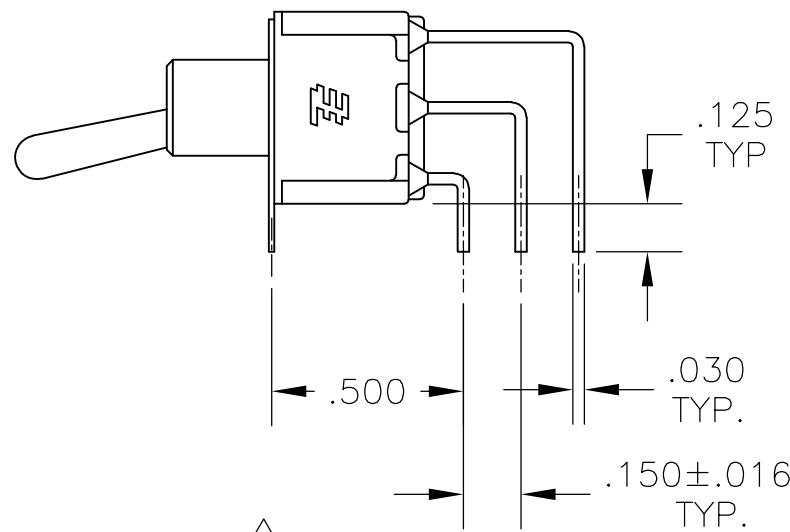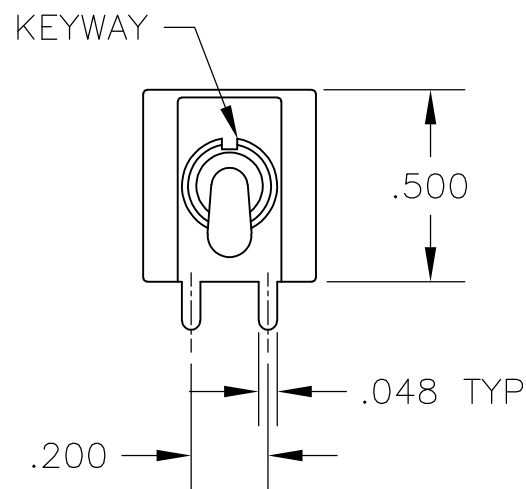


RECOMMENDED
PCB LAYOUT

AV2 VERTICAL RIGHT ANGLE 5

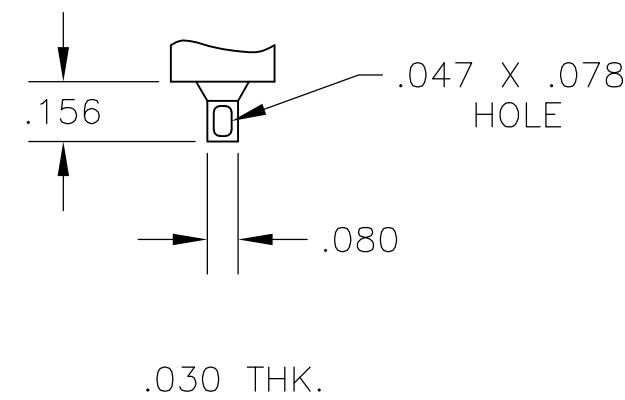

.030 THK.





Z WIRE LUG

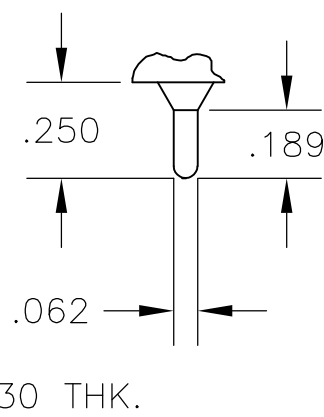

.030 THK.

Z3 QUICK CONNECT


C

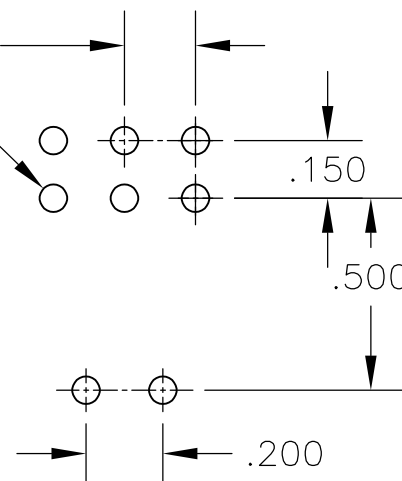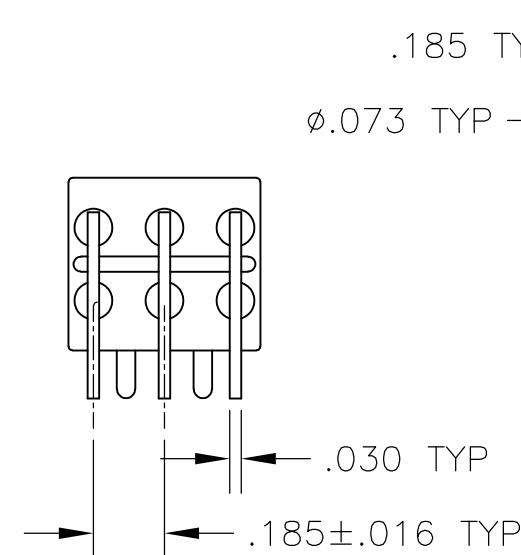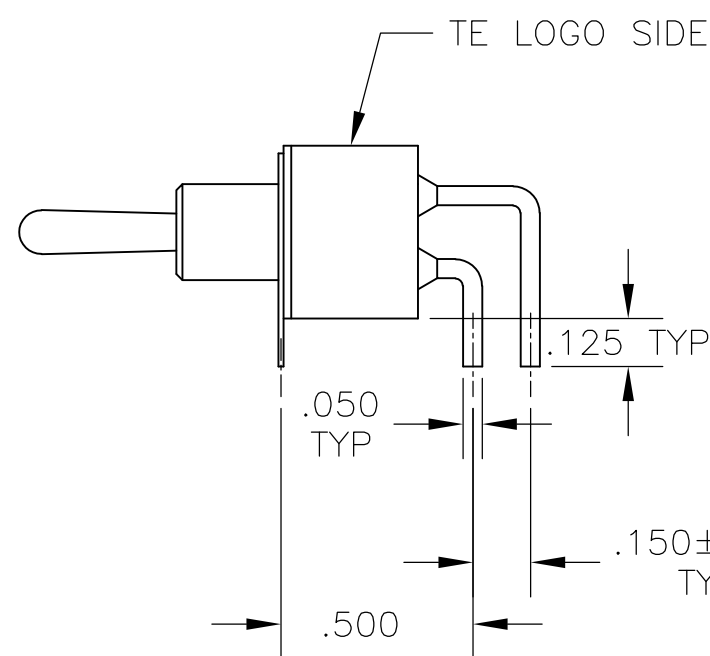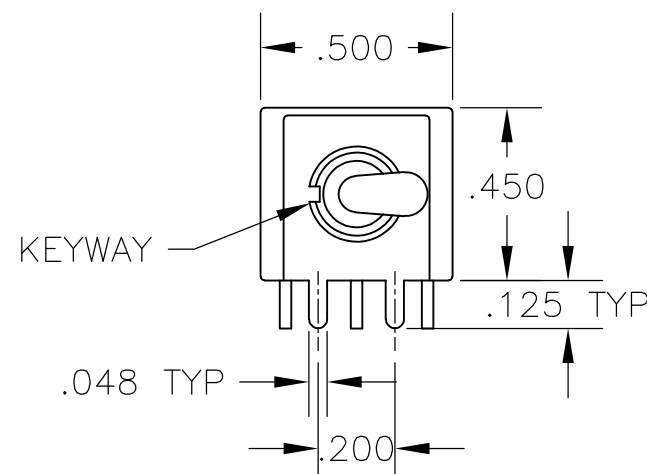

RECOMMENDED
PCB LAYOUT


A RIGHT ANGLE 5

OPTION	DIM A
W	.736
W4	1.062

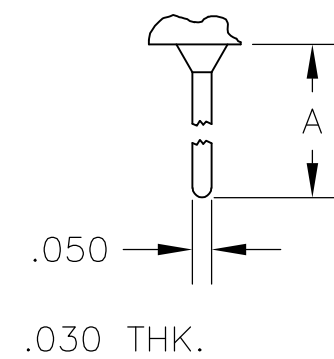

.030 THK.





W W4 WIRE WRAP

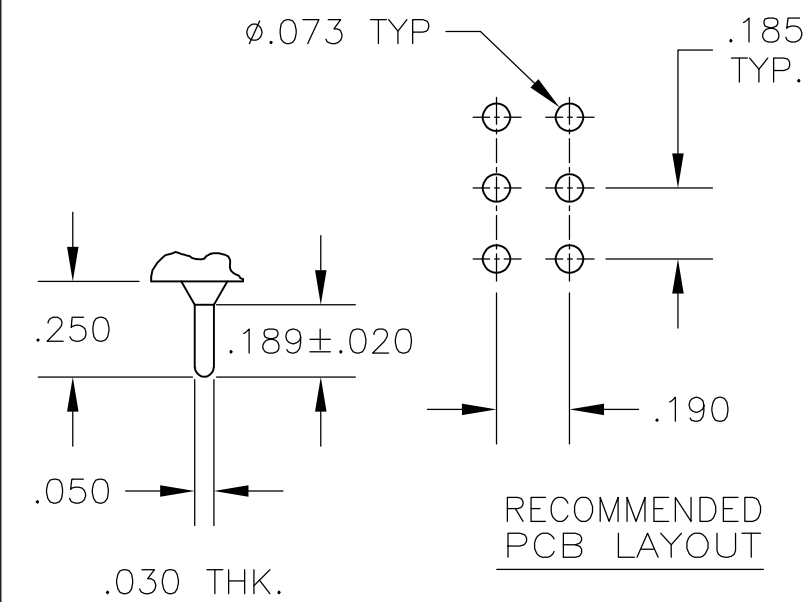

RECOMMENDED
PCB LAYOUT

C PRINTED CIRCUIT

B

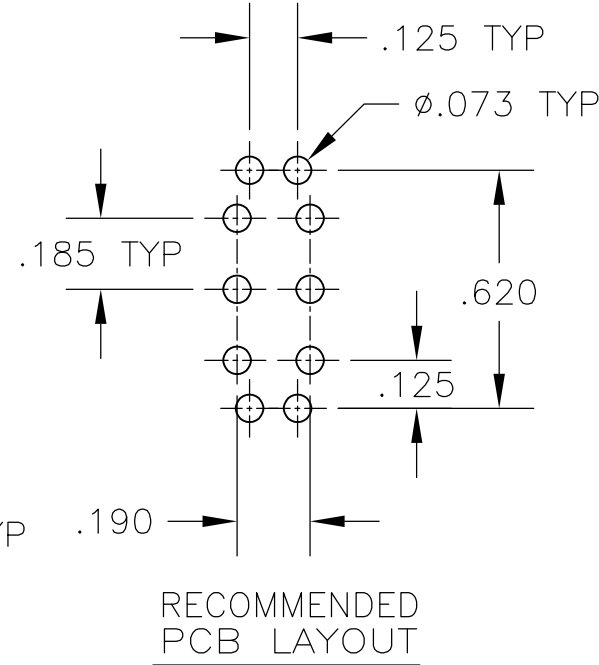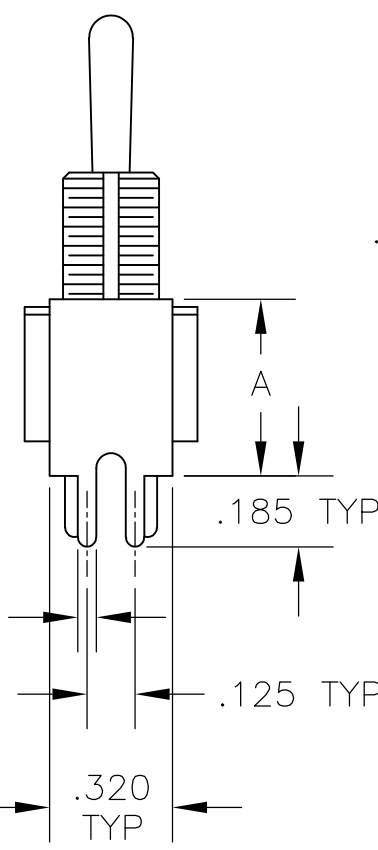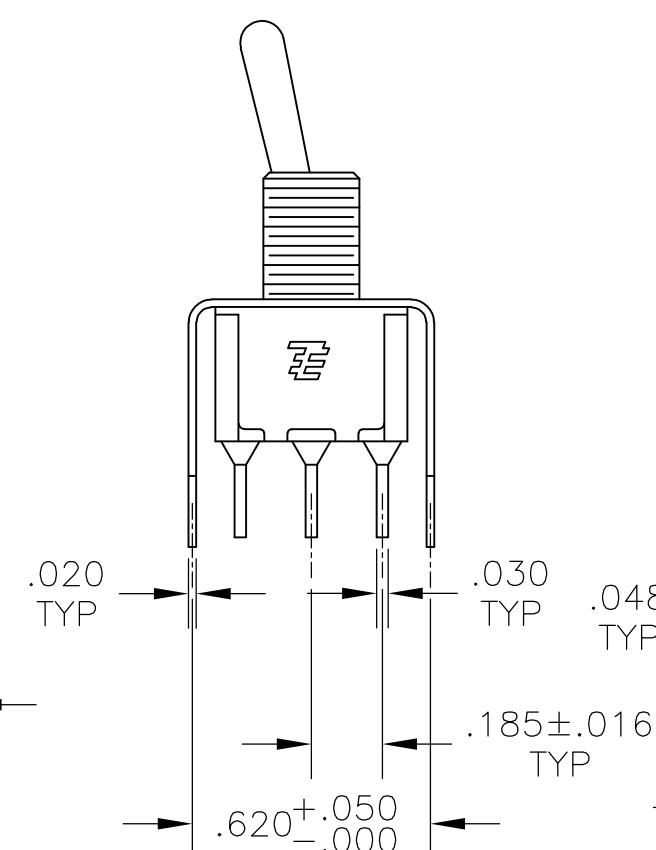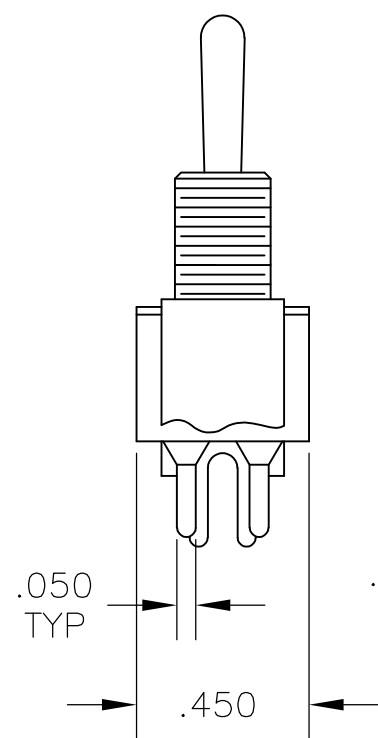





RECOMMENDED
PCB LAYOUT

OPTION	DIM A
V30	.460
V40	.630

V30 V40 5
VERTICAL SUPPORT BRACKET

V70

VERTICAL SUPPORT BRACKET

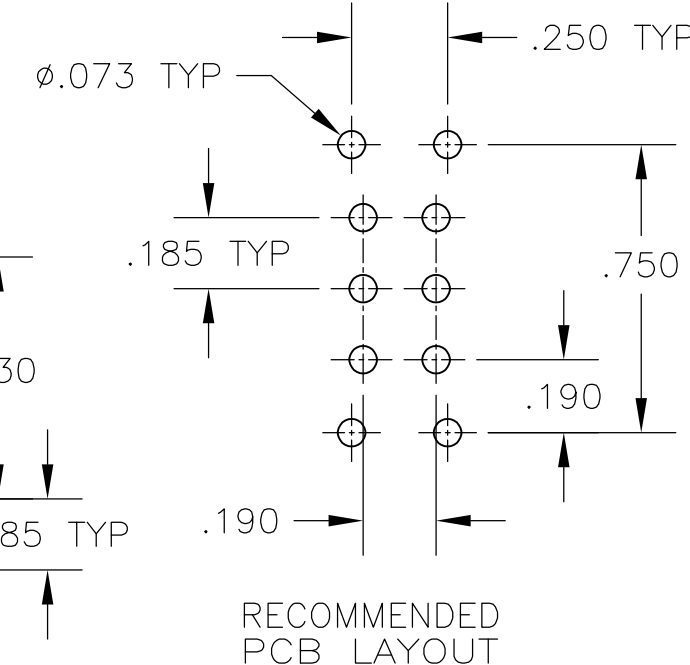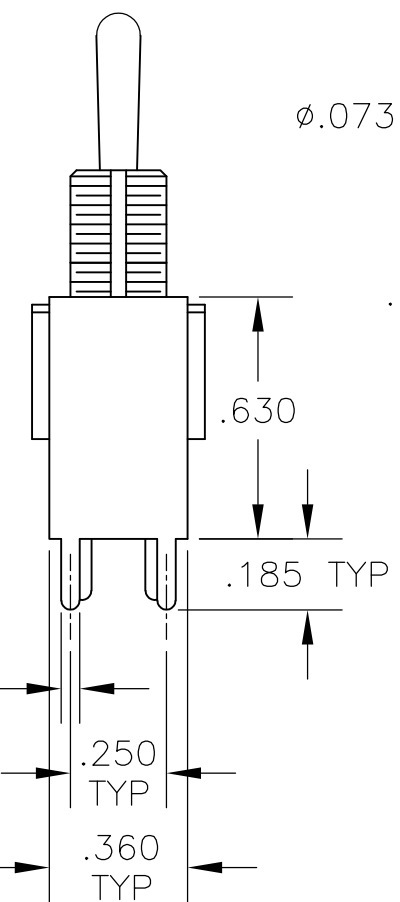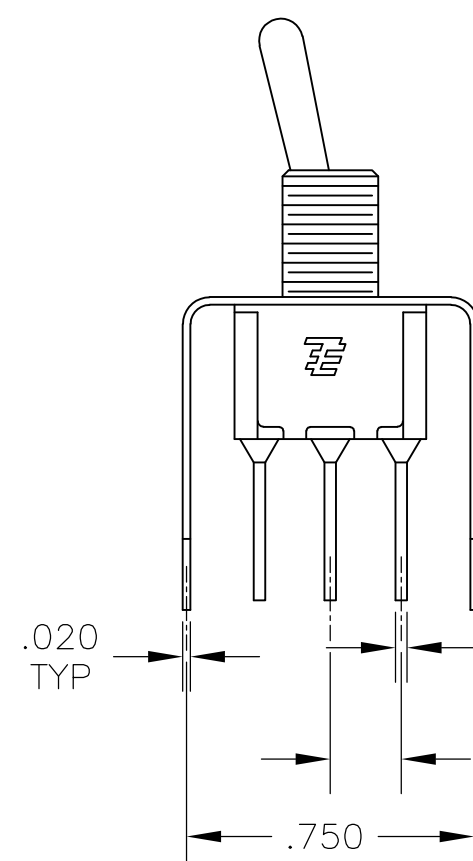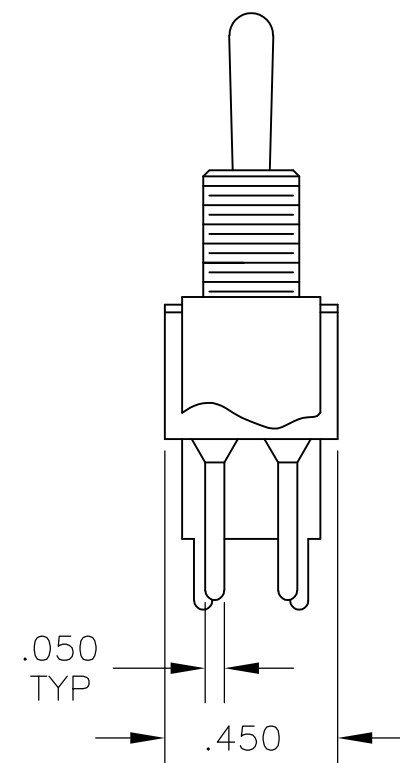


RECOMMENDED
PCB LAYOUT

A

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M. ZITTO		14APR05		 TE Connectivity															
				CHK M. ZITTO		—																	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P. BROUILLETTE		—		NAME															
		0 PLC ± —		PRODUCT SPEC		—		GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08) —															
		1 PLC ± —		APPLICATION SPEC		—																	
		2 PLC ± —		—		—																	
		3 PLC ± .010		—		—																	
4 PLC ± —		—		—		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO									
MATERIAL		FINISH		WEIGHT		—		A2		00779		C=1825138		—									
—		—		CUSTOMER DRAWING								SCALE		2:1		SHEET		3 of 4		REV		A5	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

Alco P/N	P/N
A201KAB04	1825138-1
A201KD9AQ04	1825138-2
A201KZQ04	1825138-3
not assigned	1825138-4
A201L1D9V30Q04	1825138-5
A201MD9AB04	1825138-6
A201MD9AQ04	1825138-7
A201MD9AV2B04	1825138-8
A201MD9AV2Q04	1825138-9
A201MDAQ04	1-1825138-0
not assigned	1-1825138-1
A201MYAQ04	1-1825138-2
A201MYCB04	1-1825138-3
A201MYZQ04	1-1825138-4
A201P3ZQ04	1-1825138-5
A201SCWZB04	1-1825138-6
A201SD9AQ04	1-1825138-7
A201SD9AV2Q04	1-1825138-8
A201SDCB04	1-1825138-9
A201SDZQ04	2-1825138-0
A201SY9AB04	2-1825138-1
A201SYAB04	2-1825138-2
A201SYAQ04	2-1825138-3
A201SYCB04	2-1825138-4
A201SYCQ04	2-1825138-5
A201SYWQ04	2-1825138-6
A201SYZB04	2-1825138-7
A201SYZQ04	2-1825138-8
A201T1ZQ04	2-1825138-9
not assigned	3-1825138-0
A201TZQ04	3-1825138-1
A208KZG04	3-1825138-2
A208P3ZQ04	3-1825138-3
A208SD9AQ04	3-1825138-4
A208SD9AV2Q04	3-1825138-5
A208SYCB04	3-1825138-6
A208SYCQ04	3-1825138-7
A208SYZQ04	3-1825138-8
A208T1ZQ04	3-1825138-9
A208TZQ04	4-1825138-0
A208SDCQ04	4-1825138-1
A201P3V30G04	4-1825138-2
A203MD9AQ-UL	4-1825138-3
A201MCWCB04	4-1825138-4
A201SCWCB04	4-1825138-5

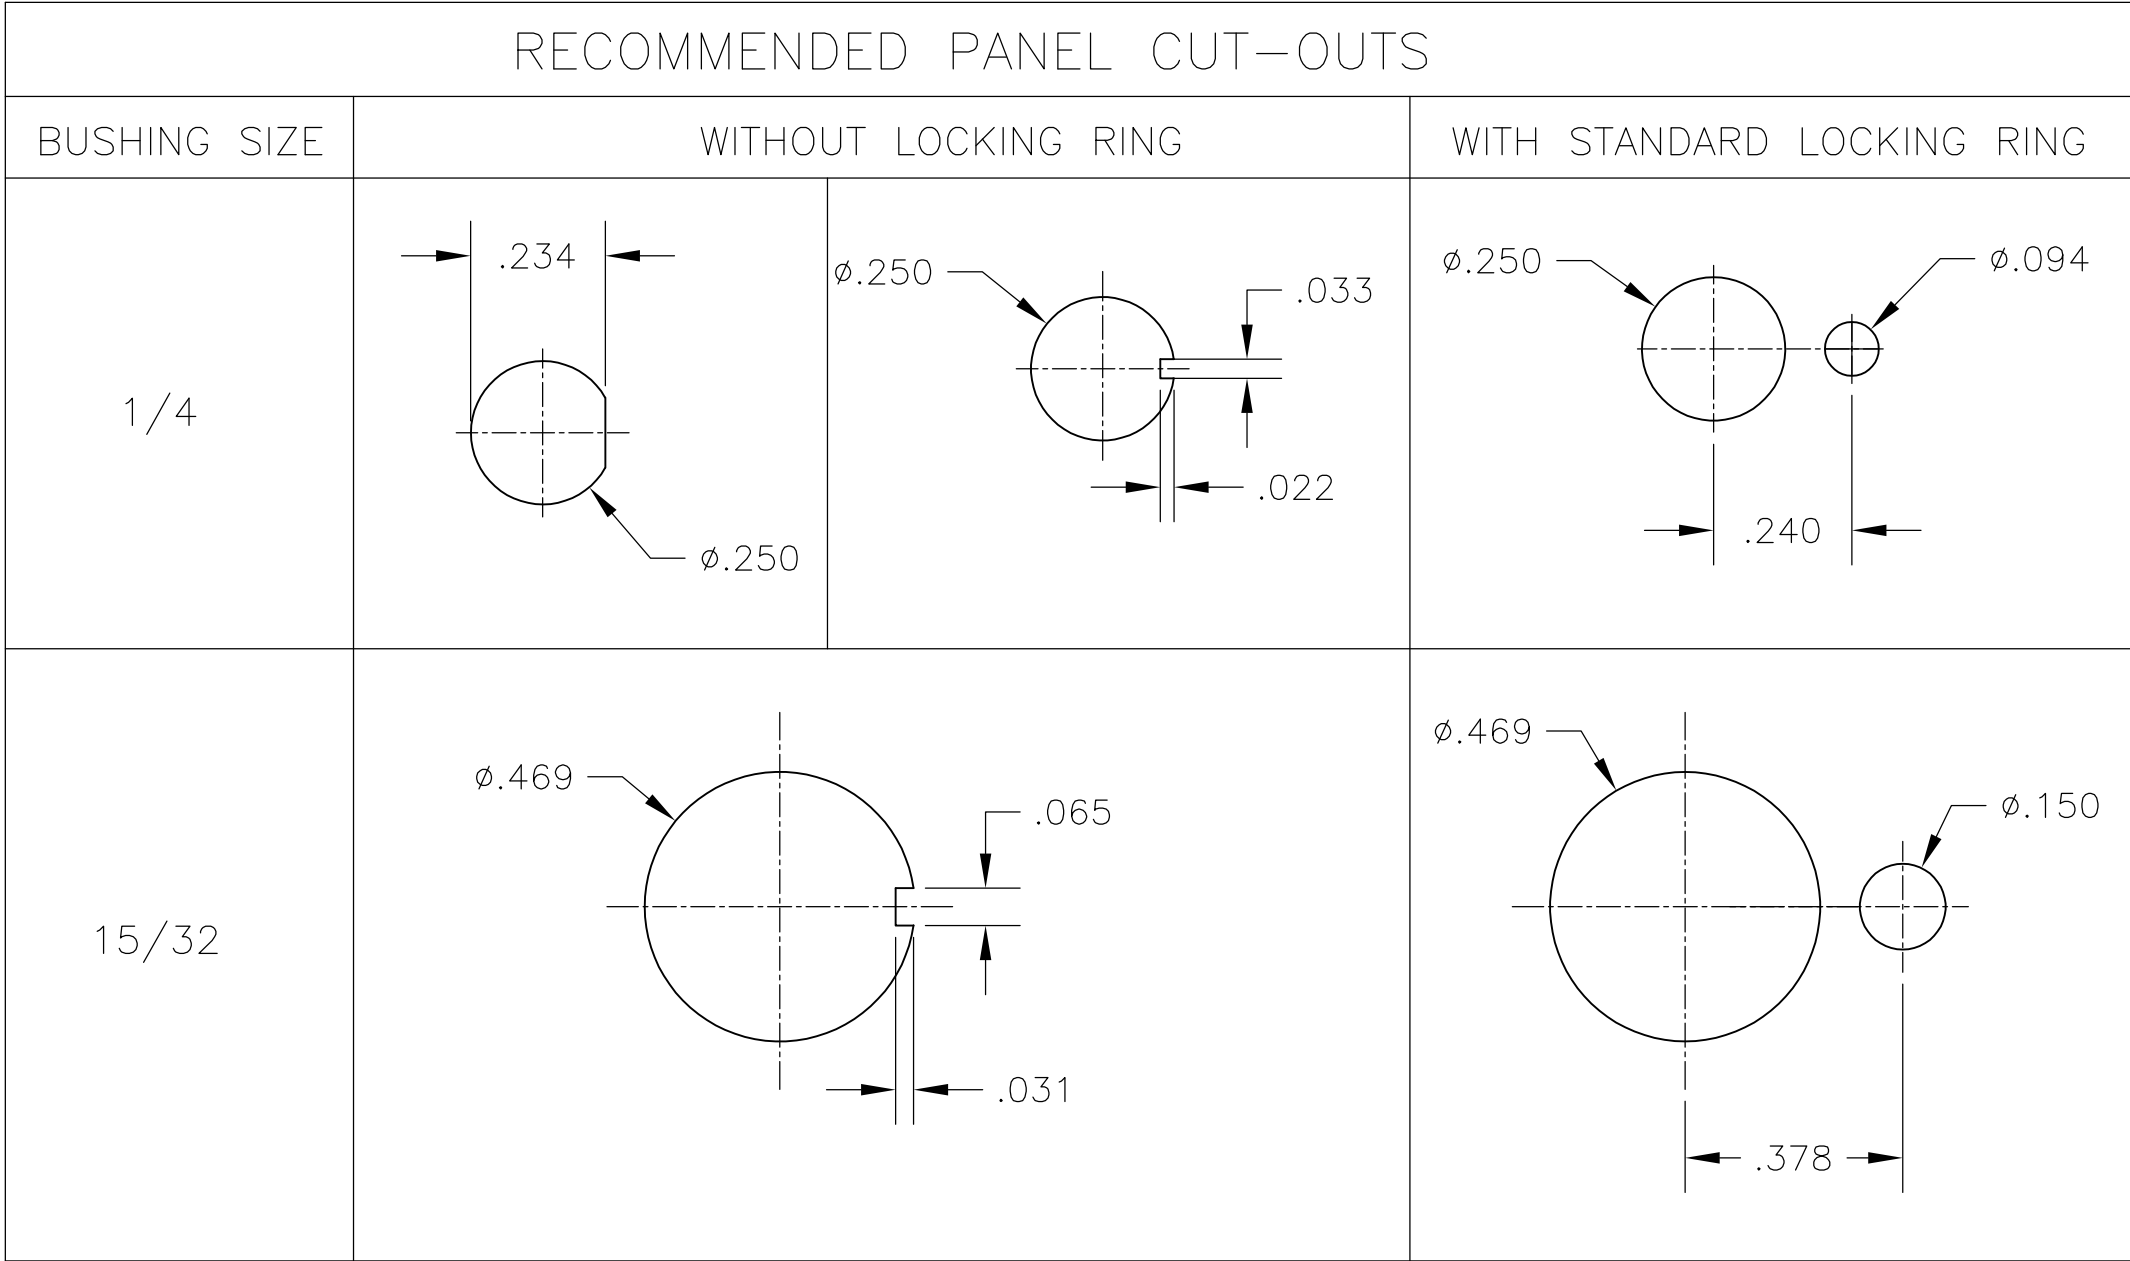

MATERIALS CHART		
COMPONENT NAME	BASE MATERIAL	
CASE	DAP, RED, UL94 V-0	
FRAME	STAINLESS STEEL	FINISH
B TERMINALS & CONTACTS	COPPER	GOLD OVER NICKEL
G TERMINALS & CONTACTS	COPPER	GOLD OVER SILVER
Q TERMINALS & CONTACTS	COPPER	.000400 SILVER
ACTUATOR	PHENOLIC, BLACK, UL94 V-1	
LEVER	BRASS	CHROME
BUSHING	BRASS	NICKEL
SPRING	MUSIC WIRE	
SUPPORT BRACKET	BRASS	TIN
PIVOT PIN	STEEL	NICKEL
LOCK WASHER	STAINLESS STEEL	
LOCKING RING	STAINLESS STEEL	
NUTS	C3604BD BRASS	NICKEL
TERMINAL SEAL	EPOXY	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. ZITTO	14APR05	TE Connectivity	
DIMENSIONS: INCHES		CHK M.ZITTO	-		
		APVD P.BROUILLETTE	-	NAME GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)	
		PRODUCT SPEC			
MATERIAL -		APPLICATION SPEC		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
FINISH -		CUSTOMER DRAWING		DRAWING NO C=1825138	
		SCALE 3:1		SHEET 4 of 4	
				REV A5	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru